

# **Crawler Crane LR 13000**




# **LIEBHERR**

# Crawler Crane LR 13000

## A new dimension

- Strongest crawler crane worldwide in conventional design
- Maximum capacity 3,000 t
- Maximum boom configuration 120 m + 126 m
- Boom system in four different versions erectable (from light to super heavy)
- Completely new developed and patented heavy duty boom
- Optimized transportation, width 4 m, single weight max. 70 t
- Concrete ballast units as 20“-container with twist lock easily and economically transportable
- Increased superstructure ballast for operation without derrick ballast

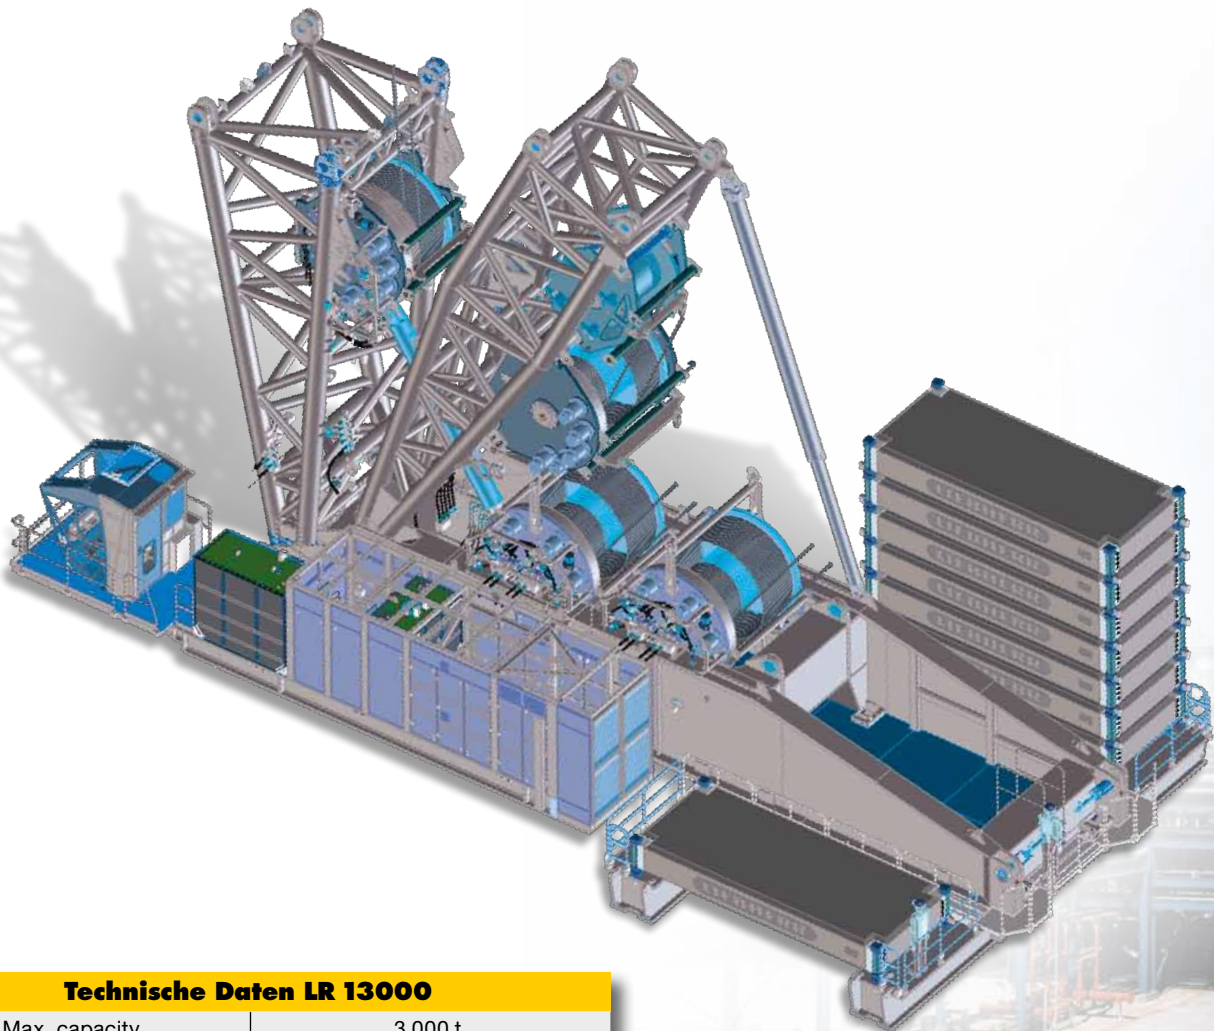

### Technische Daten LR 13000

Max. capacity	3,000 t
Max. load moment	65,000 tm
Max. hoisting height	240 m
Max. radius	160 m
Drive engine/crane engine Power	2 x Liebherr-8-cylinder turbo diesel 1,000 kW / 1,360 HP
Track width	14 m
Max. slewing platform ballast	750 t
Max. central ballast	150 t
Max. derrick ballast	1,500 t x R 30 m (55 m)









# Flexible operations

**With derrick ballast and 400 t superstructure ballast**

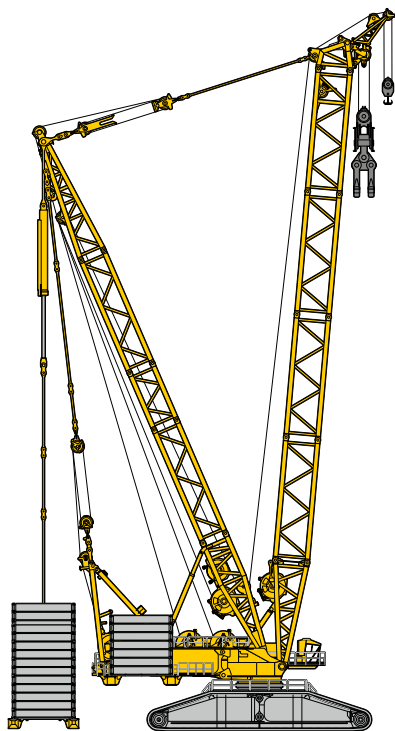


**Without derrick ballast, with 750 t superstructure ballast**

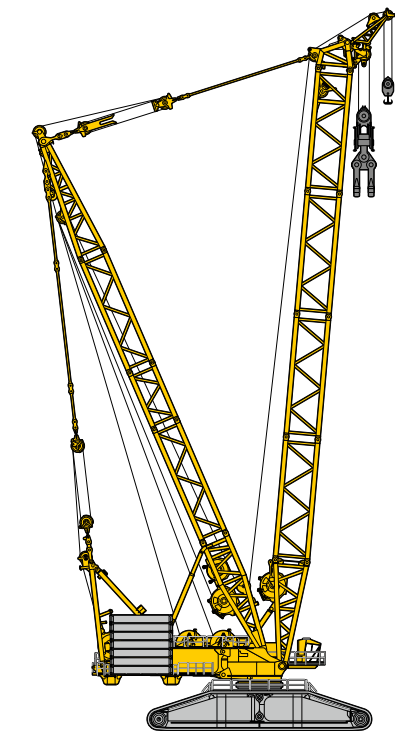

## Stepless adjustable derrick boom



## Boom head

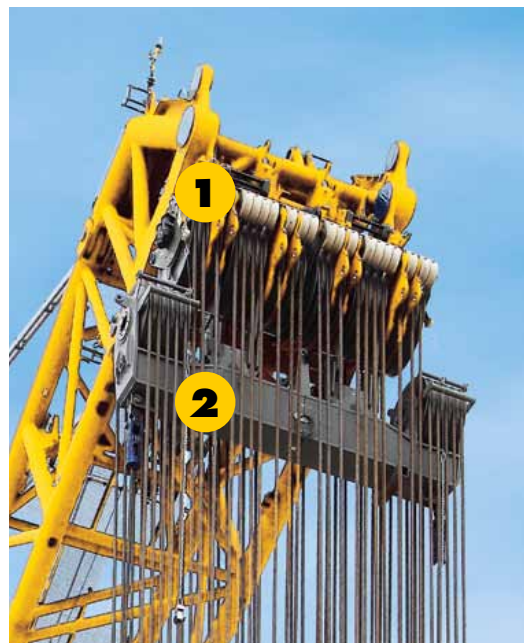

- 1** Standard sheave set up to 2,150 t
- 2** Heavy load traverse up to 3,000 t

## Comfortable ballasting with spreader



Economical transportation:  
The 25 t ballast plates have exactly the measurements of a 20"-container.

## Modular hook block



Number of sheaves total	$30 = 2 \times (3 \times 5)$
Capacity hook	2 x 2,120 t
Capacity at the LR 13000	3,000 t
Weight	111 t



# Redundant drives and control

## Roomy crane cab



- New LICCON2 crane control
- 3. monitor with crane work planner
- Monitors for camera monitoring of the winches and crane rear

## Winches with single drives



for a maximum of fail proof operation and service friendliness. In case of failure a drive can be changed under load.

Main hoist winches:



Rope diameter: 52 mm  
Rope pull: 62 t  
Rope length: 2050 m

## Powerpack




Two complete drive assemblies,  
Liebherr V8 diesel engines with 500 kW/680 HP each

# Dimensions

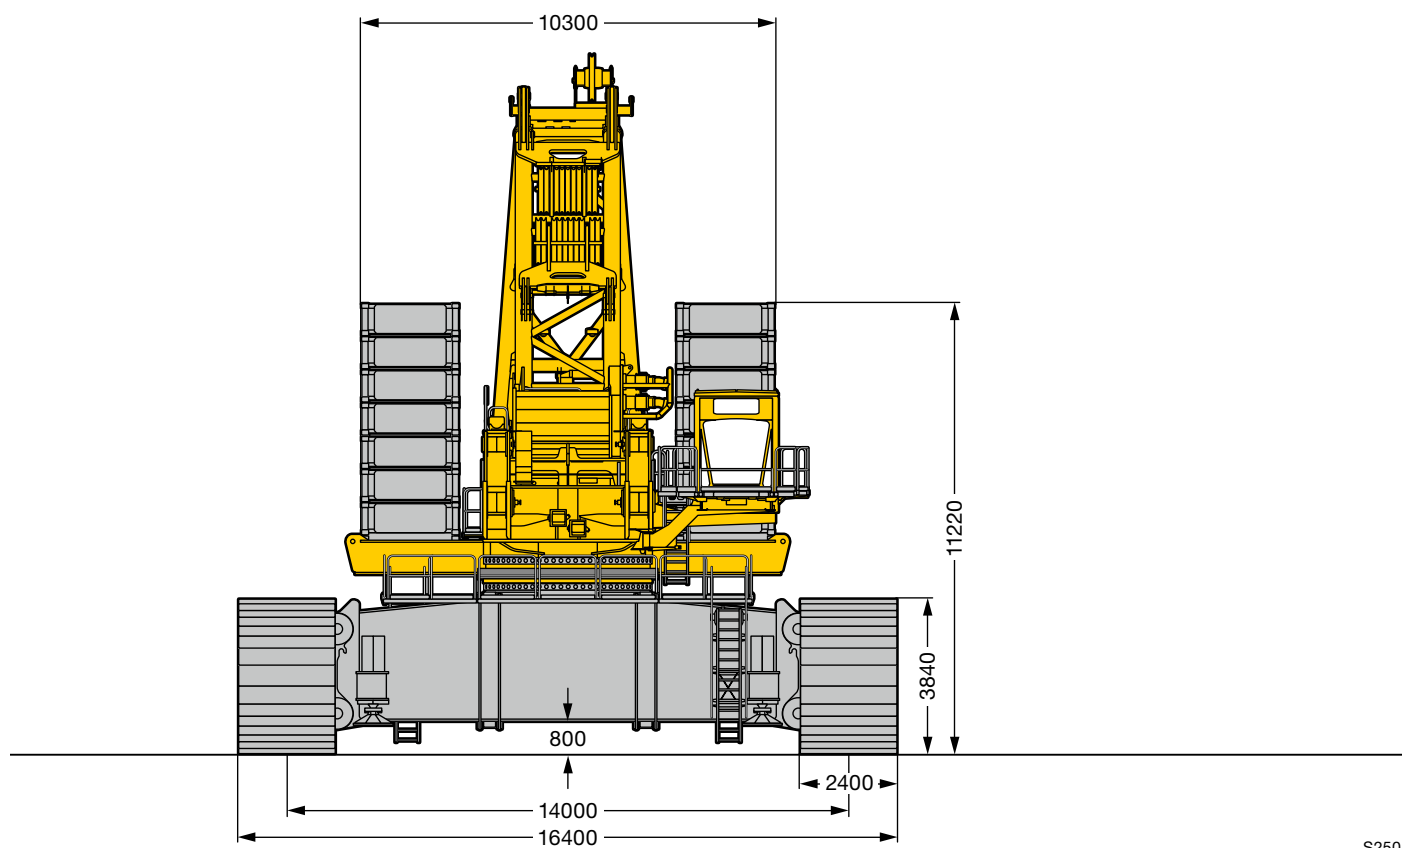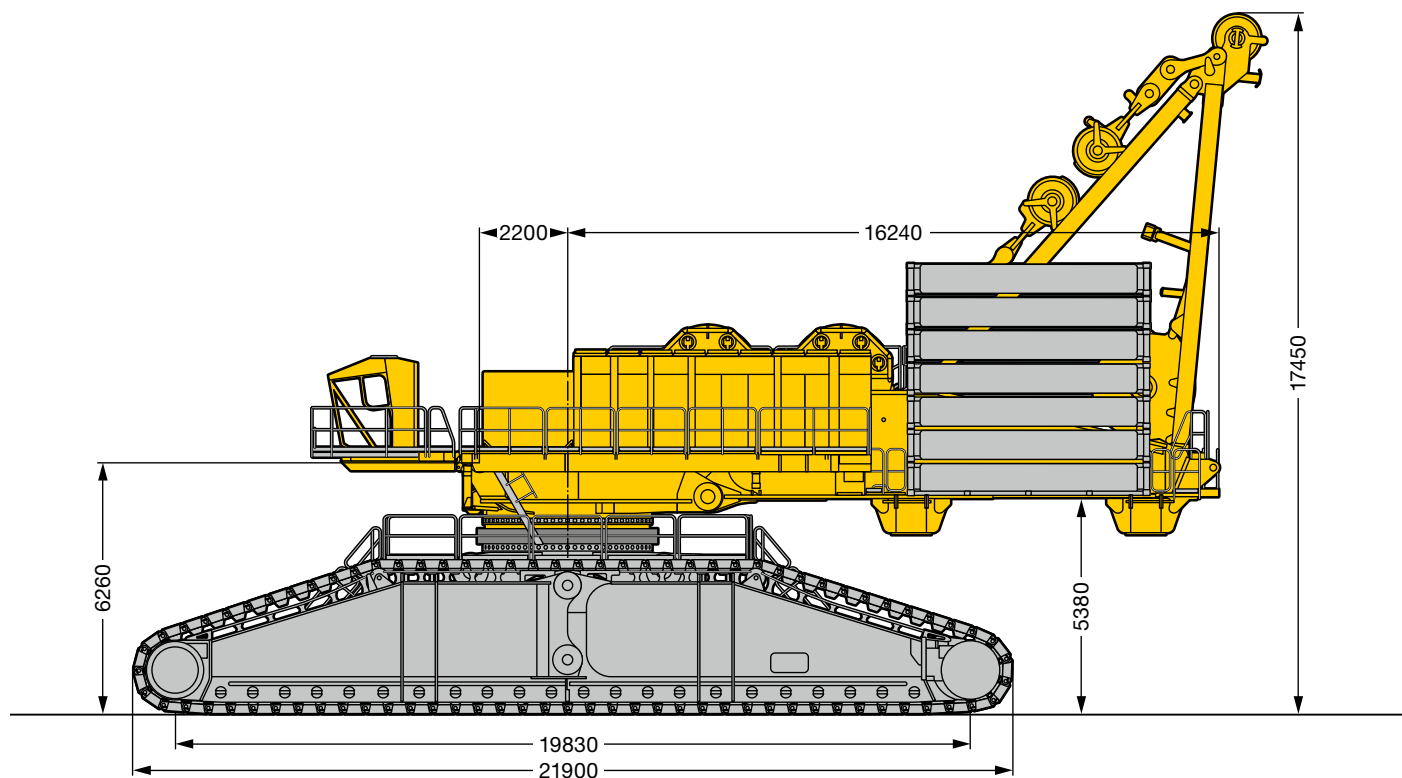


S2504

# Dimensions

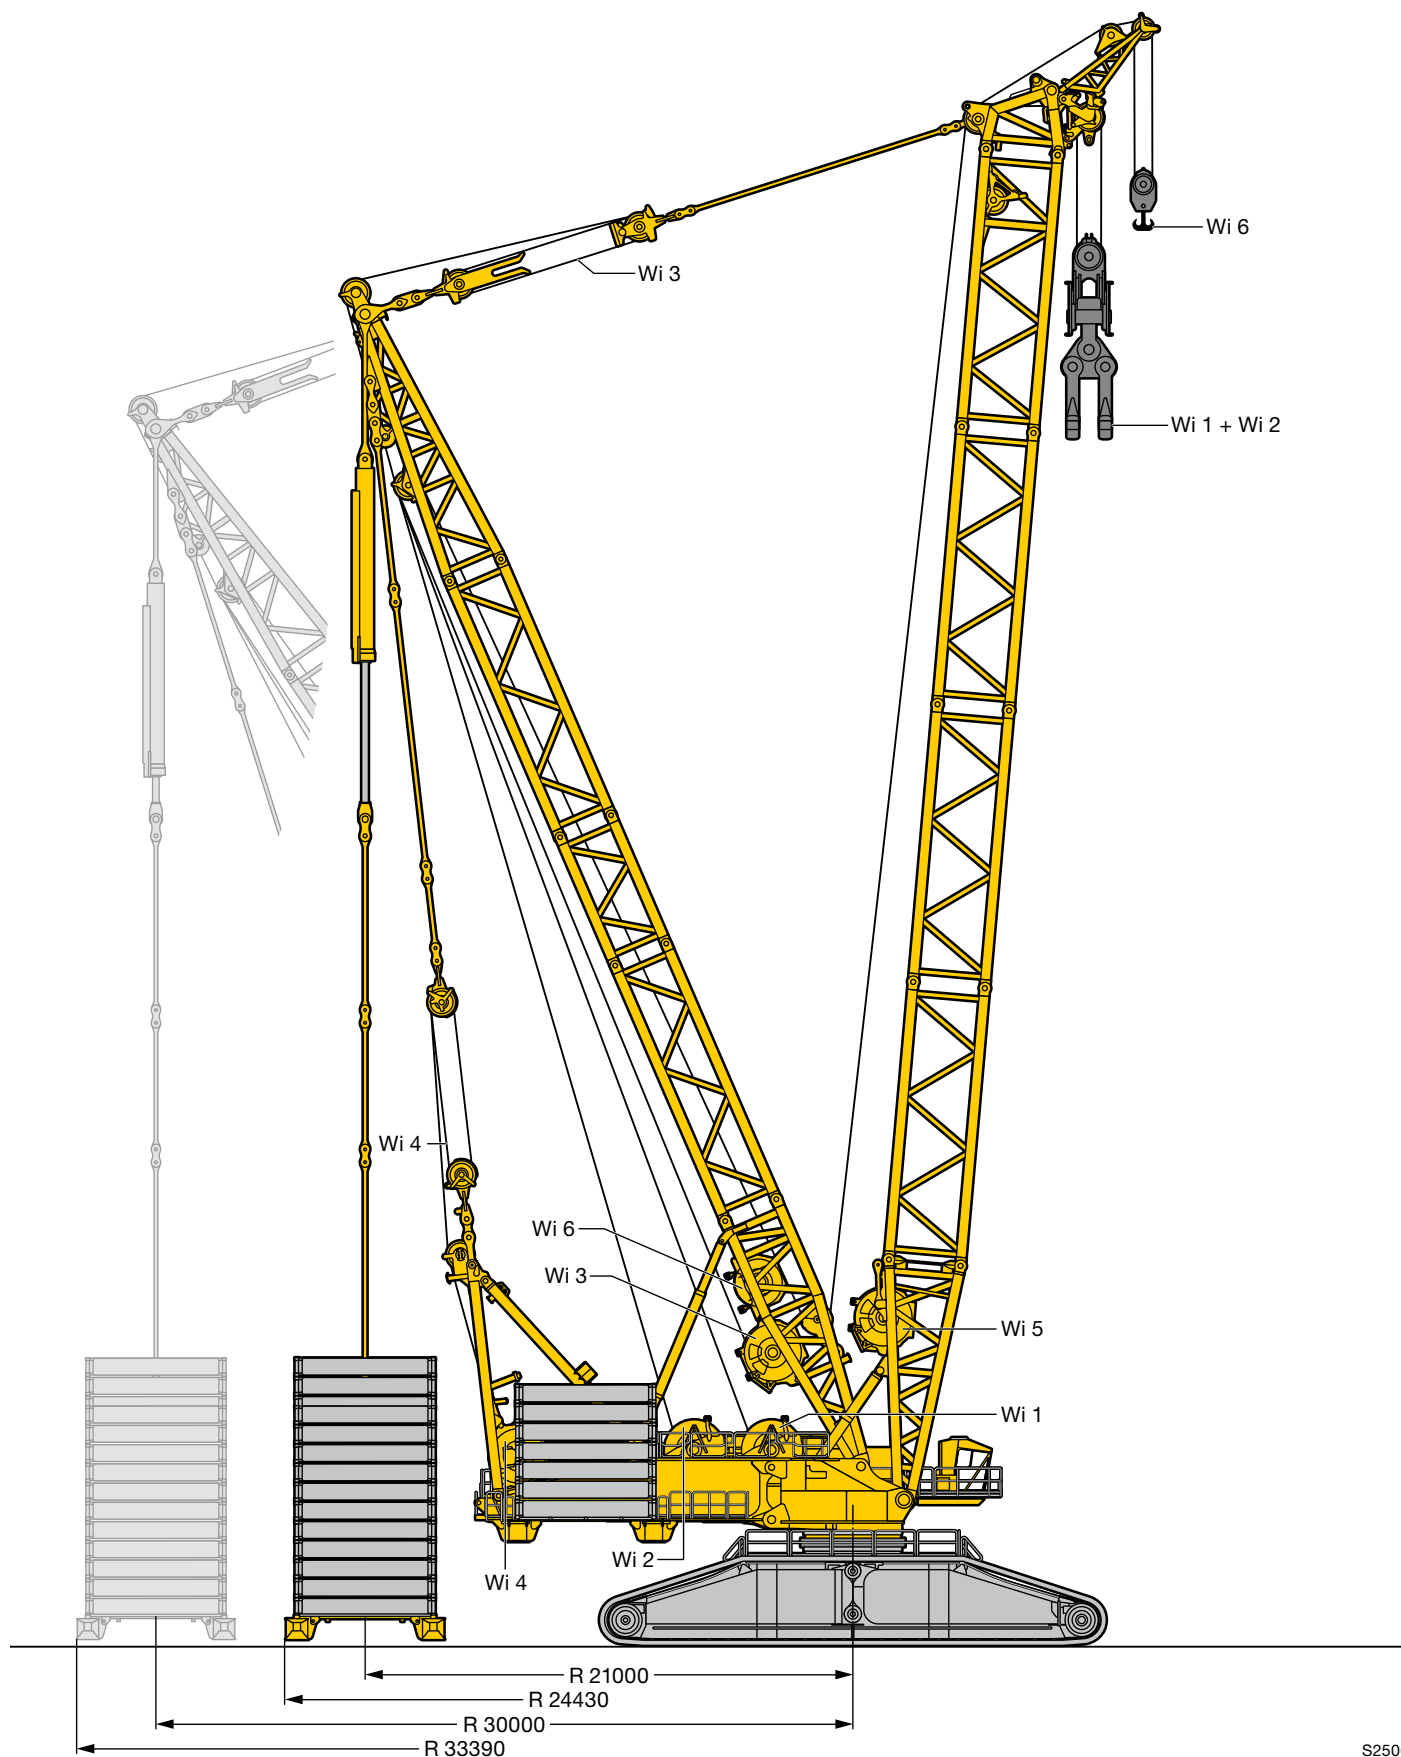

S2506



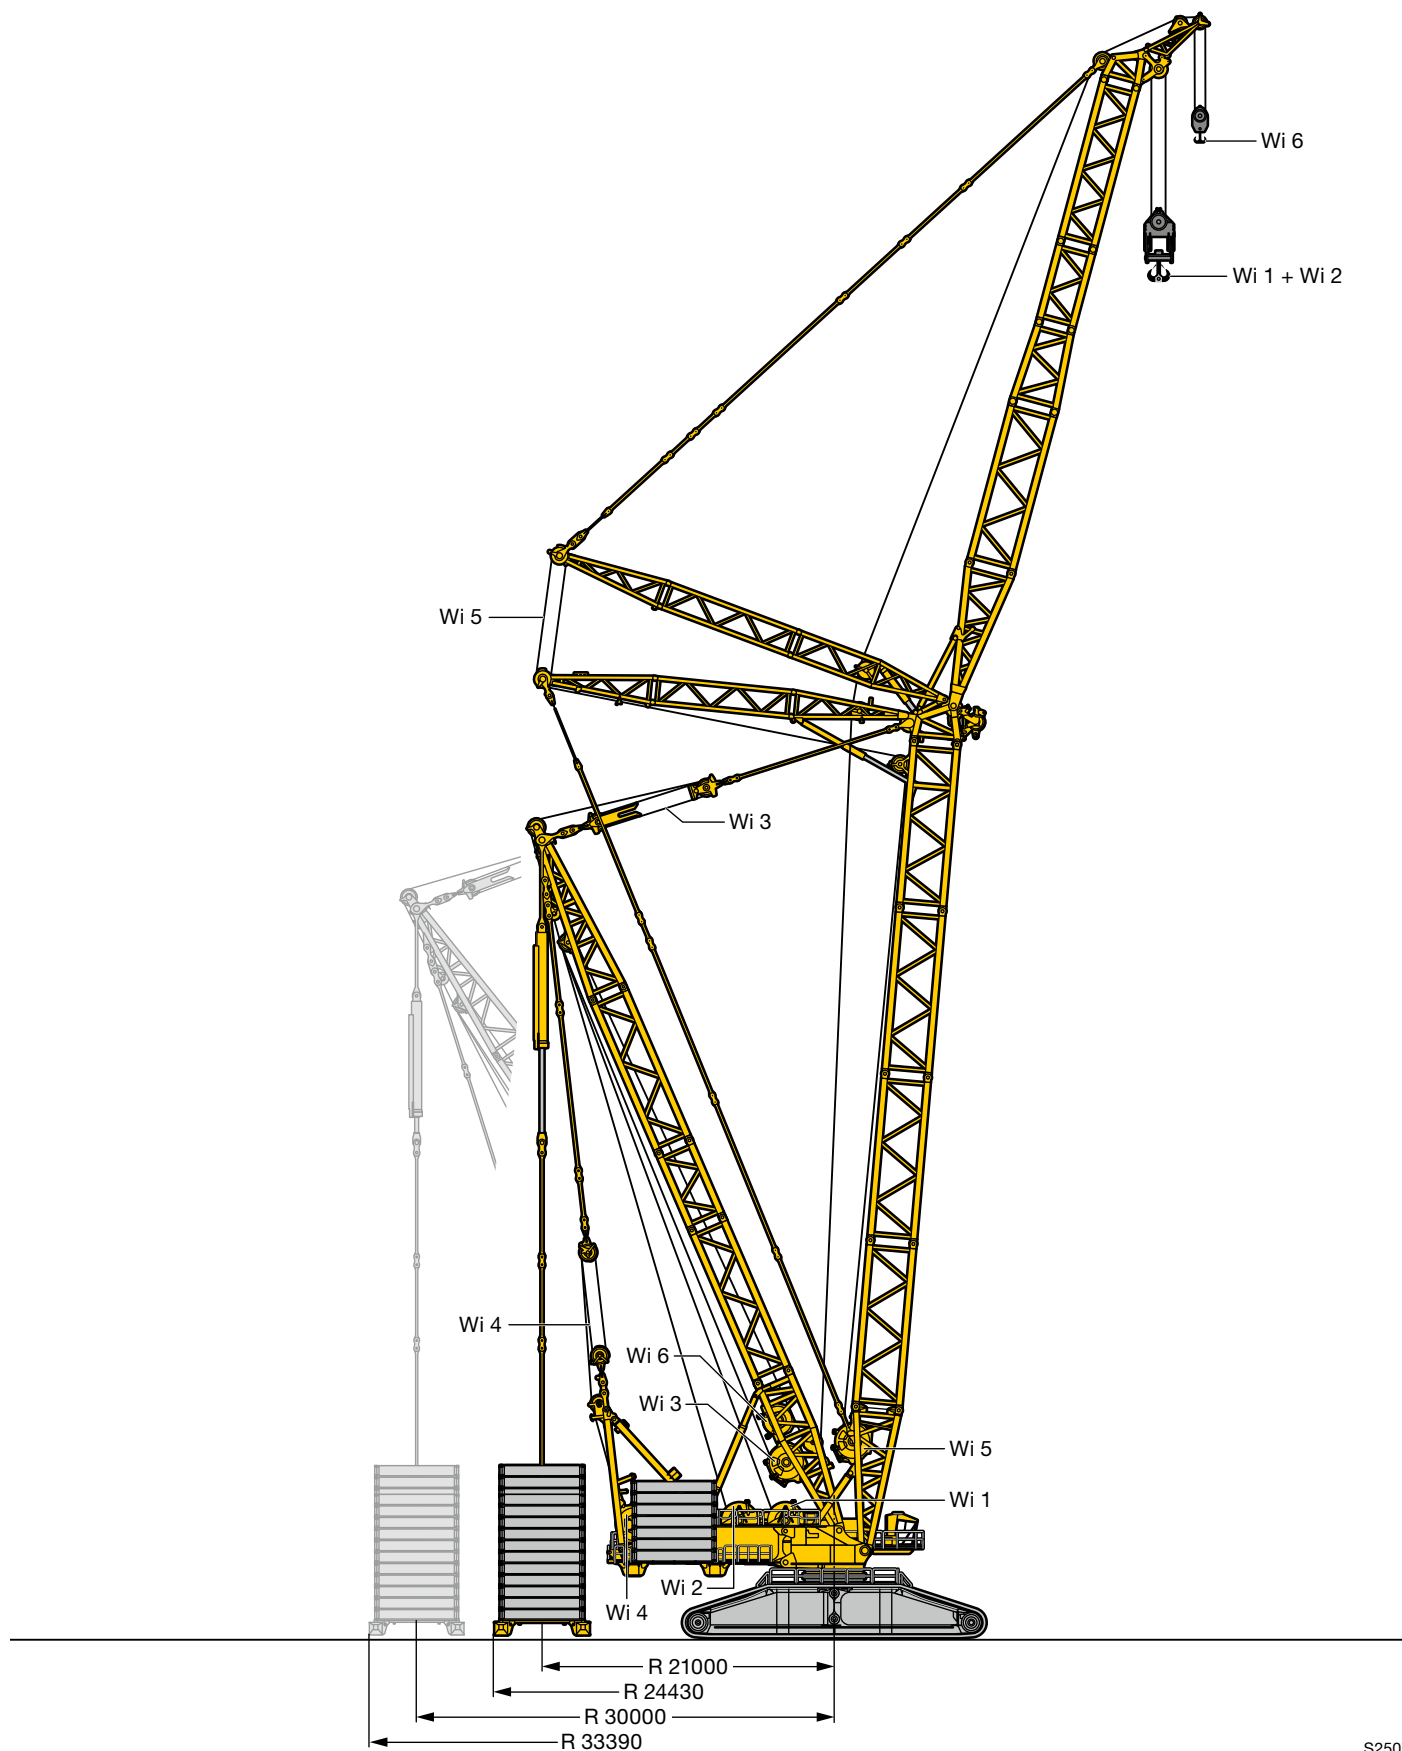

S2507

# Boom/jib combinations

**S** Main boom, heavy

**D** Derrick

**B** Suspended ballast


**SL** Main boom, heavy/light

**W** Luffing fly jib, heavy


**BW** Ballast trailer

**P** Main boom, power boom


**WV** Heavy duty jib

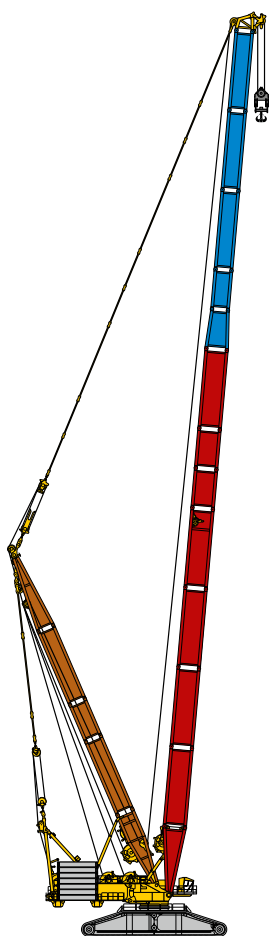

**SLD** 108 m  
**SD** 102 m

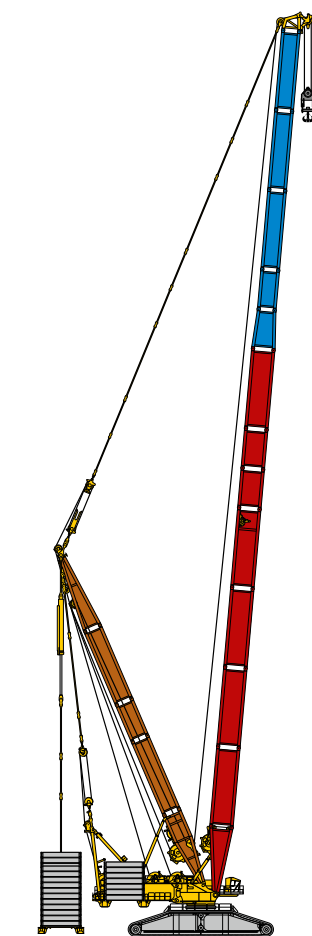


**SLDB** 132 m  
**SLDBW** 144 m

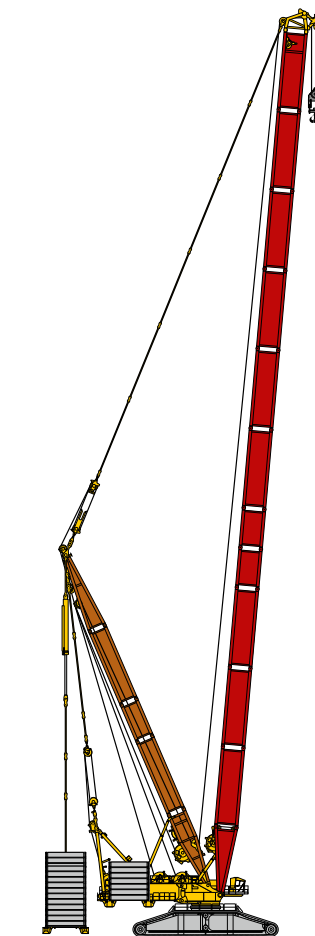


**SDB/BW** 132 m  
**PDB/BW** 132 m



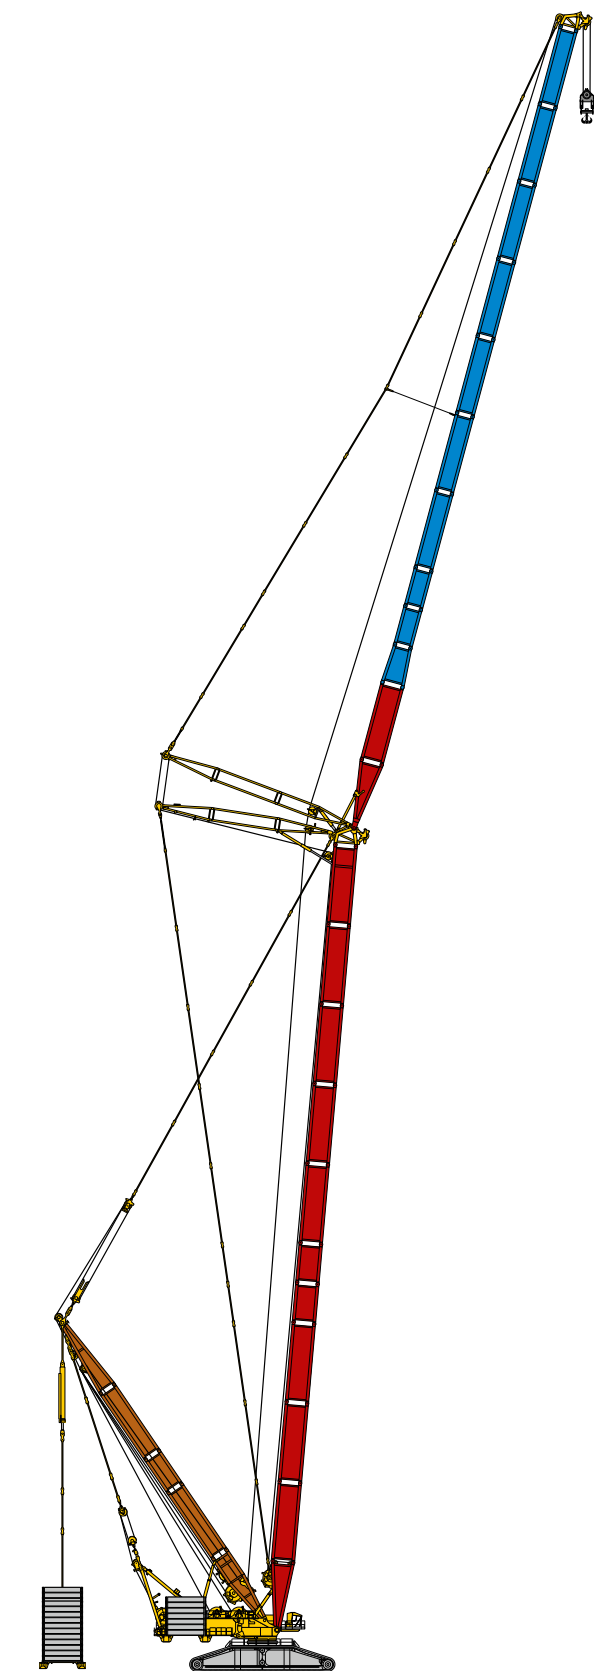

**SDWB/BW** 120 + 126 m  
**PDWB/BW** 132 + 78 m

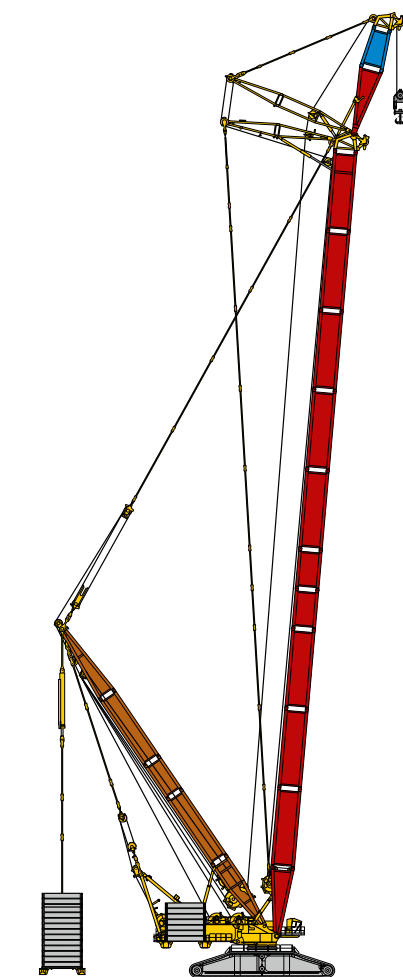

**SDWVB/BW** 120 + 18 m

# The Liebherr factory in Ehingen

## The most modern mobile and crawler crane factory worldwide

Liebherr is the leading manufacturer of mobile and crawler cranes. The range of All-Terrain- Mobile Cranes reaches from the 2-axle 35 t crane up to the heavy duty crane with 1,200 t capacity and an 9-axle carrier. The Lattice boom cranes on mobile or crawler chassis reach capacities up to 3,000 t. With universal boom systems and extensive additional equipment they are in operation on building sites all over the world.

The Liebherr-Werk Ehingen GmbH was founded in the year 1969. To stabilize and expand its international position as the leading supplier of mobile and crawler cranes in recent years an extensive factory expansion was realized. Today the Liebherr-Werk Ehingen possesses a total area of 840,000 m<sup>2</sup> of which more than 200,000 m<sup>2</sup> are fabrication areas under roof. A comprehensive worldwide service guarantees a high availability of the mobile and crawler cranes.



P393.E02.2011

Subject to technical modifications.

**Liebherr-Werk Ehingen GmbH**  
Postfach 1361, 89582 Ehingen, Germany  
☎ +49 7391 502-0, Fax +49 7391 502-33 99  
[www.liebherr.com](http://www.liebherr.com), E-Mail: [info.lwe@liebherr.com](mailto:info.lwe@liebherr.com)