


Each control is drawn with the axes it moves in and the detents it has. Force, breakout and gradient are not defined.

CENTRE INCEPTOR

Right hand. Flight path demand in both regimes.

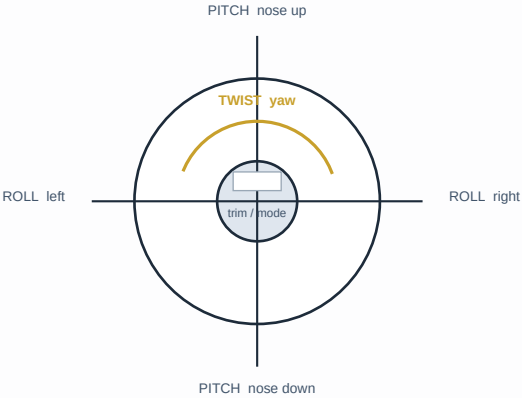


Detents: none. The inceptor is continuous in all three axes.

TBD breakout force, force gradient, displacement limits

TBD thumb switch inventory and legends

ENERGY LEVER

Left hand. Energy demand, both regimes.

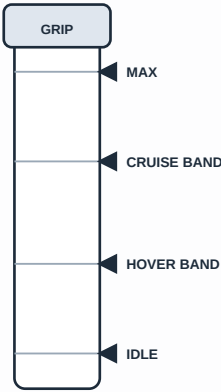


Travel is a single axis, fore and aft, with the bands marked.

TBD band boundaries in engineering units

TBD detent force and whether the bands are detented or painted

RECOVERY HANDLE

Guarded. Mechanical to the firing unit.



two-position arming switch

The handle acts mechanically. The inhibit acts on the electrical path, and it does not act on the handle.

TBD handle force and displacement

TBD guard opening direction and grip

DISPLAY BEZEL KEYS

Five per surface, along the lower edge.



TBD legend set and whether legends are fixed or driven by the page

FUNCTIONS WITH NO DEDICATED CONTROL

Named in VAY-SDD-0001, reached only through a display page:

- High-voltage bus tie
- Coolant loop crossover valve
- Battery string isolation
- Data bus A / B reset
- Ground charge initiation
- Lift rotor stop and index

TBD which of these needs a dedicated control is an open item

FLIGHT DECK CONTROLS

Inceptor, energy lever, recovery handle, bezel keys.

SHEET

Vayu VY-6 - VAY-HF-0001 - Issue 1

HF-3