


外设	功能	对应引脚
编码器1	A相	A4
编码器2	A相	B3
红外循迹	OUT1	A8
	OUT2	B15
	OUT3	B14
	OUT4	B12
舵机	PWM1	A7
屏幕接口	SCL	B8
	SDA	B9
蜂鸣器	IO	B5


引脚表(从机)

外设	功能	对应引脚
电机	PWM	A0
	PWM	A1
	PWM	A2
	PWM	A3
超声波	Echo	B0
	Trig	B1
蓝牙	TX	A9
	RX	A10
LED	IO	B4
D触发器	1Q	B10
	2Q	B11

电源接口





编码器接口




驱动板供电接口




提示灯




3V3供电

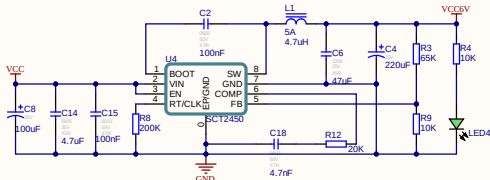


舵机6V供电

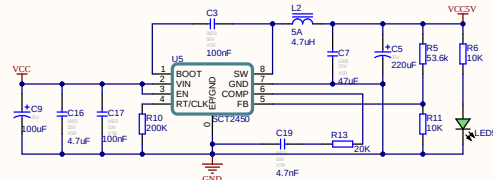


5V供电




PH:对应PCB上DIR
EN:对应PCB上PWM
电机信号接口

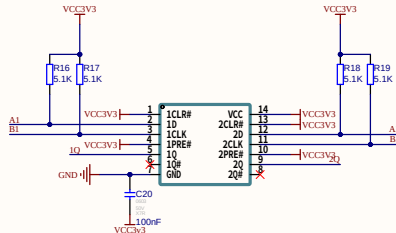


D触发器




蜂鸣器




舵机接口




超声波接口



红外传感接口




蓝牙接口



OLED接口



固定孔



剩余IO口

Comment	Description	Designator	Footprint	LibRef	Quantity
BEEP	蜂鸣器	B1	BEEP 9x5.5mm	BEEP	1
220uF 25V 铝电解	贴片电解电容 220uF 25V 6.3x7.7	C1, C4, C5	CAP-E-S 6.3	E-S 220uF 25V 6.3x7.7	3
100nF 50V X7R	贴片瓷片电容; MLCC; 0603(1608);	C2, C3, C11, C13, C15, C17, C20	C0805	100nF 0603 50V X7R	7
47uF 25V X5R	贴片瓷片电容; MLCC; 1206(3216);	C6, C7	C0805	47uF 1206 25V X5R	2
100uF 35V 铝电解	贴片电解电容 100uF 35V 6.3x7.7	C8, C9	CAP-E-S 6.3	E-S 100uF 35V 6.3x7.7	2
10uF 25V X5R	贴片瓷片电容; MLCC; 1206(3216);	C10, C12	C0805	47uF 1206 25V X5R	2
4.7uF 35V X5R	贴片瓷片电容; MLCC; 1206(3216);	C14, C16	C0805	4.7uF 1206 35V X5R	2
4.7nF 50V X7R	贴片瓷片电容; MLCC; 0603(1608);	C18, C19	C0805	4.7nF 0603 50V X7R	2
10uF 35V X5R	贴片瓷片电容; MLCC; 1206(3216);	C21	CAPC3216[1206]S	4.7uF 1206 35V X5R	1
4.7uH 5A	功率电感	L1, L2	0630 TPC 7*7*3	Ind-Power	2
翠绿贴片LED	翠绿贴片LED	LED1, LED2, LED3, LED4, LED5	LED_0805	LED Chip Green	5
Header-D-M 2x3P	2x3pin, 直插, 双排针	P1	HDR2X3-M	Header-D-M 2x3P	1
Header-D-M 1x3P	1x3pin, 直插, 排针	P2	HDR1X3-M	Header-D-M 1x3P	1
Pin HDR1X7		P3	Pin HDR1X7/2.54mm-S	Pin HDR1X7	1
Female HDR1X5		P4	Fe-HDR1X5/2.54-S	Female HDR1X5	1
Pin HDR1X4		P5	Pin HDR1X4/2.54mm-S	Pin HDR1X4	1
Female HDR1X4		P6	Fe-HDR1X4/2.54-S	Female HDR1X4	1
Pin HDR1X5		P7	Pin HDR1X5/2.54mm-S	Pin HDR1X5	1
S8050	NPN 三极管	Q1	SOT-23	NPN S8050	1
510R ±1%	贴片电阻	R1	R0805 - duplicate	Res-Chip_9	1
10K ±1%	贴片电阻	R2, R4, R6, R9, R11	R0805 - duplicate	Res-Chip	5
65K ±1%	贴片电阻	R3	R0805 - duplicate	Res-Chip_4	1
53.6k ±1%	贴片电阻	R5	R0805 - duplicate	Res-Chip_4	1
2.7K ±1%	贴片电阻	R7	R0805 - duplicate	Res-Chip_6	1
200K ±1%	贴片电阻	R8, R10	R0805 - duplicate	Res-Chip_1	2
20K ±1%	贴片电阻	R12, R13	R0805 - duplicate	Res-Chip_4	2
100R ±1%	贴片电阻	R14, R15, R22, R23	R0805 - duplicate	Res-Chip_9	4
5.1K ±1%	贴片电阻	R16, R17, R18, R19	R0805 - duplicate	Res-Chip_3	4
10R ±1%	贴片电阻	R20	R0805 - duplicate	Res-Chip_10	1
4.7K ±1%	贴片电阻	R21	R0805 - duplicate	Res-Chip_3	1
1K ±1%	贴片电阻	R24	R0805 - duplicate	Res-Chip_11	1
SW-SPDT	单刀双掷开关 3脚船型、钮子、拨动开关 SPDT Subminiature Toggle Switch	S1	SS12D10	SW-SPDT	1
STM32 40Pin Core board	江协科技 STM32F103C8T6核心板	U1	STM32 Core board	STM32 Core board	1
XT60		U2, U3	CONN-TH_XT60	XT60	2
SCT2450	SP1N28STER	U4, U5	SOP-8E	SP1N28STER	2
RT9013-33	3.3V 500mA SOT-23-5 LDO	U6	SOT-23-5	RT9013-33	1
SN74HC74D		U7	SOIC-14_L8.7-W3.9-P1.27-LS6.0-BL	SN74HC74D	1
XH4		XH1, XH2	XH4/2.54mm/180 - duplicate	XH4	2