
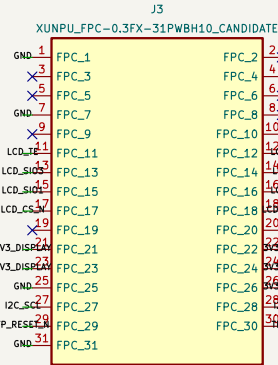









MOTO GPS REV A – FUNCTIONAL EVT SCHEMATIC

NOT FOR FABRICATION: complete electrical capture; PCB/layout/footprint/power–coupon validation still required



MCU / NATIVE USB / DISPLAY

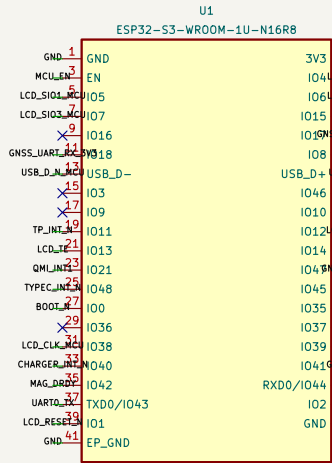






USB-C / POWER PATH

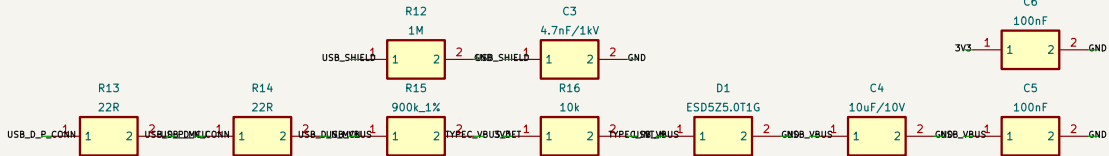


MOTION + MAGNETOMETER



GNSS / LEVEL SHIFT / RF



BQ25628E ILIM: IINREG = KILIM / RILIM = 2500 A-ohm / 4.99 kohm = 0.501 A typical

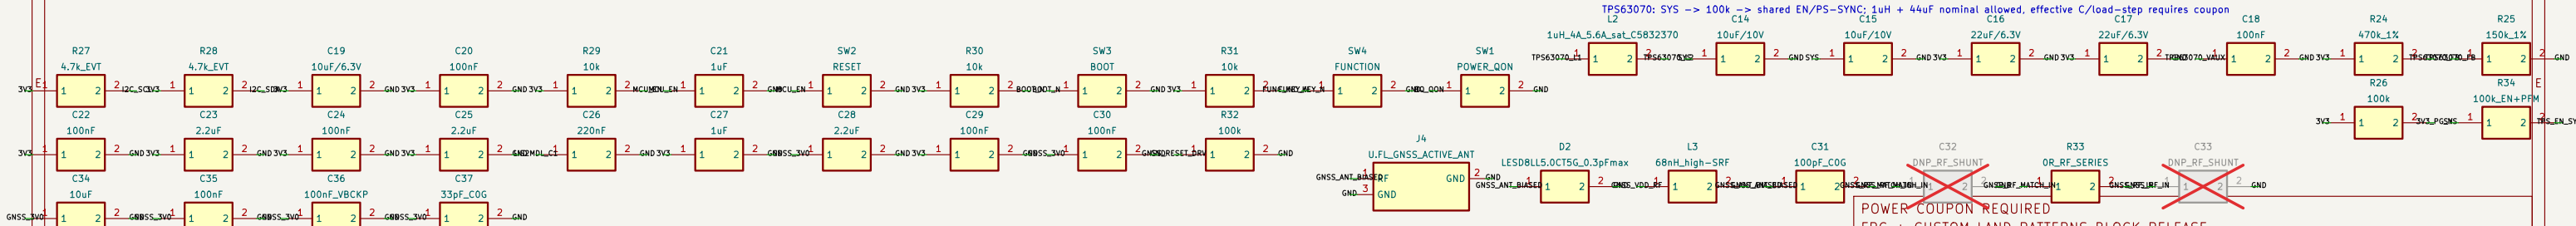

1559-1606 Mhz multi-constellation RF path: no GPS-only narrow SAW; pi network starts DNP / OR / DNP

POWER COUPON REQUIRED
FPC + CUSTOM LAND PATTERNS BLOCK RELEASE
NO AUDIO, MICROPHONE, RTC OR SD
ENGINEERING / NOT FOR FABRICATION

MOTO GPS

Sheet: /
File: moto-gps-rev-a1.kicad_sch

Title: MOTO GPS Rev A EVT electrical schematic

Size: A3 Date: 2026-09-03
KiCad E.D.A. 10.0.6

Rev: A-EVT-SCH-01
Id: 1/1