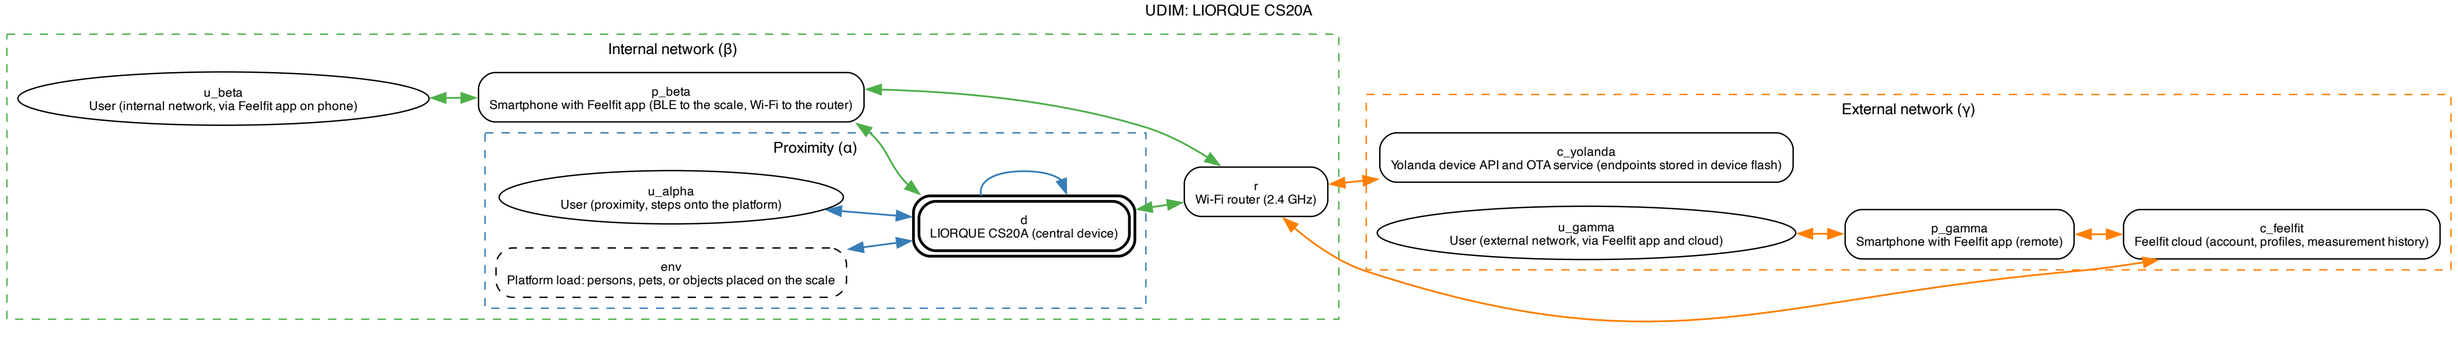
UDIM: LIORQUE CS20A
Internal network (β)
u_beta
User (internal network, via Feelfit app on phone)
p_beta
Smartphone with Feelfit app (BLE to the scale, Wi-Fi to the router)
Proximity (α)
u_alpha
User (proximity, steps onto the platform)
d
LIORQUE CS20A (central device)
env
Platform load: persons, pets, or objects placed on the scale
r
Wi-Fi router (2.4 GHz)
External network (γ)
c_yolanda
Yolanda device API and OTA service (endpoints stored in device flash)
u_gamma
User (external network, via Feelfit app and cloud)
p_gamma
Smartphone with Feelfit app (remote)
c_feelfit
Feelfit cloud (account, profiles, measurement history)