HSL+ Ni-Cd Batteries

Nickel Cadmium Pocket Plate Batteries

HBL®

High Reliability HSL+ Ni-Cd Batteries for Standby Applications

HSL+ type of Nickel Cadmium battery is developed by HBL to supply power to critical and demanding applications like solar photovoltaic or renewable energy. These batteries are completely reliable with minimal maintenance, withstand deep discharges, rough treatment over long periods and operates at widest temperature range.

HSL+ cells are available with strong steel frame structure, shock-resistant polypropylene casing material and flame arresting spill-proof vent. This battery gets better internal recombination by using special polypropylene fibrous separator.

HSL+ range is designed to comply with IEC 62259 and certified by Intertek

Constructional Cut-view of HSL+ cell

The construction of HSL+ is based on conventional pocket plate technology by introducing special features to enhance the low water usage, giving extended service life & performance when operating even at high temperatures.

Applications

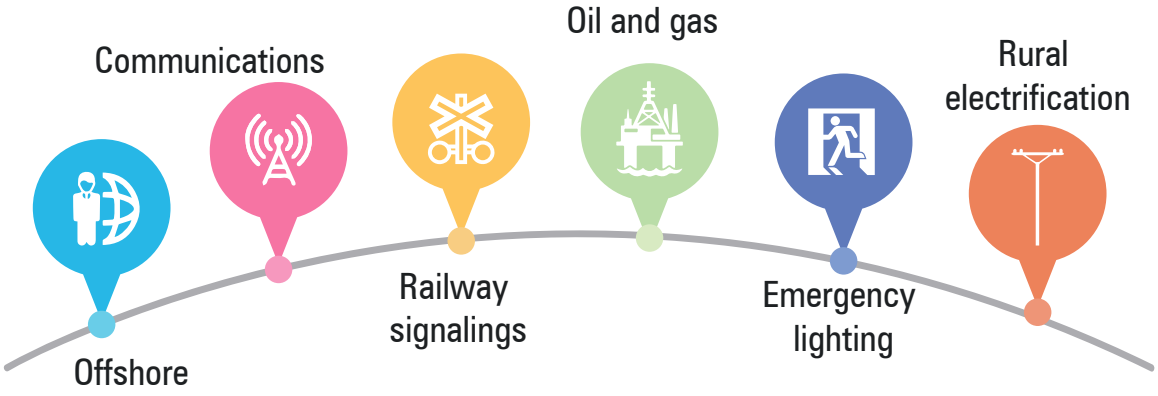

Superior Features of HSL+

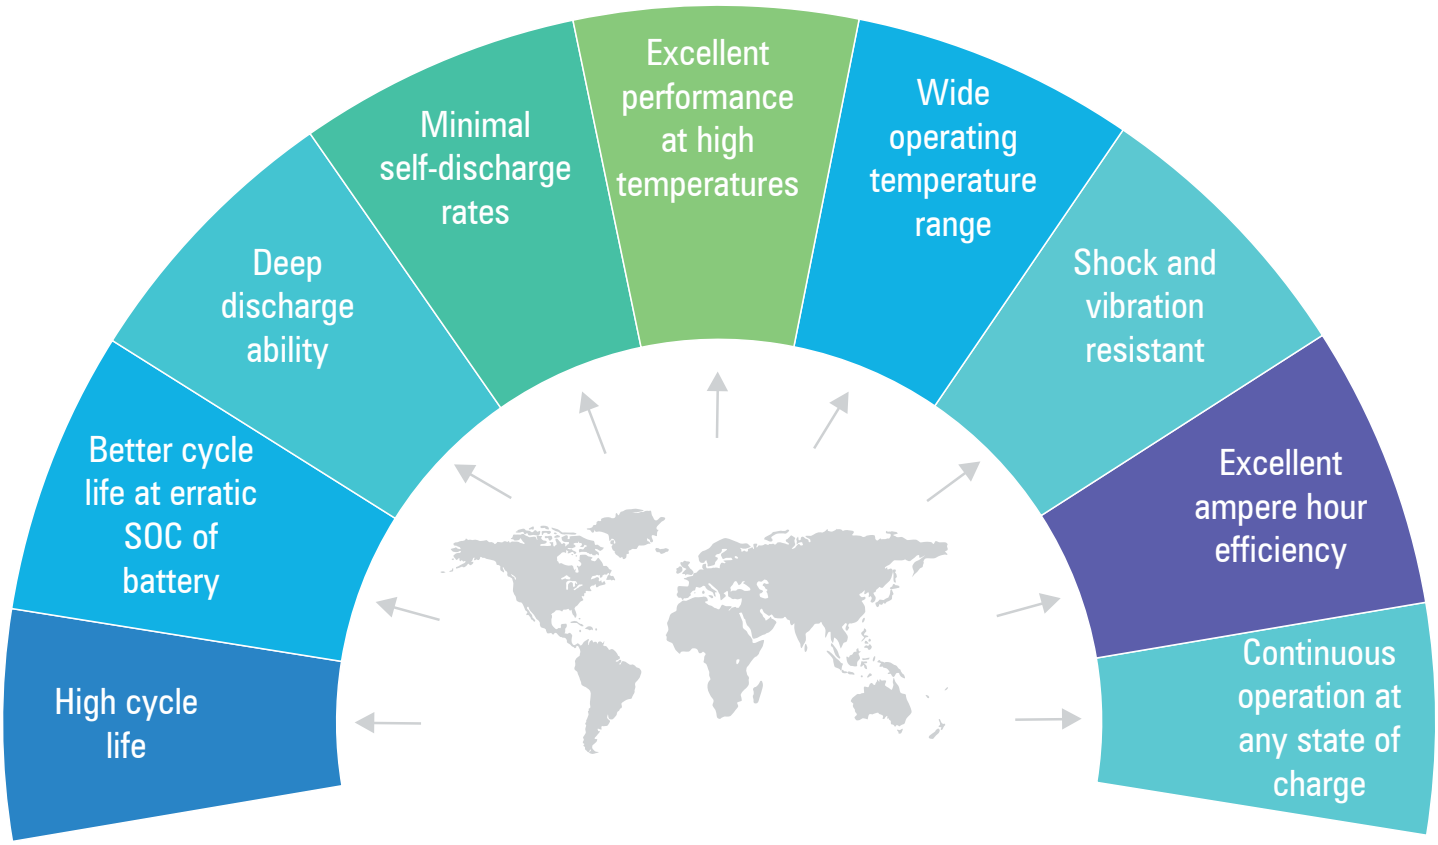

Dimensional and Electrical Data

Cell Type	Capacity		Container Size Ref.			Length per block									Weight (1.2V)
	C120 Ah	C5 Ah		Height	Width	1 cell	2 cells	3 cells	4 cells	5 cells	6 cells	8 cells	9 cells	10 cells	
	1.0 V	1.0 V		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
HSL+ 45	45	43	B45-1	405	195			121	157	192	228	300	336	371	4.2
HSL+ 90	90	85	B45-1	405	195			121	157	192	228	300	336	371	4.9
HSL+ 105	105	100	B44-1	405	195			143	185	228	271	357	400		5.8
HSL+ 140	140	128	B42A-1	405	195			175	227	281	334	441			7.2
HSL+ 160	160	148	B42A-1	405	195			175	227	281	334	441			8.1
HSL+ 185	185	171	B42-1	405	195			193	253	312	372				8.4
HSL+ 230	230	213	B41B-1	405	195		159	232	304	377					9.9
HSL+ 275	275	256	B41-1	405	195		183	268	352	437					11.5
HSL+ 320	320	300	B42A-2	405	195		228	336							15.1
HSL+ 370	370	341	B42-2	405	195		252	372							16.8
HSL+ 415	415	384	B41B-2	405	195	159	304								19.4
HSL+ 460	460	427	B41B-2	405	195	159	304								19.8
HSL+ 505	505	469	B41-2	405	195	183	352								22.4
HSL+ 555	555	512	B41-2	405	195	183	352								23.0
HSL+ 600	600	554	B41B-3	405	195	232									27.0
HSL+ 645	645	597	B41B-3	405	195	232									29.0
HSL+ 690	690	639	B41B-3	405	195	232									29.6
HSL+ 735	735	682	B41-3	405	195	268									33.0
HSL+ 790	790	731	B41-3	405	195	268									33.8
HSL+ 830	830	768	B41-3	405	195	268									34.5
HSL+ 880	880	815	B41B-4	405	195	304									37.0
HSL+ 920	920	853	B41B-4	405	195	304									39.6
HSL+ 1020	1020	944	B41-4	405	195	352									43.0
HSL+ 1060	1060	978	B41-4	405	195	352									44.5
HSL+ 1110	1110	1024	B41-4	405	195	352									46.0
HSL+ 1165	1165	1075	B41-4	405	195	352									48.3
HSL+ 1210	1210	1115	B41B-5	405	195	378									51.8
HSL+ 1275	1275	1175	B41-5	405	195	437									52.8
HSL+ 1325	1325	1220	B41-5	405	195	437									54.8
HSL+ 1375	1375	1265	B41-5	405	195	437									56.8
HSL+ 1395	1395	1280	B41-5	405	195	437									57.5
HSL+ 1465	1465	1345	B41-5	405	195	437									60.4
HSL+ 1515	1515	1395	B41-6	405	195	522									62.7
HSL+ 1575	1575	1455	B41-6	405	195	522									65.4
HSL+ 1625	1625	1505	B41-6	405	195	522									67.6
HSL+ 1655	1655	1536	B41-6	405	195	522									69.0
HSL+ 1710	1710	1590	B41-6	405	195	522									71.4
HSL+ 1770	1770	1645	B41-6	405	195	522									73.9
HSL+ 1810	1810	1680	B41-6	405	195	522									75.5

Electrical Data

Cell Type	Capacity		Performance data in Amps @End cell voltage = 1.14 V								
	C120 Ah	C5 Ah	2d	3d	4d	5d	6d	7d	8d	9d	10d
	1.0 V	1.0 V	48 h	72 h	96 h	120 h	144 h	168 h	192 h	216 h	240 h
			48	72	96	120	144	168	192	216	240
HSL+ 45	45	43	0.92	0.62	0.47	0.38	0.32	0.28	0.24	0.22	0.20
HSL+ 90	90	85	1.83	1.24	0.93	0.75	0.64	0.55	0.48	0.43	0.39
HSL+ 105	105	100	2.14	1.45	1.09	0.88	0.75	0.64	0.56	0.51	0.46
HSL+ 140	140	128	2.85	1.94	1.45	1.17	0.99	0.86	0.75	0.67	0.61
HSL+ 160	160	148	3.25	2.21	1.66	1.34	1.14	0.98	0.86	0.77	0.69
HSL+ 185	185	171	3.76	2.56	1.92	1.55	1.31	1.14	1.00	0.89	0.80
HSL+ 230	230	213	4.68	3.18	2.38	1.93	1.63	1.41	1.24	1.11	1.00
HSL+ 275	275	256	5.59	3.80	2.85	2.30	1.95	1.69	1.48	1.32	1.19
HSL+ 320	320	300	6.51	4.43	3.32	2.68	2.27	1.96	1.72	1.54	1.39
HSL+ 370	370	341	7.53	5.12	3.83	3.10	2.63	2.27	1.99	1.78	1.61
HSL+ 415	415	384	8.44	5.74	4.30	3.48	2.95	2.55	2.23	2.00	1.80
HSL+ 460	460	427	9.36	6.36	4.77	3.85	3.27	2.82	2.47	2.21	2.00
HSL+ 505	505	469	10.3	6.99	5.23	4.23	3.59	3.10	2.72	2.43	2.19
HSL+ 555	555	512	11.3	7.68	5.75	4.65	3.94	3.41	2.99	2.67	2.41
HSL+ 600	600	554	12.2	8.30	6.22	5.03	4.26	3.68	3.23	2.89	2.60
HSL+ 645	645	597	13.1	8.92	6.69	5.40	4.58	3.96	3.47	3.11	2.80
HSL+ 690	690	639	14.0	9.54	7.15	5.78	4.90	4.24	3.71	3.32	3.00
HSL+ 735	735	682	15.0	10.2	7.62	6.16	5.22	4.51	3.95	3.54	3.19
HSL+ 790	790	731	16.1	10.9	8.19	6.62	5.61	4.85	4.25	3.80	3.43
HSL+ 830	830	768	16.9	11.5	8.60	6.95	5.90	5.09	4.46	4.00	3.60
HSL+ 880	880	815	17.9	12.2	9.12	7.37	6.25	5.40	4.73	4.24	3.82
HSL+ 920	920	853	18.7	12.7	9.54	7.71	6.54	5.65	4.95	4.43	3.99
HSL+ 1020	1020	944	20.7	14.1	10.6	8.54	7.25	6.26	5.49	4.91	4.43
HSL+ 1060	1060	978	21.6	14.7	11.0	8.88	7.53	6.51	5.70	5.10	4.60
HSL+ 1110	1110	1024	22.6	15.4	11.5	9.30	7.89	6.81	5.97	5.34	4.82
HSL+ 1165	1165	1075	23.7	16.1	12.1	9.76	8.28	7.15	6.27	5.61	5.06
HSL+ 1210	1210	1115	24.6	16.7	12.5	10.1	8.60	7.43	6.51	5.83	5.25
HSL+ 1275	1275	1175	25.9	17.6	13.2	10.7	9.06	7.83	6.86	6.14	5.53
HSL+ 1325	1325	1220	27.0	18.3	13.7	11.1	9.42	8.13	7.13	6.38	5.75
HSL+ 1375	1375	1265	28.0	19.0	14.3	11.5	9.77	8.44	7.40	6.62	5.97
HSL+ 1395	1395	1280	28.4	19.3	14.5	11.7	9.91	8.56	7.50	6.72	6.06
HSL+ 1465	1465	1345	29.8	20.3	15.2	12.3	10.4	8.99	7.88	7.05	6.36
HSL+ 1515	1515	1395	30.8	21.0	15.7	12.7	10.8	9.30	8.15	7.29	6.58
HSL+ 1575	1575	1455	32.0	21.8	16.3	13.2	11.2	9.67	8.47	7.58	6.84
HSL+ 1625	1625	1505	33.1	22.5	16.8	13.6	11.5	9.98	8.74	7.82	7.05
HSL+ 1655	1655	1536	33.7	22.9	17.2	13.9	11.8	10.2	8.90	7.97	7.18
HSL+ 1710	1710	1590	34.8	23.7	17.7	14.3	12.2	10.5	9.20	8.23	7.42
HSL+ 1770	1770	1645	36.0	24.5	18.3	14.8	12.6	10.9	9.52	8.52	7.68
HSL+ 1810	1810	1680	36.8	25.0	18.8	15.2	12.9	11.1	9.74	8.71	7.86

Electrical Data

Cell Type	Capacity		Performance data in Amps @End cell voltage = 1.16 V								
	C120 Ah	C5 Ah	2d	3d	4d	5d	6d	7d	8d	9d	10d
	1.0 V	1.0 V	48 h	72 h	96 h	120 h	144 h	168 h	192 h	216 h	240 h
			48	72	96	120	144	168	192	216	240
HSL+ 45	45	43	0.90	0.62	0.46	0.38	0.32	0.27	0.24	0.22	0.20
HSL+ 90	90	85	1.80	1.23	0.92	0.75	0.63	0.55	0.48	0.43	0.39
HSL+ 105	105	100	2.10	1.44	1.08	0.88	0.74	0.64	0.56	0.51	0.46
HSL+ 140	140	128	2.79	1.92	1.44	1.17	0.99	0.85	0.75	0.67	0.61
HSL+ 160	160	148	3.19	2.19	1.64	1.34	1.13	0.97	0.86	0.77	0.69
HSL+ 185	185	171	3.69	2.53	1.90	1.55	1.30	1.13	1.00	0.89	0.80
HSL+ 230	230	213	4.59	3.15	2.36	1.93	1.62	1.40	1.24	1.11	1.00
HSL+ 275	275	256	5.49	3.76	2.82	2.30	1.94	1.67	1.48	1.32	1.19
HSL+ 320	320	300	6.39	4.38	3.28	2.68	2.25	1.95	1.72	1.54	1.39
HSL+ 370	370	341	7.38	5.06	3.80	3.10	2.61	2.25	1.99	1.78	1.61
HSL+ 415	415	384	8.28	5.68	4.26	3.48	2.92	2.53	2.23	2.00	1.80
HSL+ 460	460	427	9.18	6.30	4.72	3.85	3.24	2.80	2.47	2.21	2.00
HSL+ 505	505	469	10.1	6.91	5.18	4.23	3.56	3.07	2.72	2.43	2.19
HSL+ 555	555	512	11.1	7.60	5.69	4.65	3.91	3.38	2.99	2.67	2.41
HSL+ 600	600	554	12.0	8.21	6.15	5.03	4.23	3.65	3.23	2.89	2.60
HSL+ 645	645	597	12.9	8.83	6.62	5.40	4.54	3.93	3.47	3.11	2.80
HSL+ 690	690	639	13.8	9.44	7.08	5.78	4.86	4.20	3.71	3.32	3.00
HSL+ 735	735	682	14.7	10.1	7.54	6.16	5.18	4.47	3.95	3.54	3.19
HSL+ 790	790	731	15.8	10.8	8.10	6.62	5.57	4.81	4.25	3.80	3.43
HSL+ 830	830	768	16.6	11.4	8.51	6.95	5.85	5.05	4.46	4.00	3.60
HSL+ 880	880	815	17.6	12.0	9.03	7.37	6.20	5.36	4.73	4.24	3.82
HSL+ 920	920	853	18.4	12.6	9.44	7.71	6.48	5.60	4.95	4.43	3.99
HSL+ 1020	1020	944	20.4	14.0	10.5	8.54	7.19	6.21	5.49	4.91	4.43
HSL+ 1060	1060	978	21.2	14.5	10.9	8.88	7.47	6.45	5.70	5.10	4.60
HSL+ 1110	1110	1024	22.2	15.2	11.4	9.30	7.82	6.76	5.97	5.34	4.82
HSL+ 1165	1165	1075	23.3	15.9	12.0	9.76	8.21	7.09	6.27	5.61	5.06
HSL+ 1210	1210	1115	24.1	16.6	12.4	10.1	8.52	7.36	6.51	5.83	5.25
HSL+ 1275	1275	1175	25.4	17.5	13.1	10.7	8.98	7.76	6.86	6.14	5.53
HSL+ 1325	1325	1220	26.4	18.1	13.6	11.1	9.33	8.06	7.13	6.38	5.75
HSL+ 1375	1375	1265	27.4	18.8	14.1	11.5	9.69	8.37	7.40	6.62	5.97
HSL+ 1395	1395	1280	27.8	19.1	14.3	11.7	9.83	8.49	7.50	6.72	6.06
HSL+ 1465	1465	1345	29.2	20.1	15.0	12.3	10.3	8.92	7.88	7.05	6.36
HSL+ 1515	1515	1395	30.2	20.7	15.5	12.7	10.7	9.22	8.15	7.29	6.58
HSL+ 1575	1575	1455	31.4	21.6	16.2	13.2	11.1	9.59	8.47	7.58	6.84
HSL+ 1625	1625	1505	32.4	22.2	16.7	13.6	11.4	9.89	8.74	7.82	7.05
HSL+ 1655	1655	1536	33.0	22.7	17.0	13.9	11.7	10.1	8.90	7.97	7.18
HSL+ 1710	1710	1590	34.1	23.4	17.5	14.3	12.0	10.4	9.20	8.23	7.42
HSL+ 1770	1770	1645	35.3	24.2	18.2	14.8	12.5	10.8	9.52	8.52	7.68
HSL+ 1810	1810	1680	36.1	24.8	18.6	15.2	12.8	11.0	9.74	8.71	7.86

Cell Type	Capacity		Performance data in Amps @End cell voltage = 1.18 V								
	C120 Ah	C5 Ah	2d	3d	4d	5d	6d	7d	8d	9d	10d
	1.0 V	1.0 V	48 h	72 h	96 h	120 h	144 h	168 h	192 h	216 h	240 h
			48	72	96	120	144	168	192	216	240
HSL+ 45	45	43	0.86	0.60	0.46	0.37	0.31	0.27	0.24	0.21	0.19
HSL+ 90	90	85	1.73	1.20	0.92	0.75	0.63	0.54	0.47	0.43	0.38
HSL+ 105	105	100	2.01	1.40	1.07	0.87	0.73	0.63	0.55	0.50	0.45
HSL+ 140	140	128	2.69	1.86	1.42	1.16	0.98	0.84	0.74	0.66	0.60
HSL+ 160	160	148	3.07	2.13	1.63	1.33	1.12	0.96	0.84	0.76	0.68
HSL+ 185	185	171	3.55	2.46	1.88	1.53	1.29	1.12	0.98	0.88	0.79
HSL+ 230	230	213	4.41	3.06	2.34	1.91	1.60	1.39	1.21	1.09	0.98
HSL+ 275	275	256	5.28	3.66	2.80	2.28	1.92	1.66	1.45	1.30	1.17
HSL+ 320	320	300	6.14	4.26	3.25	2.65	2.23	1.93	1.69	1.51	1.37
HSL+ 370	370	341	7.10	4.93	3.76	3.07	2.58	2.23	1.95	1.75	1.58
HSL+ 415	415	384	7.96	5.52	4.22	3.44	2.89	2.50	2.19	1.96	1.77
HSL+ 460	460	427	8.82	6.12	4.68	3.81	3.21	2.77	2.43	2.18	1.96
HSL+ 505	505	469	9.69	6.72	5.13	4.19	3.52	3.05	2.66	2.39	2.16
HSL+ 555	555	512	10.6	7.39	5.64	4.60	3.87	3.35	2.93	2.63	2.37
HSL+ 600	600	554	11.5	7.99	6.10	4.97	4.18	3.62	3.16	2.84	2.56
HSL+ 645	645	597	12.4	8.59	6.56	5.35	4.50	3.89	3.40	3.05	2.75
HSL+ 690	690	639	13.2	9.18	7.02	5.72	4.81	4.16	3.64	3.26	2.95
HSL+ 735	735	682	14.1	9.78	7.47	6.09	5.13	4.43	3.88	3.48	3.14
HSL+ 790	790	731	15.2	10.5	8.03	6.55	5.51	4.76	4.17	3.74	3.37
HSL+ 830	830	768	15.9	11.0	8.44	6.88	5.79	5.01	4.38	3.93	3.54
HSL+ 880	880	815	16.9	11.7	8.95	7.29	6.14	5.31	4.64	4.16	3.76
HSL+ 920	920	853	17.6	12.2	9.35	7.62	6.42	5.55	4.85	4.35	3.93
HSL+ 1020	1020	944	19.6	13.6	10.4	8.45	7.11	6.15	5.38	4.83	4.35
HSL+ 1060	1060	978	20.3	14.1	10.8	8.79	7.39	6.39	5.59	5.02	4.53
HSL+ 1110	1110	1024	21.3	14.8	11.3	9.20	7.74	6.69	5.85	5.25	4.74
HSL+ 1165	1165	1075	22.3	15.5	11.8	9.66	8.13	7.03	6.14	5.51	4.97
HSL+ 1210	1210	1115	23.2	16.1	12.3	10.0	8.44	7.30	6.38	5.73	5.17
HSL+ 1275	1275	1175	24.5	17.0	13.0	10.6	8.89	7.69	6.72	6.03	5.44
HSL+ 1325	1325	1220	25.4	17.6	13.5	11.0	9.24	7.99	6.99	6.27	5.66
HSL+ 1375	1375	1265	26.4	18.3	14.0	11.4	9.59	8.29	7.25	6.51	5.87
HSL+ 1395	1395	1280	26.8	18.6	14.2	11.6	9.73	8.41	7.36	6.60	5.96
HSL+ 1465	1465	1345	28.1	19.5	14.9	12.1	10.2	8.83	7.73	6.93	6.25
HSL+ 1515	1515	1395	29.1	20.2	15.4	12.6	10.6	9.14	7.99	7.17	6.47
HSL+ 1575	1575	1455	30.2	21.0	16.0	13.1	11.0	9.50	8.31	7.45	6.72
HSL+ 1625	1625	1505	31.2	21.6	16.5	13.5	11.3	9.80	8.57	7.69	6.94
HSL+ 1655	1655	1536	31.7	22.0	16.8	13.7	11.5	9.98	8.73	7.83	7.07
HSL+ 1710	1710	1590	32.8	22.8	17.4	14.2	11.9	10.3	9.02	8.09	7.30
HSL+ 1770	1770	1645	34.0	23.6	18.0	14.7	12.3	10.7	9.34	8.38	7.56
HSL+ 1810	1810	1680	34.7	24.1	18.4	15.0	12.6	10.9	9.55	8.56	7.73

Electrical Data

Cell Type	Capacity		Performance data in Amps @End cell voltage = 1.20 V								
	C120 Ah	C5 Ah	2d	3d	4d	5d	6d	7d	8d	9d	10d
	1.0 V	1.0 V	48 h	72 h	96 h	120 h	144 h	168 h	192 h	216 h	240 h
			48	72	96	120	144	168	192	216	240
HSL+ 45	45	43	0.79	0.56	0.42	0.35	0.30	0.26	0.23	0.21	0.19
HSL+ 90	90	85	1.59	1.12	0.85	0.70	0.60	0.52	0.46	0.41	0.37
HSL+ 105	105	100	1.85	1.30	0.99	0.81	0.70	0.60	0.53	0.48	0.43
HSL+ 140	140	128	2.47	1.74	1.31	1.09	0.93	0.81	0.71	0.64	0.58
HSL+ 160	160	148	2.82	1.98	1.50	1.24	1.07	0.92	0.81	0.73	0.66
HSL+ 185	185	171	3.26	2.29	1.74	1.43	1.23	1.07	0.94	0.84	0.76
HSL+ 230	230	213	4.06	2.85	2.16	1.78	1.53	1.33	1.17	1.05	0.95
HSL+ 275	275	256	4.85	3.41	2.58	2.13	1.83	1.58	1.40	1.26	1.13
HSL+ 320	320	300	5.64	3.97	3.01	2.48	2.13	1.84	1.63	1.46	1.32
HSL+ 370	370	341	6.53	4.59	3.47	2.87	2.46	2.13	1.88	1.69	1.52
HSL+ 415	415	384	7.32	5.14	3.90	3.22	2.76	2.39	2.11	1.89	1.71
HSL+ 460	460	427	8.11	5.70	4.32	3.57	3.06	2.65	2.34	2.10	1.89
HSL+ 505	505	469	8.91	6.26	4.74	3.92	3.36	2.91	2.57	2.31	2.08
HSL+ 555	555	512	9.8	6.88	5.21	4.30	3.70	3.20	2.82	2.53	2.28
HSL+ 600	600	554	10.6	7.44	5.64	4.65	4.00	3.46	3.05	2.74	2.47
HSL+ 645	645	597	11.4	8.00	6.06	5.00	4.30	3.72	3.28	2.94	2.65
HSL+ 690	690	639	12.2	8.55	6.48	5.35	4.60	3.98	3.51	3.15	2.84
HSL+ 735	735	682	13.0	9.11	6.90	5.70	4.90	4.23	3.74	3.36	3.02
HSL+ 790	790	731	13.9	9.8	7.42	6.13	5.26	4.55	4.02	3.61	3.25
HSL+ 830	830	768	14.6	10.3	7.80	6.44	5.53	4.78	4.22	3.79	3.41
HSL+ 880	880	815	15.5	10.9	8.26	6.82	5.86	5.07	4.48	4.02	3.62
HSL+ 920	920	853	16.2	11.4	8.64	7.13	6.13	5.30	4.68	4.20	3.79
HSL+ 1020	1020	944	18.0	12.6	9.6	7.91	6.79	5.88	5.19	4.66	4.20
HSL+ 1060	1060	978	18.7	13.1	10.0	8.22	7.06	6.11	5.39	4.84	4.36
HSL+ 1110	1110	1024	19.6	13.8	10.4	8.61	7.39	6.39	5.65	5.07	4.57
HSL+ 1165	1165	1075	20.5	14.4	10.9	9.03	7.76	6.71	5.93	5.32	4.79
HSL+ 1210	1210	1115	21.3	15.0	11.4	9.4	8.06	6.97	6.16	5.52	4.98
HSL+ 1275	1275	1175	22.5	15.8	12.0	9.9	8.49	7.35	6.49	5.82	5.25
HSL+ 1325	1325	1220	23.4	16.4	12.4	10.3	8.82	7.63	6.74	6.05	5.45
HSL+ 1375	1375	1265	24.2	17.0	12.9	10.7	9.16	7.92	7.00	6.28	5.66
HSL+ 1395	1395	1280	24.6	17.3	13.1	10.8	9.29	8.04	7.10	6.37	5.74
HSL+ 1465	1465	1345	25.8	18.2	13.8	11.4	9.8	8.44	7.45	6.69	6.03
HSL+ 1515	1515	1395	26.7	18.8	14.2	11.7	10.1	8.73	7.71	6.92	6.23
HSL+ 1575	1575	1455	27.8	19.5	14.8	12.2	10.5	9.07	8.01	7.19	6.48
HSL+ 1625	1625	1505	28.7	20.1	15.3	12.6	10.8	9.36	8.27	7.42	6.69
HSL+ 1655	1655	1536	29.2	20.5	15.5	12.8	11.0	9.53	8.42	7.56	6.81
HSL+ 1710	1710	1590	30.2	21.2	16.1	13.3	11.4	9.9	8.70	7.81	7.04
HSL+ 1770	1770	1645	31.2	21.9	16.6	13.7	11.8	10.2	9.01	8.08	7.28
HSL+ 1810	1810	1680	31.9	22.4	17.0	14.0	12.1	10.4	9.21	8.26	7.45

HBL®

Customer Service and Support
HBL Engineering Limited
(formerly known as HBL Power Systems Limited)
Road10, Banjara Hills
Hyderabad, - 500034
Telangana, India
contact@hbl.in
EPR Number: 452686543742529144

HBL America Inc.
169 Progress Drive Suite B
Manchester, CT
06042, USA
www.hblbatteries.com
(+1) 860 257 9800

HBL Germany GmbH.
Emilienstraße 24A, 08056
Zwickau, Germany
www.hblpower.de
(+49) 375 390 96597