IS Engineering AG

VCD (Variable Center Distance)

Tong Head

- **Precise grabbing position**
  independent on wear
- **No air leakage**
  due to wear
- **Robust guide system**
  great load capacity
- **Precise guiding**
  closer to tongs

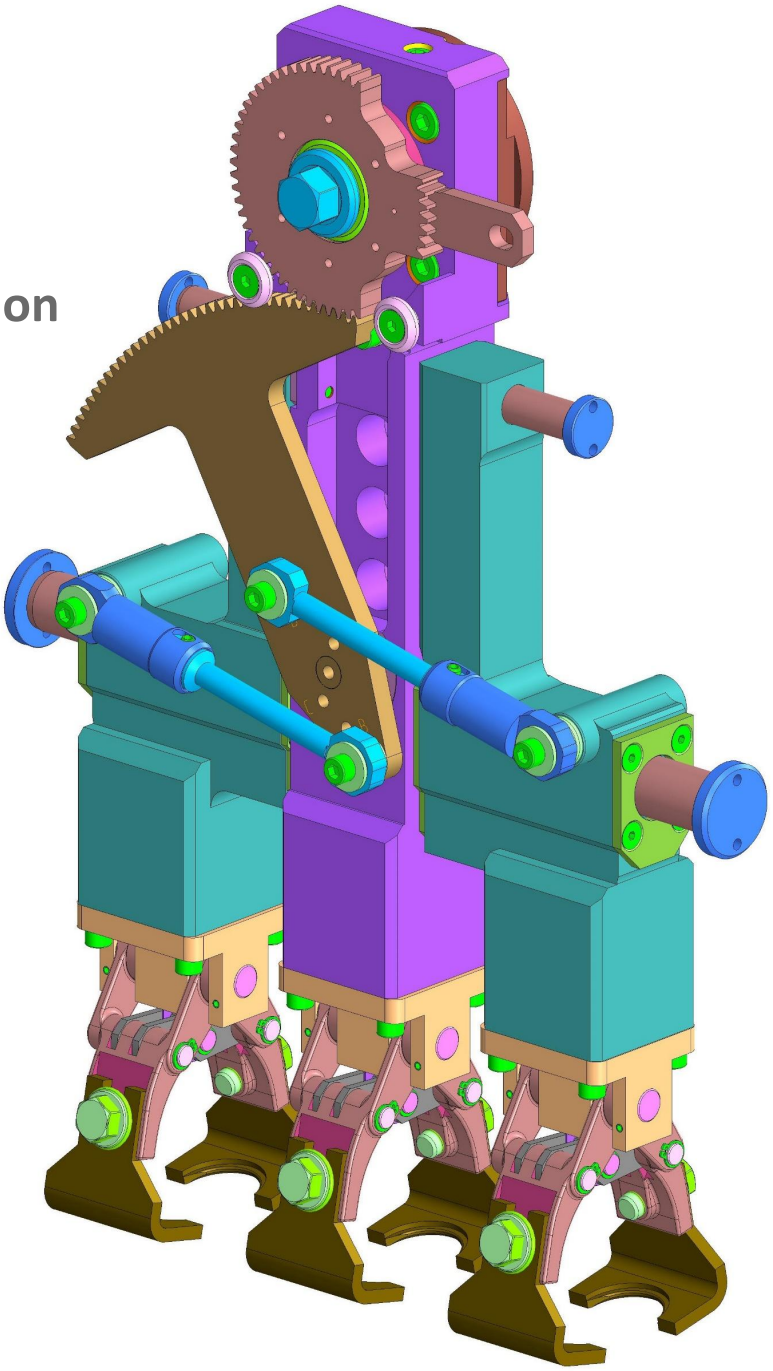

IS Engineering AG

VCD Tong Head

Variable Center Distance

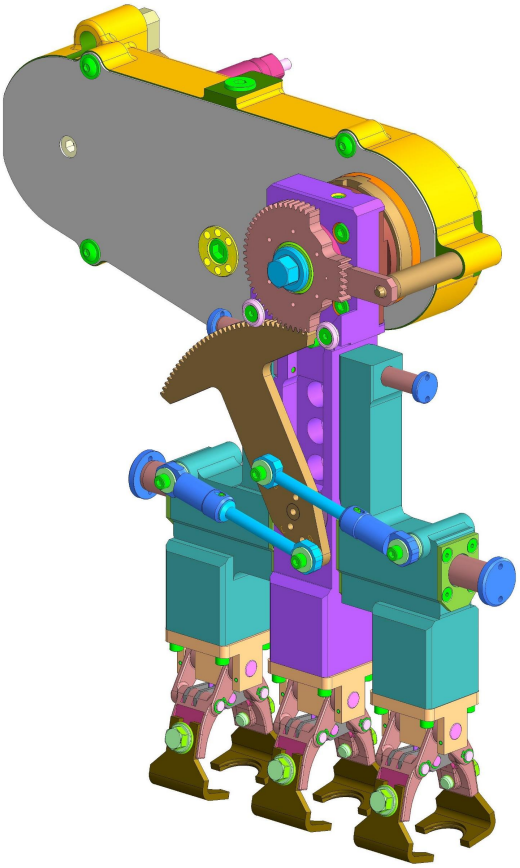

Features	Benefits
Designed in such a way that any wear on any parts of the VCD does not affect the accuracy of the gripping position over the molds or cause air leakage and loss of the tongs closing air pressure	Reduced critical defects while grabbing the container Extended service life and reduced maintenance costs
Large diameters of slider bars increase resistance against bending. Much greater load capacity of sliders guiding system	Increases rigidity. Significantly extends the service life and reduces maintenance costs
Main guide bar is close to tongs	Improves positioning accuracy of tongs, reduces critical defects
Very robust premium design, built to last	Environmentally friendly thanks to its very long service life

Available for:
NIS: TG5" & QG95mm / ISS: TG5"
AIS / IS / E-IS: TG4-$^{1}/_{4}$" & DG6-$^{1}/_{4}$" & TG85mm & TG3-$^{11}/_{32}$" & TG3-$^{1}/_{2}$"

For more information and sales inquiries please contact ISE or your sales representative

IS Engineering AG
www.isengineering.com