



Figure D — representative cases, original vs corrected reconstruction (s3_gap_bridge_gap_1.2mm). Rows are prespecified selection categories, successes and failures alike.


Case 984 — High Dice / high fragmentation
components 31→13 Dice 0.826→0.827 cIDice 0.891→0.897 surface Δ 0.098 mm

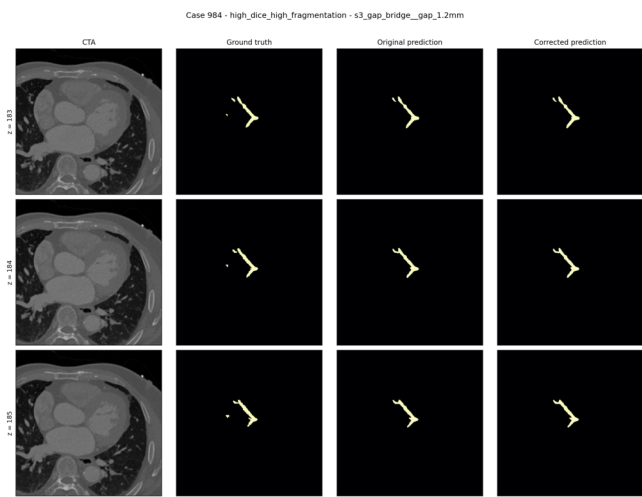


original vs corrected mesh

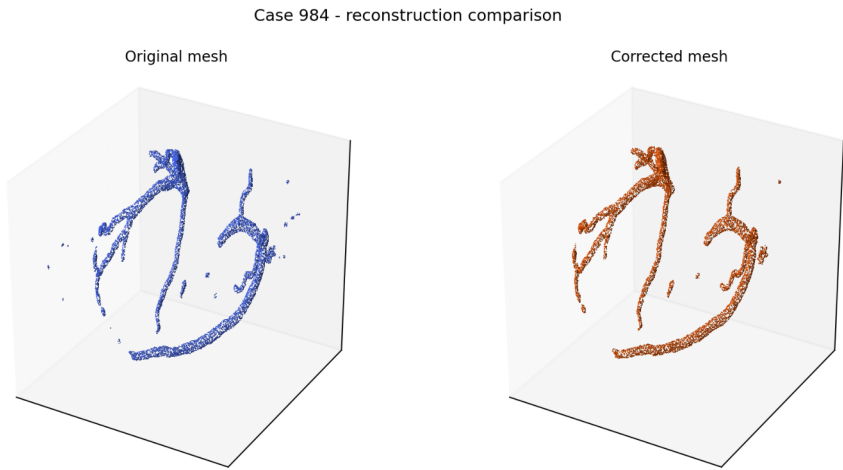


Case 977 — Moderate Dice / good topology
components 2→2 Dice 0.848→0.848 cIDice 0.952→0.952 surface Δ 0.000 mm

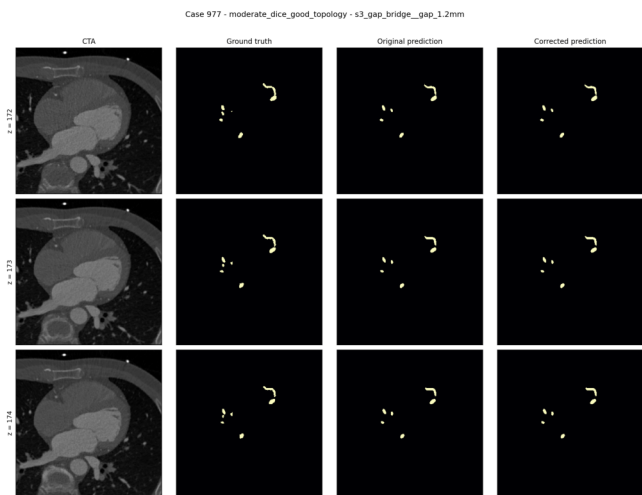


original vs corrected mesh

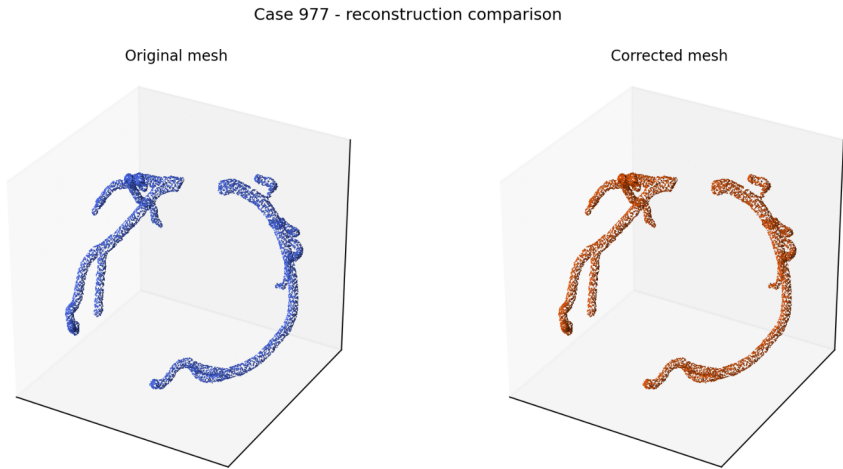


Case 798 — Largest component reduction
components 44→24 Dice 0.664→0.665 cIDice 0.764→0.774 surface Δ 0.058 mm

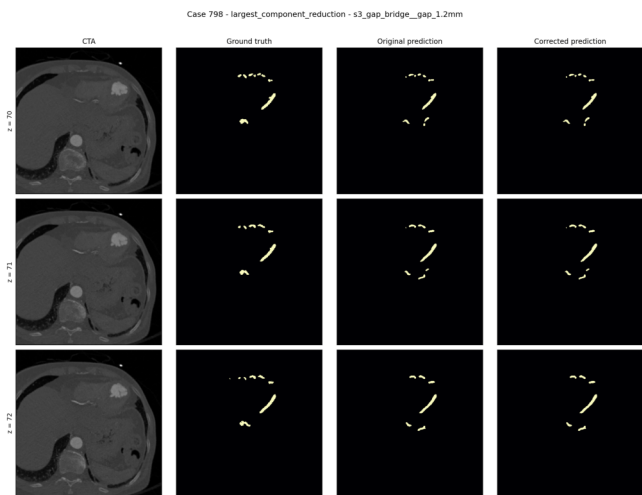


original vs corrected mesh

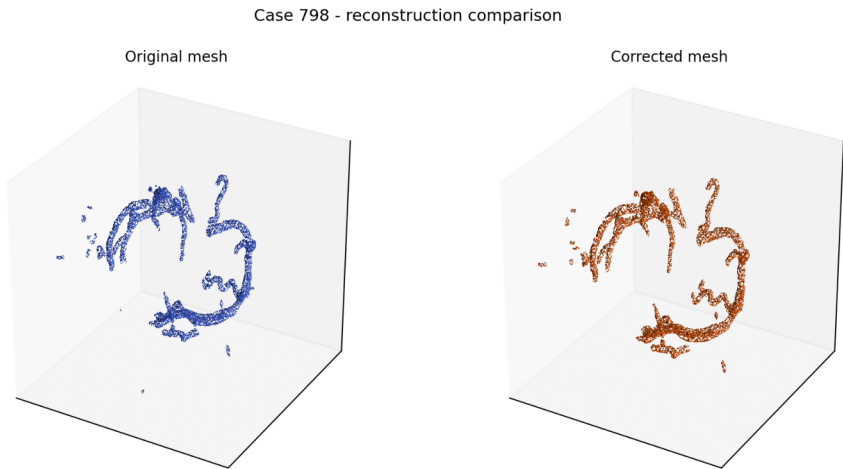


Case 792 — Little or no improvement
components 11→11 Dice 0.815→0.815 cIDice 0.892→0.892 surface Δ 0.000 mm

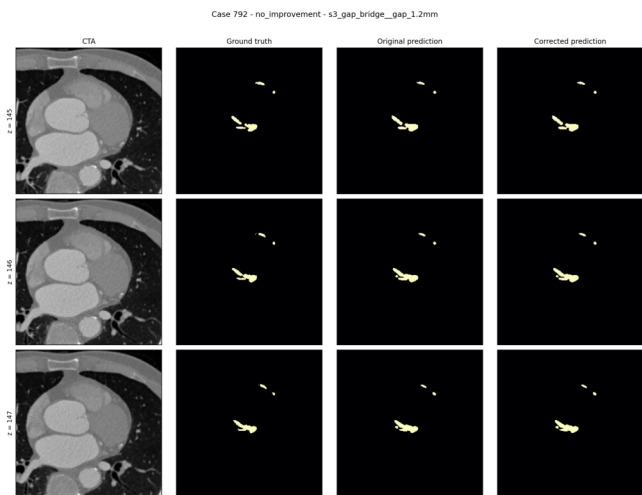

original vs corrected mesh

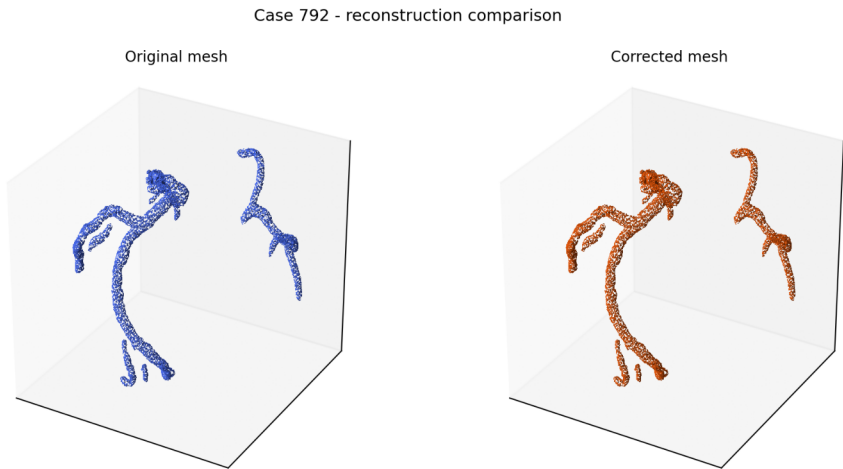

Case 759 — Largest fidelity loss (worst case)
components 9→4 Dice 0.706→0.705 cIDice 0.831→0.825 surface Δ 0.017 mm

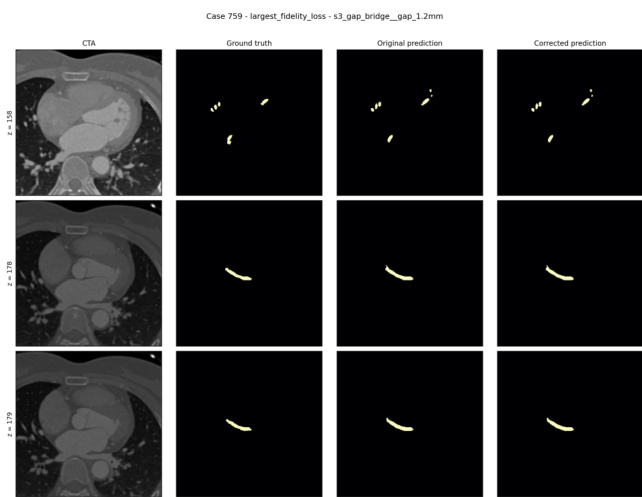

original vs corrected mesh

