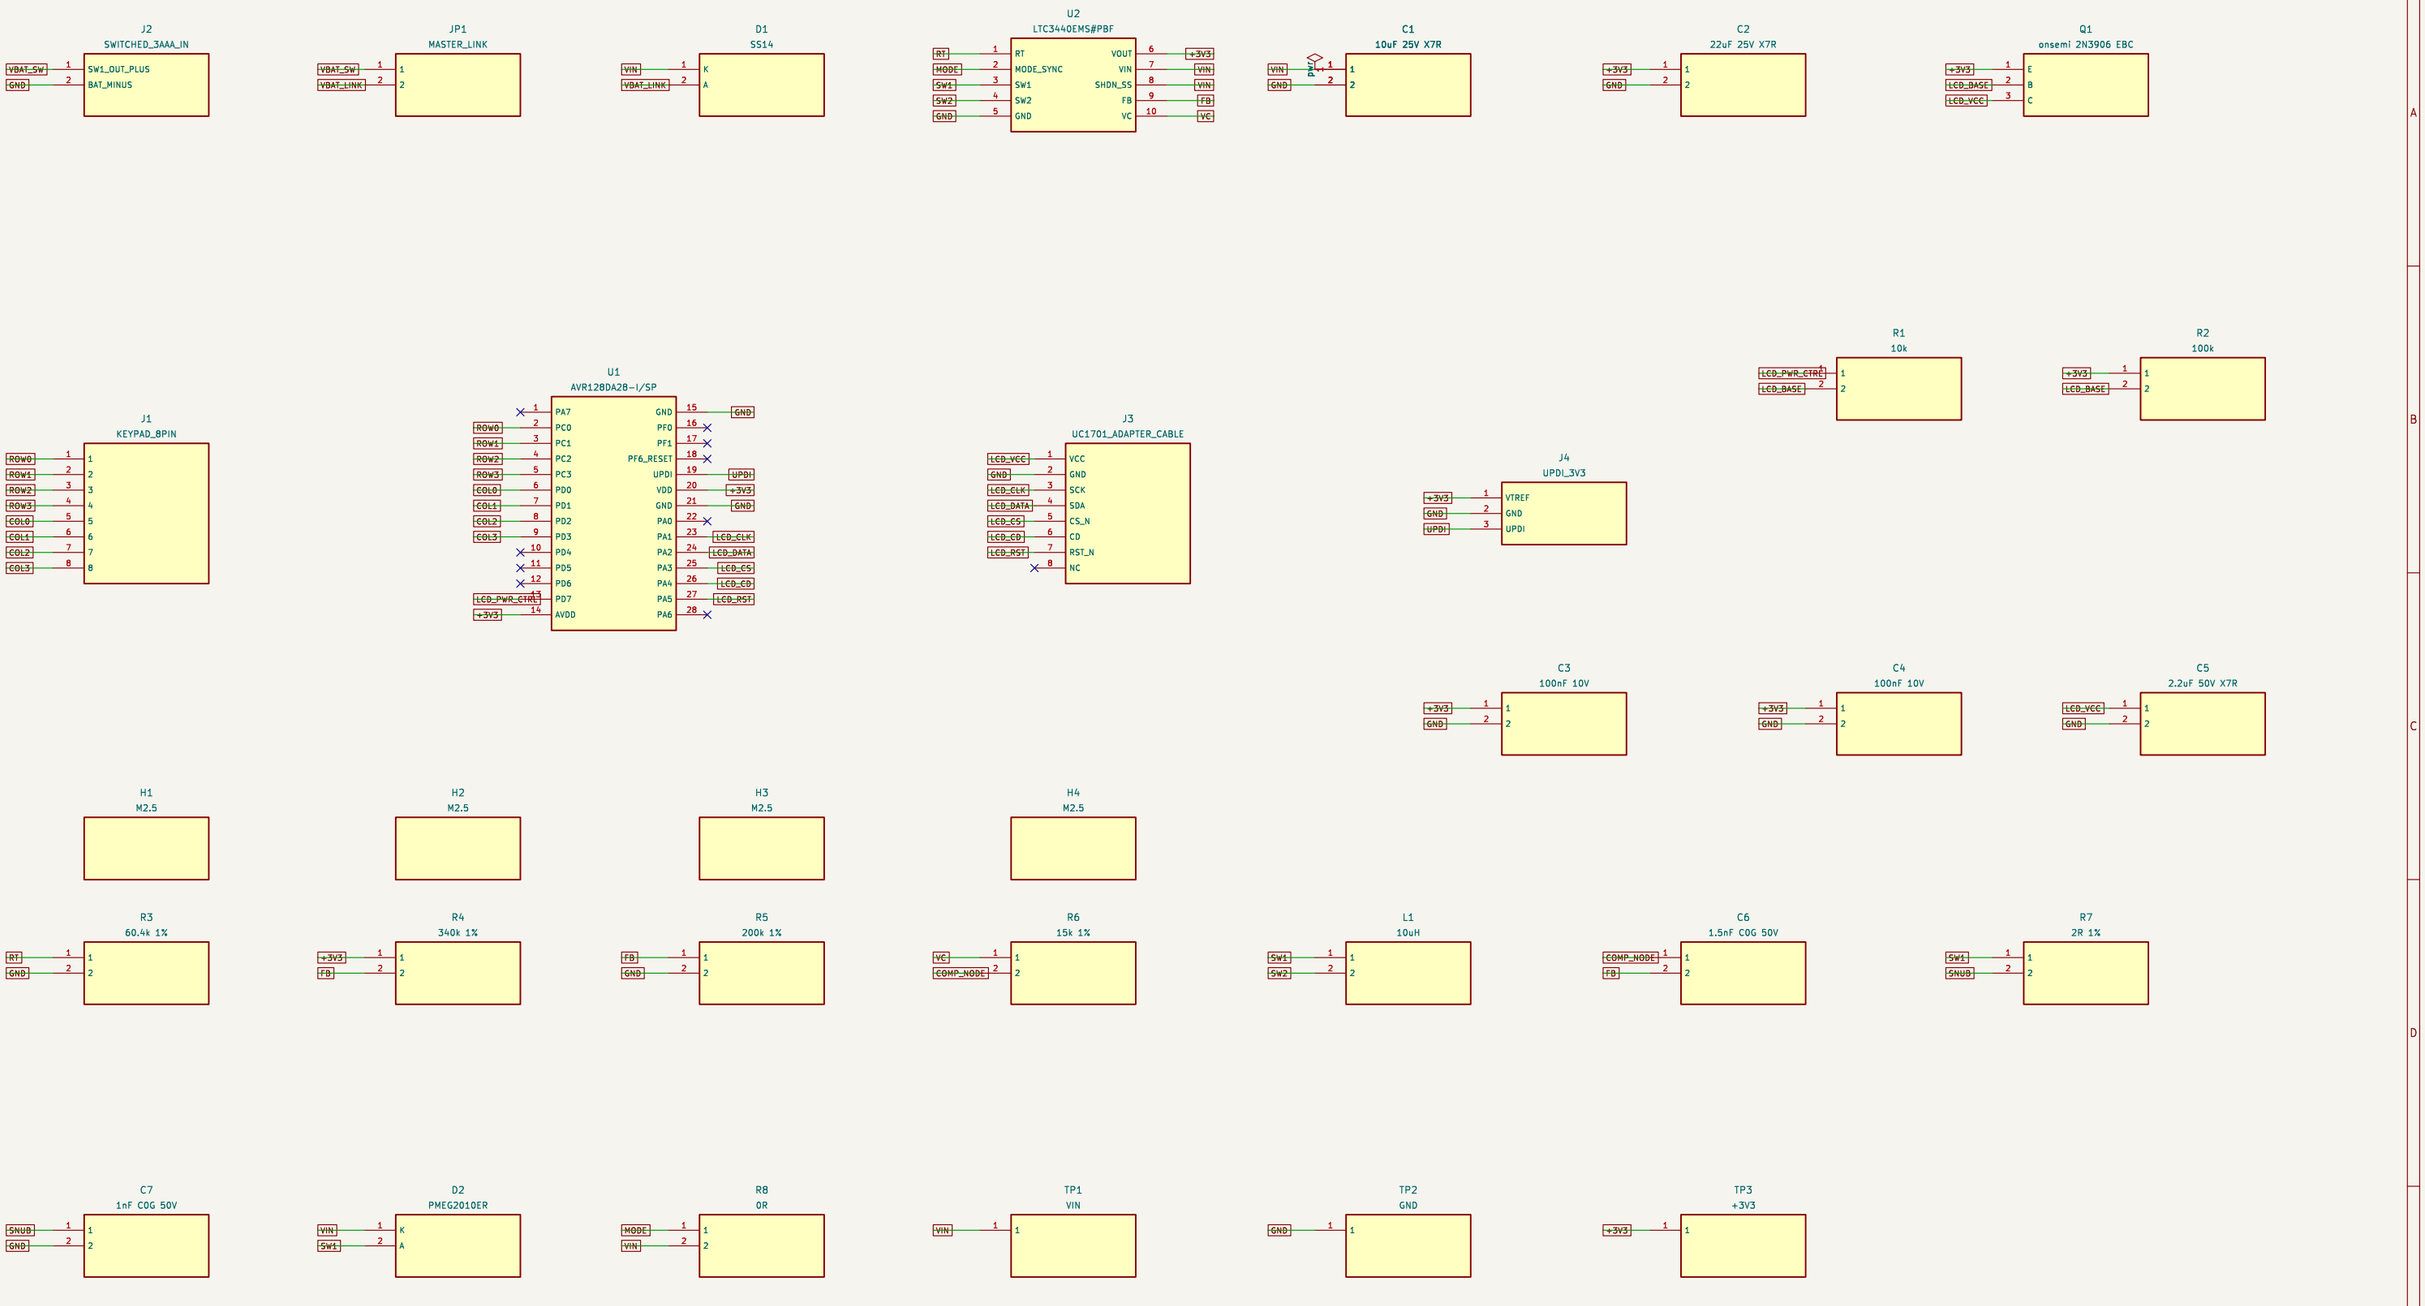


R3 LTC3440EMS MSOP-10 only. VC -> R6 -> C6 -> FB (NOT ground).

D2: K=VIN A=SW1; R7/C7: SW1-to-ground snubber for VIN above 4.5V.

J2 switched battery positive; JP1 service shunt; SS14 D1 cathode to VIN.

MODE via R8 to VIN; SHDN tied to VIN. No RC soft start fitted.

FABRICATION HOLD: physical LCD/keypad/programmer/switch mating remains unverified.

J4: remove batteries before programmer power. Never connect two power sources.

All components on F.Cu; underside drawing is mirrored; U1 notch at pins 1/28.

Prototype: firmware and physical assembly tests pending. See PCB_REVIEW.md.

Power pins on source connectors describe external supplies; Q1 collector is switched power output.

Prototype – FABRICATION HOLD

Sheet: /
File: material_weight_calculator.kicad_sch

Title: Material Weight Calculator

Size: A3	Date: 2026-11-12	**Rev: R3**
KiCad E.D.A. 9.0.2		Id: 1/1