

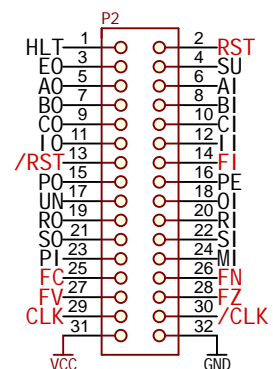


Control BUS Connector




Data BUS Connector





Step counter use the fall part of the clock signal to count the steps. Microinstructions are set during the fall clock signal and executes during the rise part.


Pull-down resistors

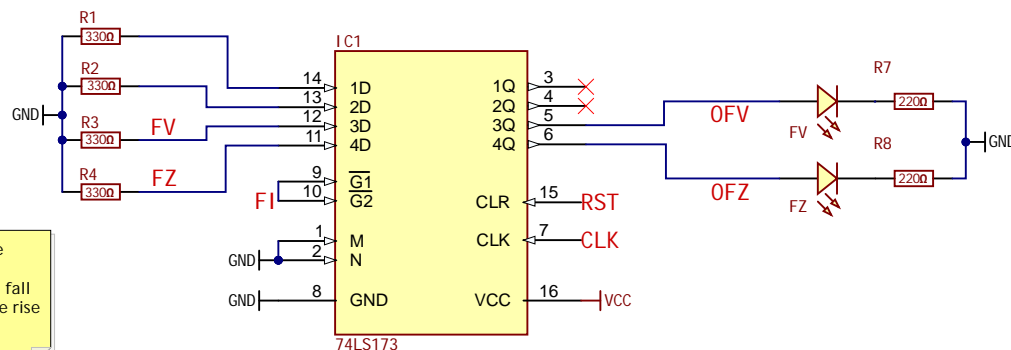

Microsequence Jumper Setup

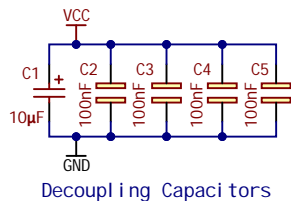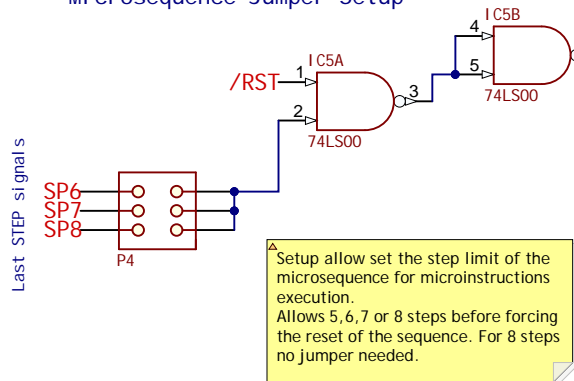

Control Logic Decoder Connector

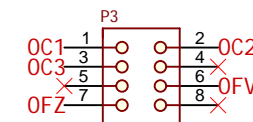

Title		
Flags Register + Step Counter		
Size	Number	Revision
A4		5
Date:	12/21/2021	Sheet of
File:	E:\OneDrive - UNED\...\FlagRegister.Sch	Drawn By:

