PROJOY electric

Portable Energy System Solution

PEOS-ESS2000




Refrigerator 120W
15.4hours

Lights 15W
5.1 days


Television 100W
18.4 hours


Electric Kettle
5 times









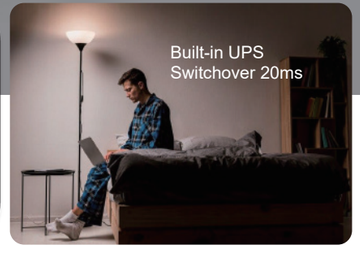





Projoy Electric Co., Ltd.

sales@projoy-electric.com www.projoy-electric.com +86 512 6620 4368

PROJOY electric

– Switch To Safety! –

Technical data

Model	PEOS-ESS2000
PV Input	
Pv Charging Input	In 3.5 hours(600W)
PV Input Voltage Range& Start Voltage	10~100Vdc,20Vdc
Maximum Charge Current	16A
MPPT Efficiency	>99%
PV Input Port	MC4
AC Input	
AC Charging Input	In 2 hours(1150W)
Input Voltage Range & Frequency	155~300Vac, 45~65Hz
Max. Input Current(RMS)	7.5A±10%
AC Input Port	1*Socket (adapt to Uk plug)
AC Output	
Rated & Peak Output Power	1000W,1500W(15s)
Output Voltage Range & Frequency	2*220~240Vac,1P, 50±0.2Hz
AC Output Port	2*Sockets(adapt to UK)
UPS Mode	Switch Time < 20ms
Battery Parameters	
Cell Type	LFP
Nominal Battery Voltage	6.4V
Nominal Battery Energy	2009.6Wh
General Specification	
Cooling Mode	Natural cooling
Altitude	≤ 2000m(Output Degradation over 2000m)
Noise	< 25dB
Weight	19kg
Dimension(D*W*H)	304*200*310mm
IP	IP54
Operating Temperature Range	Charging: 0℃~ 45℃; Discharging:-20℃~45℃
Allowed Humidity Range	20% ~ 85%
Protection	AC output overpower/ overcurrent/ short-circuit PV overcurrent/ Battery temperature

Disclaimer:
This document may contain forecast information, including but not limited to future finances, operaions, product series, new technologies, etc. Due tpractice the uncertainty in the actual results may difer from the predicted information. Therefore, the information in this document is for reference onhand does not constitute any offer or promise. Vestwoods may modify the above information without notice.