


CONTROLLED IMPEDANCE

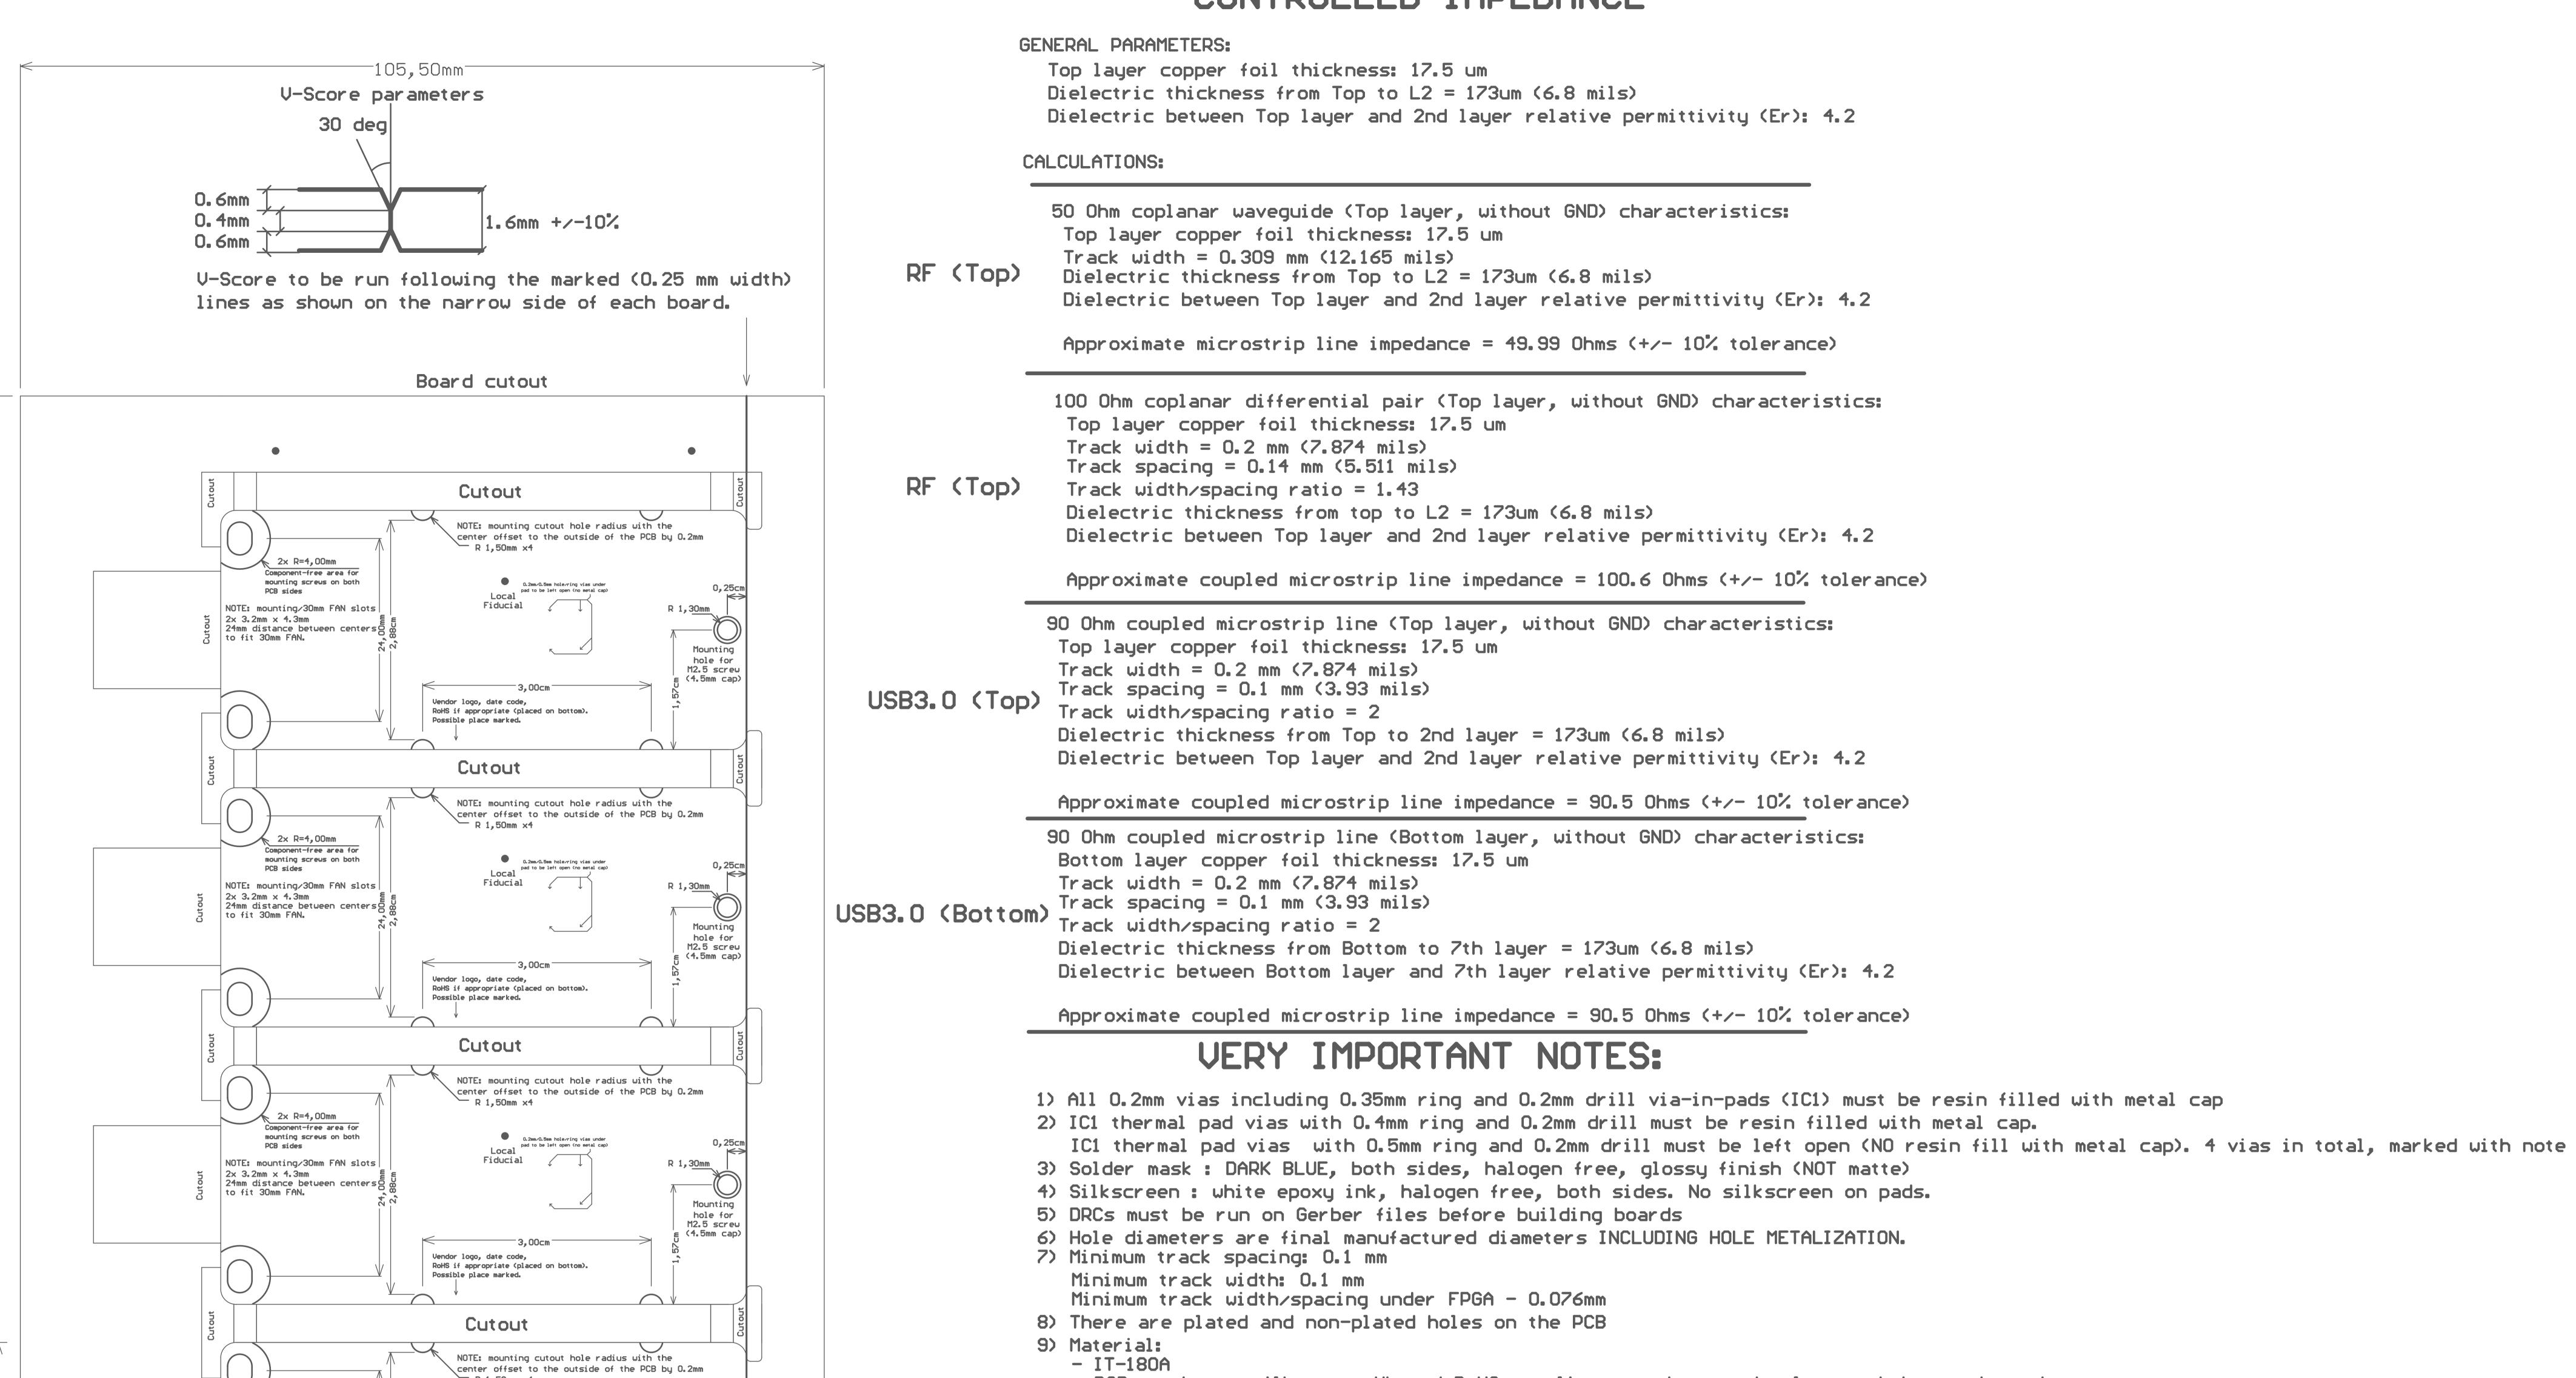

2× R=4,00mm

NOTE: mounting/30mm FAN slots

24mm distance between centers \$

to fit 30mm FAN.

omponent-free area for

mounting screws on both

0.2mm/0.5mm hole/ring vias under pad to be left open (no metal cap)

Local

Fiducial

RoHS if appropriate (placed on bottom).

Possible place marked.

R 1,30mm

Mounting hole for

M2.5 screw

- PCB vendor to silkscreen UL and RoHS compliance marks, vendor logo and date code on bottom
- where shown (ignore if none of the info will be placed on PCB)
- Copper weight: External layers 0.5 oz+plating
 Internal layers 1 oz
- 10) Electrical test: 100 % netlist.
- 11) Boards are to be individually bagged.
- 12) Assembly note: Assembly house MUST provide notes in paper with shipped board if there were any changes during assembly and the board is not assembled 100% according to BOM and P&P files. Note example:

