




A cut above the best.
For over 25 years.

Plywood | Block Boards | Doors

ISO 9001:2015 Company

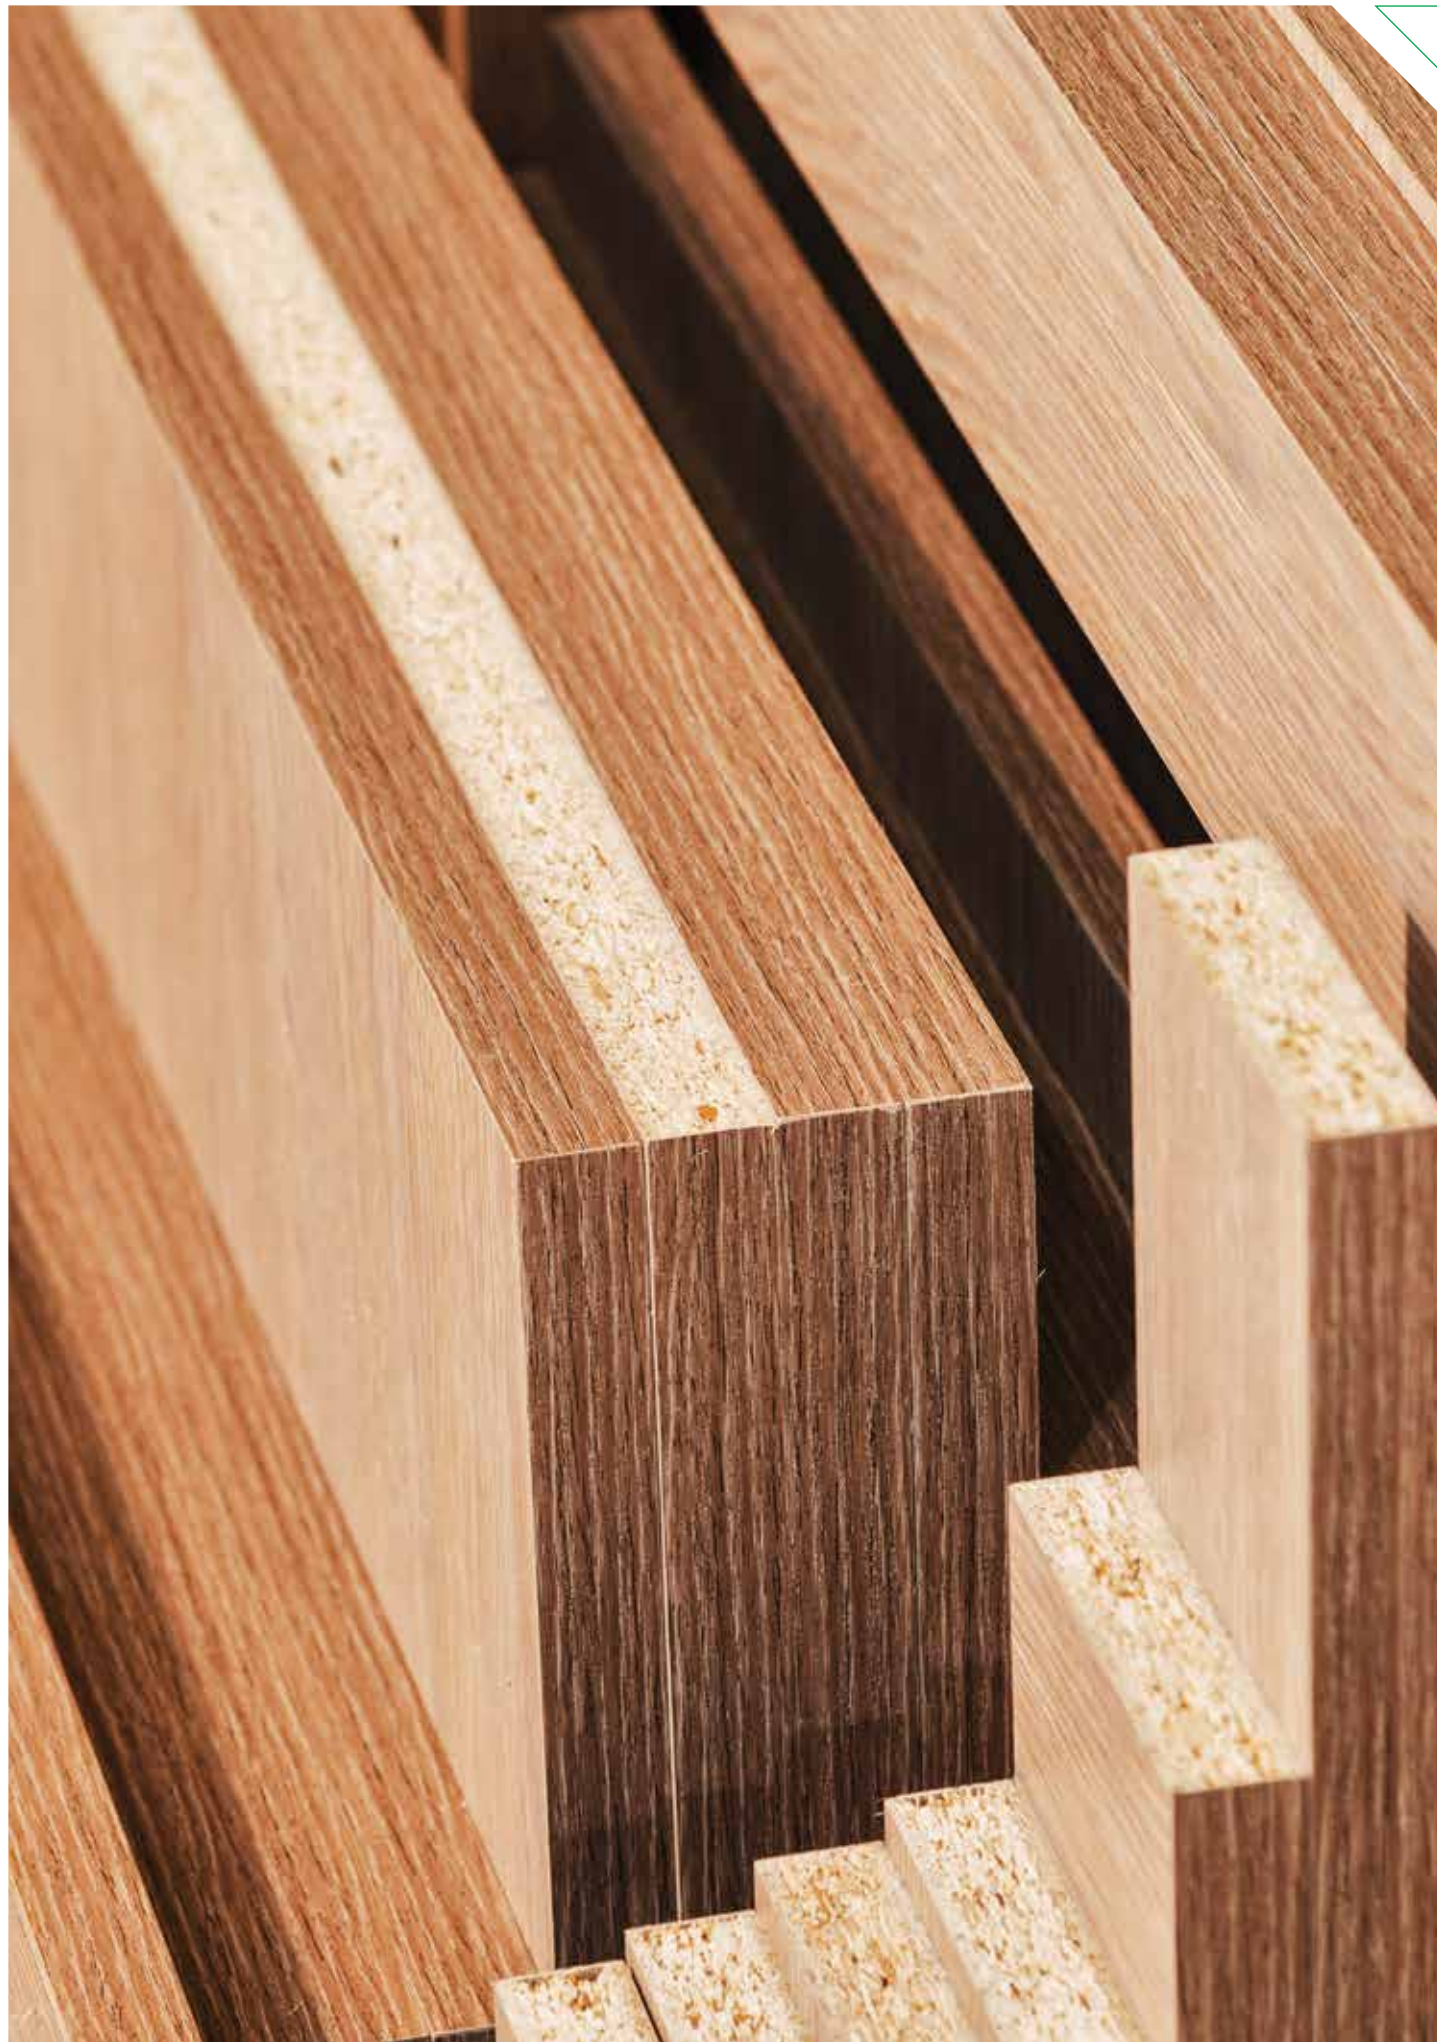

Quality & Strength in Every Inch

When you want ply, you want durability. You want reliability. You want strength. You really want only Oswin Ply. Rain or shine, termites or abrasion, nothing gets through our range of Ply designed to meet the most stringent standards, across the entire spectrum of usage.

Aesthetic interiors or heavy-duty construction, Oswin Ply is your first and only choice – whether you are the carpenter, the architect or the end-user.

Wood that's Always Good

No matter what the product is, the common ingredient in them all is care. From our top management to the highly motivated workers who man the plant, the Oswin Ply family is committed to keeping the highest standards of quality. This is why we regularly upgrade the plant, to make sure not just the latest, but also the best practices are adhered to in production.

A World of Choice

When you choose Oswin Ply, you choose expertise. Not just in one product, but an entire range of man-made wood products. We spare no effort in our mission to bring the best to our customers.

- Oswin Ply Club
- Oswin Ply Platinum
- Oswin Ply Gold
- Oswin Ply MR - Commercial
- Oswin Block-Board
- Oswin Ply Film Face Shuttering
- Oswin Flush Doors
- Oswin Panel Doors

The Oswin Advantage

There's a reason why Oswin Ply is strong from core to surface, edge to edge. More accurately, there are three reasons.

100% In-House Manufacturing

If you want it done well, you have to do it yourself. Oswin Ply is 100% in-house manufacturing. Our plant is upgraded on a regular basis to ensure that the latest and best industry practices are employed. The ply sheets are bonded with our ARTechnology which has special chemical properties that ensures better penetration during assembly and pressing. A special treatment using high quality preservatives, along with the hydraulic press makes Oswin Ply resistant to termites and borers. The Wide Belt Sander gives a higher quality finish.

ARTechnology

Quality is a commitment from beginning to end. At Oswin Ply, we are very meticulous about where we source our material from. We only use specially selected high density hardwood veneer, procured from the best global markets. The quality of the timber makes it resistant to fungus, rot and other harmful micro-agents. Our in-house developed ARTechnology is used to bind the ply together. This technology truly sets a high benchmark in ply production, so the finished ply is more stable, structurally robust and exceptionally durable with superior nail holding capacity.



An ISO 9001 Company

At Oswin Ply, quality is not just a buzzword but a way of life. Statistical methods help us improve quality continuously. Process quality is monitored on a constant basis. Our company's ISO 9001:2015 quality standard is a strong catalyst for producing the world's finest quality ply panels.

Why Choose Oswin Ply



Super Strong



Loyal Network



ISO 9001:2015



ARTechnology



Eco-friendly Practices



Architect's Choice



Superior Quality



Termite & Borer Free




ISI Certified



Carpenter's Delight



The Ply Process

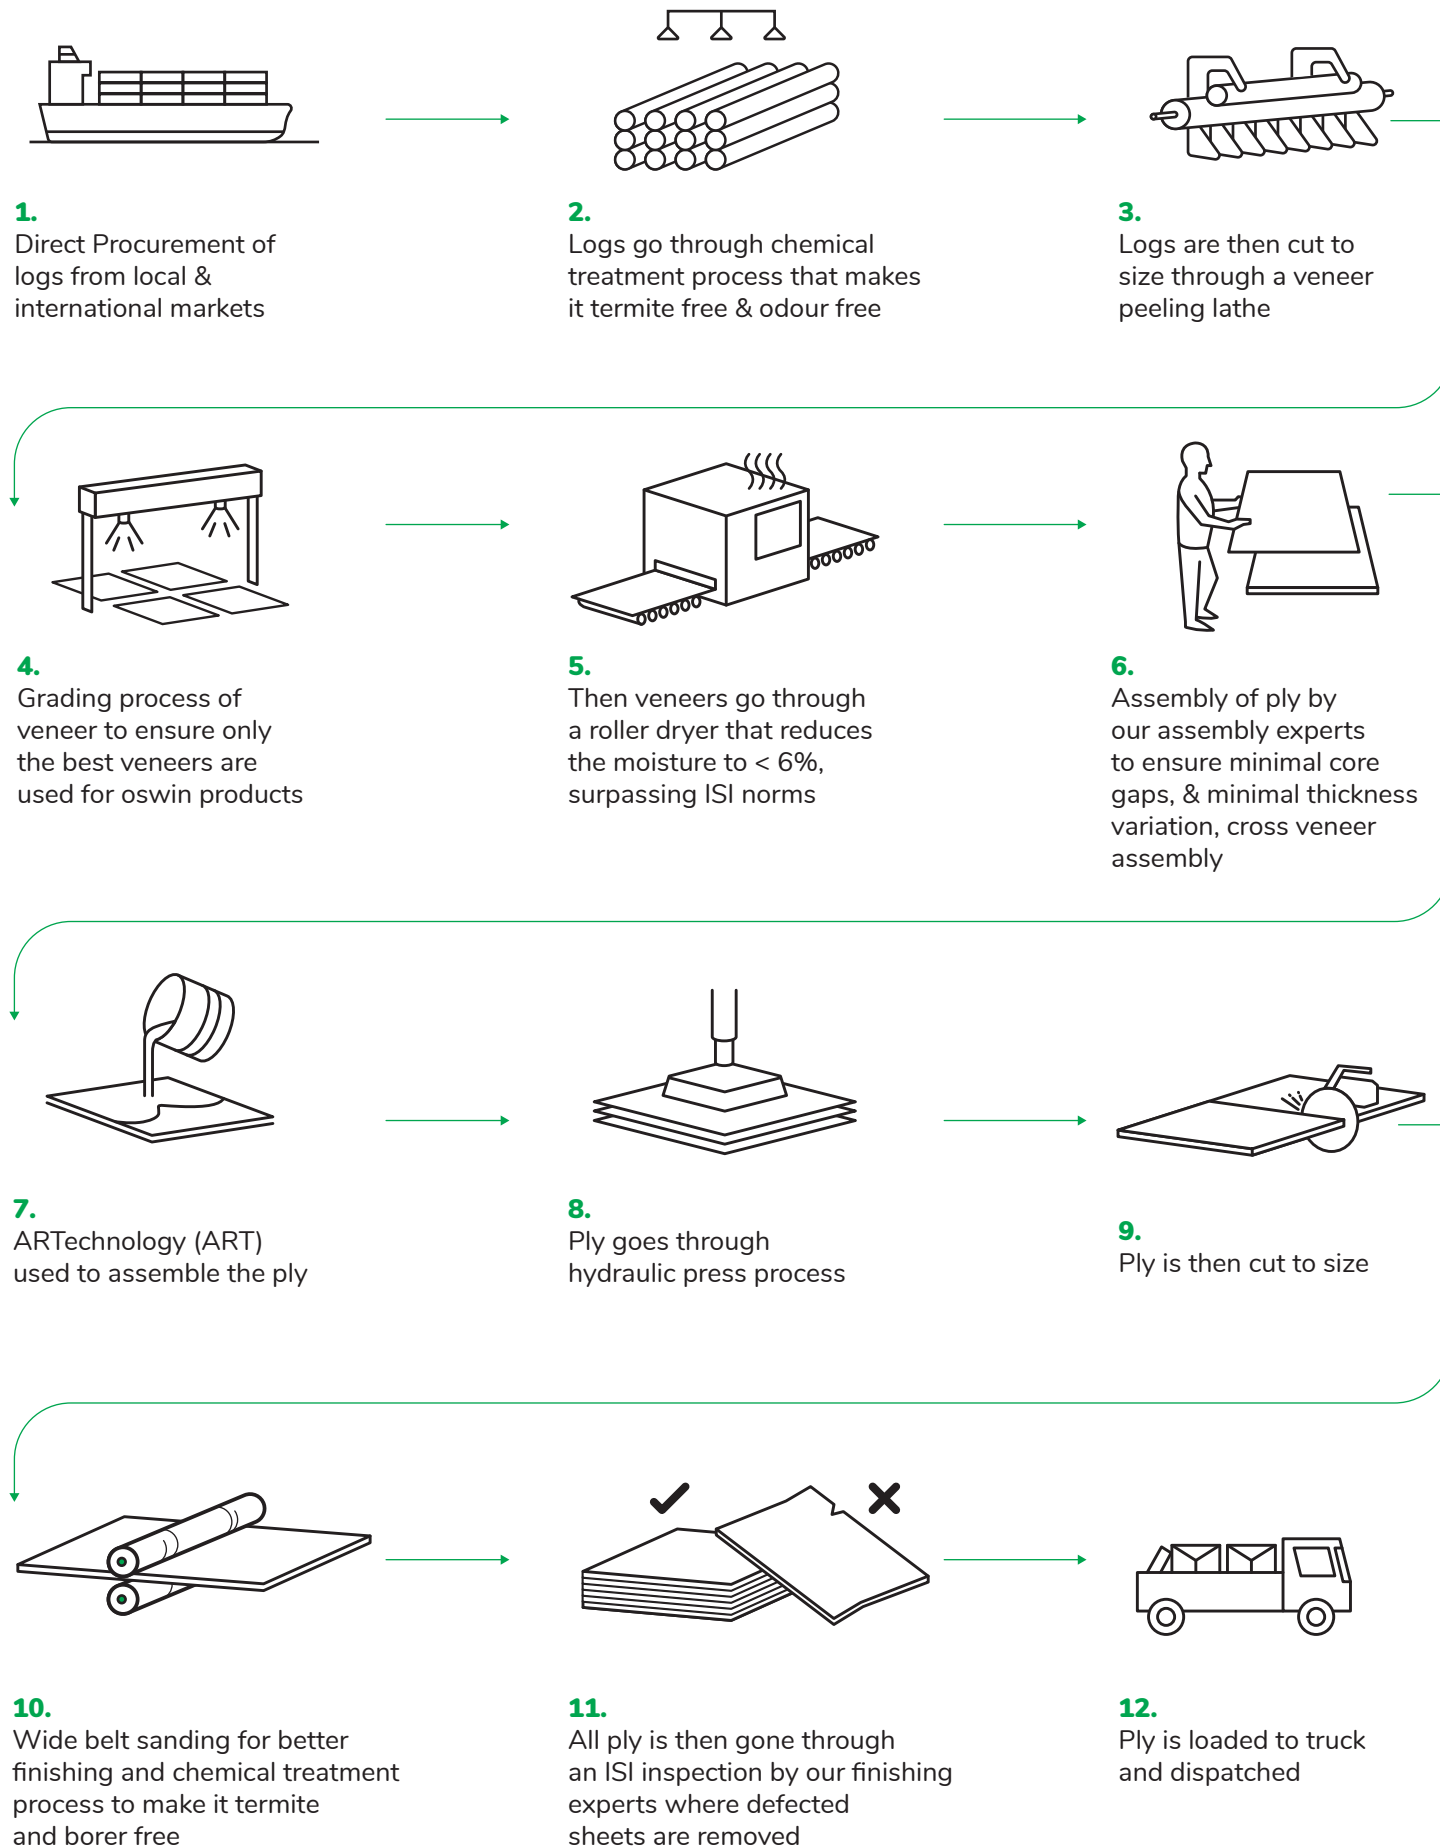

The Oswin Ply Range

A deep dive into the world of Oswin Ply will reveal a dazzling range of products and the unique qualities that make them the best in the market.



Oswin Ply Club Simply The Best

Oswin's Marine Grade Ply is made with high-quality waterproof glue that makes the ply structurally intact and virtually free of defects. This is a popular choice for durable outdoor furnishing projects that gets exposed to moisture, humidity and the stresses of weather due to its strong protective finish. Marine Grade Club Ply from Oswin Ply is truly the toughest there is. No second thoughts, no hesitation.

STANDARD SIZES (In mtrs)
2.44 x 1.22, 2.14 x 1.22, 1.84 x 1.22,
2.44 x 0.92, 2.14 x 0.92, 1.84 x 0.92

THICKNESS (In mm)
6, 8/9, 12, 15/16, 18/19, 24/25

Oswin Ply Platinum
Most Preferred Choice

While standard BWR grade ply can stand 72 hours of water at 100°C, Oswin Ply Platinum comes with an unbeatable 108 hours boiling water proof guarantee thanks to the ARTechnology. They can also withstand massive variations in temperature and climate due to anti-stress measures implemented at every stage. When the going gets tough, Oswin Ply Platinum gets going.

STANDARD SIZES (In mtrs)
2.44 × 1.22, 2.14 × 1.22, 1.84 × 1.22,
2.44 × 0.92, 2.14 × 0.92, 1.84 × 0.92

THICKNESS (In mm)
4, 6, 8/9, 12, 15/16, 18/19, 24/25



Oswin Ply Gold
Most Cost Efficient Choice

This ISI marked ply from Oswin is bonded under high pressure and heat using indigenously manufactured ARTechnology. The tough treatment given to the ply makes it particularly sturdy and worthy of the 'boiling water grade' tag. The veneers are treated with preservatives and the glue line is infused with chemicals for borer and termite protection. The finished panels are treated in acid copper chrome and boric acid compound. In effect, the ply does not swell even when immersed in boiling water for hours on end. This is the perfect choice for hot, humid locations.



Highlights

	Oswin Ply Club	Oswin Ply Platinum	Oswin Ply Gold
Raw Material	100% Internationally Sourced Timber	Internationally Sourced Timber and Selected Indian Hardwood	Selected Indian Hardwood with Internationally Sourced Timber
ARTechnology	✓	✓	✓
Waterproof 100 °c	108 hours	108 hours	72 hours
Glue Spread	★★★★★	★★★★★	★★★★☆
Glue Bonding	★★★★★	★★★★★	★★★★☆
Termite Treatment Process	★★★★★	★★★★★	★★★★☆
Price	★★★★★	★★★★★	★★★★☆

Specifications

	IS:710 BWP Requirement			
Density	0.65 - 0.70	Compliant	Compliant	Compliant
Moisture Content	5-15%	8-9%	8-9%	8-9%
Glue Shear Strength (Dry)	Average Min 1350 Newton	1800 N	1800 N	1650 N
Water Resistance Test	More than 1200 N	1300 N	1300 N	1300 N
Mycological Test	More than 1150 N	1250 N	1250 N	1250 N
Boiling Water Test	No Delamination even after boiling for 108 hrs	Passed/No Delamination	Passed/No Delamination	Passed/No Delamination
Specific Gravity	0.7 - 0.85	Compliant	Compliant	Compliant
Screw Holding Strength	More than 350 Kgs	450 Kgs	450 Kgs	400 Kgs
Nail Holding Strength (Normal to Face)	More than 75 Kgs	185 Kgs	185 Kgs	130 Kgs
Water Absorption	Less than 4.5%	Compliant	Compliant	Compliant
Tensile Strength	Not less than 42 N/mm ² (parallel to grain)	55 N/m ²	55 N/m ²	45 N/m ²
Tolerance	Length ± 0-6 mm Width ± 0-3 mm	Length - 2 mm Width - 2 mm	Length - 2 mm Width - 2 mm	Length - 2 mm Width - 2 mm
Squareness	2 mm/1 mm or 0.2%	0.15%	0.15%	0.17%

ARTechnology
That leads in superior bonding

Oswin Ply M. R. Commercial

The term ‘commercial plywood’ is often used to mean weak or non-durable ply. Oswin Ply destroys that perception with strength and unusual durability. Bonded with a superior grade MUF Technology, it makes the ply high-performing. Oswin Ply MR - Commercial is ideal for interior work whether paint, laminate or varnish.

IS Grade	303 MR
Moisture Content	7-10%
Water Resistance Test	780N-910 N
Mycological Test	710N-910 N
Glue Adhesion Test	860N-1120 N
Raw Material	Selected Indian hardwood
MUF Technology	✓
Glue Spread	★ ★ ★
Glue Bonding	★ ★ ★
Termite Treatment Process	★ ★ ★
Price	★ ★ ★



Oswin Ply Film Face Shuttering

High density ply with superior performance, Oswin Ply Film Face Shuttering is built for repeat use. The ply is preservative treated by the vacuum pressure impregnation process as per IS 5539:1969 standards, with Copper Chrome Arsenic composition having a retention of not less than 12 Kg/cm². The ply is manufactured as per specifications laid down under IS 4990:1993 to give Oswin Ply Film Face Shuttering an incredible reuse value.



	Prescribed Value
Dimension (mm)	
a) Length	+6 mm, -0 mm²
b) Width	+3 mm, -0 mm²
c) Thickness	+8%
Squareness (%)	0.2
Edge Straightness (%)	0.2
Workmanship and Finish	Confirm
Moisture Content (%) IS 1734 (P-1)	5 - 15
Glue Adhesion Strength in Dry State IS 1734 (P-4)	
i) Glue Shear Strength (N)	
a) Average	1000 N
b) Minimum Individual	800 N
ii) Adhesion of Plies (Knife Test)	Min. Pass Standard
Resistance to Water (After 72 hrs Boiling), N	
i) Glue Shear Strength (N)	
a) Average	1000 N
b) Minimum Individual	800 N
ii) Adhesion of Plies (Knife Test)	Min. Pass Standard
Resistance to Micro-Organisms (N)	
i) Glue Shear Strength (N)	
a) Average	1000 N
b) Minimum Individual	800 N
ii) Adhesion of Plies (Knife Test)	Min. Pass Standard
Tensile Strength, N/mm²	
i) Parallel to the Face Grain	32.5 N/mm²
ii) Perpendicular to the Face Grain	22.5 N/mm²
iii) Sum of the Tensile Strengths (i+ii)	60.0 N/mm²
Retention of Preservative Chemicals, Kg/m³	Min. 12 Kg/m³
Modulus of Elasticity	8000 N/mm²



Oswin Block Boards

Durability and strength are the key to block boards. At Oswin, the block board is made from kiln-seasoned and preservative treated high density timber. As with every product, the timber is imported hard wood veneer, giving the board high mechanical strength and screw/nail holding capacity. The unbeatable ARTechnology gives the blockboard added robustness. They do not twist when wood work is under way. They also come with excellent insulating properties and are weather proof.

STANDARD SIZES (mtrs)
2.44 × 1.22, 2.14 × 1.22, 1.84 × 1.22,
2.44 × 0.92, 2.14 × 0.92, 1.84 × 0.92

THICKNESS (In mm)
19, 25, 30, 35, 40 & 45



Plywood | Blockboards | Doors
ISO 9001:2015 Company

No.183/1, Sydenhams Road, Apparao Garden, Choolai, Chennai 600 112, India.

Ph: +91 44 2669 0023 / +91 44 2669 0156 / +91 44 2669 0182

Email: sales@oswinply.com