

规格说明:Specifications:
电气特性:Electrical:

1. 额定电流: Current Rating
1.0A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
50 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
300 V AC AT Sea level
5. 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

物理性能: Mechanical:






1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.0kgf (MAX)
Unmate force: 0.7kgf (MIN)
2. 端子保持力: Terminal Retention
0.5kgf (MIN)

原材料: Material:

1. 塑胶: Housing:
Hing Temperature Thermoplastics,
UL 94V-0 LCP Black
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳: Shell:
Nickel Plating

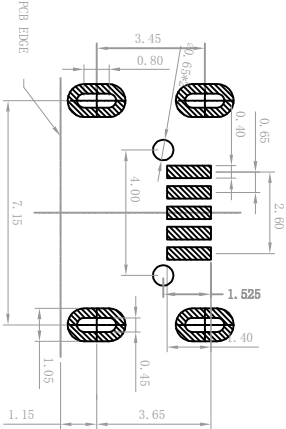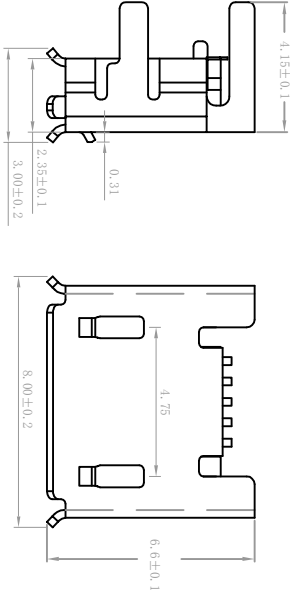

RECOMMENDED PCB LAYOUT

(TOL: ±0.05)

 深圳市莞端电子科技有限公司 Shenzhen Guanduan Electronic Technology Co., Ltd		图号 (DWG NO)		单位 (UNIT): MM
品名 (ITEM NO)	MICRO USB 5P/F DIP B型有柱端子加长0.35 (四脚插板)	版本 (REV)	A/0	比例 (SCALE) 1:1
料号 (PART NO)		日期 (DATE)	2012.07.08	设计 (DESIGN)
型号 (MODEL NO)		审核 (CHECKED)	王文东	公差 (TOLERANCE INSPECTED)
		核准 (APPROVED)		X.X X.XX X.XXX X.X° ±2°