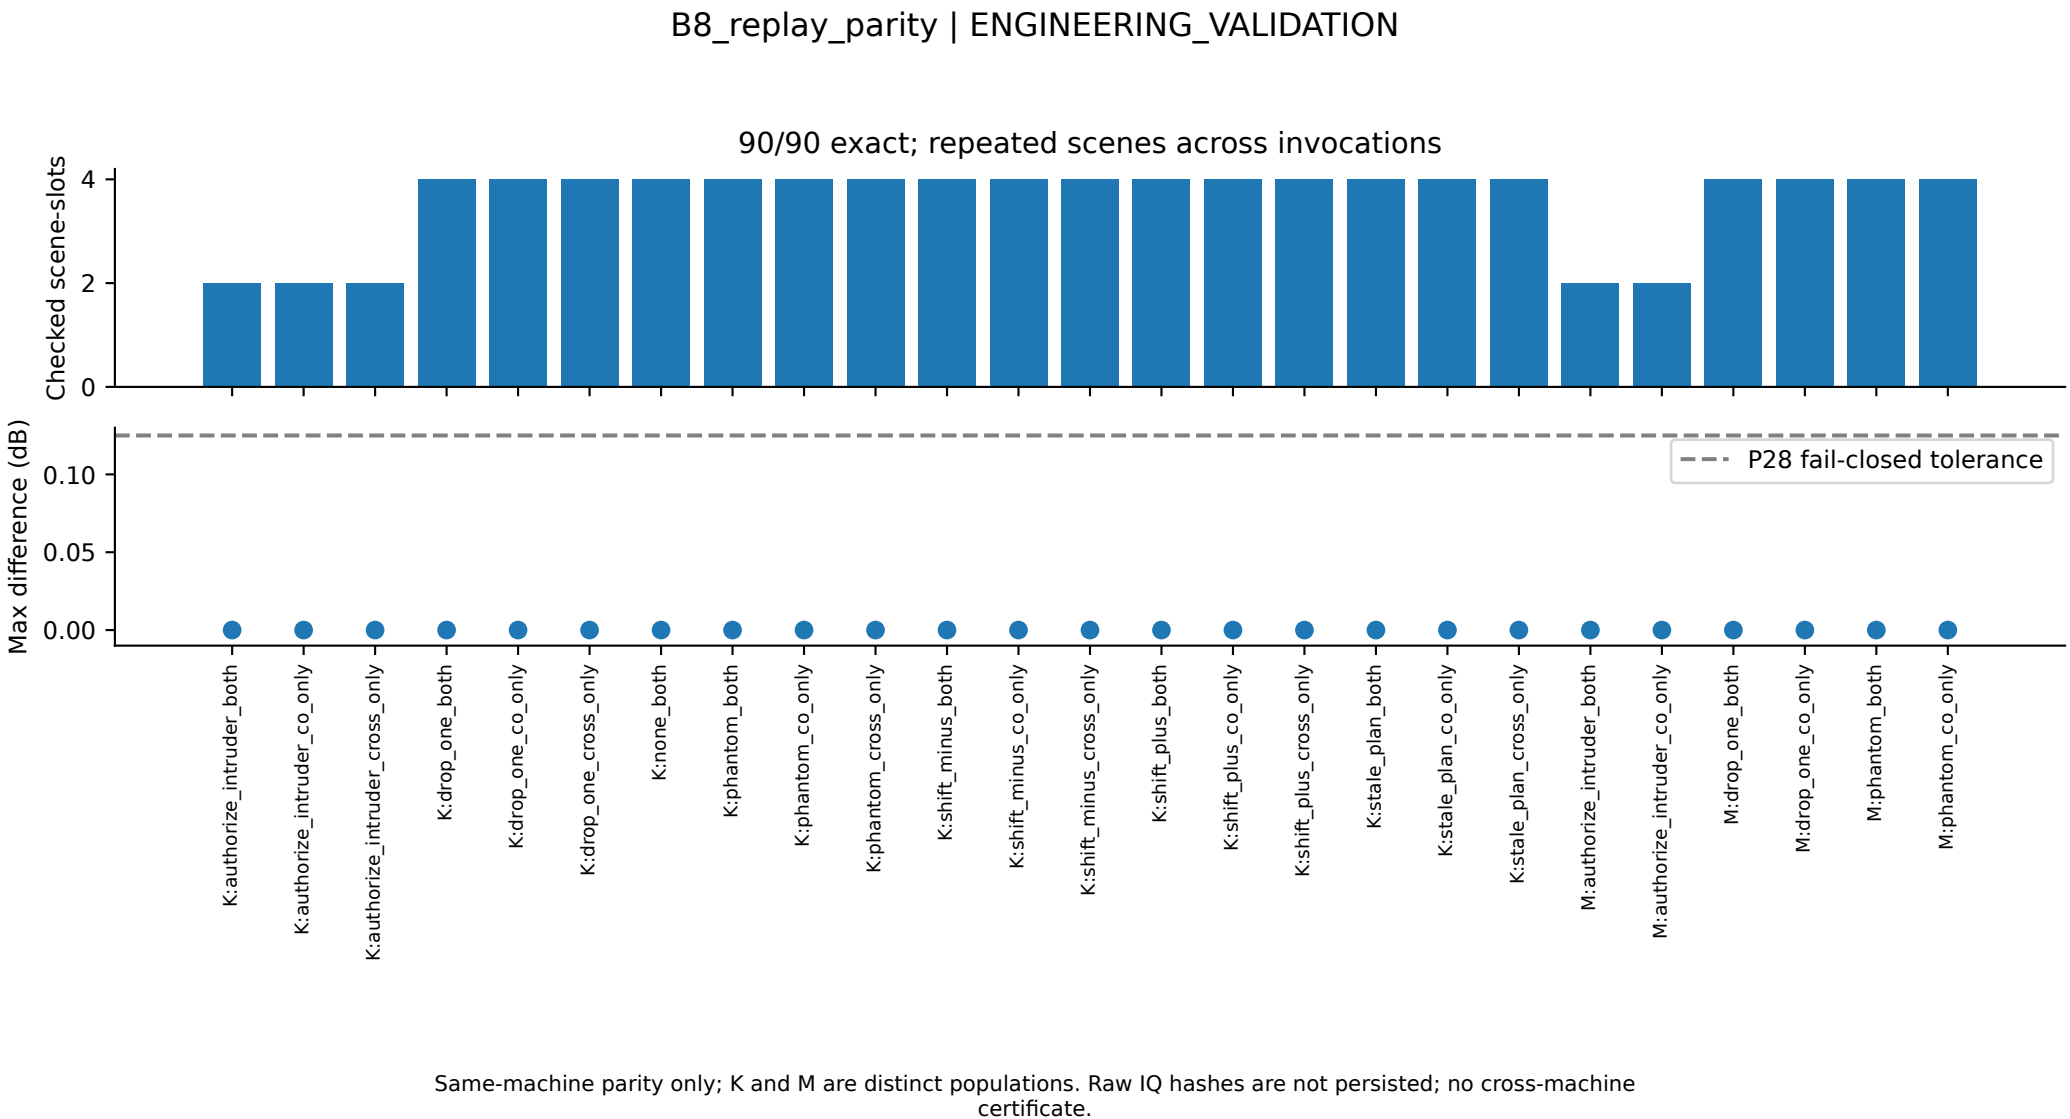
B8_replay_parity | ENGINEERING_VALIDATION
90/90 exact; repeated scenes across invocations
Checked scene-slots
0
2
4
Max difference (dB)
0.00
0.05
0.10
P28 fail-closed tolerance
K:authorize_intruder_both
K:authorize_intruder_co_only
K:authorize_intruder_cross_only
K:drop_one_both
K:drop_one_co_only
K:drop_one_cross_only
K:none_both
K:phantom_both
K:phantom_co_only
K:phantom_cross_only
K:shift_minus_both
K:shift_minus_co_only
K:shift_minus_cross_only
K:shift_plus_both
K:shift_plus_co_only
K:shift_plus_cross_only
K:stale_plan_both
K:stale_plan_co_only
K:stale_plan_cross_only
M:authorize_intruder_both
M:authorize_intruder_co_only
M:drop_one_both
M:drop_one_co_only
M:phantom_both
M:phantom_co_only
Same-machine parity only; K and M are distinct populations. Raw IQ hashes are not persisted; no cross-machine certificate.