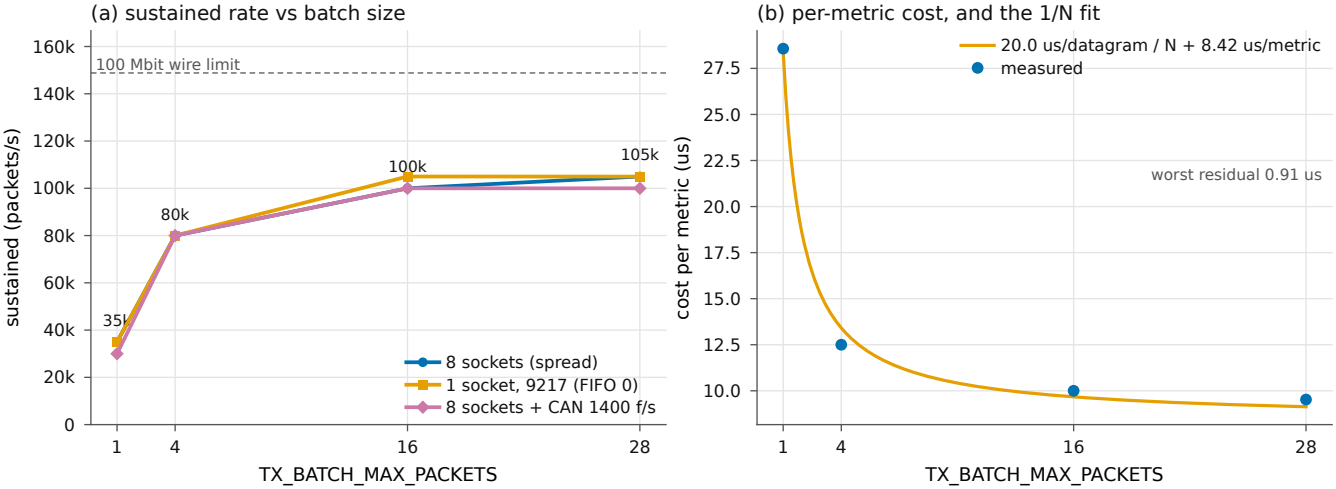
(a) sustained rate vs batch size
sustained (packets/s)
160k
140k
120k
100k
80k
60k
40k
20k
0
100 Mbit wire limit
35k
80k
100k
105k
8 sockets (spread)
1 socket, 9217 (FIFO 0)
8 sockets + CAN 1400 f/s
1
4
16
28
TX_BATCH_MAX_PACKETS
(b) per-metric cost, and the 1/N fit
cost per metric (us)
27.5
25.0
22.5
20.0
17.5
15.0
12.5
10.0
20.0 us/datagram / N + 8.42 us/metric
measured
worst residual 0.91 us
1
4
16
28
TX_BATCH_MAX_PACKETS