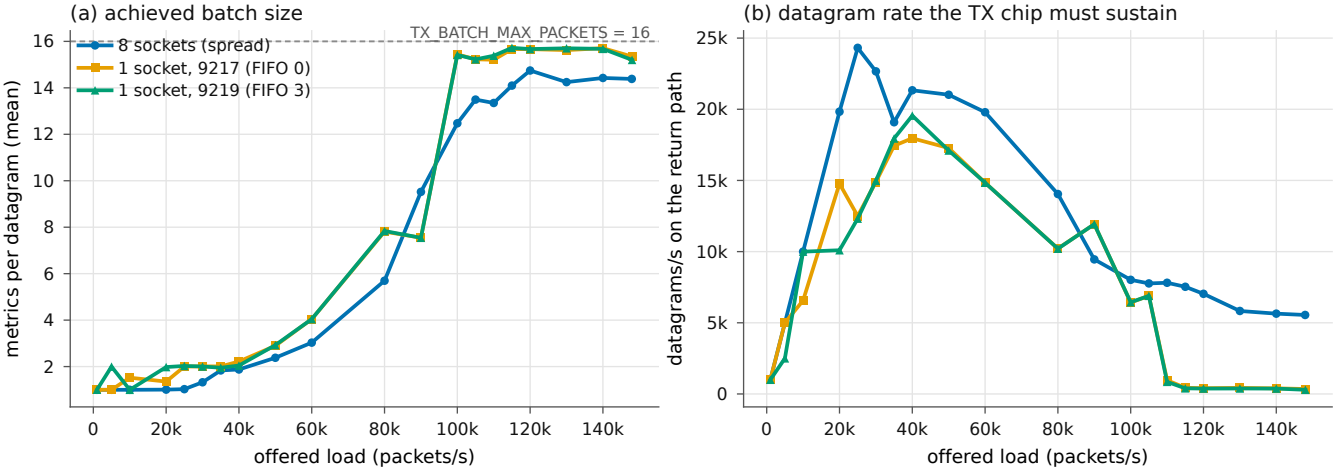
(a) achieved batch size
TX_BATCH_MAX_PACKETS = 16
8 sockets (spread)
1 socket, 9217 (FIFO 0)
1 socket, 9219 (FIFO 3)
metrics per datagram (mean)
offered load (packets/s)
(b) datagram rate the TX chip must sustain
datagrams/s on the return path
offered load (packets/s)