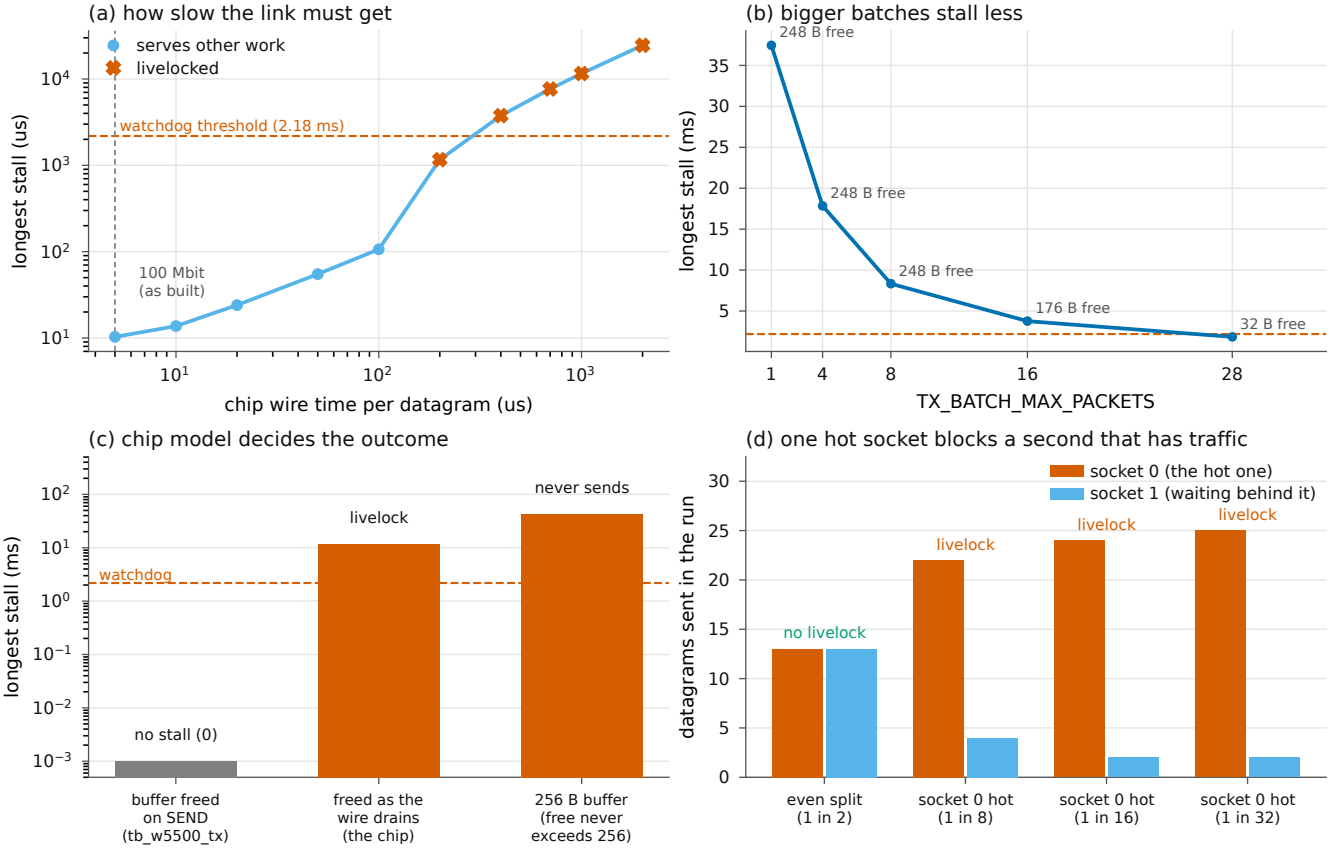
(a) how slow the link must get
serves other work
livelocked
watchdog threshold (2.18 ms)
100 Mbit
(as built)
longest stall (us)
chip wire time per datagram (us)
(b) bigger batches stall less
248 B free
248 B free
248 B free
176 B free
32 B free
longest stall (ms)
TX_BATCH_MAX_PACKETS
(c) chip model decides the outcome
never sends
livelock
watchdog
no stall (0)
longest stall (ms)
buffer freed
on SEND
(tb_w5500_tx)
freed as the
wire drains
(the chip)
256 B buffer
(free never
exceeds 256)
(d) one hot socket blocks a second that has traffic
socket 0 (the hot one)
socket 1 (waiting behind it)
no livelock
livelock
livelock
livelock
datagrams sent in the run
even split
(1 in 2)
socket 0 hot
(1 in 8)
socket 0 hot
(1 in 16)
socket 0 hot
(1 in 32)