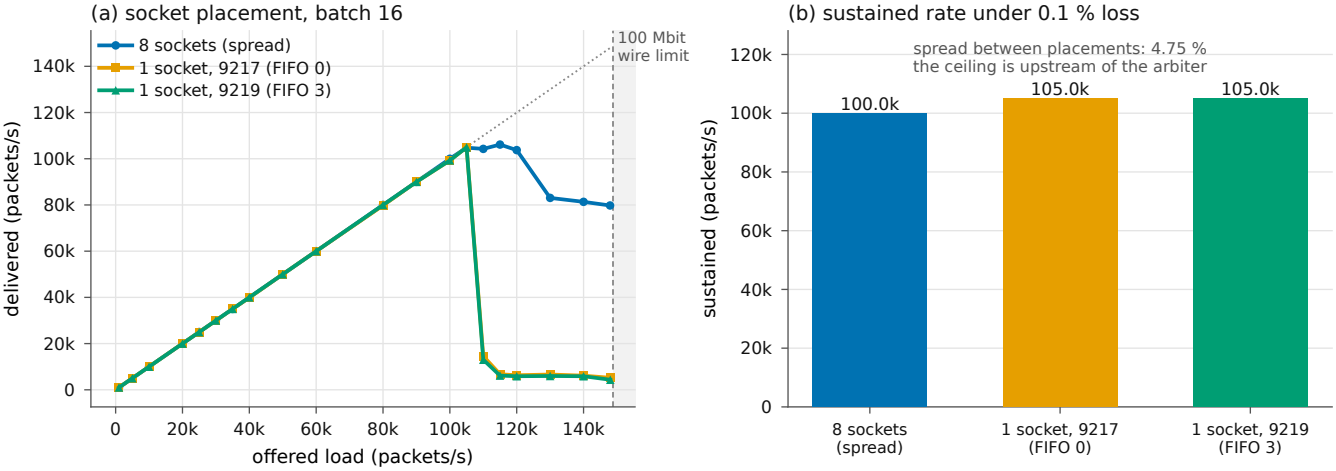
(a) socket placement, batch 16
8 sockets (spread)
1 socket, 9217 (FIFO 0)
1 socket, 9219 (FIFO 3)
100 Mbit
wire limit
delivered (packets/s)
offered load (packets/s)
0
20k
40k
60k
80k
100k
120k
140k
(b) sustained rate under 0.1 % loss
spread between placements: 4.75 %
the ceiling is upstream of the arbiter
sustained (packets/s)
100.0k
105.0k
105.0k
8 sockets
(spread)
1 socket, 9217
(FIFO 0)
1 socket, 9219
(FIFO 3)