

NORMAN[®]
SHUTTERS. BLINDS. SHADES.



Call for current pricing
(609) 742-1720



Ultimate[™] Normandy

Revision Log



Date	Rev
12/12/2025	Pg 8: Added notes under wand options
4/30/2025	1. Updated the images for installation 2. Added running change note for Hold 3. Added running change note for wand 4. Update the valance return size 5. Updated the Mounting Depth Requir
12/24/2024	Updated drawing for 2 ½" Contempo V
10/18/2024	Updated wand drop length 11 ¾" to be blind length $Y \leq 36"$. Removed 11 ¾" for
8/1/2024	Max area increased to 64 sq. ft.
6/11/2024	New default head rail, bottom rail, & br
5/7/2024	Updated color coordination for 1502 Te
5/1/2024	Side by Side option added OSMO collection now referred to as "P collection remain the same.
10/15/2023	New adjustable valance clip
8/2/2023	Updated ladder & inner cord chart for v
7/01/2023	New program

Call for current pricing

(609) 742-1720

Table of Contents

Features and Benefits

Terminology

General Specifications

Color Availability

Mounting Requirements

Options

Hardware

Operating Your Cordless Blind

Call for current pricing
(609) 742-1720

Features & Benefits

- Environmentally-friendly, premium solid wood slats to
 - Textured grain finish highlights the natural characteris
 - 26 colors and finishes, including Premium finishes
 - 2" slats and 2 ½" slats available for all colors and syst
 - Patented, award-winning SmartPrivacy® feature allow
- privacy and light blocking in the industry
- Light weight slat enables easier lifting and lowering
 - Advanced tilting mechanism makes angling blinds effc
 - Pivoting bottom rail helps block light beneath the blind
 - Smooth "Best for Kids" cordless lift system comes star
 - Metal one-piece wands are never split
 - Valance-free Poly Deco headrail with built in light bloc
 - Self-leveling technology virtually eliminates lopsided li

Call for current pricing
(609) 742-1720



ULTIMATE™ NORMANDY® CORD



Call for current pricing
(609) 742-1720



ULTIMATE™ NORMANDY® CORDLESS

2" & 2 1/2" SLATS

Width

Height

USA	24	28	32	36	42	48	54	60
30	297	318	339	364	394	425	472	526
36	327	343	361	389	429	461	501	574
42	345	369	389	421	464	501	557	627
48	376	389	418	451	500	536	598	680
54	390	424	464	505	557	604	666	760
60	420	464	494	535	598	641	714	813
66	448	493	523	568	633	691	767	870
73	479	522	560	604	682	739	822	939
78	487	542	581	635	709	769	884	1000
84	522	561	621	673	751	820	943	1050
90	548	585	649	704	788	862	986	1100
96	561	616	684	746	834	913	1035	1150

NO EXTRA CHARGE

- BEST FOR KIDS CERTIFIED CORDLESS
- WAND LOCATION CHANGE

Call for current pricing
(609) 742-1720

Surcharges:

- Designer color 10%
- Premium color 50%
- Shim \$7 each
- Side mount bracket \$25 per blind
- Keystone \$81
- Cut-out \$99 per side

Valance Surcharge:

	24	28	32	36	42	48	54
Designer Crown	50	56	62	75	87	93	106
Contempo	62	68	81	87	99	118	124

* For every additional foot, please add \$25 (retail)

Features & Benefits

Standard Features

- Industry-leading closure and privacy with award-winning
- Smooth, reliable Performance cordless lift system. W
- Environmentally-friendly, premium solid wood slats to
- Covers a large range of sizes
- 2" & 2 ½" slat sizes available in all colors
- Impact resistant, modern, valance-free PolyDeco head
- Pivoting bottom rail helps block light beneath the blind

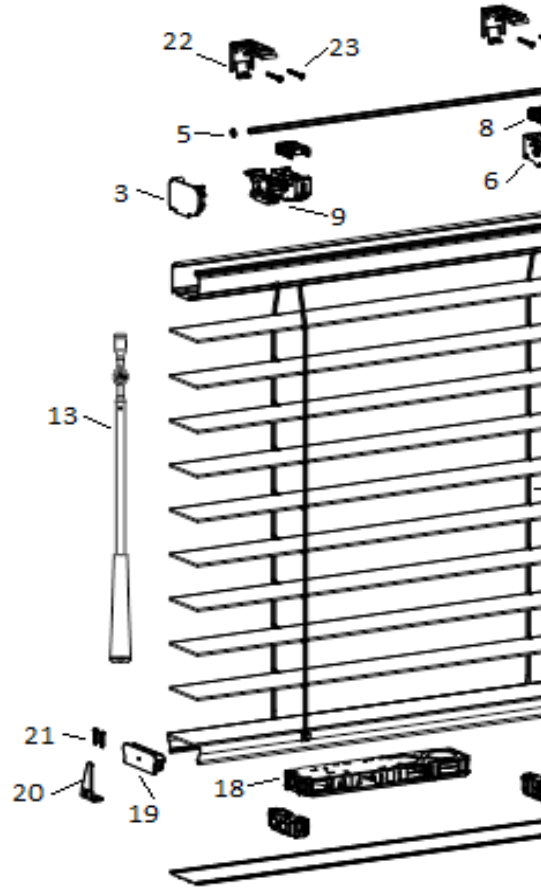
Options

- Optional Control Location — Wand: Right
- Optional Wand drop sizes
- Valances: Designer Crown & Contempo
- Keystones
- Common valance
- Cut-outs
- Optional hardware for Side Mount, Hold Down Bracket

Call for current pricing
(609) 742-1720



Terminology



Call for current pricing
(609) 742-1720

No	Description	No	Description
1	Head Rail(PVC)	9	Wand Tilter
2	Head Rail End Cap(Right)	10	Slat
3	Head Rail End Cap(Left)	11	Ladder
4	Tilt rod	12	Inner Cord
5	Ring Stopper	13	Wand Set
6	Head Rail Drum Support	14	Slat (covered on bottom

General Specifications

Size Considerations

Single Blind	Min.	M
Blind Width (Net) (X)	6 1/2"	9
Blind Length (Y)	16"	9

- Side mount brackets are available for all widths (IB). For widths over 37" will be provided to be used in conjunction with side mount brackets.
- Blinds under 15" width(Net) have no lift function with tilting wand at tl

Standard Deductions

Inside Mount:

Blind Width= Ordered Width – 3/8" *

Blind Height= Ordered Height

Outside Mount:

Ordered Width = Blind Width

Ordered Height= Blind Height *OM recommen

Tolerance:

Blind Width may vary $\pm 1/8"$.

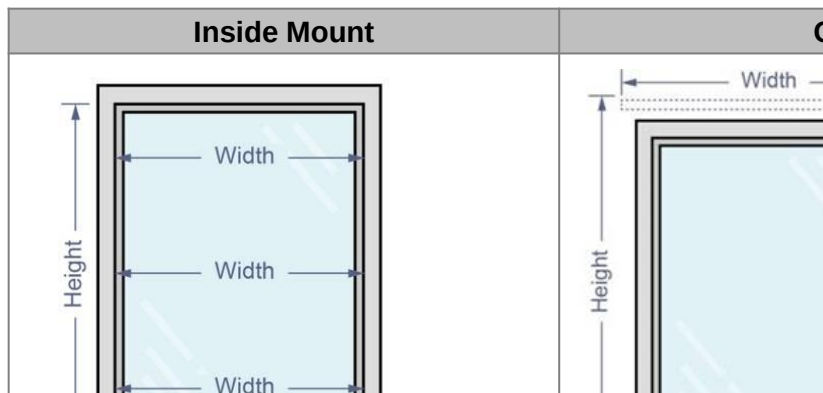
Blind Height may vary +0~2 1/4" for **2" blinds**, and +0~2 3/4"

Measurements:

Blind width: Measured from the left end to the right end

Blind height: Lower the blind completely, then measure of the bottom rail with slats in the open position.

Call for current pricing
(609) 742-1720




General Specifications

Wand Options

- Wand Control Location
 - Left (Default for $X \geq 15"$)
 - Right (Optional for $X \geq 15"$)
 - Center (Standard for $X < 15"$)
- *Blind Widths (Net) $< 15"$ will be made with a tilt wand placed

Control	Blind Width (Net) (X)
Center (Standard)	$6 \frac{1}{2}" \leq X < 15"$
Left (Default)/Right (Optional)	$X \geq 15"$

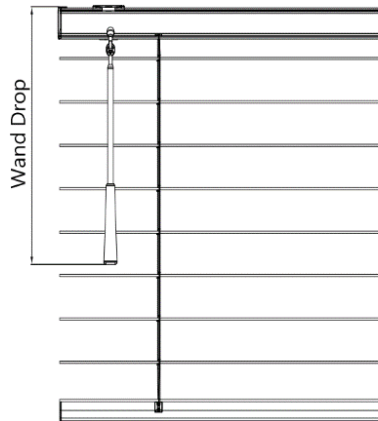- Wand Drop** is measured from the top of the headrail, to the bottom of the wand in the opened position. Wand drop is not the height of the wand itself.



Call for current pricing
(609) 742-1720

- Wand Drop Sizes: $11 \frac{3}{4}"$ (Running change), $17 \frac{3}{4}"$, $29 \frac{3}{4}"$, $38 \frac{1}{4}"$ ($47 \frac{1}{4}"$)
 - The default wand drop size is for a blind at the given height.
 - Optional wand drop sizes can be selected as an override.
 - For common valance with different blind sizes, wand drop blind.

Blind Length(Y)	Blind Width (Net)(X)	Default Wand Drop
$Y \leq 36"$	All	$11 \frac{3}{4}"$ (Running change)
		$17 \frac{3}{4}"$
$36" < Y \leq 48"$	All	$17 \frac{3}{4}"$
$48" < Y \leq 72"$	All	$29 \frac{3}{4}"$

Color Availability

**Slat color will match optional valance color.

26 Colors: 8 Paint, 8 Stain, 10 Premium Colors

Color Code	Color Name	Color Type
ND001	Pure White	Paint
ND003	Silk White	Paint
ND006	Pearl	Paint
ND080	*Taupe Gray	Paint
ND053	*Clay	Paint
ND091	*Solid Black	Paint
ND617	*Platter	Paint
ND017	*Gray Black	Paint

Color Code	Color Name	Color Type
1003	White Matte	Premium
1501	Oak	Premium
1502	Teak	Premium
1301	Cherry	Premium
1109	Silk Gray	Premium
1111	Granite Gray	Premium
1203	Black	Premium
1204	Ebony	Premium
1112	Sunbleached Gray	Premium
1114	Weathered Gray	Premium

Color
N
N
N
N
N
N
N
N
*P

Call for current pricing
(609) 742-1720




*The following are Designer Colors and will carry an added surcharge & Matte Black. Premium colors also carry an added surcharge. See |

Color Coordination

Color Code	Color Name	HeadRail, Bottom Rail, Bottom Rail Cover	Brack
ND001	Pure White	2080 Pure White	3058 W
ND003	Silk White	2003 Silk White	3058 W
ND006	Pearl	2095 Pearl	H002 Va
ND080	Taupe Gray	2151 Taupe Gray	3132 Ligh
ND617	Platter	2149 Storm Gray	3149 Storr
ND053	Clay	2148 Clay	3115 Brigh
ND017	Gray Black	2219 Matte Black	3208 Bl
ND091	Solid Black	2219 Matte Black	3208 Bl
ND110	Limed White	2059 Limed White	3059 Limec
ND114	Taupe	2484 Taupe	3484 Ta
ND108	Rustic Gray	2152 Granite Gray	3152 Grani
ND204	Oak Mantel	2537 Oak Mantel	3523 Sugar
ND211	Cherry	2457 Old Teak	3436 Co
ND230	Old Teak	2457 Old Teak	3436 Co
ND221	Black Walnut	2202 Black Walnut	3436 Co
ND246	Matte Black	2219 Matte Black	3208 Bl
1003	White Matte	2059 Limed White	3059 Limec
1109	Silk Gray	2138 Gray	3132 Ligh
1114	Weathered Gray	2141 Granite	3105 G
1111	Granite Gray	2152 Granite Gray	3152 Grani
1112	Sunbleached Gray	2150 Sea Mist	3150 Sea
1203	Black	2202 Black Walnut	3436 Co
1204	Ebony	2202 Black Walnut	3436 Co
1501	Oak	2592 Natural Oak	3523 Sugar
1502	Teak	2483 Dark Teak	3413 Wz
1301	Cherry	2537 Oak Mantel	3523 Sugar



Call for current pricing
(609) 742-1720

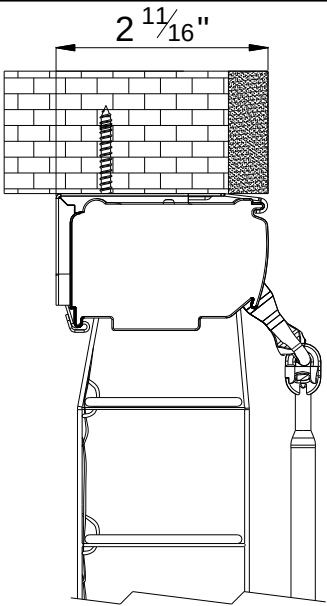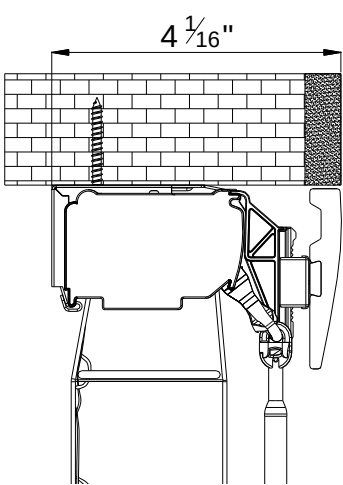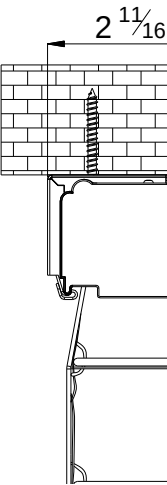Mounting Requirements

Default	Fully IB Depth Requirement	Se
Without Valance	2 11/16"	
		
Option	Fully IB Depth Requirement	Semi-IB w Flush
With 2 1/2" Contempo Valance (Optional)	4 1/16"	2 11/16"
		



Call for current pricing
(609) 742-1720

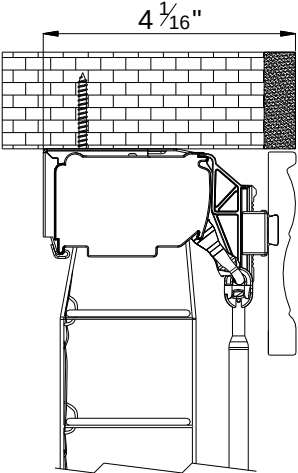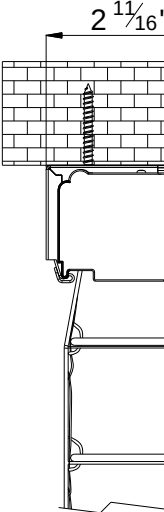Mounting Requirements




Default	Fully IB Depth Requirement	Semi-IB with Flush t
With 3 1/4" Designer Crown Valance (Optional)	4 1/16"	2 11/16"
		
	No Valance Return	Valance Ret 7/8" (inner d

Call for current pricing
(609) 742-1720

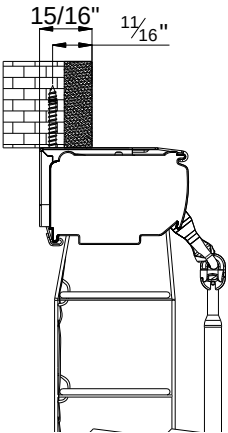-Shallow Window Mount

2" & 2.5" Blind	Without Valance	With 2 1/2" (Vala
Semi-IB with Shallow Depth	15/16"	15/16"
		

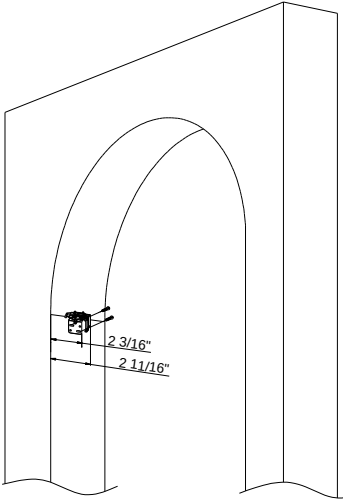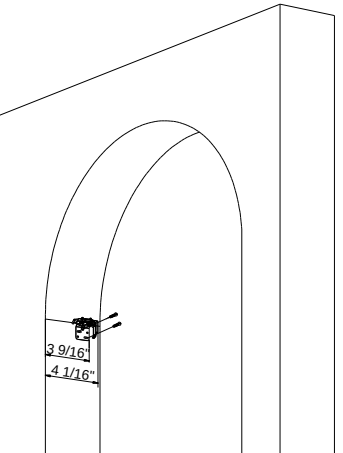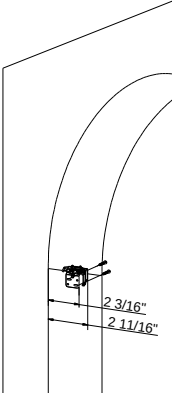Mounting Requirements

Option	Fully Side Mount Depth Requirement	Semi-S
Without Valance	2 11/16"	
		
With 3 1/4" Designer Crown Valance & 2 1/2" Contempo Valance (Optional)	Fully Side Mount Depth Requirement	Semi-Side Bracket Fl
	4 1/16"	2 11/16"
		

Call for current pricing
(609) 742-1720

Options

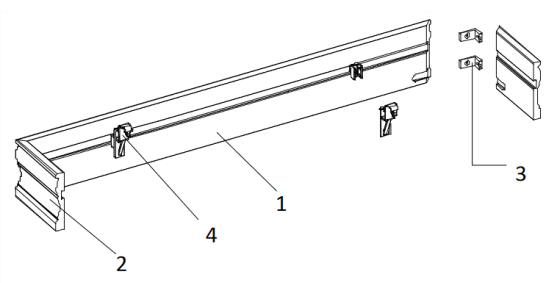
Valances

*Color availability: Valance color will match slat color.


Default: No Valance

Options:

3 1/4" Designer Crown Valance



2 1/2" C



Call for current pricing
(609) 742-1720

Valance and Valance Returns

- Valance return locations: left only, right only or both left and right return
- Standard or custom sizes available
 - Custom return size: minimum 1/2" and maximum 5"
- Max custom valance length is 5" longer than finished blind width

	Blind Width
Fully IB with flush cut valance	Window Width – 3/8"
Semi-IB with bracket flush against the wall	Window Width – 3/8"
Semi-IB w/ min. mounting depth of 1 5/8"	Window Width – 3/8"
Semi-IB, with shallow mounting holes	Window Width – 3/8"
OB with valance & valance returns	Ordered Width

Options


Valances

- Default: No Valance
- Optional: 2 ½" Contempo Valance & 3 ¼" Designer Crown Valance
- Size: Standard length or custom length (blind width + 5")
- Color availability: Valance color will match slat color.

Valance Joinery

Valances will be spliced when the width exceeds 96". A valance joinery common valances; Valance connectors will be provided by default; key

- Default : Valance Connector
 - Valance Connector splits will be made evenly along the split location & at gaps between blinds is not available
 - Max of 3 splices & 3 valance connectors per valance
- **Optional:** Keystone
 - Up to 3 keystones can be requested per valance/common
 - Keystones can also be requested onto non-spliced valance



Keystone



Keystone Spacing Requirements

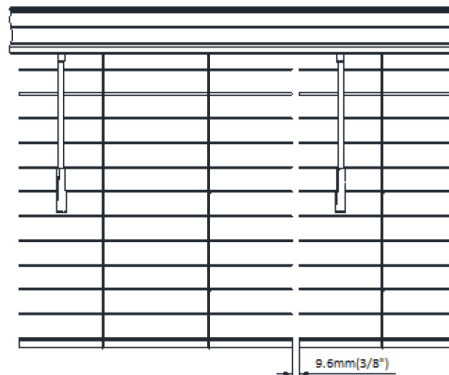
- Measure from the left of the valance inner width to the center of the keystone
- Available for valance width 13" and above
- Minimum distance between 2 keystones is 18" and the min. distance from valance to the keystone center is 6.5".
- Custom keystone location limitation:
 1. When there're 3 keystones:
 - 1st keystone: 6.5" ~ (total valance width - 18"x2 - 6.5")
 - 2nd keystone: (1st keystone location+18") ~ (total valance width - 6.5")
 - 3rd keystone: (2nd keystone location +18") ~ (total valance width - 6.5")
 2. When there're 2 keystones:
 - 1st keystone: 6.5" ~ (total valance width-18"- 6.5")
 - 2nd keystone: (1st keystone location+18") ~ (total valance width - 6.5")
 3. When there's 1 keystone:
 - Keystone: 6.5" ~ (total valance width-6.5")

Call for current pricing
(609) 742-1720

Options

Common Valance

- Not available with side mount brackets
- Maximum of 4 blinds for common valance
- There is a min gap of 3/8" between each blind, but a gap of up to 1 3/8" width deductions will be taken from each blind (only when common valance is used)
- Standard Common Valance sizes
 1. For IM without valance return, the standard common valance size is **width (net) + right blind width (net) + middle blind width (net) + gap width x gap qty + 2"**
 2. For IM with valance return, the standard common valance size is **(net) + right blind width (net) + middle blind width (net) + gap width x gap qty + 2"**
 3. For OM with no valance returns, the standard common valance size is **width (net) + middle blind width (net) + gap width x gap qty + 2"**
 4. For OM with valance returns, the standard common valance size is **(net) + middle blind width (net) + gap width x gap qty + 1"**



Call for current pricing
(609) 742-1720

Note: If blinds heights are the same under one common valance, the gap between blinds should be about $\leq 1/4"$. If blind height are not the same, then slat alignment is required.

Custom Valance Width

- For single blinds, the custom valance width cannot be more than 5"
- For blinds under a common valance, Therefore, when there are 2, 3, or 4 blinds, the max gap between each blind is 12".
 - 2 blinds under a common valance, the custom valance width is **net blind width + 12"**
 - 3 blinds under a common valance, the custom valance width is **net blind width + 24"**
 - 4 blinds under a common valance, the custom valance width is **net blind width + 36"**

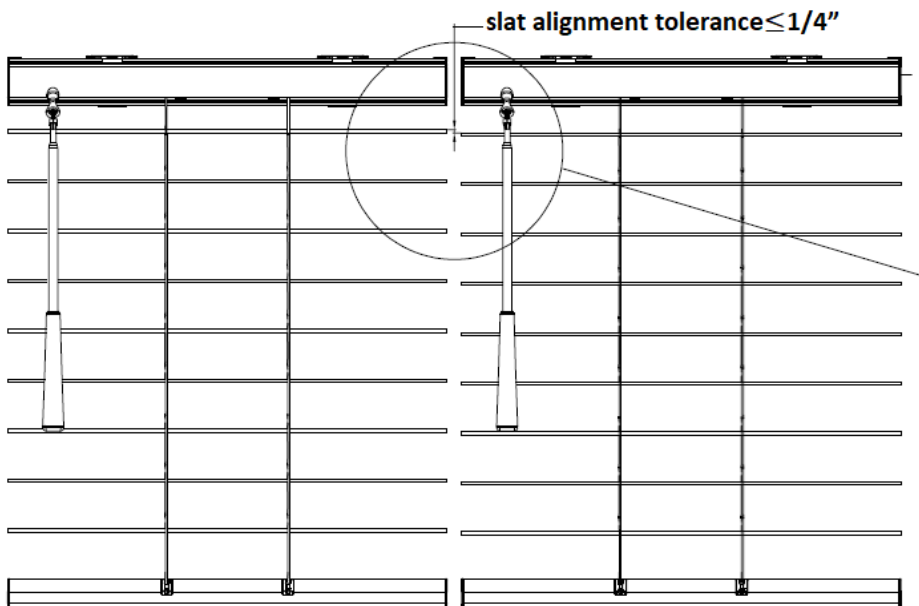
Options

Side by side (Optional): only available for blind

Side by side blinds must have the following:

- Same order height
- Same mount type
- Same slat size
- Same color/finish
- Within the same order

When selecting the Side by Side option, and when the above conditions are met, the slat alignment is about $\leq \frac{1}{4}"$.



Call for current pricing
(609) 742-1720

Note: If Side by Side is not specified, the slat alignment is not guaranteed. This is due to the fact that the blinds are manufactured to different standards.

Options

Cut Outs

A cut-out is a blind with an area removed from it to avoid an existing measurements of the area to be removed, which should include: Cut

Corner (Bottom) Cut Out		Blind Width(x)		
		$x \leq 8 \frac{7}{8}"$	$8 \frac{7}{8}" < x \leq 17 \frac{1}{4}"$	$17 \frac{1}{4}" < x \leq 21 \frac{3}{8}"$
Cut Out size Width(W)	Min.	$\frac{1}{8}"$		
	Max.	$\frac{3}{8}"$	$1 \frac{3}{8}"$	$2 \frac{7}{8}"$
Height(H)	Min.	$1 \frac{1}{2}"$		
	Max.	2.5" slat: $Y - 2 \frac{3}{4}"$ 2" slat: $Y - 2 \frac{1}{4}"$		

*Please note that the cut-out will be made when slats are at a closed position.
Cut outs are made on complete slats only, based on the size provided.

Corner (Bottom) Cut Out (cut out on the bottom rail and the bottom section)

* Cut-out width (W): Measuring from the edge of the blind/end cap to the edge of the cut-out.

* Cut-out Height (H): Measuring from the top of the head rail to the top of the cut-out.

Single blinds: available on left, right or both sides

Common valance blinds: Cut outs are only available on the left side of the left blind. Cut outs are not available on the center blinds.

Only one cut-out type per side is available; Corner (Bottom) Cut Out and Side Cut Out cannot be on the same blind.

Call for current pricing
(609) 742-1720

Options

Cut Outs (continued)

Side (Middle) Cut Out (cut out on the middle drop section of the slats, either

*Cut-out width (W): Measuring from the edge of the blind/end cap to the edge of the cut out

*Cut-out Height (H1): Measuring from the top of the head rail to the top of the cut out


*Cut-out Height (H2): Measuring from the top of the head rail to the end of the cut out

Please note that the cut out will be made when slats are at a close position. The cut out will not be made if the slats are open. Cut-out is available for Single blind/Common valance.

Call for current pricing
(609) 742-1720





Side (Middle) Cut Out		Blind Width(x)		
		$x \leq 8 \frac{7}{8}"$	$8 \frac{7}{8}" < x \leq 17 \frac{1}{4}"$	$17 \frac{1}{4}" < x \leq 21 \frac{3}{8}"$
Cut Out size on Width(W)	Min	$\frac{1}{8}"$		
	Max	$\frac{3}{8}"$	$1 \frac{3}{8}"$	$2 \frac{7}{8}"$
Height(H1)	Min	$1 \frac{1}{2}"$		
	Max	2.5" slat: H2 - $2 \frac{1}{4}"$ 2" slat: H2 - $1 \frac{3}{4}"$		
Height(H2)	Min	2.5" slat: 4" 2" slat: $3 \frac{1}{2}"$		
	Max	2.5" slat: Y- 3" 2" Slat: Y- $2 \frac{1}{2}"$		

Hardware

Item	
PolyDeco Head Rail	
Slat	2" Blind
	
Punch Type (SmartPrivacy)	
Bottom Rail+ Bottom Rail Cover	2" Blind
	
2 1/2" Contempo Valance(Optional)	
3 1/4" Designer Crown Valance(Optional)	

Call for current pricing
(609) 742-1720

Hardware

Item	
End cap for Bottom rail	2" Blind
	
Wand Set (Iron Wand)	
Installation Bracket (Top/Back Mount)	
Side Mount Supporting Bracket Kit (Optional for IM only)	(Side Mount Supporting B 
Illustration to show the side mount supporting bracket attached to the standard installation bracket with the included nut & bolt	

Call for current pricing
(609) 742-1720

Hardware

Item	
Adjustable Valance Clip Set (Clip Receptor + Clip Plug) (Optional)	
Valance Return Joinery (Optional)	
Valance Connector (Default, for split valance)	
Hold Down Bracket (Optional) (Running change, customer may receive Hold Down Bracket with two screw holes or one screw hole)	2" Blind
	 or 
Shim (Optional for outside mount only) 3/8" thickness for one layer 11/16" thickness for two layers	
Double-side Adhesive tape (Assistant for installation bracket and side mount supporting bracket installation)	
1 1/4" Screw (For Installation bracket and Side Mount Supporting Bracket)	
2" Screw (For Installation bracket with shim; optional)	
3/4" Screw (For Hold down bracket)	

Call for current pricing
(609) 742-1720

Hardware

Installation Bracket

Blind Width (Net)	Installation Bracket qty
$X \leq 37"$	2
$37" < X \leq 47"$	3
$47" < X \leq 75"$	4
$75" < X \leq 96"$	5

Hold Down Bracket (Optional)

Hold Down Bracket Qty	#6x3/4" Screw Qty
2	4 for Double hole Hold Down Bracket 2 for Single hole Hold Down Bracket

Installation Screws

Screws	Quantity
1 1/4" Screw	Installation bracket qty x 2
2" Screw (with shim)	Installation bracket qty x 2
3/4" Screw	Hold down bracket qty x1 or x 2
M4 Nut & Bolt	4 (for Side Mount only)

Valance Return Connector

Optional Valance	Valance Return Connector Qty
2 1/2" Contempo	Valance Return qty x 1
3 1/4" Designer Crown	Valance Return qty x 2

Valance Clips

Blind Width(Net)(X)/Custom Valance length(L)	Valance Clip Qty
$X \leq 37"$; $L \leq 37"$	2
$37" < X < 60"$; $37" < L < 60"$	3
$60" \leq X \leq 96"$; $60" \leq L \leq 96"$	4
$L > 96"$	4+


Ladder and Inner Cord Standards

2" Blind Width(Net)(X)	# of Ladders	# of Cords	2 1/2" Width(Net)(X)
$X \leq 32"$	2	4	$X \leq 32"$
$32" < X < 40"$	3	4	$36.5" < X < 40"$
$40" \leq X \leq 52"$	3	6	$40" \leq X \leq 52"$


Call for current pricing
(609) 742-1720

Operating Your Cordless Blind

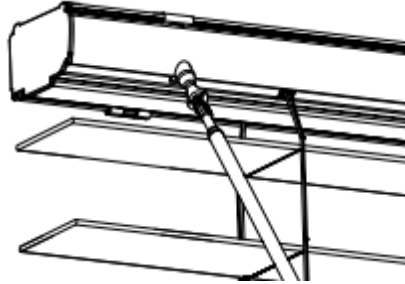Tilting Wand: Rotate the wand to achieve the desired slat position.




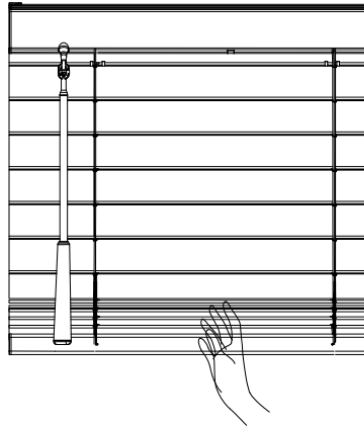To lower the blind: Pull the blind down, by hand, from the top or closed position when lowering the blind.



To raise the blind: Gently tilt the slats to an open/level position, with slats in an open position.

****Do not leave slats in a closed up or closed down position.***

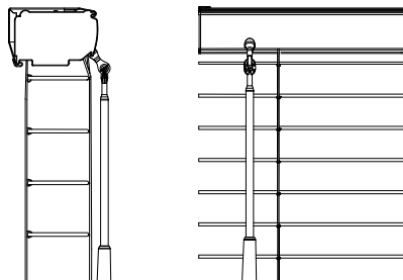

Call for current pricing
(609) 742-1720