



Call for current pricing
(609) 742-1720



ULTIMA
FAUX WO

Revision Log



Date	Revis
12/12/2025	• <u>Pg.7</u> Added notes under wand op
5/31/2025	• Added 11 ¾" wand drop as option • Added valance information. • Updated valance clips formula for
2/17/2025	• Added running change note for H
8/1/2024	• Updated default wand drop length 48".
5/1/2024	• Updated default wand drop length • Remove 11 ¾" wand drop as a de • Adding Side-by-Side option.
10/15/23	• New adjustable valance clip
6/15/2022	<u>General Update:</u> 2" slats now availab • Added 2" slat color availability • Updated cut-out rules
5/5/2022	• Updated keystone spacing requir

Call for current pricing
(609) 742-1720



Features and Benefits

Terminology

General Specifications

Color Availability


Mounting Requirements

Options

Hardware

Operating Your Cordless Blind

Call for current pricing
(609) 742-1720

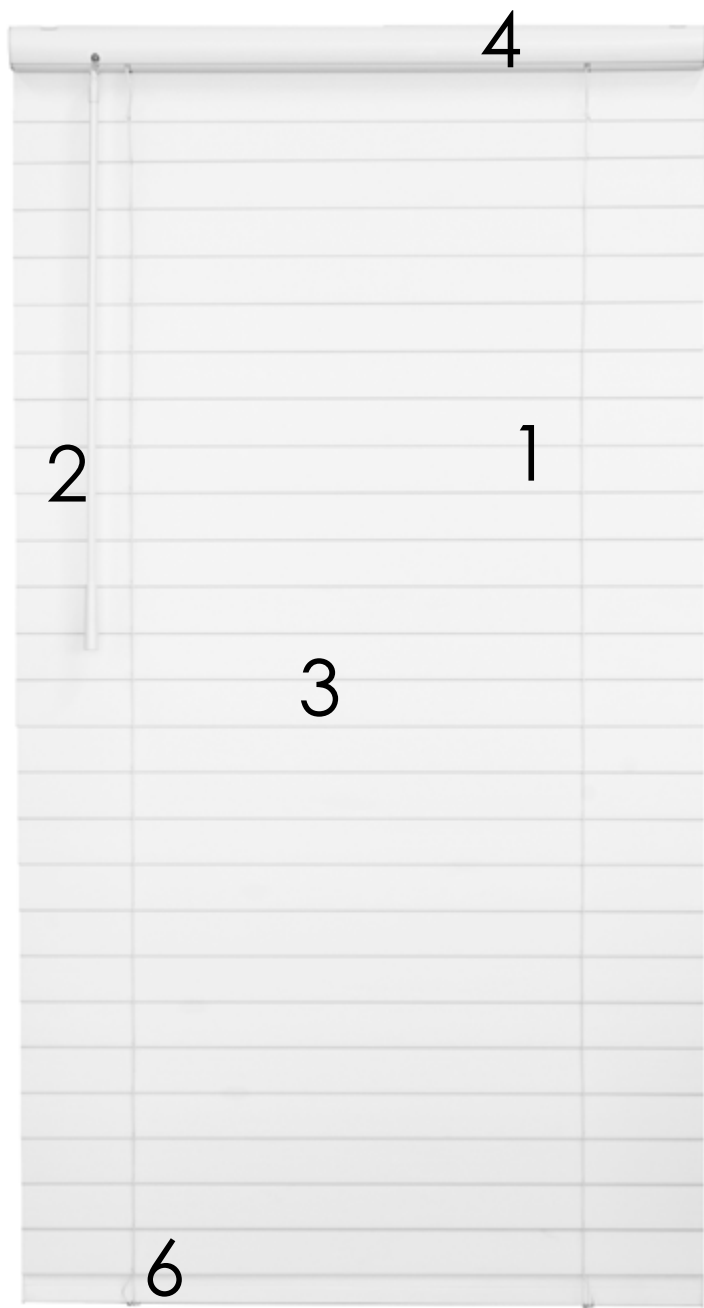

Call for current pricing
(609) 742-1720



ULTIMATE™ CORDLESS FAUX

2" & 2 1/2" SLATS

Width

Height

USA	24	28	32	36	42	48	54	
30	169	185	200	223	238	256	280	
36	180	194	210	236	254	273	304	
42	193	210	228	252	272	298	329	
48	206	223	239	267	289	319	350	
54	223	249	259	296	321	350	384	
60	238	255	278	314	340	368	407	
66	252	270	293	331	357	394	432	
73	265	288	312	355	383	420	462	
78	273	302	329	365	400	438	482	
84	288	314	342	388	420	462	512	
90	302	329	357	407	439	482	533	
96	312	346	373	421	462	512	569	

IMPORTANT: Faux Wood Cordless blinds have

Call for current pricing
(609) 742-1720

NO EXTRA CHARGE

- BEST FOR KIDS CERTIFIED CORDLESS
- WAND LOCATION CHANGE

Valance Surcharges

	24	28	32	36	42	48	54
Valance	28	28	34	40	51	56	61

For every additional foot, please add \$18 (retail)

General Specifications:

- Modern, valance-free, color coordinated PolyDeco headrail
- Cordless operation

Surcharge

- Printed
- Shim

Features & Benefits

Features

- Pivoting bottom rail helps block light beneath the blind
- Industry-leading closure and privacy with SmartPrivacy®
- Self-leveling technology virtually eliminates lopsided lifting
- “Best for Kids” cordless for safety and convenience
- Valance-free Poly Deco headrail with built in light block



Call for current pricing
(609) 742-1720

Options


- 16 colors and finishes
- Optional Valances Designer Crown & Modern Curved
- Valance Keystones
- Optional Wand Sizes
- Control Locations — Left or Right
- Common Valance

Get Quote

Terminology

Ultimate™ Cordless Faux Wood Blind – 2" & 2 ½" Slat

Valance-free Headrail with Wand Tilt

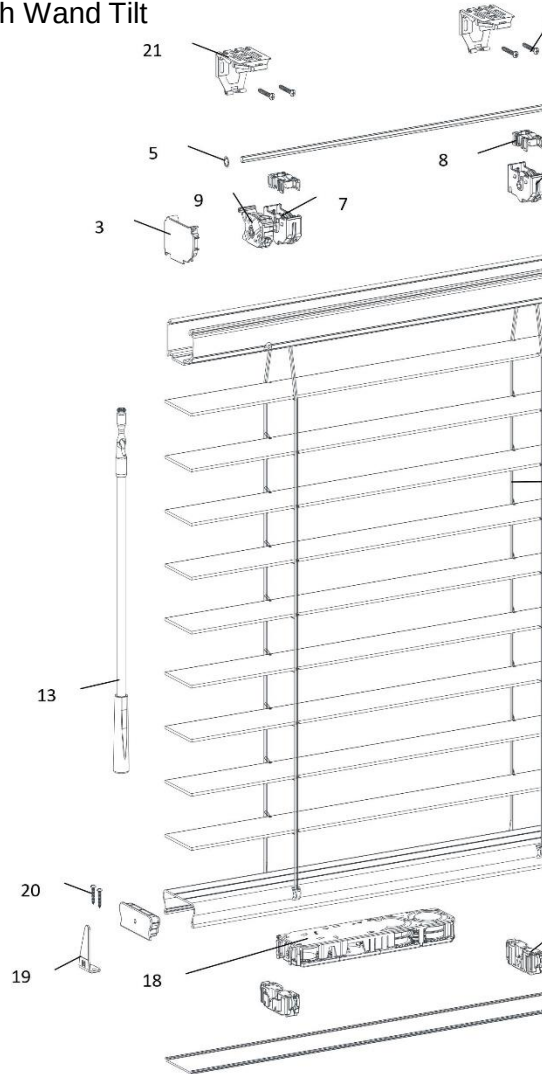

Call for current pricing
(609) 742-1720

Description			
1	PVC Headrail	8	Drum Cap
2	Headrail End Cap (Right)	9	Wand Tilter
3	Headrail End Cap (Left)	10	Slat
4	Tilt Rod	11	Ladder
5	Ring Stopper	12	Inner Cord

General Specifications

Size Considerations

Single Blind	Min	Max
Width (Net)	6 ½"	96" 37" (Side Mount)
Height	16"	96"

- * The overall max blind size is limited by the maximum are ordered as one blind.
- Side mount brackets are available for all widths (IB). For w required and will be provided to be used in conjunction with
- Blinds under 15" width(Net) have no lift function with tilting \

Standard Deductions

Inside Mount:

Blind Width = Ordered Width – 3/8" *

Blind Height = Ordered Height

Outside Mount:

Ordered Width = Blind Width

Ordered Height= Blind Height

Tolerance:


Blind Width may vary $\pm 1/8"$

Blind Height may vary +0~2 ¾"

Measurements:

Blind width: Measure from the left end to the right end

Blind height: Lower the blind completely, then measur the bottom rail with slats in an open position.

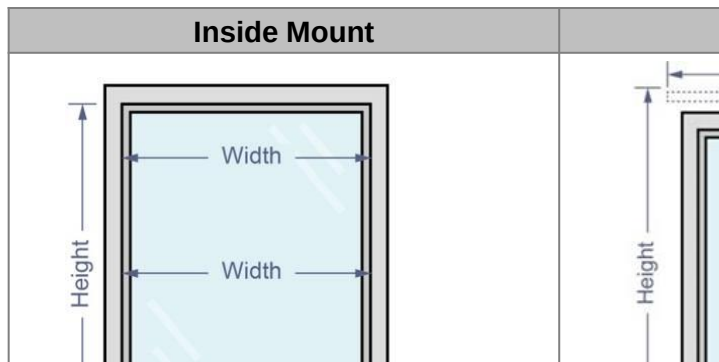

Call for current pricing
(609) 742-1720


General Specifications

Wand Options

- Wand Control Location
 - Left (Default for $X \geq 15"$)
 - Right (Optional for $X \geq 15"$)
 - Center (Standard for $X < 15"$)
- *Blind Widths (Net) $< 15"$ will be made with a tilt wand p

Control	Blind Width (Net)
Center (Standard)	$6 \frac{1}{2}" \leq X < 15"$
Left (Default)/Right (Optional)	$X \geq 15"$

- Wand Drop** is measured from the top of the headrail, to the in a level opened position. Wand drop is not the height of th

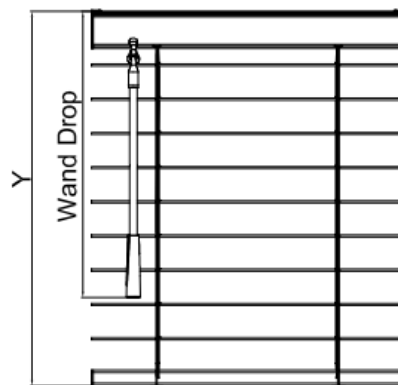

Call for current pricing
(609) 742-1720

- Wand Drop Sizes: $17 \frac{3}{4}"$, $24"$, $29 \frac{3}{4}"$, $38 \frac{1}{4}"$ ($11 \frac{3}{4}"$ & $47 \frac{1}{4}"$)
 - The default wand drop size is for a blind at the given
 - Optional wand drop sizes can be selected as an ove
 - For common valance with different blind sizes, wand the shortest blind.

Net Blind Width (X)	Blind Height (Y)	Default Wand Drop
All	$Y \leq 36"$	$17 \frac{3}{4}"$
	$36" < Y \leq 48"$	$24"$
	$48" < Y \leq 72"$	$29 \frac{3}{4}"$
	$72" < Y < 96"$	$38 \frac{1}{4}"$

Color Availability

No.	Color Code	Color Name	Color Type	Finish
1	P001	Pure White	Solid	Smooth
2	P001	Pure White	Solid	Embossed
3	E008	Designer White	Solid	Smooth
4	E008	Designer White	Solid	Embossed
5	P003	Silk White	Solid	Smooth
6	P003	Silk White	Solid	Embossed
7	P004	Bright White	Solid	Smooth
8	P004	Bright White	Solid	Embossed
9	P006	Pearl	Solid	Smooth
10	P006	Pearl	Solid	Embossed
11	P075	Storm Gray	Solid	Embossed
12	P075	Storm Gray	Solid	Smooth
13	6957	Mist	Printed	Embossed
14	P230	Old Teak	Printed	Embossed
15	6959	Granite	Printed	Embossed
16	P226	Chestnut	Printed	Embossed

Call for current pricing
(609) 742-1720

Color Coordination Chart

Color Code	Color Name	Finish	Headrail	Wand	Botto
6016	Pure White	Smooth	2080 Pure White	2080 Pure White	2080 W
6016	Pure White	Embossed	2080 Pure White	2080 Pure White	2080 W
6051	Designer White	Smooth	20103 Designer White	2080 Pure White	20 Des W
6051	Designer White	Embossed	20103 Designer White	2080 Pure White	20 Des W
6017	Silk White	Smooth	2003 Silk White	2080 Pure White	200 W
6017	Silk White	Embossed	2003 Silk White	2080 Pure White	200 W
6019	Pearl	Smooth	2095 Pearl	2095 Pearl	2095
6019	Pearl	Embossed	2095 Pearl	2095 Pearl	2095
6018	Bright White	Smooth	2003 Silk White	2080 Pure White	2079 W
6018	Bright White	Embossed	2003 Silk White	2080 Pure White	2079 W
6101	Storm Gray	Smooth	2149 Storm Gray	2149 Storm Gray	2149 G
6101	Storm Gray	Embossed	2149 Storm Gray	2149 Storm Gray	2149 G
6957	Mist	Embossed	2003 Silk White	2080 Pure White	6957
6922	Old Teak	Embossed	2457 Old Teak	2457 Old Teak	6922 C
6959	Granite	Embossed	2141 Granite	2141 Granite	6959 C
6921	Chestnut	Embossed	2537 Oak Mantel	2537 Oak Mantel	6921 C

Call for current pricing
(609) 742-1720

Mounting Requirement

Minimum Depth Requirements and Valance Returns

- Valance return locations: left only, right only or both left and right re
- Standard or custom sizes available
 - Custom valance return size: minimum ½" and maximum 5"


Inside Mount

Blind/Valance Type	Fully Recessed IB	Semi-IB bracket to w
2" & 2 ½" Blinds with No Valance	2 11/16"	N/A
2" & 2 ½" Blind with Modern Curved Valance	3 7/8"	2 11/16" *Valance size: 1"
2" & 2 ½" Blind with Designer Crown Valance	4 1/16"	2 11/16" *Valance size: 1"


Outside Mount

Blind/Valance Type	OB re
2" & 2 ½" Blinds with any valance and return	Valance retu
2" & 2 ½" Blinds with any valance without return	

Call for current pricing
(609) 742-1720

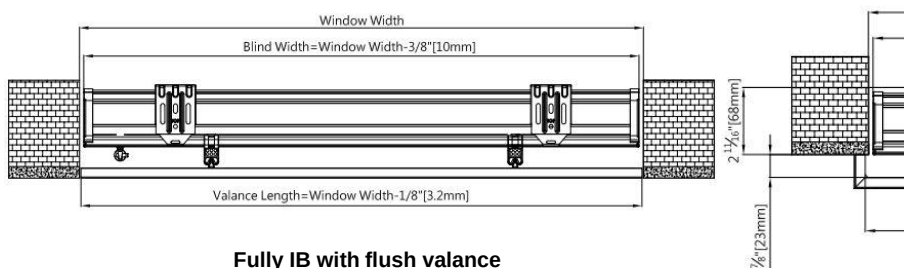

Fully IB with flush valance

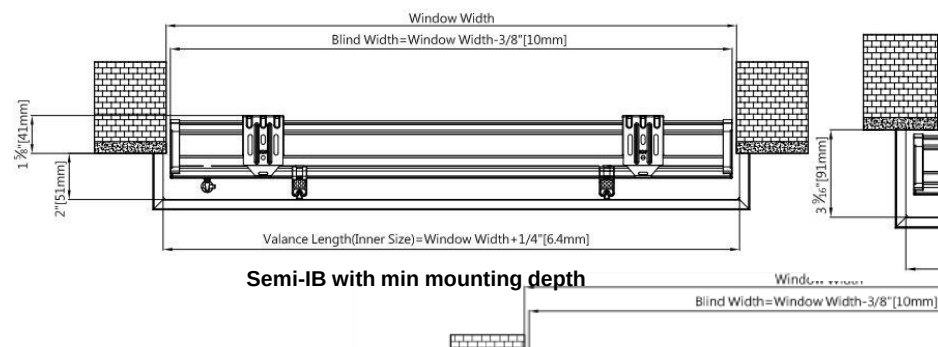

Semi-IB with min mounting depth

Options

Valances

- Default: No Valance
- Optional: 2 ½" Modern Curved & 3 ¼" Designer Crown Valance
- Size: Standard length or custom length (maximum custom length: bli
- Color availability: Valance color will match slat color.
- When ordering a valance only, the valance will be split equally when dimension of an individual piece exceeds 96". In such situation, valan be provided as default with keystone being optional. When keystone i valance can either be split equally or at specified locations.
- Max inner length for valance only = 384"

Mount Type & Return Option	Standard Valance Width	Custom Valance Width Maximum
IB with No Returns	Net Blind Width + 1/4"	Net Blind Width + 5"
IB with Returns	Net Blind Width + 5/8"	
OB with No Returns	Net Blind Width + 2"	
OB with Returns	Net Blind Width + 1"	

Valance Joinery

Valances will be spliced when the width exceeds **96"**; valance joinery common valances; Valance connectors will be provided by default, ke

- **Default:** Valance Connector
 - Valance Connector splits will be made evenly along custom split location & At gaps between blinds is no
- **Optional:** Keystone
 - Up to 3 keystones can be requested per valance/cc
 - Select the keystone location based on an even split
 - At gaps between blinds is not available.
 - Keystones can also be requested onto non-spliced

Keystone Spacing Requirements


- Measure from the left of the valance inner width to the center of
- Available for valance width 13" and above
- Minimum distance between 2 keystones is 18" and the min. dista valance to the keystone center is 6.5".
- Custom keystone location limitation:
 1. When there're 3 keystones:
 - 1st keystone: 6.5" ~ (total valance width - 18"x2 - 6.5
 - 2nd keystone: (1st keystone location+18") ~ (total va
 - 3rd keystone: (2nd keystone location +18") ~ (total v
 2. When there're 2 keystones:
 - 1st keystone: 6.5" ~ (total valance width-18" - 6.5")
 - 2nd keystone: (1st keystone location+18") ~ (total va

Call for current pricing
(609) 742-1720

Options

Common Valance

- Not available with side mount brackets
 - Maximum of 4 blinds for common valance
 - There is a min gap of 3/8" between each blind, but a gap of up to 3/8" width deductions will be taken from each blind (only when using standard common valance sizes)
1. For IM without valance return, the standard common valance width (net) + right blind width (net) + middle blind width (net)
 2. For IM with valance return, the standard common valance size (net) + right blind width (net) + middle blind width (net) + gap width x gap qty + 2
 3. For OM with no valance returns, the standard common valance width (net) + middle blind width (net) + gap width x gap qty + 2
 4. For OM with valance returns, the standard common valance width (net) + middle blind width (net) + gap width x gap qty + 1"

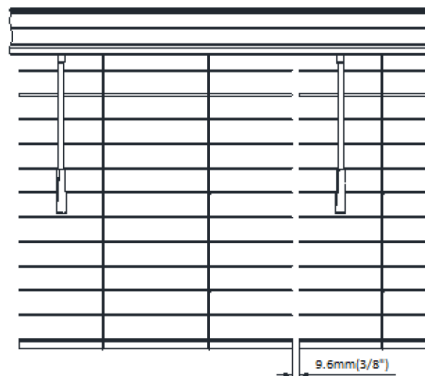

Call for current pricing
(609) 742-1720

Note: If blinds heights are the same under one common valance, the gap between blinds is ≤ 1/4". If blind heights are not the same, then slat alignment is required.

Custom Valance Width


- For single blinds, the custom valance width cannot be more than the net blind width.
- For blinds under a common valance, the minimum gap size between each blind is 12". Therefore, when there are:
 - 2 blinds under a common valance, the custom valance width = net blind width + 12";
 - 3 blinds under a common valance, the custom valance width = net blind width + 24";
 - 4 blinds under a common valance, the custom valance width = net blind width + 36".

Side by side (Optional): only available for blinds

Side by side blinds must have the following:

- Same order height
- Same mount type
- Same slat size
- Same color/finish
- Within the same order

When selecting the Side by Side option, and when the slat alignment is about $\leq \frac{1}{4}$ ".

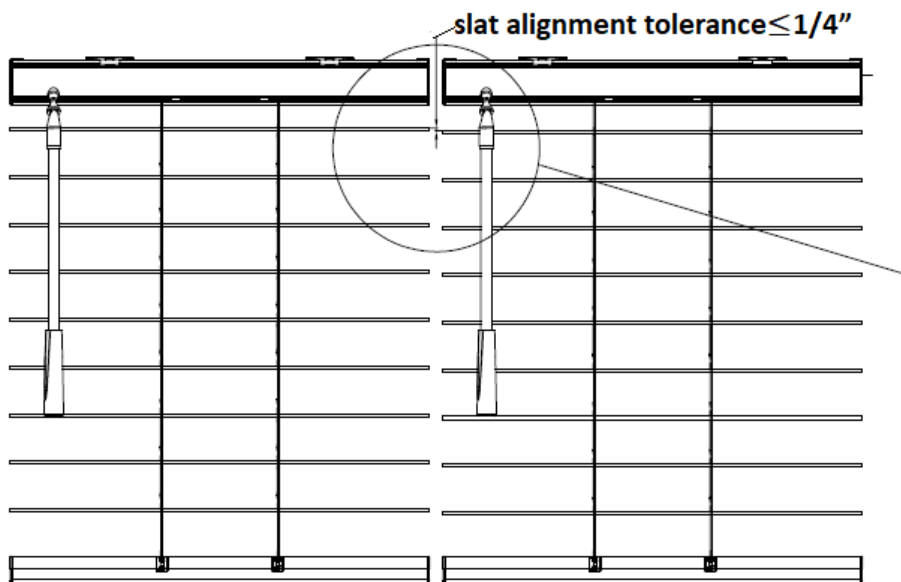

Call for current pricing
(609) 742-1720

Note: If Side by Side is not specified, the slat alignment is not guaranteed. This is due to the fact that the blinds are manufactured to different standards.

Options

Cut Outs

A cut-out is an area of the blind that needs to be removed to avoid an

- All measurements are taken from top to bottom, with slats in a closed position.
- Cut-outs are made on complete slats only based on the size provided. No partial slat cuts will be made.
- Available for Single & Common Valance blinds
 - **Single blinds:** available on left, right, or both sides
 - **Common Valance blinds:** cut-outs are only available on the left or right of the right blind; not available on any of the center blinds.
- Select a cut-out type, indicate the location, and provide the required dimensions. Both Bottom Corner and Side/Middle cut-out types are available per side. Both Bottom Corner and Side/Middle cut-outs are available on both sides of the blind.

• Corner (Bottom) Cut-out

Removes the bottom corner(s) of the blind, including the bottom edge of the cut-out. See diagram below.

- Cut-out Width (W): Measured from the edge of the blind to the edge of the cut-out.
- Cut-out Height (H): Measured from the top of the head to the bottom of the cut-out.

• Side (Middle) Cut-out

Removes the side(s) of the blinds in the middle only; the bottom edge of the cut-out, the start of cut-out height, and the end of cut-out height.

- Cut-out Width (W): Measured from the edge of the blind to the edge of the cut-out.
- Cut-out Height (H1): Measured from the top of the head to the bottom of the cut-out.
- Cut-out Height (H2): Measured from the top of the head to the top of the cut-out.


Call for current pricing
(609) 742-1720

Corner (Bottom) Cut-out		Blind Width (X)			
		X ≤ 8 7/8"	8 7/8" < X ≤ 26 5/8"	26 5/8" < X ≤ 39"	X > 39"
Cut-out Width (W)	Min	1/8"			
	Max	3/8"	1 3/8"	2 7/8"	4 3/8"
Height (H)	Min	1 1/2"			
	Max	2" Slat: Y - 2 1/4" / 2.5" Slat: Y - 2 3/4"			

Side (Middle) Cut-out		Blind Width (X)			
		X ≤ 8 7/8"	8 7/8" < X ≤ 26 5/8"	26 5/8" < X ≤ 39"	X > 39"
Cut-out Width (W)	Min	1/8"			
	Max	3/8"	1 3/8"	2 7/8"	4 3/8"
	Min	1 1/2"			

Hardware

Installation Bracket

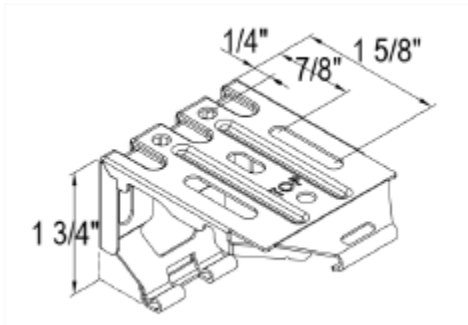


Side Mount Instal

When selected, inc
supporting bracket



Hold Down Bracket

(Optional for all blind widths)

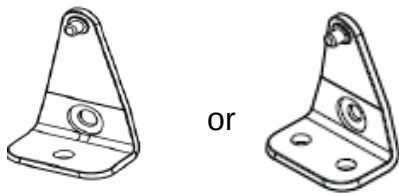

Shim (Optional 1

Offers a 3/8" exte
wall. Two shims c
a 11/16" extensio

(Running change, customer may receive Hold Down
Bracket with two screw holes or one screw hole)

Hardware

Blind Width (Net)	Installation Bracket qty
$X \leq 37"$	2
$37" < X \leq 47"$	3
$47" < X \leq 75"$	4
$75" < X \leq 96"$	5

Screws	Quantity
1 1/4" Screw	Installation bracket qty x 2
2" Screw (with shim)	Installation bracket qty x 2
3/4" Screw	Hold down bracket qty x1 or x 2
M4 Nut & Bolt	4 (for Side Mount only)

Ladder Cord Count

Blind Width (Net)	# of Ladders	# of Inner Cords
$X \leq 24"$	2	4
$24" < X \leq 37"$	3	4
$37" < X \leq 50"$	4	4
$50" < X \leq 62"$	5	4

Call for current pricing
(609) 742-1720

2 1/2" M
3 1/4" D


Cus

37
(


Opt

Operating Your Cordless Blind

Tilting Wand: Rotate the wand to achieve the desired slat p



To lower the blind: Pull the blind down by hand from the bottom rail when lowering the blind.

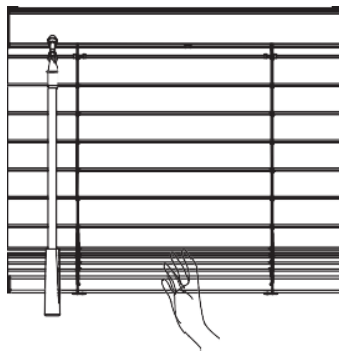

Call for current pricing
(609) 742-1720

To raise the blind: Gently tilt the slats to an open/level position, with slats in an open position.

****Do not leave slats in a closed up or closed down position.***

