



ULTIMATE™

F A U X W O O D

PROGRAM REFERENCE GUIDE
And Price Book

Revision Log



Date	Revision
12/12/2025	• Pg.7 Added notes under wand options
5/31/2025	• Added 11 ¾" wand drop as optional wand drop. • Added valance information. • Updated valance clips formula for L>96"
2/17/2025	• Added running change note for Hold Down Bracket
8/1/2024	• Updated default wand drop length to 24" for blind height $36" \leq Y \leq 48"$.
5/1/2024	• Updated default wand drop length to 17 ¾" for blind height $Y \leq 36"$. Remove 11 ¾" wand drop as a default or optional wand drop option. • Adding Side-by-Side option.
10/15/23	• New adjustable valance clip
6/15/2022	<u>General Update:</u> 2" slats now available for Ultimate™ Faux Wood • Added 2" slat color availability • Updated cut-out rules
5/5/2022	• Updated keystone spacing requirements



	Page
Features and Benefits	4
Terminology	5
General Specifications	6 – 7
Color Availability	8 – 9
Mounting Requirements	10
Options	11 –14
Hardware	15
Operating Your Cordless Blind	16



1. SMARTPRIVACY® CLOSURE
 - Smooth operation
 - Reliable performance
 - Larger max. sizes
2. PERFORMANCE CORDLESS
 - Smooth operation
 - Reliable performance
 - Larger max. sizes
3. CO-EXTRUDED SLATS
 - QUV 500H
 - 125° HDT
 - Lighter, easy to lift
4. POLY DECO HEADRAIL
 - Modern, impact resistant
 - Valance-free
 - Built-in light block
5. PIVOTING BOTTOM RAIL
6. SELF-LEVELING TECHNOLOGY





2" & 2 1/2" SLATS

2" & 2 1/2" SLATS							Width							
Height	USA	24	28	32	36	42	48	54	60	66	72	78	84	96
	30	169	185	200	223	238	256	280	326	347	373	400	421	454
	36	180	194	210	236	254	273	304	347	371	408	421	454	494
	42	193	210	228	252	272	298	329	372	403	438	462	498	535
	48	206	223	239	267	289	319	350	397	431	471	494	528	571
	54	223	249	259	296	321	350	384	438	471	509	543	577	620
	60	238	255	278	314	340	368	407	467	500	544	574	620	673
	66	252	270	293	331	357	394	432	497	531	591	614	660	715
	73	265	288	312	355	383	420	462	531	571	620	660	711	769
	78	273	302	329	365	400	438	482	559	598	659	696	742	812
	84	288	314	342	388	420	462	512	585	632	701	730	771	854
	90	302	329	357	407	439	482	533	609	660	725	761	805	NA
96	312	346	373	421	462	512	569	641	695	764	791	NA	NA	

IMPORTANT: Faux Wood Cordless blinds have a max area of 48sqft.

NO EXTRA CHARGE

- BEST FOR KIDS CERTIFIED CORDLESS
- WAND LOCATION CHANGE

Valance Surcharges

	24	28	32	36	42	48	54	60	66	72	78	84	96
Valance	28	28	34	40	51	56	61	73	78	84	94	100	106

For every additional foot, please add \$18 (retail)

General Specifications:

- Modern, valance-free, color coordinated PolyDeco headrail
- Engineered bottom rail
- SmartPrivacy®
- Wand tilt (Standard left, optional right)

Freight handling fee (net) \$25.00 Minimum per order (First Shade) & \$11.00 each additional Unit no Maximum 90" or over; IN WIDTH \$80.00 minimum \$50.00 each additional


Surcharges:

- Printed Color 20%
- Shim \$7 each
- Side Mount Bracket \$23 per blind
- Keystone \$73
- Cut-Out \$89 per side

Terminology

Ultimate™ Cordless Faux Wood Blind – 2" & 2 ½" Slat

Valance-free Headrail with Wand Tilt

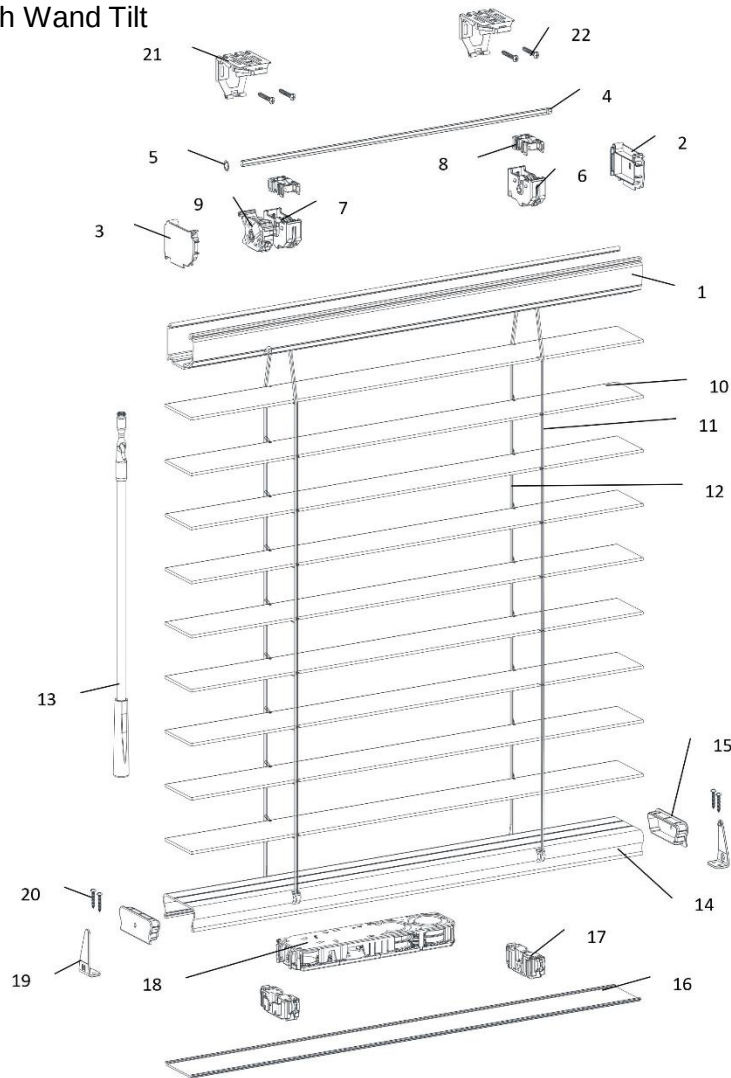

Description					
1	PVC Headrail	8	Drum Cap	15	Bottom Rail End Cap
2	Headrail End Cap (Right)	9	Wand Tilter	16	Bottom Rail Cover
3	Headrail End Cap (Left)	10	Slat	17	Cord Guide
4	Tilt Rod	11	Ladder	18	Spring Box
5	Ring Stopper	12	Inner Cord	19	Hold Down Bracket (optional) (Running change, Single hole or Double hole)
6	Headrail Drum Support	13	Wand	20	Hold Down Bracket Screw
7	Drum	14	Bottom Rail	21 & 22	Installation Bracket & Screw

General Specifications

Size Considerations

Single Blind	Min	Max	Max SQFT
Width (Net)	6 ½"	96" 37" (Side Mount)	48 SQFT *
Height	16"	96"	

- * The overall max blind size is limited by the maximum area; max width by max height cannot be ordered as one blind.
- Side mount brackets are available for all widths (IB). For widths over 37" top mount brackets are required and will be provided to be used in conjunction with side mount brackets.
- Blinds under 15" width(Net) have no lift function with tilting wand at the center

Standard Deductions

Inside Mount:

Blind Width = Ordered Width – 3/8" *

Blind Height = Ordered Height

Outside Mount:

Ordered Width = Blind Width

Ordered Height= Blind Height

Tolerance:


Blind Width may vary $\pm 1/8"$

Blind Height may vary +0~2 ¾"

Measurements:

Blind width: Measure from the left end to the right end of the slat.

Blind height: Lower the blind completely, then measure from the top of the headrail to the bottom of the bottom rail with slats in an open position.

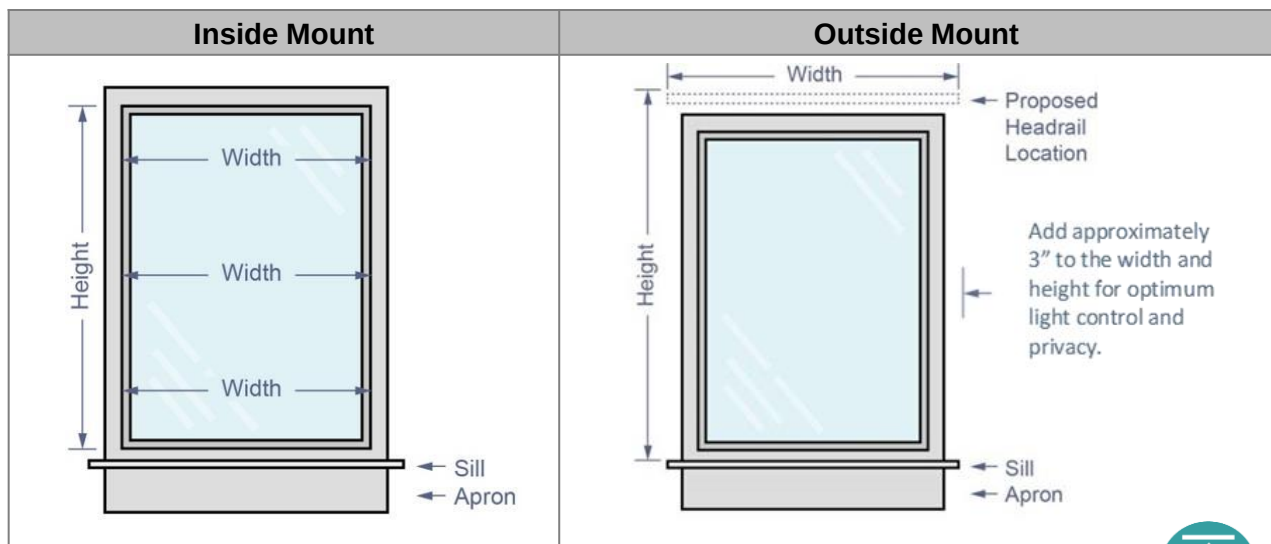


General Specifications

Wand Options

- Wand Control Location
 - Left (Default for $X \geq 15"$)
 - Right (Optional for $X \geq 15"$)
 - Center (Standard for $X < 15"$)
- *Blind Widths (Net) $< 15"$ will be made with a tilt wand placed in the center with no lift function.

Control	Blind Width (Net) (X)
Center (Standard)	$6 \frac{1}{2}" \leq X < 15"$
Left (Default)/Right (Optional)	$X \geq 15"$

- Wand Drop** is measured from the top of the headrail, to the bottom of the wand grip when slats are in a level opened position. Wand drop is not the height of the wand.

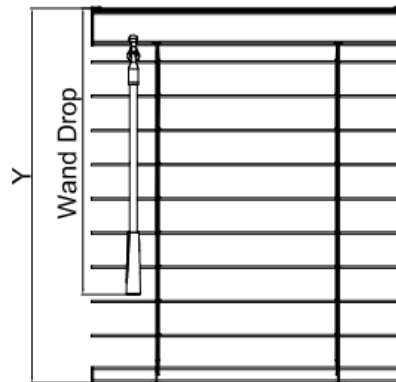

- Wand Drop Sizes: **17 3/4", 24", 29 3/4", 38 1/4" (11 3/4" & 47 1/4" & 60" optional only)**
 - The default wand drop size is for a blind at the given height.
 - Optional wand drop sizes can be selected as an override.
 - For common valance with different blind sizes, wand drop will be based on the default size of the shortest blind.

Net Blind Width (X)	Blind Height (Y)	Default Wand Drops	Optional Wand Drops	Tolerance
All	$Y \leq 36"$	17 3/4"	11 3/4"	-1" ~ +1"
	$36" < Y \leq 48"$	24"	17 3/4"	
	$48" < Y \leq 72"$	29 3/4"	24"	
	$72" < Y \leq 96"$	38 1/4"	29 3/4"	
			38 1/4"	
			47 1/4"	
			60"	

- The wands will be pieced accordingly:
 - 11 3/4", 17 3/4", 24", 29 3/4" & 38 1/4" wands will come as one piece
 - 47 1/4" and 60" wands will come in a 2-piece design



Ultimate™ Cordless Faux Wood Blinds

 Color Availability

No.	Color Code	Color Name	Color Type	Finish	2" Slat	2 ½" Slat
1	P001	Pure White	Solid	Smooth	✓	✓
2	P001	Pure White	Solid	Embossed	✓	✓
3	E008	Designer White	Solid	Smooth	✓	✓
4	E008	Designer White	Solid	Embossed	✓	✓
5	P003	Silk White	Solid	Smooth	✓	✓
6	P003	Silk White	Solid	Embossed	✓	✓
7	P004	Bright White	Solid	Smooth	✓	✓
8	P004	Bright White	Solid	Embossed	✓	✓
9	P006	Pearl	Solid	Smooth	✓	✓
10	P006	Pearl	Solid	Embossed	✓	✓
11	P075	Storm Gray	Solid	Embossed	✓	✓
12	P075	Storm Gray	Solid	Smooth	✓	✓
13	6957	Mist	Printed	Embossed	✓	✓
14	P230	Old Teak	Printed	Embossed	✓	✓
15	6959	Granite	Printed	Embossed	✓	✓
16	P226	Chestnut	Printed	Embossed	✓	✓



Ultimate™ Cordless Faux Wood Blinds

Color Coordination Chart

Color Code	Color Name	Finish	Headrail	Wand	Bottom Rail	Installation Bracket	Cord & Ladder	End Cap
6016	Pure White	Smooth	2080 Pure White	2080 Pure White	2080 Pure White	3058 White	T001 White	2037 Snow White
6016	Pure White	Embossed	2080 Pure White	2080 Pure White	2080 Pure White	3058 White	T001 White	2037 Snow White
6051	Designer White	Smooth	20103 Designer White	2080 Pure White	20103 Designer White	3058 White	T001 White	20103 Designer White
6051	Designer White	Embossed	20103 Designer White	2080 Pure White	20103 Designer White	3058 White	T001 White	20103 Designer White
6017	Silk White	Smooth	2003 Silk White	2080 Pure White	2003 Silk White	3058 White	T001 White	2037 Snow White
6017	Silk White	Embossed	2003 Silk White	2080 Pure White	2003 Silk White	3058 White	T001 White	2037 Snow White
6019	Pearl	Smooth	2095 Pearl	2095 Pearl	2095 Pearl	H002 Vanilla	5020 Alabaster	2012 Cameo
6019	Pearl	Embossed	2095 Pearl	2095 Pearl	2095 Pearl	H002 Vanilla	5020 Alabaster	2012 Cameo
6018	Bright White	Smooth	2003 Silk White	2080 Pure White	2079 Bright White	3058 White	T001 White	2037 Snow White
6018	Bright White	Embossed	2003 Silk White	2080 Pure White	2079 Bright White	3058 White	T001 White	2037 Snow White
6101	Storm Gray	Smooth	2149 Storm Gray	2149 Storm Gray	2149 Storm Gray	3149 Storm Gray	5107 Silver	2139 Silver Gray
6101	Storm Gray	Embossed	2149 Storm Gray	2149 Storm Gray	2149 Storm Gray	3149 Storm Gray	5107 Silver	2139 Silver Gray
6957	Mist	Embossed	2003 Silk White	2080 Pure White	6957 Mist	3058 White	T001 White	2037 Snow White
6922	Old Teak	Embossed	2457 Old Teak	2457 Old Teak	6922 Old Teak	3436 Coffee	5413 Walnut	2435 Old Teak
6959	Granite	Embossed	2141 Granite	2141 Granite	6959 Granite	3105 Gray	T168 Gray	2141 Granite
6921	Chestnut	Embossed	2537 Oak Mantel	2537 Oak Mantel	6921 Chestnut	3523 Sugar Maple	5526 Cottage Pine	2522 Teak

Mounting Requirement

Minimum Depth Requirements and Valance Returns


- Valance return locations: left only, right only or both left and right returns
- Standard or custom sizes available
 - Custom valance return size: minimum ½" and maximum 5"

Inside Mount

Blind/Valance Type	Fully Recessed IB	Semi-IB with bracket flush to wall	Semi-IB Minimum Mounting Depth	Semi-IB with shallow depth mounting holes
2" & 2 ½" Blinds with No Valance	2 11/16"	N/A	1 5/8"	15/16"
2" & 2 ½" Blind with Modern Curved Valance	3 7/8"	2 11/16" *Valance return size: 7/8"	1 5/8" *Valance return size: 2"	15/16" *Valance return size: 2 5/8"
2" & 2 ½" Blind with Designer Crown Valance	4 1/16"	2 11/16" *Valance return size: 7/8"	1 5/8" *Valance return size: 2"	15/16" *Valance return size: 2 5/8"

Outside Mount


Blind/Valance Type	OB return size
2" & 2 ½" Blinds with any valance and return	Valance return size: 3 9/16"
2" & 2 ½" Blinds with any valance without return	N/A

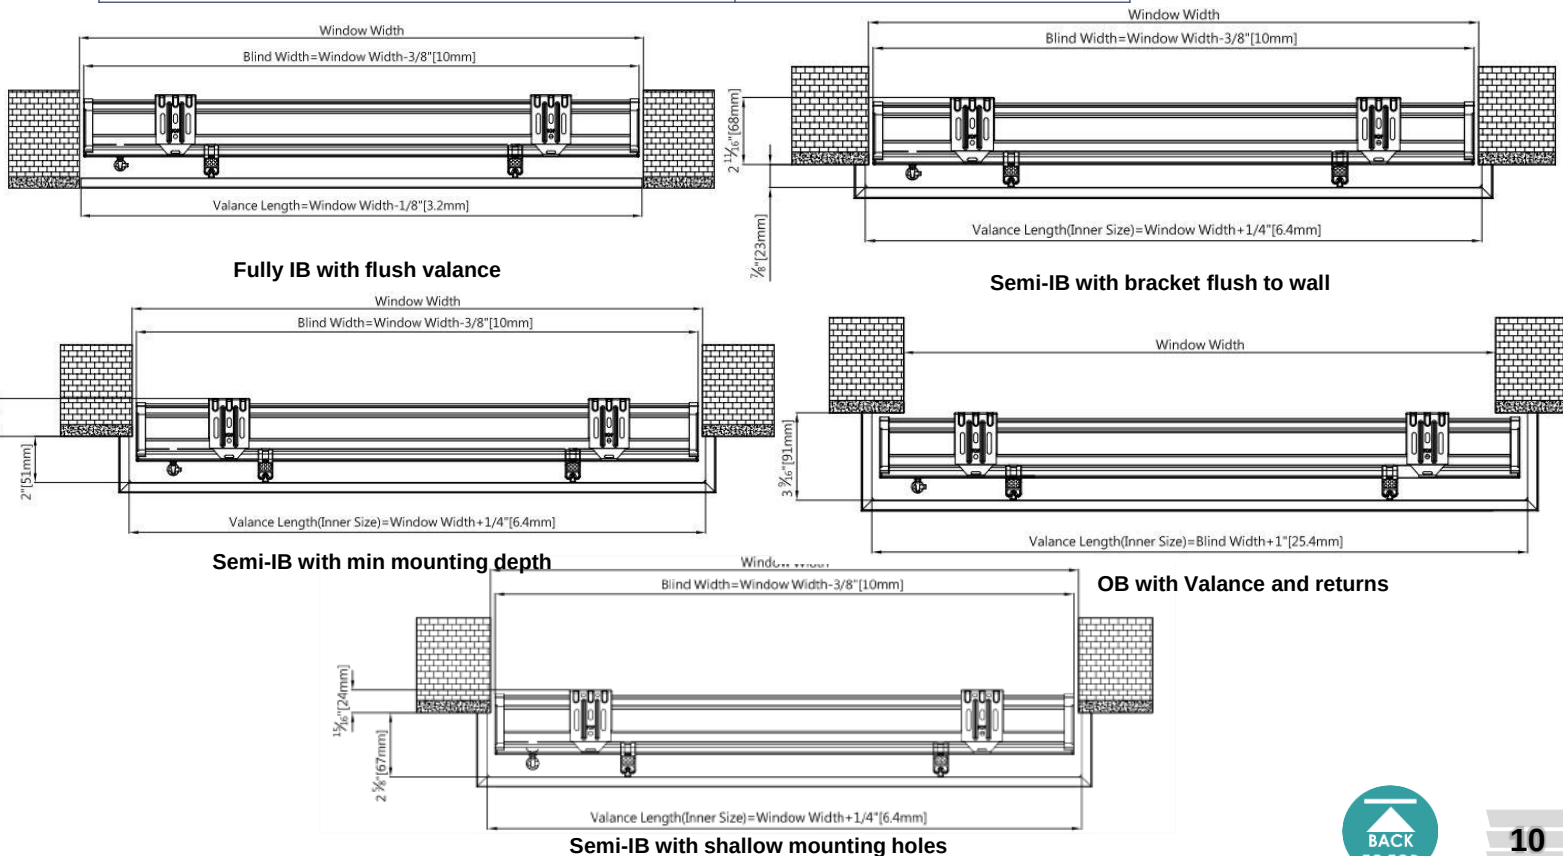


Options

Valances

- Default: No Valance
- Optional: 2 1/2" Modern Curved & 3 1/4" Designer Crown Valance
- Size: Standard length or custom length (maximum custom length: blind width + 5")
- Color availability: Valance color will match slat color.
- When ordering a valance only, the valance will be split equally when the inner dimension of an individual piece exceeds 96". In such situation, valance connector will be provided as default with keystone being optional. When keystone is selected, valance can either be split equally or at specified locations.
- Max inner length for valance only = 384"

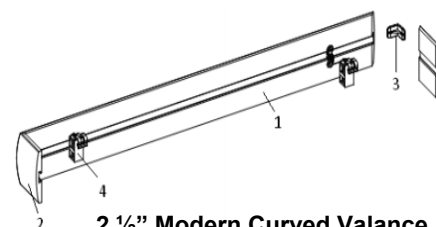

2 1/2" Modern Curved Valance

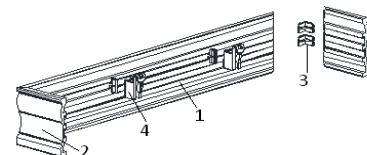

3 1/4" Designer Crown Valance


Mount Type & Return Option	Standard Valance Width	Custom Valance Width Maximum
IB with No Returns	Net Blind Width + 1/4"	Net Blind Width + 5"
IB with Returns	Net Blind Width + 5/8"	
OB with No Returns	Net Blind Width + 2"	
OB with Returns	Net Blind Width + 1"	

	Description
1	Valance
2	Valance Return
3	Valance Return Joinery
4	Valance Clip

Valance Joinery

Valances will be spliced when the width exceeds **96"**; valance joinery is required for support on spliced valances or common valances; Valance connectors will be provided by default, keystones can be selected as an option.

- **Default:** Valance Connector
 - Valance Connector splits will be made evenly along the valance; custom split location & At gaps between blinds is not available
- **Optional:** Keystone
 - Up to 3 keystones can be requested per valance/common valance
 - Select the keystone location based on an even split or custom split. At gaps between blinds is not available.
 - Keystones can also be requested onto non-spliced valances.



Valance Connector



Keystone

Keystone Spacing Requirements


- Measure from the left of the valance inner width to the center of the keystone.
- Available for valance width 13" and above
- Minimum distance between 2 keystones is 18" and the min. distance between either ends of the valance to the keystone center is 6.5".
- Custom keystone location limitation:
 1. When there're 3 keystones:
 - 1st keystone: 6.5" ~ (total valance width - 18"x2 - 6.5")
 - 2nd keystone: (1st keystone location+18") ~ (total valance width - 18" - 6.5")
 - 3rd keystone: (2nd keystone location +18") ~ (total valance width - 6.5")
 2. When there're 2 keystones:
 - 1st keystone: 6.5" ~ (total valance width-18" - 6.5")
 - 2nd keystone: (1st keystone location+18") ~ (total valance width - 6.5")
 3. When there's 1 keystone:
 - Keystone: 6.5" ~ (total valance width-6.5")



Options

Common Valance

- Not available with side mount brackets
- Maximum of 4 blinds for common valance
- There is a min gap of 3/8" between each blind, but a gap of up to 12" can be requested.
- 3/8" width deductions will be taken from each blind (only when ordered as Inside Mount)
- Standard Common Valance sizes
 1. For IM without valance return, the standard common valance size = order width - 1/8" or = **left blind width (net) + right blind width (net) + middle blind width (net) + gap width x gap qty + 1/4"**
 2. For IM with valance return, the standard common valance size = order width + 1/4" or = **left blind width (net) + right blind width (net) + middle blind width (net) + gap width x gap qty + 5/8"**
 3. For OM with no valance returns, the standard common valance size = left blind width (net) + right blind width (net) + middle blind width (net) + gap width x gap qty + 2"
 4. For OM with valance returns, the standard common valance size = left blind width (net) + right blind width (net) + middle blind width (net) + gap width x gap qty + 1"

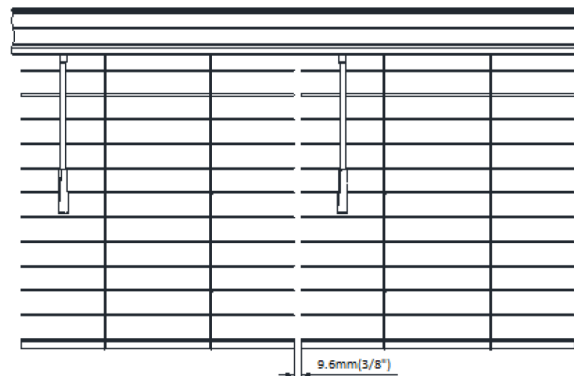

Note: If blinds heights are the same under one common valance, the slat alignment tolerance is about $\leq 1/4"$. If blind height are not the same, then slat alignment between blinds is not guaranteed.

Custom Valance Width

- For single blinds, the custom valance width cannot be more than 5" wider than the (net) blind width.
- For blinds under a common valance, the minimum gap size between each blind is 3/8", and the max gap between each blind is 12". Therefore, when there are:
 - 2 blinds under a common valance, the custom valance width cannot be 12" wider than the combined net blind width;
 - 3 blinds under a common valance, the custom valance width cannot be 24" wider than the combined net blind width;
 - 4 blinds under a common valance, the custom valance width cannot be 36" wider than the combined net blind width.


Options

Side by side (Optional): only available for blinds within the same order

Side by side blinds must have the following:

- Same order height
- Same mount type
- Same slat size
- Same color/finish
- Within the same order

When selecting the Side by Side option, and when the above conditions are met, the slat alignment is about $\leq 1/4"$.

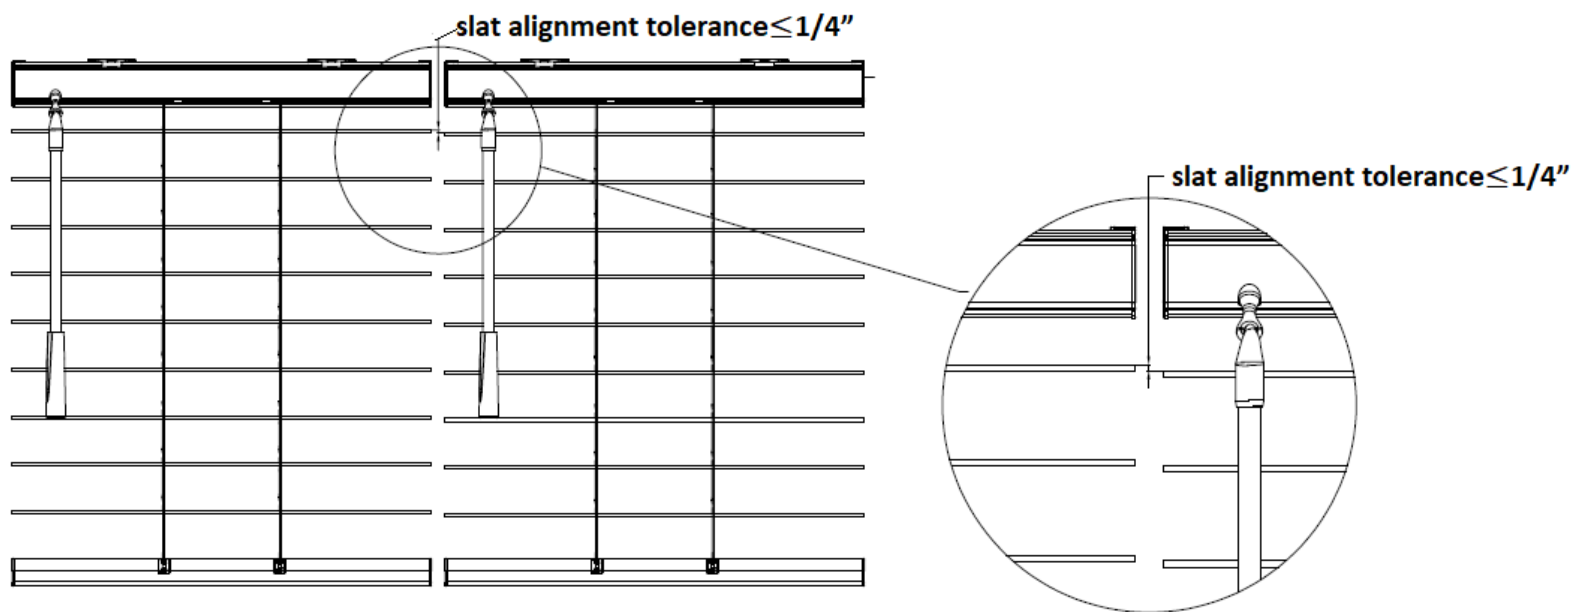


Note: If Side by Side is not specified, the slat alignment is not guaranteed and the slat qty of the blinds may be different even the blinds meet the above conditions. This is due to the unique characteristics of the cordless mechanism.

Options

Cut Outs

A cut-out is an area of the blind that needs to be removed to avoid an existing obstruction.

- All measurements are taken from top to bottom, with slats in a closed position.
- Cut-outs are made on complete slats only based on the size provided. Partial slat cuts will not be made.
- Available for Single & Common Valance blinds
 - **Single blinds:** available on left, right, or both sides
 - **Common Valance blinds:** cut-outs are only available on the left side of the left blind and the right side of the right blind; not available on any of the center blinds.
- Select a cut-out type, indicate the location, and provide the required cut-out measurements. Only one cut-out type is available per side. Both Bottom Corner and Side/Middle cut-outs cannot be made on the same side of the blind.

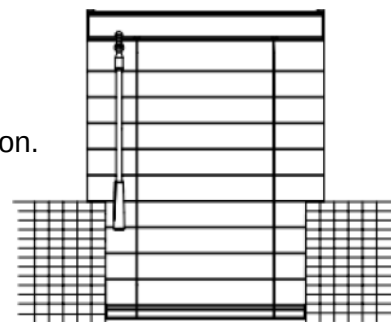

• Corner (Bottom) Cut-out

Removes the bottom corner(s) of the blind, including the bottom rail. Must provide the width and height of the cut-out. See diagram below.

- Cut-out Width (W): Measured from the edge of the blind/end cap to the end of the cut-out.
- Cut-out Height (H): Measured from the top of the headrail to the top of the cut-out.


• Side (Middle) Cut-out

Removes the side(s) of the blinds in the middle only; the bottom rail will not be cut. Must provide the width, the start of cut-out height, and the end of cut-out height. See diagram below.

- Cut-out Width (W): Measured from the edge of the blind/end cap to the end of the cut-out.
- Cut-out Height (H1): Measured from the top of the headrail to the top of the cut-out.
- Cut-out Height (H2): Measured from the top of the headrail to the end of the cut-out.


Corner (Bottom) Cut-out		Blind Width (X)			
		$X \leq 8 \frac{7}{8}"$	$8 \frac{7}{8}" < X \leq 26 \frac{5}{8}"$	$26 \frac{5}{8}" < X \leq 39"$	$X > 39"$
Cut-out Width (W)	Min	$1 \frac{1}{8}"$			
	Max	$\frac{3}{8}"$	$1 \frac{3}{8}"$	$2 \frac{7}{8}"$	$4 \frac{3}{8}"$
Height (H)	Min	$1 \frac{1}{2}"$			
	Max	2" Slat: $Y - 2 \frac{1}{4}"$ / 2.5" Slat: $Y - 2 \frac{3}{4}"$			

Side (Middle) Cut-out		Blind Width (X)			
		$X \leq 8 \frac{7}{8}"$	$8 \frac{7}{8}" < X \leq 26 \frac{5}{8}"$	$26 \frac{5}{8}" < X \leq 39"$	$X > 39"$
Cut-out Width (W)	Min	$1 \frac{1}{8}"$			
	Max	$\frac{3}{8}"$	$1 \frac{3}{8}"$	$2 \frac{7}{8}"$	$4 \frac{3}{8}"$
Height (H1)	Min	$1 \frac{1}{2}"$			
	Max	2" Slat: $H2 - 1 \frac{3}{4}"$ / 2.5" slat: $H2 - 2 \frac{1}{4}"$			
Cut-out Height (H2)	Min	2" Slat: $3 \frac{1}{2}"$ / 2.5" Slat: 4"			
	Max	2" Slat: $Y - 2 \frac{1}{2}"$ / 2.5" Slat: $Y - 3"$			

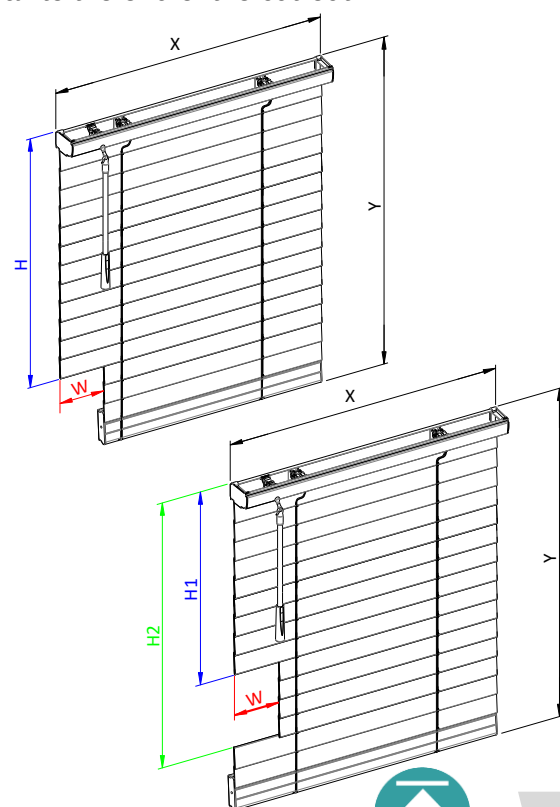


Hardware

Installation Bracket

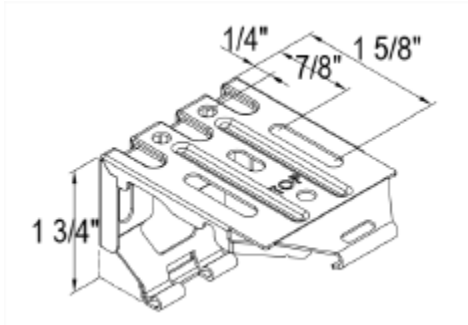


Side Mount Installation (Optional for IM only)

When selected, includes installation bracket, plus side mount supporting bracket.

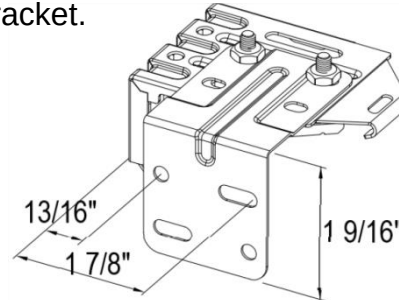

Hold Down Bracket

(Optional for all blind widths)

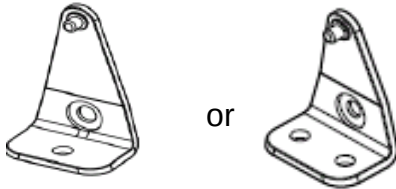

Shim (Optional for OM only)

Offers a 3/8" extension outwards from the wall. Two shims can be stacked to allow for a 11/16" extension.



(Running change, customer may receive Hold Down Bracket with two screw holes or one screw hole)

Hardware

Blind Width (Net)	Installation Bracket qty
$X \leq 37"$	2
$37" < X \leq 47"$	3
$47" < X \leq 75"$	4
$75" < X \leq 96"$	5

Screws	Quantity
1 1/4" Screw	Installation bracket qty x 2
2" Screw (with shim)	Installation bracket qty x 2
3/4" Screw	Hold down bracket qty x1 or x 2
M4 Nut & Bolt	4 (for Side Mount only)

Ladder Cord Count

Blind Width (Net)	# of Ladders	# of Inner Cords
$X \leq 24"$	2	4
$24" < X \leq 37"$	3	4
$37" < X \leq 50"$	4	4
$50" < X \leq 63"$	5	8
$63" < X \leq 76"$	6	8
$76" < X \leq 89"$	7	8
$89" < X \leq 96"$	8	8

Optional Valances	Valance Return Connector qty
2 1/2" Modern Curved Valance	Valance Return qty x 1
3 1/4" Designer Crown Valance	Valance Return qty x 2

Blind Width Net (X) / Custom Valance Length (L)	Valance Clip qty
$X \leq 37"$; $L \leq 37"$	2
$37" < X < 60"$; $37" < L < 60"$	3
$60" \leq X \leq 96"$; $60" \leq L \leq 96"$	4
$L > 96"$	5~17 {fx (L-13)/24+1}


Optional Hold Down Bracket Qty	#6x3/4" Screw Qty
2	4 for Double hole Hold Down Bracket 2 for Single hole Hold Down Bracket

Note: Number of ladders may vary if the blind order is close to the maximum width of that range.




Operating Your Cordless Blind

Tilting Wand: Rotate the wand to achieve the desired slat position.



To lower the blind: Pull the blind down by hand from the bottom rail. Slats can be in an opened or closed position when lowering the blind.

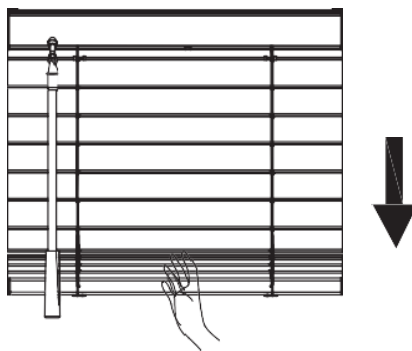

To raise the blind: Gently tilt the slats to an open/level position before lifting the bottom rail. Lift by hand, with slats in an open position.

****Do not leave slats in a closed up or closed down position while lifting the bottom rail.***

