



Ultimate[™] Normandy[®] Wood Blinds

PROGRAM REFERENCE GUIDE

And Price Book

Revision Log



Date	Revision
12/12/2025	<u>Pg 8</u> : Added notes under wand options
4/30/2025	1. Updated the images for installation brackets. 2. Added running change note for Hold Down Bracket 3. Added running change note for wand drop length 11 ¾" 4. Update the valance return size 5. Updated the Mounting Depth Requirements
12/24/2024	Updated drawing for 2 ½" Contempo Valance
10/18/2024	Updated wand drop length 11 ¾" to be running change and added 17 ¾" for blind length Y≤36". Removed 11 ¾" for custom wand drop.
8/1/2024	Max area increased to 64 sq. ft.
6/11/2024	New default head rail, bottom rail, & bracket color for ND108 Rustic Gray.
5/7/2024	Updated color coordination for 1502 Teak.
5/1/2024	Side by Side option added OSMO collection now referred to as "Premium Colors". Actual colors for this collection remain the same.
10/15/2023	New adjustable valance clip
8/2/2023	Updated ladder & inner cord chart for widths between 52-54"
7/01/2023	New program

Table of Contents

	Page
Features and Benefits	4 – 5
Terminology	6
General Specifications	7 – 8
Color Availability	9 – 10
Mounting Requirements	11 – 13
Options	14 – 19
Hardware	20 – 23
Operating Your Cordless Blind	24

Features & Benefits

- Environmentally-friendly, premium solid wood slats to resist warping, cupping or twisting
- Textured grain finish highlights the natural characteristic of the wood
- 26 colors and finishes, including Premium finishes
- 2" slats and 2 ½" slats available for all colors and systems
- Patented, award-winning SmartPrivacy® feature allows optimum blind closure for the best privacy and light blocking in the industry
- Light weight slat enables easier lifting and lowering
- Advanced tilting mechanism makes angling blinds effortless
- Pivoting bottom rail helps block light beneath the blind
- Smooth "Best for Kids" cordless lift system comes standard for child and pet safety
- Metal one-piece wands are never split
- Valance-free Poly Deco headrail with built in light block
- Self-leveling technology virtually eliminates lopsided lifting







2" & 2 1/2" SLATS

2" & 2 1/2" SLATS

		Width													
	USA	24	28	32	36	42	48	54	60	66	72	78	84	90	96
Height	30	297	318	339	364	394	425	472	526	563	609	655	709	748	796
	36	327	343	361	389	429	461	501	574	612	664	714	775	816	876
	42	345	369	389	421	464	501	557	627	678	735	788	864	913	982
	48	376	389	418	451	500	536	598	680	732	794	856	938	994	1063
	54	390	424	464	505	557	604	666	760	815	888	956	1053	1111	1191
	60	420	464	494	535	598	641	714	813	875	956	1035	1133	1191	1289
	66	448	493	523	568	633	691	767	870	937	1020	1111	1223	1289	1407
	73	479	522	560	604	682	739	822	939	1022	1115	1218	1329	1412	1531
	78	487	542	581	635	709	769	884	1008	1084	1167	1261	1433	1515	1655
	84	522	561	621	673	751	820	943	1059	1147	1223	1342	1505	1619	1698
	90	548	585	649	704	788	862	986	1106	1187	1307	1378	1578	1667	1774
	96	561	616	684	746	834	913	1035	1156	1266	1369	1414	1600	1703	1799

NO EXTRA CHARGE

- BEST FOR KIDS CERTIFIED CORDLESS
- WAND LOCATION CHANGE

Surcharges:

- Designer color 10%
- Premium color 50%
- Shim \$7 each
- Side mount bracket \$25 per blind
- Keystone \$81
- Cut-out \$99 per side

General Specifications

- Modern, valance-free, color coordinated PolyDeco headrail
- SmartPrivacy®
- Wand tilt (standard left, optional right)

Freight handling fee (net) \$25.00 Minimum per order (First Shade) & \$11.00 each additional Unit no Maximum 90" or over; IN WIDTH \$80.00 minimum \$50.00 each addition

Valance Surcharge:

	24	28	32	36	42	48	54	60	66	72	78	84	90	96
Designer Crown	50	56	62	75	87	93	106	118	130	143	155	161	174	186
Contempo	62	68	81	87	99	118	124	143	155	167	180	198	211	223

* For every additional foot, please add \$25 (retail)

Features & Benefits

Standard Features

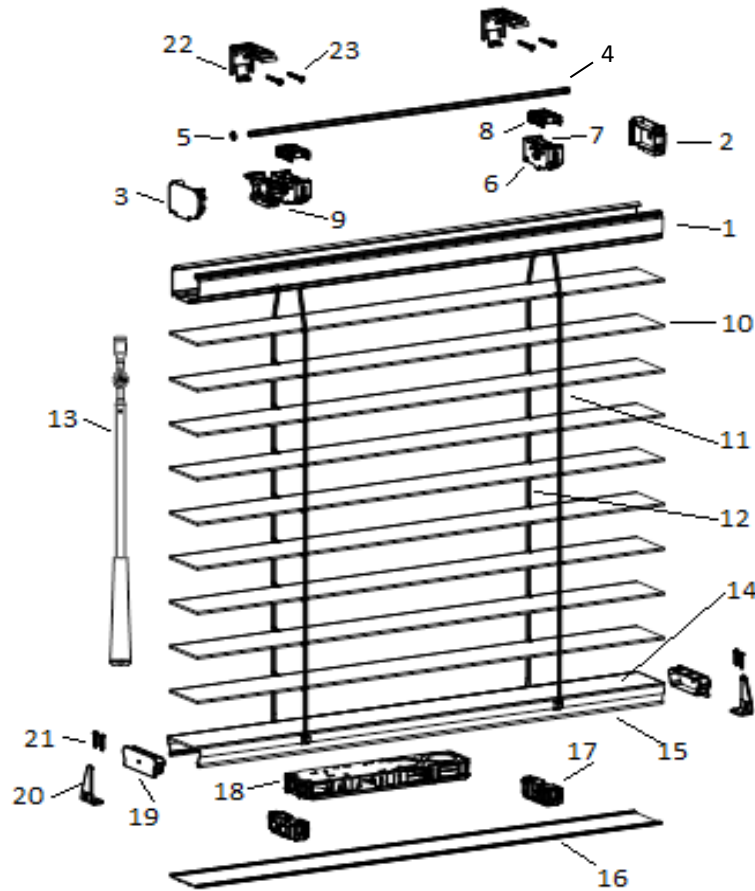
- Industry-leading closure and privacy with award-winning SmartPrivacy®
- Smooth, reliable Performance cordless lift system. Wand tilt for child and pet safety
- Environmentally-friendly, premium solid wood slats to resist warping, cupping or twisting
- Covers a large range of sizes
- 2" & 2 ½" slat sizes available in all colors
- Impact resistant, modern, valance-free PolyDeco headrail
- Pivoting bottom rail helps block light beneath the blind and allows for maximum slat closure

Options

- Optional Control Location — Wand: Right
- Optional Wand drop sizes
- Valances: Designer Crown & Contempo
- Keystones
- Common valance
- Cut-outs
- Optional hardware for Side Mount, Hold Down Brackets, and Shims



Terminology



No	Description	No	Description	No	Description
1	Head Rail(PVC)	9	Wand Tilter	17	Cord Guide
2	Head Rail End Cap(Right)	10	Slat	18	Spring Box
3	Head Rail End Cap(Left)	11	Ladder	19	Bottom Rail End Cap
4	Tilt rod	12	Inner Cord	20	Hold Down Bracket(Optional) (Running change, Single hole or Double hole)
5	Ring Stopper	13	Wand Set	21	Screw for Hold Down Bracket (Optional)
6	Head Rail Drum Support	14	Slat (covered on bottom rail)	22	Installation Bracket (Top/Back Mount)
7	Drum	15	Bottom Rail	23	Screw for Installation Bracket
8	Drum Cap	16	Bottom Rail Cover		

General Specifications

Size Considerations

Single Blind	Min.	Max.	Max Area
Blind Width (Net) (X)	6 1/2"	96"	64 sq.ft.
Blind Length (Y)	16"	96"	

- Side mount brackets are available for all widths (IB). For widths over 37" top mount brackets are required and will be provided to be used in conjunction with side mount brackets.
- Blinds under 15" width(Net) have no lift function with tilting wand at the center

Standard Deductions

Inside Mount:

Blind Width= Ordered Width – 3/8" *

Blind Height= Ordered Height

Outside Mount:

Ordered Width = Blind Width

Ordered Height= Blind Height

*OM recommendation: Add 1 1/2 width on each side of the blind.

Tolerance:

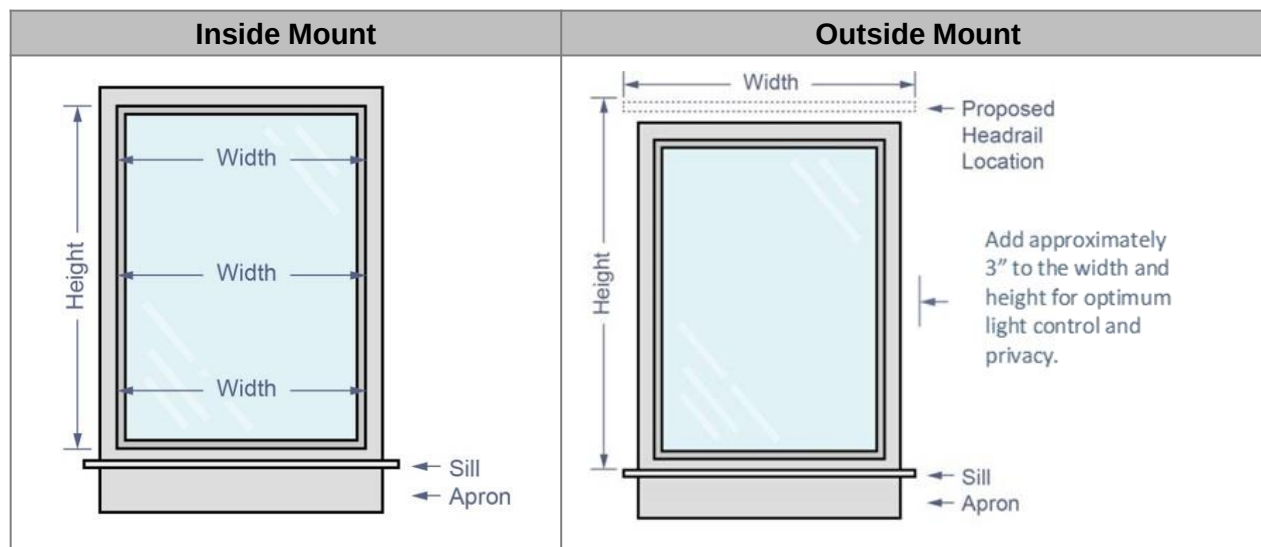
Blind Width may vary $\pm 1/8"$.

Blind Height may vary +0~2 1/4" for **2" blinds**, and +0~2 3/4" for **2 1/2" blinds**.

Measurements:

Blind width: Measured from the left end to the right end of the slat.

Blind height: Lower the blind completely, then measure from the top of the headrail to the bottom of the bottom rail with slats in the open position.




General Specifications

Wand Options

- Wand Control Location
 - Left (Default for $X \geq 15"$)
 - Right (Optional for $X \geq 15"$)
 - Center (Standard for $X < 15"$)
- *Blind Widths (Net) $< 15"$ will be made with a tilt wand placed in the center with no lift function.

Control	Blind Width (Net) (X)
Center (Standard)	$6 \frac{1}{2}" \leq X < 15"$
Left (Default)/Right (Optional)	$X \geq 15"$

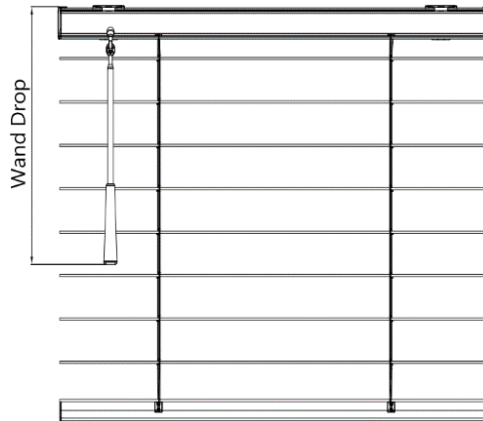- Wand Drop** is measured from the top of the headrail, to the bottom of the wand grip when slats are in a level opened position. Wand drop is not the height of the wand itself.



- Wand Drop Sizes: **11 3/4"** (Running change), **17 3/4"**, **29 3/4"**, **38 1/4"** (**47 1/4"** & **60"** optional only)
 - The default wand drop size is for a blind at the given height
 - Optional wand drop sizes can be selected as an override.
 - For common valance with different blind sizes, wand drop will be based on the default size of the shortest blind.

Blind Length(Y)	Blind Width (Net)(X)	Default Wand Drops	Optional Wand Drops	Tolerance
$Y \leq 36"$	All	11 3/4" (Running change)	17 3/4" 29 3/4" 38 1/4" 47 1/4" 60"	Wand length/ wand drop tolerance: -1"~ +1"
		17 3/4"		
$36" < Y \leq 48"$	All	17 3/4"		
$48" < Y \leq 72"$	All	29 3/4"		
$72" < Y \leq 96"$	All	38 1/4"		

***All wand sizes are metal and will never be split, regardless of wand length**

***For blinds of the same height, regardless of color, the wand drop length will match**

Color Availability

**Slat color will match optional valance color.

26 Colors: 8 Paint, 8 Stain, 10 Premium Colors

Color Code	Color Name	Color Type
ND001	Pure White	Paint
ND003	Silk White	Paint
ND006	Pearl	Paint
ND080	*Taupe Gray	Paint
ND053	*Clay	Paint
ND091	*Solid Black	Paint
ND617	*Platter	Paint
ND017	*Gray Black	Paint

Color Code	Color Name	Color Type
ND110	Limed White	Stain
ND114	Taupe	Stain
ND108	Rustic Gray	Stain
ND204	Oak Mantel	Stain
ND211	Cherry	Stain
ND230	Old Teak	Stain
ND221	Black Walnut	Stain
*ND246	Matte Black	Stain

Color Code	Color Name	Color Type
1003	White Matte	Premium
1501	Oak	Premium
1502	Teak	Premium
1301	Cherry	Premium
1109	Silk Gray	Premium
1111	Granite Gray	Premium
1203	Black	Premium
1204	Ebony	Premium
1112	Sunbleached Gray	Premium
1114	Weathered Gray	Premium

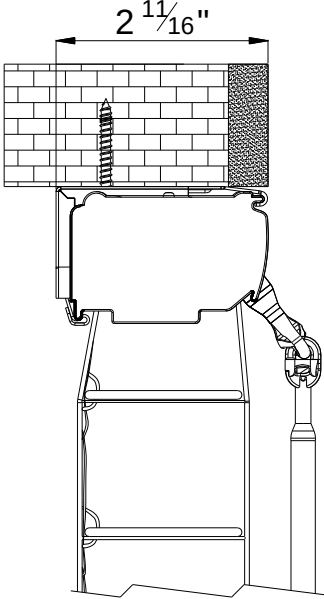
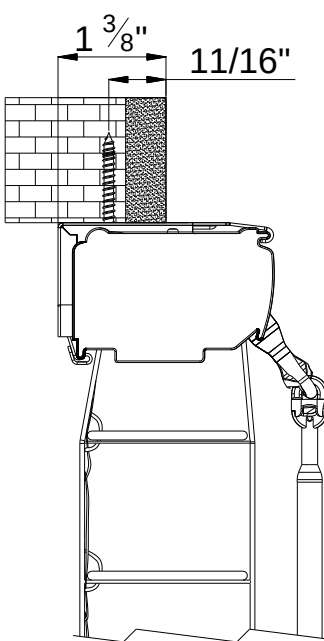
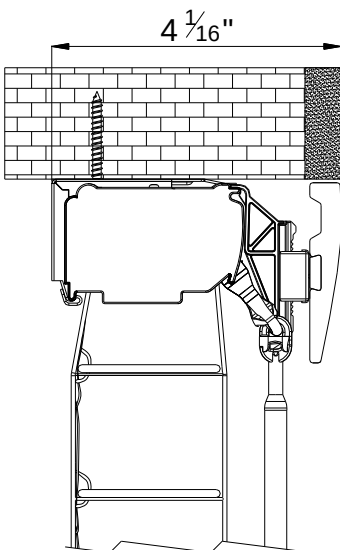
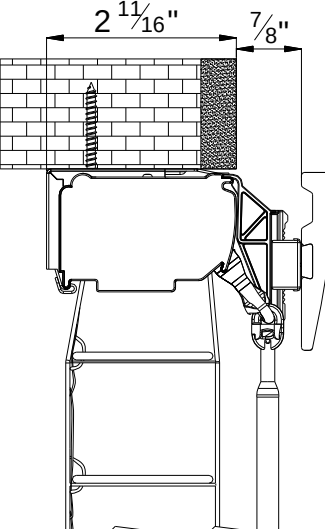
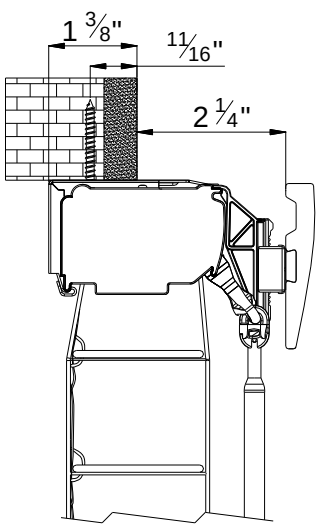
*The following are Designer Colors and will carry an added surcharge: Taupe Gray, Platter, Clay, Gray Black, Solid Black & Matte Black. Premium colors also carry an added surcharge. See price list for full details of each.

*** Color ND110, ND114 and All Premium colors are a special stain that enhances the wood grain and therefore the final product may appear different than the sample due to natural variations found in wood.




Color Coordination

Color Code	Color Name	HeadRail, Bottom Rail, Bottom Rail Cover	Bracket	Wand	Cord/Ladder
ND001	Pure White	2080 Pure White	3058 White	3058 White	T001 White
ND003	Silk White	2003 Silk White	3058 White	3058 White	T001 White
ND006	Pearl	2095 Pearl	H002 Vanilla	3094 Cottage White	5020 Alabaster
ND080	Taupe Gray	2151 Taupe Gray	3132 Light Gray	3129 Sliver	5107 Silver
ND617	Platter	2149 Storm Gray	3149 Storm Gray	3129 Sliver	5107 Silver
ND053	Clay	2148 Clay	3115 Bright Steel	3208 Black	T201 Black
ND017	Gray Black	2219 Matte Black	3208 Black	3208 Black	T201 Black
ND091	Solid Black	2219 Matte Black	3208 Black	3208 Black	T201 Black
ND110	Limed White	2059 Limed White	3059 Limed White	3094 Cottage White	5020 Alabaster
ND114	Taupe	2484 Taupe	3484 Taupe	3485 French Oak	5526 Cottage Pine
ND108	Rustic Gray	2152 Granite Gray	3152 Granite Gray	3141 Granite	T168 Gray
ND204	Oak Mantel	2537 Oak Mantel	3523 Sugar Maple	3485 French Oak	5526 Cottage Pine
ND211	Cherry	2457 Old Teak	3436 Coffee	3457 Old Teak	5413 Walnut
ND230	Old Teak	2457 Old Teak	3436 Coffee	3457 Old Teak	5413 Walnut
ND221	Black Walnut	2202 Black Walnut	3436 Coffee	3208 Black	T201 Black
ND246	Matte Black	2219 Matte Black	3208 Black	3208 Black	T201 Black
1003	White Matte	2059 Limed White	3059 Limed White	3094 Cottage White	5020 Alabaster
1109	Silk Gray	2138 Gray	3132 Light Gray	3141 Granite	T168 Gray
1114	Weathered Gray	2141 Granite	3105 Gray	3141 Granite	T168 Gray
1111	Granite Gray	2152 Granite Gray	3152 Granite Gray	3141 Granite	T168 Gray
1112	Sunbleached Gray	2150 Sea Mist	3150 Sea Mist	3129 Sliver	5107 Silver
1203	Black	2202 Black Walnut	3436 Coffee	3208 Black	T201 Black
1204	Ebony	2202 Black Walnut	3436 Coffee	3208 Black	T201 Black
1501	Oak	2592 Natural Oak	3523 Sugar Maple	3485 French Oak	5526 Cottage Pine
1502	Teak	2483 Dark Teak	3413 Walnut	3485 French Oak	5413 Walnut
1301	Cherry	2537 Oak Mantel	3523 Sugar Maple	3485 French Oak	5526 Cottage Pine




Mounting Requirements

Default	Fully IB Depth Requirement	Semi-IB with Min. Depth Requirement	
Without Valance	2 11/16"	1 3/8"	
			
Option	Fully IB Depth Requirement	Semi-IB with Bracket Flush to Wall	Semi-IB with Min. Depth Requirement
With 2 1/2" Contempo Valance (Optional)	4 1/16"	2 11/16"	1 3/8"
	 No Valance Return	 Valance Return Size: 7/8" (inner dimension)	 Valance Return Size: 2 1/4" (inner dimension)



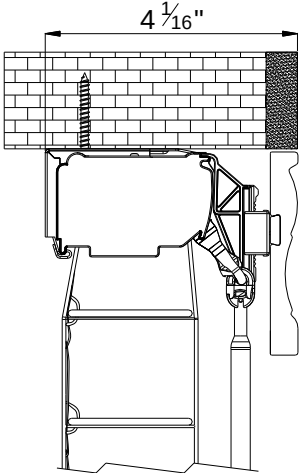
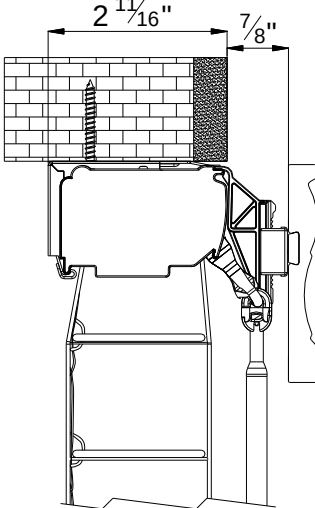
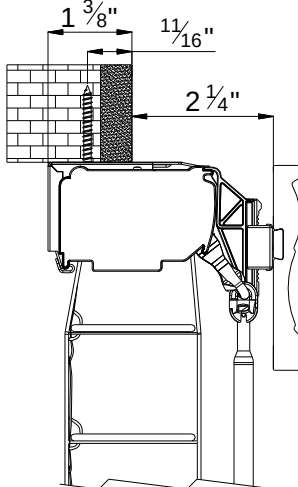
Mounting Requirements

Default	Fully IB Depth Requirement	Semi-IB with Bracket Flush to Wall	Semi-IB with Min. Depth Requirement
	4 1/16"	2 11/16"	1 3/8"
With 3 1/4" Designer Crown Valance (Optional)	 No Valance Return	 Valance Return Size: 7/8" (inner dimension)	 Valance Return Size: 2 1/4" (inner dimension)

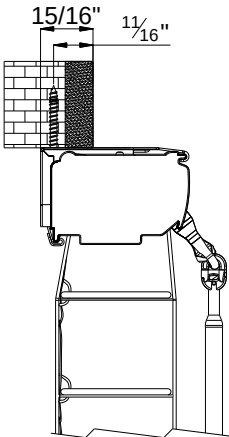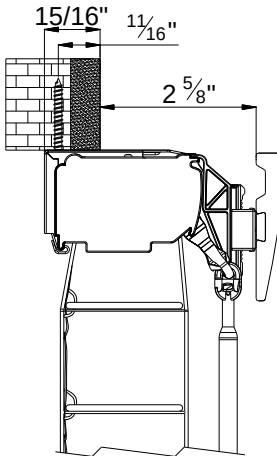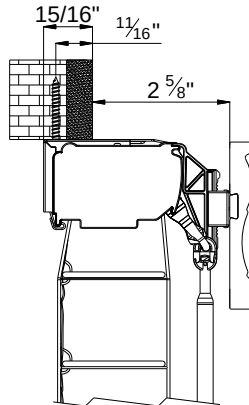-Shallow Window Mount

2" & 2.5" Blind	Without Valance	With 2 1/2" Contempo Valance	With 3 1/4" Designer Crown Valance
	15/16"	15/16"	15/16"
Semi-IB with Shallow Depth	 No Valance Return	 Valance Return Size: 2 5/8" (inner dimension)	 Valance Return Size: 2 5/8" (inner dimension)

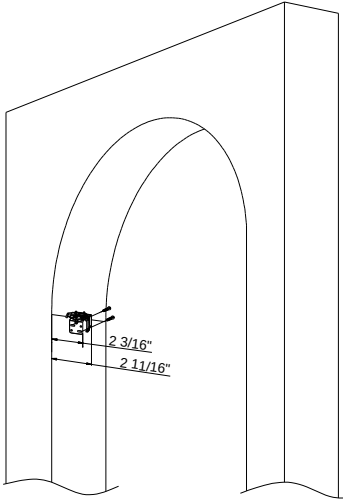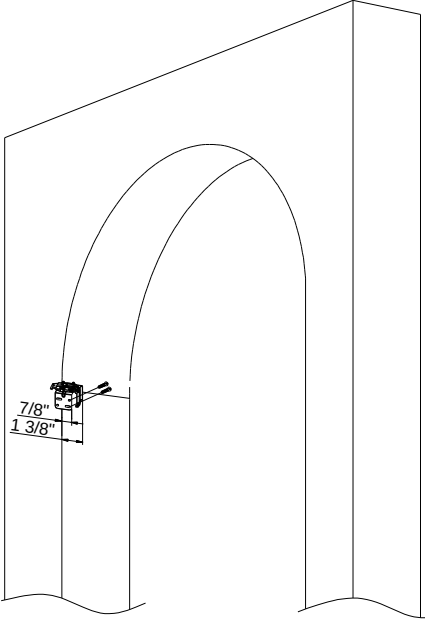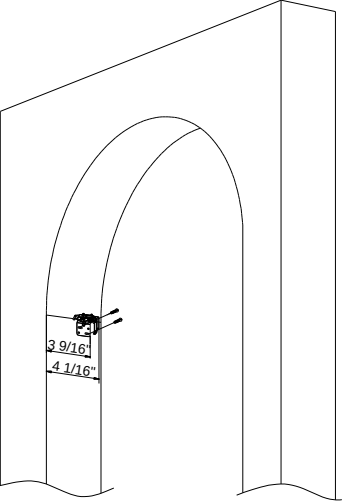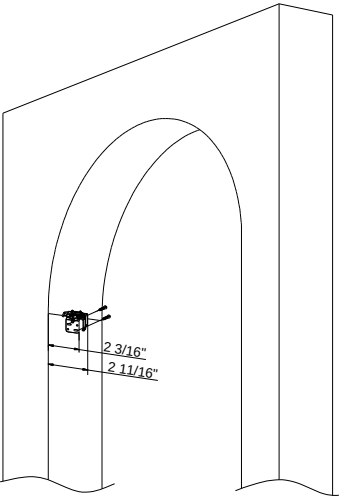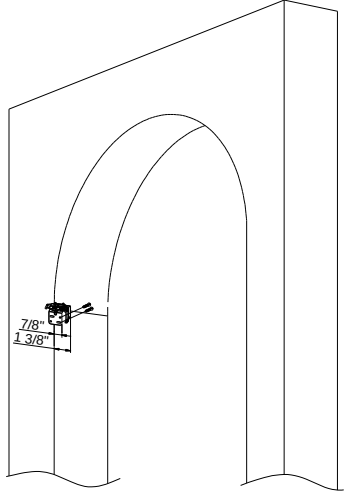Mounting Requirements

Option	Fully Side Mount Depth Requirement	Semi-Side Mount with Min. Depth Requirement	
Without Valance	2 11/16"	1 3/8"	
			
With 3 1/4" Designer Crown Valance & 2 1/2" Contempo Valance (Optional)	Fully Side Mount Depth Requirement	Semi-Side Mount with Bracket Flush to Wall	Semi-Side Mount with Min. Depth Requirement
	4 1/16"	2 11/16"	1 3/8"
			
No Valance Return		Valance Return Size: 7/8" (inner dimension)	Valance Return Size: 2 1/4" (inner dimension)

Options

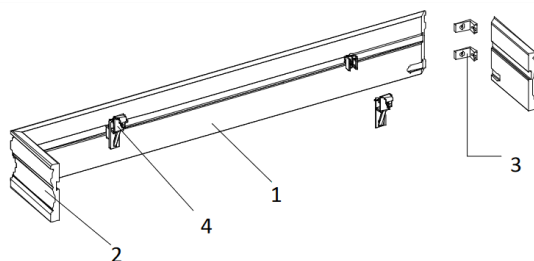
Valances

*Color availability: Valance color will match slat color.


Default: No Valance

Options:

3 1/4" Designer Crown Valance



2 1/2" Contempo Valance

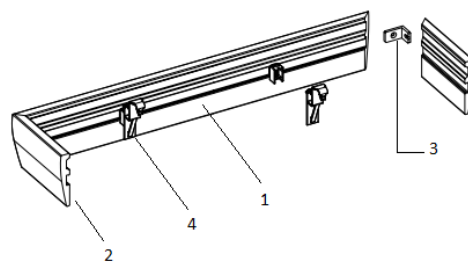

Valance and Valance Returns

- Valance return locations: left only, right only or both left and right returns
- Standard or custom sizes available
 - Custom return size: minimum 1/2" and maximum 5"
- Max custom valance length is 5" longer than finished blind width

	Blind Width	Valance Width	Valance Return Width (inner dimension)
Fully IB with flush cut valance	Window Width – 3/8"	Order width – 1/8"	
Semi-IB with bracket flush against the wall	Window Width – 3/8"	Order width + 1/4"	7/8" (inner dimension)
Semi-IB w/ min. mounting depth of 1 5/8"	Window Width – 3/8"	Order width + 1/4"	2 1/4" (inner dimension)
Semi-IB, with shallow mounting holes	Window Width – 3/8"	Order width + 1/4"	2 5/8" (inner dimension)
OB with valance & valance returns	Ordered Width	Blind width + 1"	3 9/16" (inner dimension)
OB with valance & No Return	Ordered Width	Blind width + 2"	

Options

Valances


- Default: No Valance
- Optional: 2 ½" Contempo Valance & 3 ¼" Designer Crown Valance
- Size: Standard length or custom length (blind width + 5")
- Color availability: Valance color will match slat color.

Valance Joinery

Valances will be spliced when the width exceeds 96". A valance joinery is required for support on spliced valances or common valances; Valance connectors will be provided by default; keystones can be selected as an option.

- Default : Valance Connector
 - Valance Connector splits will be made evenly along the valance; custom split location & at gaps between blinds is not available
 - Max of 3 splices & 3 valance connectors per valance
- **Optional:** Keystone
 - Up to 3 keystones can be requested per valance/common valance
 - Keystones can also be requested onto non-spliced valances.

Valance connector



Keystone



Keystone Spacing Requirements

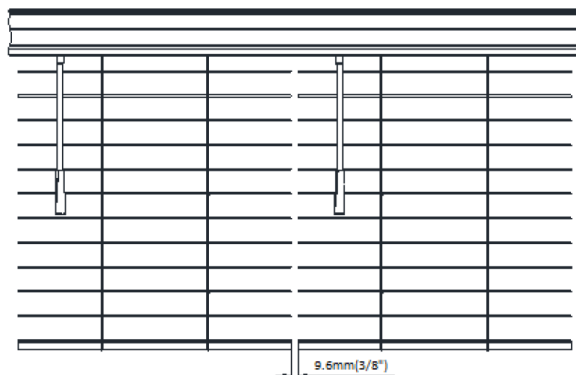
- Measure from the left of the valance inner width to the center of the keystone.
- Available for valance width 13" and above
- Minimum distance between 2 keystones is 18" and the min. distance between either ends of the valance to the keystone center is 6.5".
- Custom keystone location limitation:
 1. When there're 3 keystones:
 - 1st keystone: 6.5" ~ (total valance width - 18"x2 - 6.5")
 - 2nd keystone: (1st keystone location+18") ~ (total valance width - 18" - 6.5")
 - 3rd keystone: (2nd keystone location +18") ~ (total valance width - 6.5")
 2. When there're 2 keystones:
 - 1st keystone: 6.5" ~ (total valance width-18" - 6.5")
 - 2nd keystone: (1st keystone location+18") ~ (total valance width - 6.5")
 3. When there's 1 keystone:
 - Keystone: 6.5" ~ (total valance width-6.5")



Options

Common Valance

- Not available with side mount brackets
- Maximum of 4 blinds for common valance
- There is a min gap of 3/8" between each blind, but a gap of up to 12" can be requested.
- 3/8" width deductions will be taken from each blind (only when ordered as Inside Mount)
- Standard Common Valance sizes
 1. For IM without valance return, the standard common valance size = order width - 1/8" or = **left blind width (net) + right blind width (net) + middle blind width (net) + gap width x gap qty + 1/4"**
 2. For IM with valance return, the standard common valance size = order width + 1/4" or = **left blind width (net) + right blind width (net) + middle blind width (net) + gap width x gap qty + 5/8"**
 3. For OM with no valance returns, the standard common valance size = left blind width (net) + right blind width (net) + middle blind width (net) + gap width x gap qty + 2"
 4. For OM with valance returns, the standard common valance size = left blind width (net) + right blind width (net) + middle blind width (net) + gap width x gap qty + 1"



Note: If blinds heights are the same under one common valance, the slat alignment tolerance is about $\leq 1/4"$. If blind height are not the same, then slat alignment between blinds is not guaranteed.

Custom Valance Width

- For single blinds, the custom valance width cannot be more than 5" wider than the (net) blind width.
- For blinds under a common valance, Therefore, when there are:, the minimum gap size between each blind is 3/8", and the max gap between each blind is 12".
 - 2 blinds under a common valance, the custom valance width cannot be 12" wider than the combined net blind width;
 - 3 blinds under a common valance, the custom valance width cannot be 24" wider than the combined net blind width;
 - 4 blinds under a common valance, the custom valance width cannot be 36" wider than the combined net blind width.

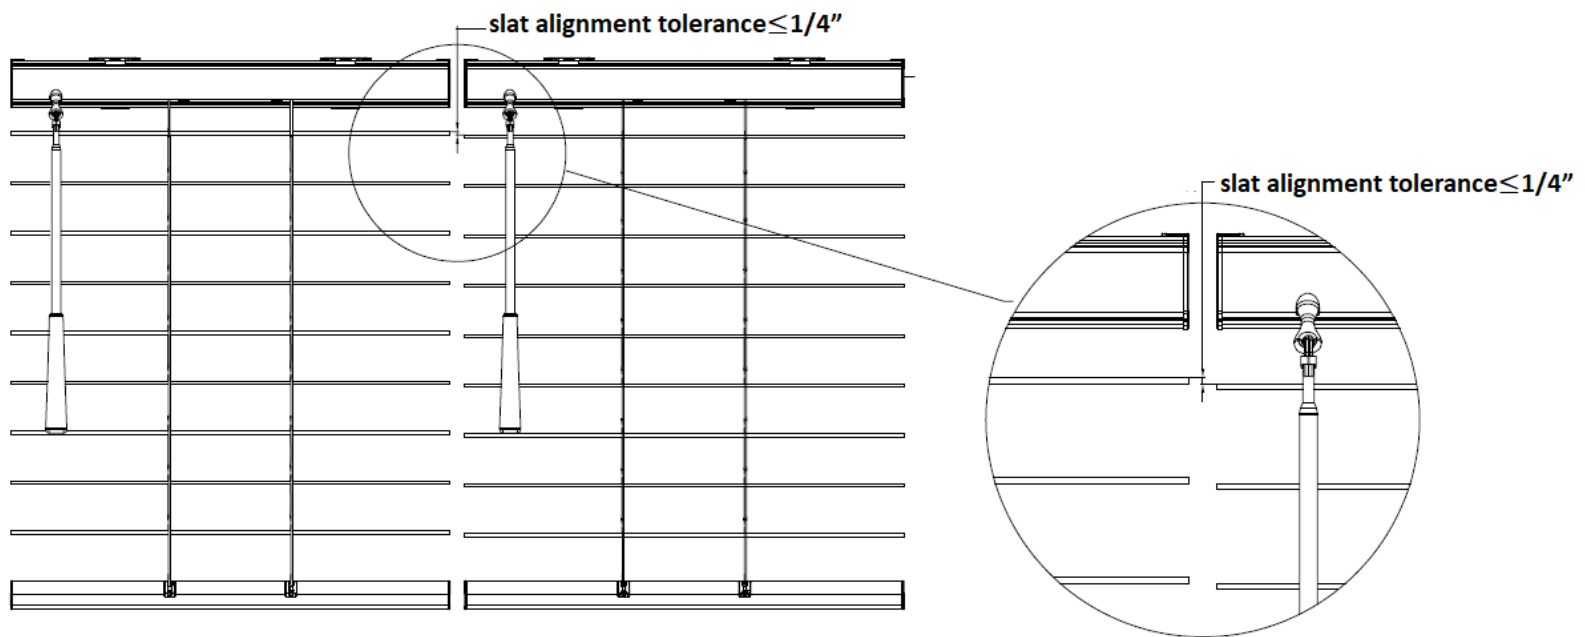
Options

Side by side (Optional): only available for blinds within the same order

Side by side blinds must have the following:

- Same order height
- Same mount type
- Same slat size
- Same color/finish
- Within the same order

When selecting the Side by Side option, and when the above conditions are met, the slat alignment is about $\leq 1/4"$.




Note: If Side by Side is not specified, the slat alignment is not guaranteed and the slat qty of the blinds may be different even the blinds meet the above conditions. This is due to the unique characteristics of the cordless mechanism.

Options

Cut Outs

A cut-out is a blind with an area removed from it to avoid an existing obstruction. Please provide detailed measurements of the area to be removed, which should include: Cut-out **width** and cut-out **height**

Corner (Bottom) Cut Out		Blind Width(x)			
		$x \leq 8 \frac{7}{8}"$	$8 \frac{7}{8}" < x \leq 17 \frac{1}{4}"$	$17 \frac{1}{4}" < x \leq 21 \frac{3}{8}"$	$x > 21 \frac{3}{8}"$
Cut Out size Width(W)	Min.	$1 \frac{1}{8}"$			
	Max.	$3 \frac{3}{8}"$	$1 \frac{3}{8}"$	$2 \frac{7}{8}"$	$4 \frac{7}{8}"$
Height(H)	Min.	$1 \frac{1}{2}"$			
	Max.	2.5" slat: $Y - 2 \frac{3}{4}"$ 2" slat: $Y - 2 \frac{1}{4}"$			

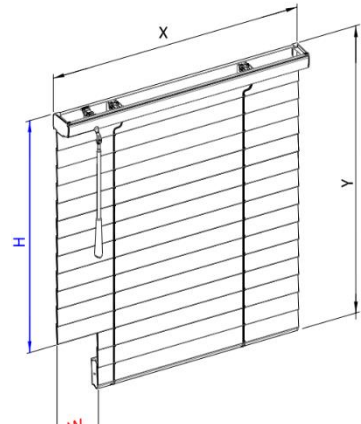

*Please note that the cut-out will be made when slats are at a closed position based on the cut out size provided.

Cut outs are made on complete slats only, based on the size provided. Partial slat cuts will not be made.

Corner (Bottom) Cut Out (cut out on the bottom rail and the bottom section of the slats, either left/right side or both sides)

* Cut-out width (W): Measuring from the edge of the blind/end cap to the end of the cut out

* Cut-out Height (H): Measuring from the top of the head rail to the top of the cut out

Single blinds: available on left, right or both sides

Common valance blinds: Cut outs are only available on the left side of the left blind and the right side of the right blind. Cut-outs are not available on the center blinds.

Only one cut-out type per side is available; Corner (Bottom) Cut Out and Side (Middle) Cut Out cannot be made on the same side of the blind.

Options

Cut Outs (continued)

Side (Middle) Cut Out (cut out on the middle drop section of the slats, either left/right side or both sides)


*Cut-out width (W): Measuring from the edge of the blind/end cap to the end of the cut out

*Cut-out Height (H1): Measuring from the top of the head rail to the top of the cut out

*Cut-out Height (H2): Measuring from the top of the head rail to the end of the cut out


Please note that the cut out will be made when slats are at a close position based on the cut out size provided and the slat will be cut entirely. Cut-out is available for Single blind/Common valance.

Side (Middle) Cut Out		Blind Width(x)			
		$x \leq 8 \frac{7}{8}"$	$8 \frac{7}{8}" < x \leq 17 \frac{1}{4}"$	$17 \frac{1}{4}" < x \leq 21 \frac{3}{8}"$	$x > 21 \frac{3}{8}"$
Cut Out size on Width(W)	Min	1/8"			
	Max	3/8"	1 3/8"	2 7/8"	4 7/8"
Height(H1)	Min	1 1/2"			
	Max	2.5" slat: H2 - 2 1/4" 2" slat: H2 - 1 3/4"			
Height(H2)	Min	2.5" slat: 4" 2" slat: 3 1/2"			
	Max	2.5" slat: Y- 3" 2" Slat: Y-2 1/2"			







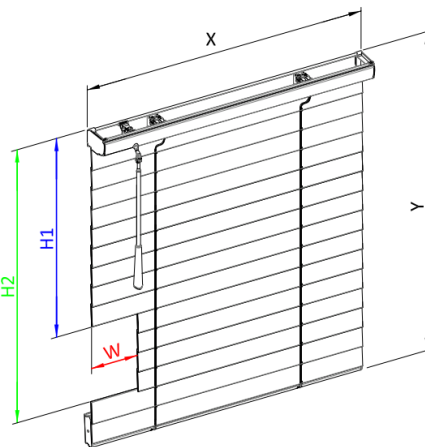


*Please note that the cut-out will be made when slats are at a closed position based on the cut out size provided.






Hardware

Item	Profile	
PolyDeco Head Rail		
Slat	2" Blind	2.5" Blind
		
Punch Type (SmartPrivacy)		
Bottom Rail+ Bottom Rail Cover	2" Blind	2.5" Blind
		
2 1/2" Contempo Valance(Optional)	 2 1/2"	
3 1/4" Designer Crown Valance(Optional)	 3 1/4"	

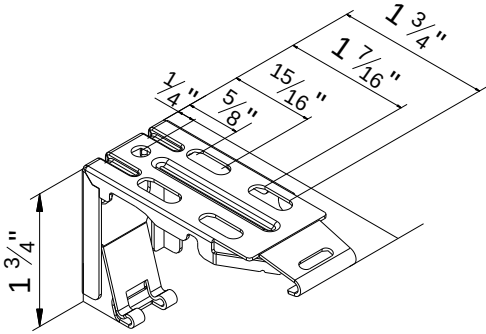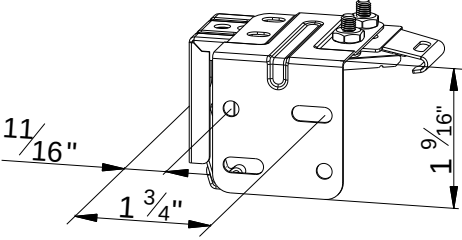Hardware

Item	Profile	
	2" Blind	2.5" Blind
End cap for Bottom rail		
Wand Set (Iron Wand)		
Installation Bracket (Top/Back Mount)		
Side Mount Supporting Bracket Kit (Optional for IM only)	(Side Mount Supporting Bracket) 	(M4 Nut & Bolt) 
Illustration to show the side mount supporting bracket attached to the standard installation bracket with the included nut & bolt		

Hardware

Item	Profile	
Adjustable Valance Clip Set (Clip Receptor + Clip Plug) (Optional)		
Valance Return Joinery (Optional)		
Valance Connector (Default, for split valance)		
Hold Down Bracket (Optional) (Running change, customer may receive Hold Down Bracket with two screw holes or one screw hole)	2" Blind	2.5" Blind
	 or 	 or 
Shim (Optional for outside mount only) 3/8" thickness for one layer 11/16" thickness for two layers		
Double-side Adhesive tape (Assistant for installation bracket and side mount supporting bracket installation)		
1 1/4" Screw (For Installation bracket and Side Mount Supporting Bracket)		
2" Screw (For Installation bracket with shim; optional)		
3/4" Screw (For Hold down bracket)		

Hardware

Installation Bracket

Blind Width (Net)	Installation Bracket qty
$X \leq 37"$	2
$37" < X \leq 47"$	3
$47" < X \leq 75"$	4
$75" < X \leq 96"$	5

Hold Down Bracket (Optional)

Hold Down Bracket Qty	#6x3/4" Screw Qty
2	4 for Double hole Hold Down Bracket 2 for Single hole Hold Down Bracket

Installation Screws

Screws	Quantity
1 1/4" Screw	Installation bracket qty x 2
2" Screw (with shim)	Installation bracket qty x 2
3/4" Screw	Hold down bracket qty x1 or x 2
M4 Nut & Bolt	4 (for Side Mount only)

Valance Return Connector

Optional Valance	Valance Return Connector Qty
2 1/2 Contempo	Valance Return qty x 1
3 1/4" Designer Crown	Valance Return qty x 2

Valance Clips

Blind Width(Net)(X)/Custom Valance length(L)	Valance Clip Qty
$X \leq 37"$; $L \leq 37"$	2
$37" < X < 60"$; $37" < L < 60"$	3
$60" \leq X \leq 96"$; $60" \leq L \leq 96"$	4
$L > 96"$	4+


Ladder and Inner Cord Standards

2" Blind Width(Net)(X)	# of Ladders	# of Cords
$X \leq 32"$	2	4
$32" < X < 40"$	3	4
$40" \leq X \leq 52"$	3	6
$52" < X \leq 78"$	4	8
$78" < X \leq 96"$	5	8


2 1/2" Blind Width(Net)(X)	# of Ladders	# of Cords
$X \leq 36.5"$	2	4
$36.5" < X < 40"$	3	4
$40" \leq X \leq 54"$	3	6
$54" < X \leq 75"$	4	8
$75" < X \leq 96"$	5	8

Operating Your Cordless Blind

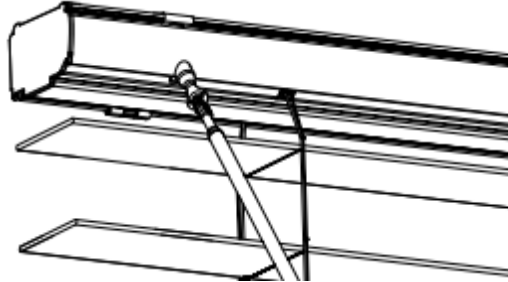Tilting Wand: Rotate the wand to achieve the desired slat position.



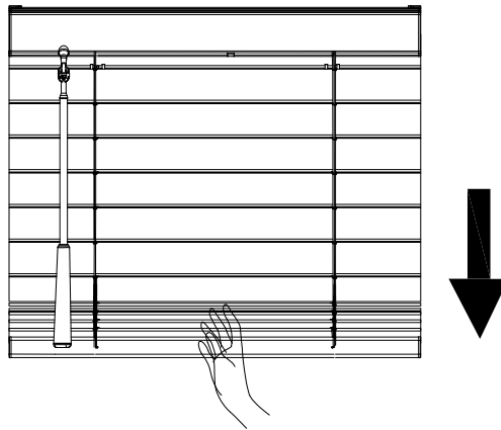To lower the blind: Pull the blind down, by hand, from the bottom rail. Slats can be in an opened or closed position when lowering the blind.



To raise the blind: Gently tilt the slats to an open/level position before lifting the bottom rail. Lift by hand, with slats in an open position.

****Do not leave slats in a closed up or closed down position while lifting the bottom rail.***

