Chapter 4

The Processor

Performance Issues

- Longest delay determines clock period
  - Critical path: load instruction
  - Instruction memory → register file → ALU → data memory → register file
- Not feasible to vary period for different instructions
- Violates design principle
  - Making the common case fast
- We will improve performance by pipelining

Pipelining Analogy

- Pipelined laundry: overlapping execution
  - Parallelism improves performance

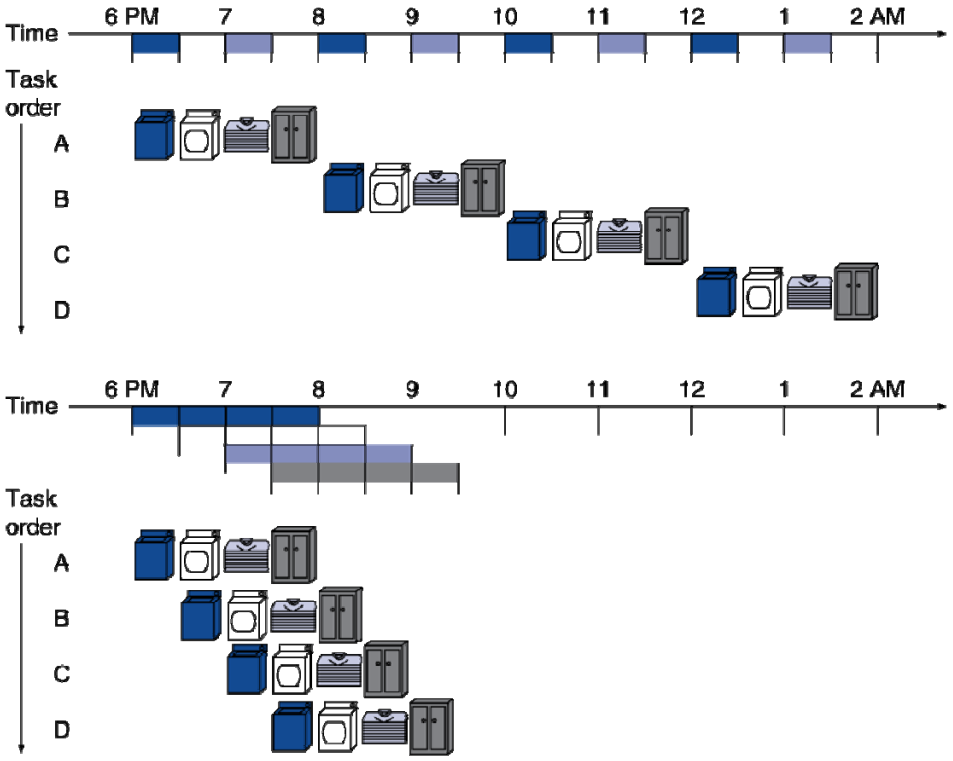

- Four loads:
  - Speedup
    = 8/3.5 = 2.3
- Non-stop:
  - Speedup
    = 2n/0.5n + 1.5 ≈ 4
    = number of stages

MIPS Pipeline

- Five stages, one step per stage
  1. IF: Instruction fetch from memory
  2. ID: Instruction decode & register read
  3. EX: Execute operation or calculate address
  4. MEM: Access memory operand
  5. WB: Write result back to register

MIPS Pipelined Datapath

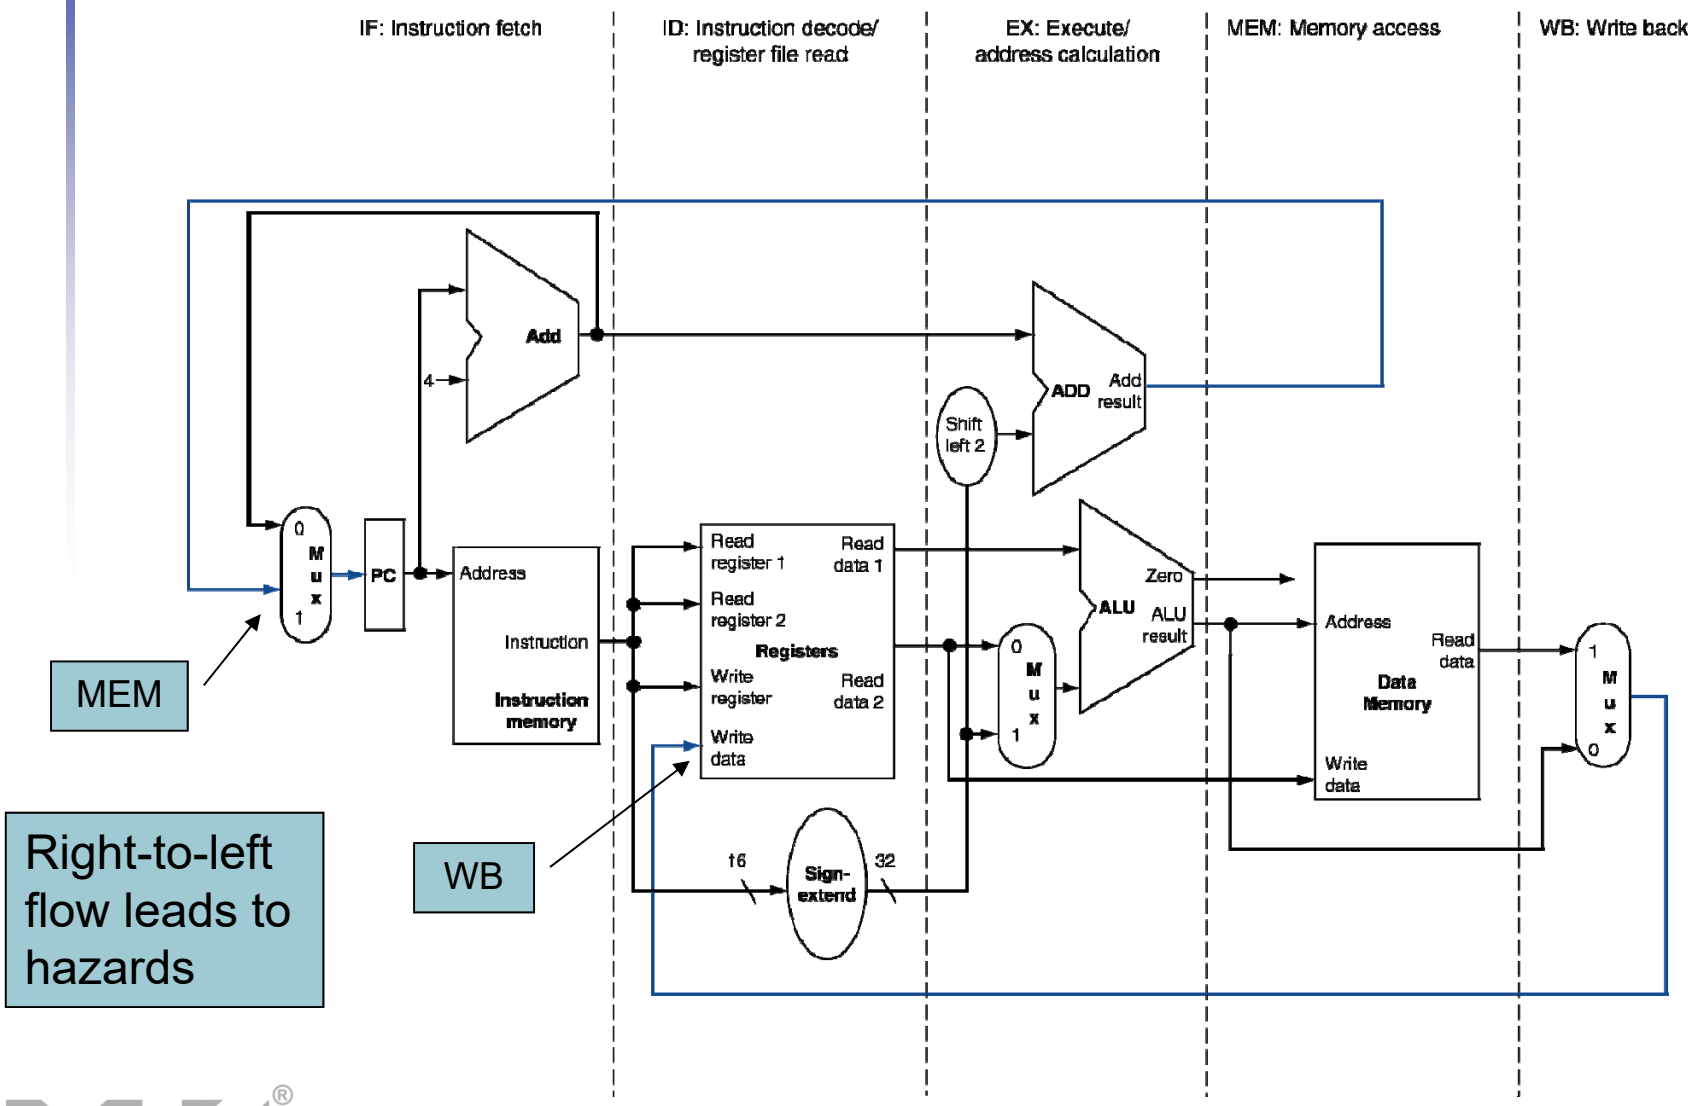

Execution in a Pipelined Datapath