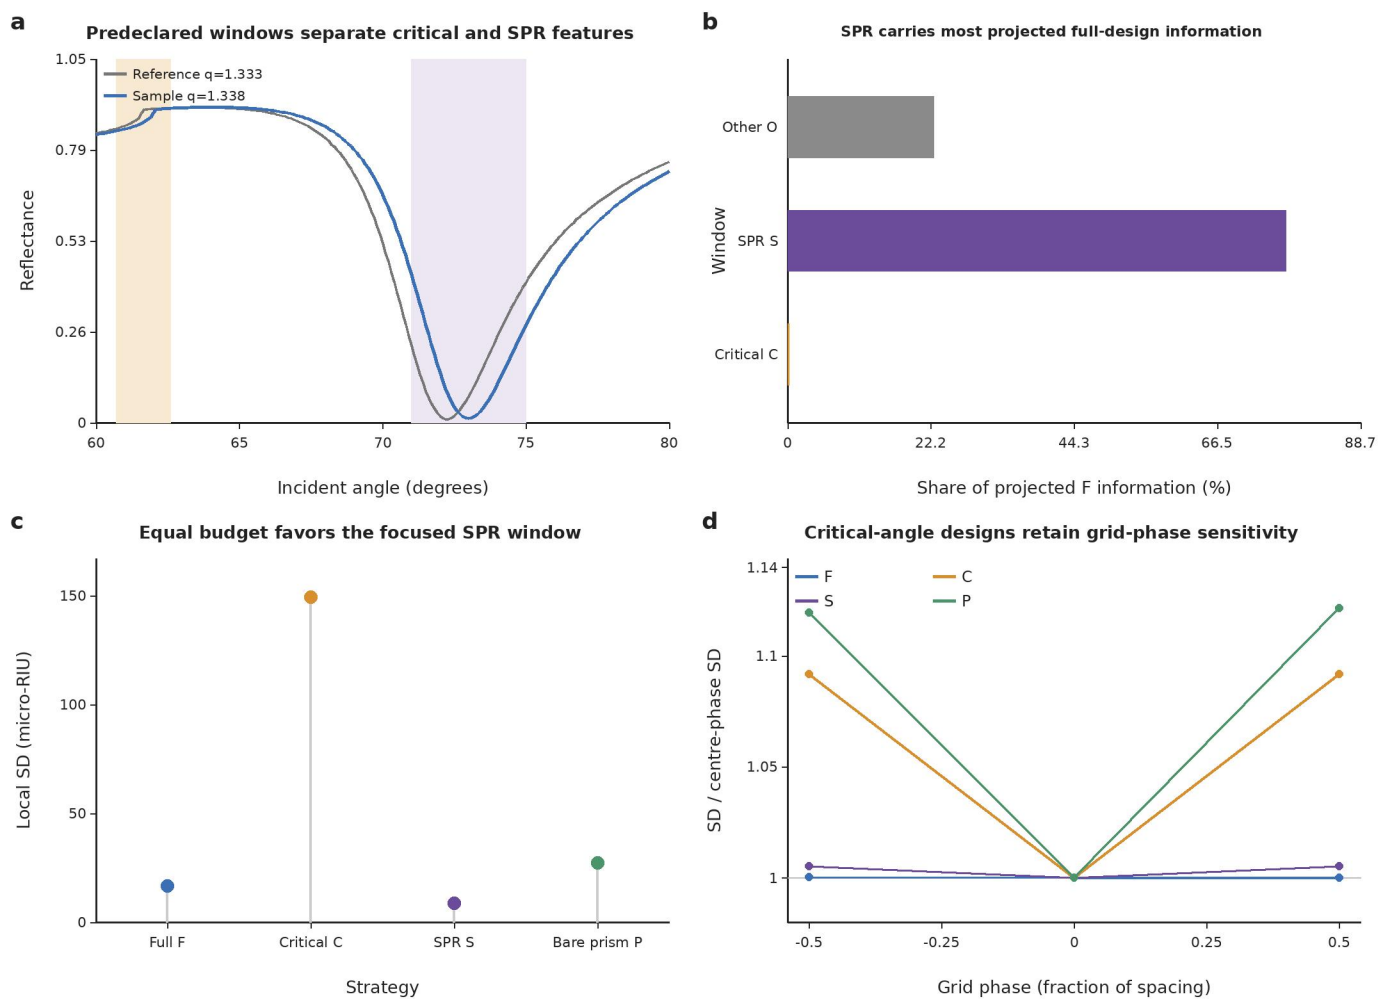

a
Predeclared windows separate critical and SPR features
Reference q=1.333
Sample q=1.338
Reflectance
1.05
0.79
0.53
0.26
0
60
65
70
75
80
Incident angle (degrees)
b
SPR carries most projected full-design information
Other O
SPR S
Critical C
Window
0
22.2
44.3
66.5
88.7
Share of projected F information (%)
c
Equal budget favors the focused SPR window
Local SD (micro-RIU)
150
100
50
0
Full F
Critical C
SPR S
Bare prism P
Strategy
d
Critical-angle designs retain grid-phase sensitivity
F
S
C
P
SD / centre-phase SD
1.14
1.1
1.05
1
-0.5
-0.25
0
0.25
0.5
Grid phase (fraction of spacing)