

# piHPSDR User's Manual

Christoph van Wüllen, DL1YCF  
email: [dl1ycf@darc.de](mailto:dl1ycf@darc.de)

September 15, 2023

**Copyright Notice:**

Copyright (C) 2023 Christoph van Wüllen, DL1YCF.

This work is licensed under the Creative Commons licence CC BY-SA, version 4 or later, so it can be freely distributed. This license also allows reusers to distribute, modify and build upon the material in any medium or format, as long as attribution is given to the creator. The license allows for commercial use. If you modify or build upon the material, you must license the modified material under identical terms.

**Disclaimer.** The manual has been written with the intention that it is useful. It is quite clear that it still contains errors, therefore it is stressed here that it comes without any warranty. The reader is hereby explicitly warned that through wrong use of an SDR program such as piHPSDR, it is possible to damage the radio hardware.

**Trade marks.** Registered trade marks are not marked with a sign in this manual. From the absence of a trademark sign, it cannot be concluded that a mark you find in this manual is not registered or not protected.

**The author:**

Christoph van Wüllen (DL1YCF) has contributed a lot to piHPSDR in the last few years, this manual refers to the code in his github account

<https://github.com/dl1ycf/pihpsdr>

where the L<sup>A</sup>T<sub>E</sub>X „source code” of this manual, together with all figures in .png format, can be found in the `release/LatexManual` directory. At this moment this code has significant developed compared to the piHPSDR code in John Melton’s master repository, but there is still hope that both versions can be merged in the future, although this will be hard work.

If you think you can improve the manual, you are welcome. Simply fork the above repository and make a pull request, or (this is the recommended way) write an email to the author: `dl1ycf@darc.de`

# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Starting piHPSDR for the first time</b>	<b>5</b>
<b>3</b>	<b>Main window layout</b>	<b>11</b>
3.1	One or two receivers . . . . .	11
3.2	Spectrum scope options . . . . .	13
3.3	Zoom and Pan . . . . .	14
3.4	The Hide button . . . . .	15
3.5	Window areas . . . . .	16
3.6	Mouse clicks in the main window . . . . .	18
3.7	VFO bar and status indicators . . . . .	19
3.8	Meter section . . . . .	23
<b>4</b>	<b>The Main Menu: introduction</b>	<b>25</b>
4.1	The Exit Menu . . . . .	27
4.2	The About Menu . . . . .	28
<b>5</b>	<b>The Main Menu: Radio-related menus</b>	<b>31</b>
5.1	The Radio Menu . . . . .	31
5.2	The Screen Menu . . . . .	37

5.3	The Display Menu . . . . .	39
5.4	The Meter menu . . . . .	42
5.5	The XVTR (Transverter) Menu . . . . .	43
<b>6</b>	<b>The Main Menu: VFO-related menus</b>	<b>45</b>
6.1	The VFO menu . . . . .	45
6.2	The Band menu . . . . .	47
6.3	The BndStack (Bandstack) menu . . . . .	48
6.4	The Mode menu . . . . .	49
6.5	The Memory menu . . . . .	50
<b>7</b>	<b>The Main Menu: RX-related menus</b>	<b>53</b>
7.1	The RX Menu . . . . .	53
7.2	The Filter menu . . . . .	55
7.3	The Noise Menu . . . . .	57
7.4	The AGC Menu . . . . .	60
7.5	The Diversity Menu . . . . .	61
<b>8</b>	<b>The Main Menu: TX-related menus</b>	<b>63</b>
8.1	The TX Menu . . . . .	63
8.2	The PA Menu . . . . .	66
8.3	The VOX Menu . . . . .	69
8.4	The PS (PureSignal) Menu . . . . .	71
8.5	The CW Menu . . . . .	76
<b>9</b>	<b>The Main Menu: menus for RX and TX</b>	<b>79</b>
9.1	The FFT (Signal Processing) Menu . . . . .	79
9.2	The Equalizer Menu . . . . .	80

9.3	The Ant (Antenna) Menu . . . . .	80
9.4	The OC (OpenCollector) Menu . . . . .	80
<b>10</b>	<b>The Main Menu: controlling piHPSDR</b>	<b>83</b>
10.1	The Toolbar Menu . . . . .	83
10.2	The RigCtl (Rig control, or CAT) Menu . . . . .	87
10.3	The MIDI Menu . . . . .	87
10.4	The Encoders Menu . . . . .	87
10.5	The Switches Menu . . . . .	87
<b>A</b>	<b>List of piHPSDR „Actions”</b>	<b>93</b>
<b>B</b>	<b>piHPSDR keyboard bindings</b>	<b>117</b>
<b>C</b>	<b>piHPSDR CAT commands</b>	<b>119</b>
<b>D</b>	<b>How to connect a Morse key or paddle</b>	<b>121</b>
<b>E</b>	<b>Running piHPSDR alongside with DigiMode programs</b>	<b>123</b>
<b>F</b>	<b>Compile-time options</b>	<b>125</b>
<b>G</b>	<b>RaspPi: Activating I2C</b>	<b>129</b>
<b>H</b>	<b>RaspPi: binary piHPDSR installation</b>	<b>131</b>
<b>I</b>	<b>Linux: piHPDSR install from sources</b>	<b>135</b>
<b>J</b>	<b>MacOS: piHPDSR install from sources</b>	<b>139</b>



# Chapter 1

## Introduction

piHPSDR is a program that can operate with software defined radios (SDRs). As a graphical user interface, it uses the GTK-3 toolkit, while the actual signal processing is done by Warren Pratt's WDSP library. Thus, piHPSDR organizes the transfer of digitized radio frequency (RF) data between the radio hardware and the WDSP library, the transfer of audio data (either from a microphone or to a headphone), as well as the processing of user input (either by mouse/touch-screen, keyboard, or external "knobs and buttons"), and the graphical display of the RF data. piHPSDR is intended to run on different variants of Unix. It runs on all sorts of Linux systems, including a Raspberry Pi (hence the name piHPSDR), but equally well on Linux desktop or laptop computers, and on Apple Macintosh (Mac OSX) computers which have a Unix variant under the hood. The present author is not aware of piHPSDR running under the Windows operating system, although with environments such as MinGW, this should be possible.

Although piHPSDR can be operated entirely by using mouse and keyboard as input devices, many users prefer to have physical push-buttons and/or knobs or dials. To this end, piHPSDR can control push-buttons and rotary encoders connected to the GPIO (general purpose input/output) lines of a Raspberry Pi. At least two generations of such controllers have been put on the market by Apache labs, and I know of several projects where home-brewn controllers have successfully been made. As an alternative, MIDI devices can be used for user interaction. For desktop/laptop computers that do not have GPIO lines, MIDI offers an easy-to-use possibility of having push-buttons and dials that

control piHPSDR. Apart from homebrew projects in which a micro-controller such as an Arduino Micro controls the actual buttons/knobs and acts as a MIDI device to the computer to which it is connected via USB, there are low-cost so-called "DJ controllers" (DJ stands for disk jockey) from various brands which have successfully been used with piHPSDR. A third possibility to control piHPSDR is via a serial interface through CAT (computer aided transceiver) commands. The CAT model used by piHPSDR is based on the Kenwood TS-2000 command set with lots of PowerSDR extensions.

Using a touch-screen instead of a mouse offers the possibility to put the actual radio hardware together with a Raspberry Pi running piHPSDR and an assortment of buttons/knobs into a single enclosure. This way, one can build an SDR radio which can be operated like a conventional analog one.

The piHPSDR program has been written by John Melton G0ORX/N6LYT. It is free software that is licensed under the GNU (free software foundation) general public license. Many other radio amateurs have contributed to the code. A lot of extensions and improvements have been added by myself, therefore this document refers to the version of piHPSDR that can be found on my github account <https://github.com/dl1ycf/pihpsdr>.

Because piHPSDR can be used on many different types of computers, and because operating systems change rather quickly over time, I generally do not recommend to have a „binary release” with files that you can just copy to your computer and then it runs. Instead, my personal recommendation is to build piHPSDR and WDSP from the sources, only this procedure guarantees compatibility of the final program with your operating system. A manual of how to compile piHPSDR from the sources is available separately, see <https://github.com/dl1ycf/pihpsdr-compile-from-sources>, so this will not be covered in the present manual. This manual starts with the first invocation of a freshly compiled piHPSDR.

Within this manual, we shall use a typewriter font in red color if we refer to a text or a button within a menu or within the VFO bar. piHPSDR menus and commands are indicated through a typewriter font printed in blue. The author hopes that this improves readability. In some cases, if the name of a command or menu is written on the screen, you may find the same string both typed in red and blue in the description, depending on whether the text refers to the command in an abstract sense or to the string as it can be found on the screen. This may be confusing upon first reading, but I shall try to

follow the coloring convention as laid out here.




# Chapter 2

## Starting piHPSDR for the first time

Let us assume you have an SDR (say, an ANAN-7000 or a HermesLite-II) powered up and connected to an antenna, and you have piHPSDR installed on a computer (say, a Raspberry Pi or an Apple Macintosh), the first thing to do is to establish a proper connection between the computer and the radio. Although advocated at many places, I do highly recommend against a WiFi connection. WiFi routers often use optimizations where they hold back data packets for a given client for a while, to be able to send a collection of them in a burst. While this certainly optimizes the through-put because it minimizes clear-channel arbitration events, such jitters are disastrous in SDR operation. The safest way of connecting the radio and the computer is to have a managed switch with a built-in DHCP server, and to connect both the computer and the radio with a suitable cable to the switch. If the computer has both a RJ45 jack for an ethernet cable, and a WiFi interface, my personal recommendation is to use WiFi to connect the computer to the internet, and use a single direct cable plugged into the RJ45 jacks of the computer and of the radio. This is a little bit tricky since both the computer and the radio have to be set to a fixed IP address (e.g. computer: 192.168.1.50, radio: 192.168.1.51) with the same netmask. However, once this has been done, this is the safest connection with no perturbations from elsewhere.

If the piHPSDR program is started for the first time, it opens a window that looks like Fig. 2.1. Besides stating a version number and when piHPSDR was

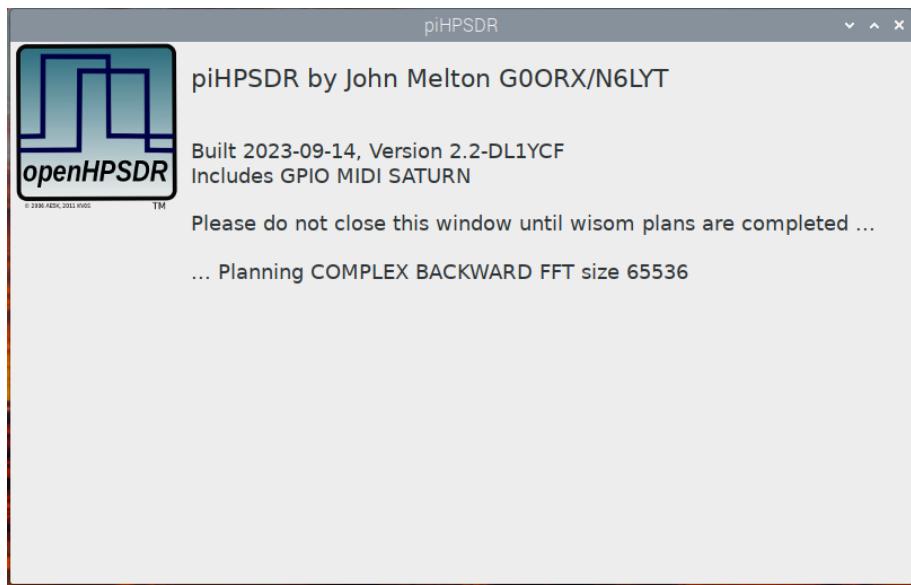


**Fig. 2.1:** piHPSDR screen while completing the *wisdom plans*.

built, a list of optional features (to be activated at compile time) is stated, in this case, GPIO, MIDI, SATURN. These are compile-time options that are detailed in Appendix F.

What is important here that you have to wait. This only applies to the very first time you start piHPSDR. On CPUs with a rather simple instruction set (like the ARM processor in the Raspberry Pi, or the Apple Silicon processor in recent Macintosh computers), this so-called *planning* step is quite fast. For example, on my Apple M2 Mac mini, this step only takes 6 seconds, and you have to wait for 34 seconds on a RaspberryPi 4. On the contrary, on CPUs with complex instruction sets, more planning is necessary: on my other Mac mini with a 3 GHz x86 processor, it takes 16 minutes! But note this has only to be done once, in subsequent starts of piHPSDR, the wisdom will simply be read from the file created during the *wisdom plans*. These plans contain, for a large number of dimensions, the fastest way how to perform FFTs (fast Fourier transformations) on the given CPU. When the wisdom is secured, piHPSDR tries to detect a radio on the network. If everything went well with the network connection, you then see a screen with a discovery menu (Fig. 2.2).

At this point, you can start the radio by clicking the **Start** button, but let us

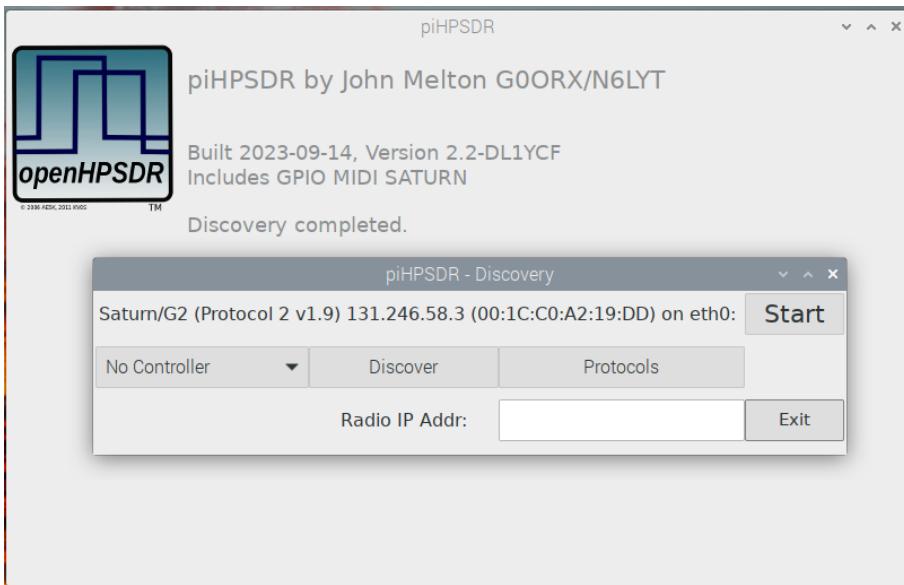

**Fig. 2.2:** A radio has been discovered. You are ready to start it.

first explain the purpose of the other buttons! Easiest to explain is the **Exit** button, this will simply terminate the program. Most likely, you may want to go into the **Protocols** menu sooner or later. By default, piHPSDR tries to discover the presence of a radio using all protocols known to piHPSDR. However, if you know that your radio, for example, uses P2 (Protocol 2), then trying to discover a P1 (Protocol 1) radio is just a waste of time. So if you know which types of radio you want to connect to, you can enable (only) these in the **Protocols** menu. The available protocols are

**Protocol 1** This is the "original" HPSDR protocol.

**Protocol 2** This is the "new" HPSDR protocol.

**Saturn XDMA** This is used to talk to a Saturn FPGA through the internal XDMA interface. Only available if piHPSDR is compiled with the **SATURN** option.

**USB OZY** This is used to talk to a radio using the legacy USB OZY interface. Only available if piHPSDR is compiled with the **USBOZY** option.

**SoapySDR** This is used to talk to a radio through the SoapySDR library, for example to an AdalmPLUTO. Only available if piHPSDR is compiled with the `SOAPYSDR` option.

**STEMlab** This is used to connect to RedPitaya based SDRs through the WEB interface. Only available if piHPSDR is compiled with the `STEMLAB_DISCOVERY` option. Starting the radio using this protocol is a two-step process: first, the RedPitaya's WEB interface is located, and the `Start` button then starts the SDR app on the RedPitaya. Then, piHPSDR tries to connect to this SDR app and upon success offers a new `Start` button to start the radio. If the RedPitaya is exclusively used as a radio, it is recommended to auto-start the SDR app when the RedPitaya is powered up. In this case, the STEMlab protocol is not used, because the SDR app can be started through Protocol-2.

**Autostart** This is a very useful option. It indicates that if exactly one radio has been found, it is automatically started. So in normal operation, when starting piHPSDR subsequently, and all settings are still valid, the radio is started without user intervention. If this option is activated and one radio is present, you will not see this menu, so in order to make further changes here, you have to disconnect the radio from the ethernet cable, start piHPSDR until you see this menu, and reconnect the radio.

Sometimes piHPSDR needs to know the IP address of the radio. This is, for example, the case for the **STEMlab** discovery described above. In such a case the IP address in numerical form (xxx.xxx.xxx.xxx) can be entered in the box with the label **Radio IP Addr:**. If a legal IP address is contained in this box, protocol-1 and protocol-2 discoveries will also send to the IP address specified, in addition to the standard broadcast discovery packets which can only reach radios on the same network segment. With a known IP address, one can connect to radios which are not on the same subnet as the computer, in principle you can connect to any radio on the world provided it is on the internet. However, the original HPSDR standard states that a broadcast packet must be used, so several radios won't reply. On the other

hand, there are some radios such as a RedPitaya or a HermesLite-II which allow being discovered by such a routed packet.

The **Discover** button re-starts the discovery process. This is useful if the radio has been powered up too late and was not yet ready when piHPSDR was started. Simply press **Discover** to give another try.

The combo-box (pop-down menu) to the left of the **Discover** button lets you choose which type of GPIO controller you have attached to the computer. This menu is only available if piHPSDR has been compiled with the **GPIO** option, which is not the case on desktop/laptop computers. The menu lets you choose between

**No Controller** Choose this if no GPIO controller is wired to your Raspberry Pi. This is the default when you first start piHPSDR.

**Controller1** Choose this if you have a "version 1" piHPSDR controller.

**Controller2 V1** This option is valid for some early prototypes of the "version 2" controller with single encoders.

**Controller2 V2** Choose this if you have a "version 2" piHPSDR controller with double encoders.

**G2 Front Panel** Choose this if you have an ANAN G2 radio with a built-in controller.

**Attention.** Be sure to choose a controller only if such a controller is actually connected to your Raspberry Pi. If you choose, for example, a controller which uses an I2C expander for the switches, but no I2C interface is present on your Raspberry Pi, the program may hang when trying to open the I2C connection.

All settings (protocols, controller, IP address) made in this menu are stored in the global (radio-independent) settings and are restored when piHPSDR is started the next time.

If all went well, a radio could be discovered and you hit the **Start** button, the radio is started, and if this succeeds, you see something like shown in Fig. 2.3.



**Fig. 2.3:** The radio with two RX. Sliders and Toolbar are not on display by default when using a controller.

The bottom of the window looks different (more controls) if you have chosen **No Controller** in the preceding menu. You see two receiver panels stacked vertically, both of them having a spectrum display and a waterfall area. At the top, just below the window title, you have the VFO bar which contains information on the frequencies of the two VFOs A and B, as well as lots of further information, to be explained later. At the top right, there are two buttons **Hide** and **Menu** which will be explained in the next chapter. To the left of these two buttons, there is the meter bar which by default is a digital S-meter. At this point, you have started piHPSDR successfully for the first time.

# Chapter 3

## Main window layout

### 3.1 One or two receivers


At the end of the previous chapter (Fig. 2.3), there were two receiver panels in the piHPSDR window, stacked vertically, and both including a spectrum scope (the green-coloured noise floor) and a waterfall. The waterfall area is completely black in the above picture since there was no RF signal. piHPSDR can be switched between having one or two receivers in the `Radio` menu. If there are two receivers (called RX1 and RX2), one of the two is the *active receiver*. If you look closely at the above picture, you will note that the spectrum scope of the lower (RX2) panel is shaded, while it is in bright colour for RX1. This indicates that RX1 is currently the active receiver. By simply clicking into the panel of the other (inactive) receiver, either with a mouse or on a touch screen, the formerly inactive receiver becomes active.

Many conventional rigs with two independent receivers discriminate between the *main* and the *sub* receiver. It is important that this is **not** the case for piHPSDR. In piHPDSR, both receivers are largely equivalent. For example, if you start transmitting in normal (non-split) mode, the TX frequency matches the frequency of the active receiver, no matter whether this is RX1 or RX2. Likewise, in split mode, the TX frequency matches the frequency of the non-active receiver. Most of the receiver-specific controls, for example adjusting the AF volume or the AGC gain, refer to the current active receiver. If piHPSDR runs with two receivers, RX1 is always controlled by VFO-A

while RX2 is controlled by VFO-B. The VFO settings not only include the frequency but also the current mode (e.g. LSB or CWU), the filter setting, the band and bandstack setting, whether RIT is enabled or not, and the RIT offset. So changing the RIT value only changes it for the active receiver. If you want to change the RIT value for RX2 while RX1 is the active receiver, you have to make RX2 active, change the RIT value and then make RX1 active again.

RX1 and RX2 are largely independent. They can receive on different bands. They can receive from different antennas provided the radio has two RF frontend with two analog-to-digital converter4s (ADC, as most modern radios do. In this case, one usually assigns the first ADC (ADC0) to RX1 and the second ADC (ADC1) to RX2. This can be done in the [RX](#) menu.

By default, if there are two receivers, they are vertically stacked, with RX1 in the upper part and RX2 in the lower part of the display. This can be changed in the [Screen](#) menu to horizontal stacking, where RX1 is in the left half and RX2 in the right half of the display. Changing the stacking trades vertical against horizontal resolution, of course.

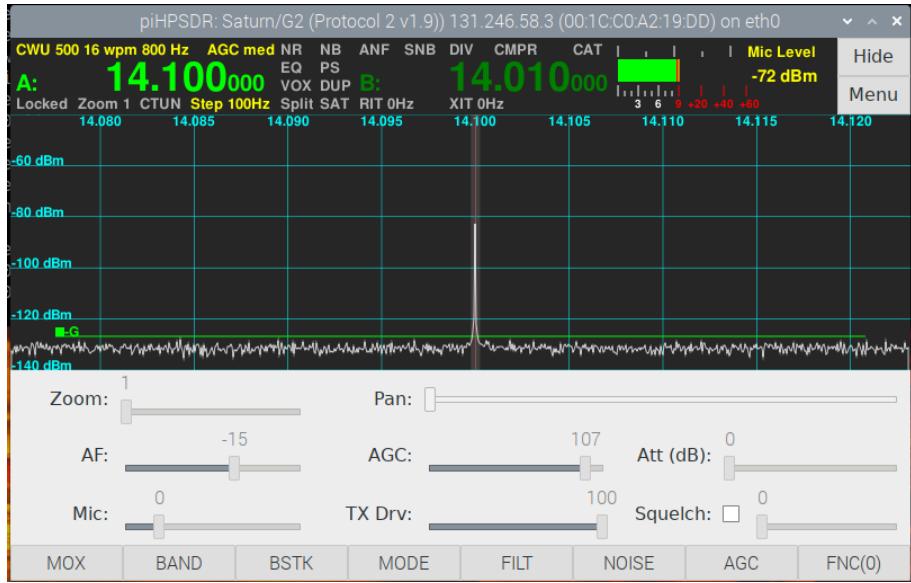


**Fig. 3.1:** piHPSDR with a single RX and all controls (Zoom/Pan, Sliders, Toolbar) at the bottom.

Fig. 3.1 picture shows, for demonstration purpose, a piHPSDR window with

a single receiver. The RX panel only contains a spectrum scope with a white line and no waterfall (this can be changed in the [Display](#) menu). In addition, you see the toolbar with eight buttons at the lower edge of the window, and above it an area with sliders. Showing the sliders is the default (and necessary) if there is no GPIO or MIDI controller attached, since then these sliders are the only way to change, for example, the AF volume. If there is only one receiver, it is controlled by VFO-A. VFO-B then actually controls nothing (except the TX frequency in split mode), but the data stored in VFO-B can be quickly used, for example by copying VFO-B to VFO-A (the [A<B](#) command), or by swapping the two VFOs (the [A<>B](#) command).

## 3.2 Spectrum scope options

You have already seen two different spectrum scopes: in the first picture, the spectrum was a filled green area, while in the last picture, there only was a white line (this is similar to what you would see on a spectrum analyzer). This can be adjusted to your personal preference in the [Display](#) menu (see below). There are two options which you can enable or disable, such that there are four different outcomes. The first option is the „Filled” option which discriminates between a line spectrum and a spectrum which is filled below the line. In the picture below, the first and third example have no filling, while the second and fourth spectrum are filled:

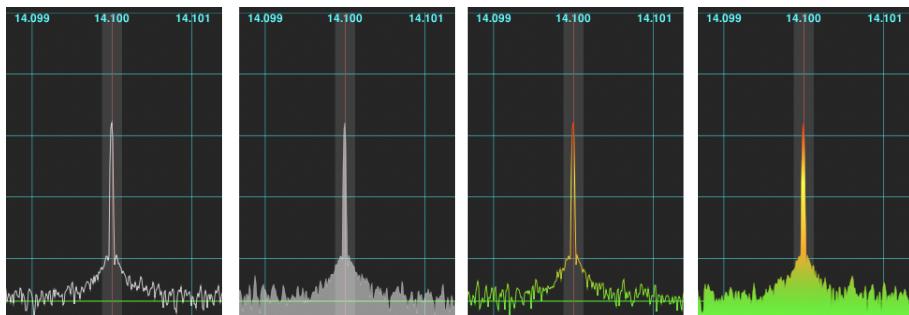


**Fig. 3.2:** Display options for the spectrum scope.

Then there is the „Gradient” option. Without this option, the spectrum is displayed in white colour. With the gradient option, the colour changes from green over yellow towards red depending on the signal strength (red colour

is reached for S9). The above picture demonstrates the four possible combinations, and in the [Display](#) menu, you can make your choice. This setting refers to both receivers when there are two. Note that the TX spectrum can be a filled one or a line spectrum, but that the gradient option does not apply.

### 3.3 Zoom and Pan

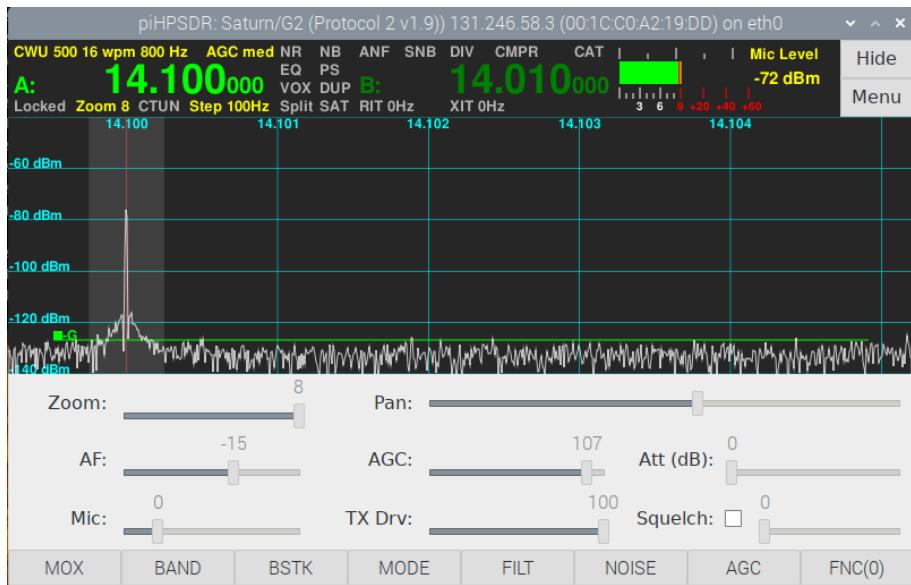

**Fig. 3.3:** The spectrum scope of Fig. 3.1 with a large Zoom value.

The width of the RX spectrum equals the sample rate of the receiver. This means that if you use, say, a sample rate of 96 kHz for a receiver, its spectrum will be 96 kHz wide, which may encompass a larger part of the spectrum than you are interested in. As a drawback, the part which is relevant to you may look a little bit compressed. This is where the [Zoom](#) command comes in. The zoom value can adopt integral values between 1 (no zoom) and 8. In the latter case, only 1/8 of the overall spectrum is displayed on the screen. In the picture below, you see that the RX scope is only 12 kHz wide (which is 1/8 of the RX sample rate, 96 kHz in our example). Note that what is displayed is in full resolution. Internally, a spectrum with 8 times the number of pixels

of the screen width is created and only a part of it is displayed. The zoom value can be changed using the **Zoom** slider (at the left edge below the RX panel).

When using a zoom value larger than one, this means that a spectrum with more pixels than the actual screen width is produced. One can select which part of that area is displayed on the screen with the **Pan** slider (below the RX panel at the right side). Normally (Zoom=1), the VFO dial frequency is exactly in the middle of the RX scope, and marked with a thin red line. On the picture above, the dial frequency (14.100 MHz) is found in the RX panel close to the left edge, and this has been done by moving the **Pan** slider.

## 3.4 The Hide button



**Fig. 3.4:** piHPSDR window with the Toolbar/Sliders/Zoom area „hidden”.

On small screens, space is scarce. This is particularly true for the vertical space if one uses two RX panels and both with a spectrum scope and a waterfall. In this case, it may be hard to actually watch the signals if the screen is small. This is where the **Hide** button comes in. Clicking on this button „hides” the toolbar and slider area:

The text on the button then changes to **Show**, and clicking this button again will then return to the previous display.


### 3.5 Window areas

Look again at Fig. 3.1! Starting from the top, you see the title bar of the window. This bar is not visible in full screen mode, where the size of the piHPSDR window matches the display size. The title bar contains some basis information about the radio, e.g. its type, the protocol used, the IP and the hardware address of the radio. If you are really interested in this information, it is recommended to open the [About](#) menu.

Between the title bar and the RX spectrum scope, you see a small vertical area, most of which is taken by the VFO bar (containing the large frequency dials). At the rightmost end of this area, you see two buttons **Hide** (already discussed) and **Menu**. Clicking on the latter button opens the main menu, which will be discussed in detail in the following chapters. The **Menu** button is really important, since it enables access to one of the menus used for configuring piHPSDR. Between the VFO bar and the **Hide/Menu** buttons, you see the meter area where you find the S-meter (during RX) and information about output power, SWR, etc. during TX.

Below the RX spectrum scope, you see the Zoom/Pan area with the Zoom and Pan sliders, as already discussed. This area can be „hidden” with the [Display](#) menu to save some vertical space. Below the Zoom/Pan sliders you see a larger Sliders area containing several sliders for adjusting AF volume, TX drive level, RX AGC threshold, etc. Although the Sliders area can also be hidden via the [Display](#) menu, you should not do so unless you have a GPIO or MIDI controller which knobs that you can assign to the slider functions. This is so since for normal operation, having access to the sliders is vital. Remember that for temporarily enlarging the space for the RX panel, there is the **Hide** button!

If you have a GPIO or MIDI console, and, say, assigned a knob there to control the AF volume, then turning the knob will auto-magically also move the AF slider if its on display (that is, if the sliders area is not hidden). If you turn a knob for which function there is slider on display, either because the slider area is hidden or because this function does not have a slider in

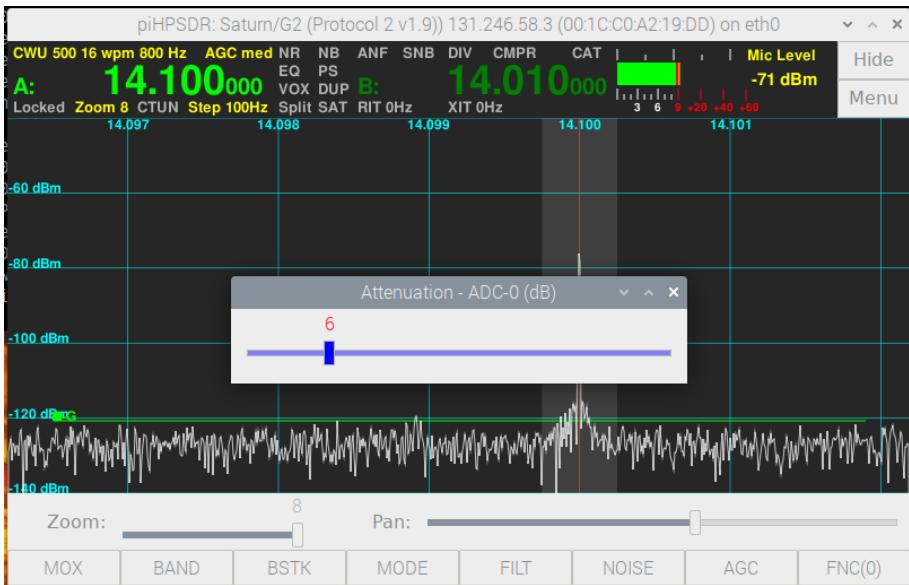

**Fig. 3.5:** A pop-up attenuation slider.

that area, then a graphical slider will temporarily pop up in the middle of the window to inform you about the changes you have made. To give one example, a knob at a MIDI console has been assigned to the RF attenuator ([Atten](#) function, see Appendix A), which controls the step attenuator in the RF front-end (if there is one). As long as the sliders are on display, the [Att](#) slider in the right part of the slider area moves when turning the knob. But when the sliders are not displayed, then a slider image pops up on the middle of the screen, and the bar contained therein moves when turning the knob, and the numerical value is displayed as well (Fig. 3.5). Such a pop-up slider always occurs if a knob on the GPIO or MIDI console is turned and no slider associated with the value changing is on display.

At the very bottom of the window, there is the toolbar. This can also be individually hidden/shown via the [Display](#) menu. The toolbar consists of eight „buttons” which you can click with a mouse or on a touchscreen. If you are using the original (V1) piHPSDR GPIO controller, it has eight push buttons below the screen and pressing those is equivalent to clicking the buttons on the screen. You might still want to keep the toolbar on display even if you are using the V1 controller since it shows you to which functions the buttons are actually assigned. This assignments consists of six „layers”

(0 through 5). The rightmost button is hard-wired to the [Function](#) action which cycles through the layers. The button text includes the number of the currently active layer, and the button text of the other buttons reflect the functions assigned to the buttons in the current layer.

**Bonus for mouse users only.** For the first seven toolbar buttons, there is no difference if you do a primary or secondary mouse click on that button (that is, it does not matter whether you use the left or right mouse button). But for the rightmost toolbar button, a normally mouse click cycles forward through the layers, while a secondary mouse click cycles backwards. If you use a V2 or G2-frontpanel GPIO controller or a MIDI console, then you can also map this function ([FuncRev](#)) to a spare button.

## 3.6 Mouse clicks in the main window

The main window „accepts” mouse or touchscreen click events. Some of them come from the standard handlers of the GUI. It is clear, for example, that clicking the [Hide](#) or [Menu](#) buttons, as well as clicking one of the toolbar buttons, will activate the function associated with these buttons. Furthermore, the sliders (and the squelch enable/disable checkbox) in the sliders and Zoom/Pan are operated as usual. But there are additional functions coded into piHPSDR:

If there are two receivers, a mouse click (press and release) into the panel of the non-active receiver makes it active. On the other hand, a mouse click in the panel of the active receiver changes the VFO frequency of that receiver to the value clicked on. This means, if you see a signal in the spectrum scope, click on that signal and your VFO will move (*jump*) to that signal. Note the VFO frequency will be rounded to the next multiple of the VFO step size when jumping by a mouse click or touch screen press.

The second option to change the VFO frequency of the active receiver is to click (and hold) into its panel, then drag the mouse to the left or to the right, and then release the button. This will shift the VFO frequency by the amount dragged, it makes no difference where the first click actually occurred, only the difference in horizontal position between click and release is used. You must drag at least three pixels so there is clear discrimination between a ,*VFO jump* (click then release) and a *VFO drag* (click, drag, and release)

operation. Finally, the VFO frequency of the active receiver can be changed by the scroll wheel of the mouse, if there is any. Using the scroll wheel lets the VFO frequency move in multiples of the VFO step size, while mouse dragging can also be used for finer tuning.

Clicking into the VFO bar opens the **FREQ** (VFO) menu, for the VFO-A if clicked into the left half of the bar, and for VFO-B if clicked into the right half. This menu not only offers the possibility for direct frequency entry, but also lets you alter the RIT/XIT or VFO step size, or alter the Lock, Duplex, CTUN, or Split states. So a simple click in the VFO bar gets you quick access to often-used functions.

Clicking in the meter section (between the VFO bar and the Hide/Menu buttons) opens the **METER** menu, where you can change the meter properties (see below).

When operating with a mouse, there are usually two mouse buttons, the primary button (for right-handed mouses, this is usually the left button) and a secondary one. Secondary mouse clicks are difficult to apply with a touch-screen. Although there are touch-screen drivers which convert long presses to secondary clicks, they generate, for a long press, a primary click first and a secondary one later, so it is not possible to generate a single „secondary press” event. But for the benefit of mouse users, secondary mouse clicks are handled in a special way:

A secondary click into the VFO bar will open the **BAND** menu, so a band change can be made with really few mouse clicks. Likewise, a secondary click into the panel of a receiver (no matter if it the active or the non-active one) will open the **RX** menu for that receiver. This can be used to change the settings of a non-active receiver without making it temporarily active. In the same way, a secondary click in the TX panel will open the **TX** menu.

## 3.7 VFO bar and status indicators



**Fig. 3.6:** The VFO bar

Fig. 3.6 shows the VFO bar layout in more detail. The example shown is a VFO bar whose width is 745 pixels and thus suitable for screens that are 1024 pixels wide (or more), since the meter area has a fixed width of 200 pixels, and the **Hide/Menu** buttons are 65 pixels wide. This layout is denoted **Large dials for 1024px windows**, as to the choice of VFO bar layouts, see the description of the **Screen** menu.

The large dials indicating the frequencies of VFO-A and VFO-B are easily recognized. The number to the left of the decimal point is the MHz part of the frequency, the three large digits to the right of the decimal point is the kHz part, and the last three (smaller) digits offer sub-kHz resolution. You may wonder why there is so much space to the left of the frequencies. This is so because with the advent of the QO-100 satellite, frequencies above 10 GHz can be used (with the transverter bands) and therefore eleven digits are needed!

Apart from the frequencies, you see a lot of text, most in light grey colour. As a general rule, a text in grey colour indicates a feature that is currently disabled, while features currently active are normally shown in yellow and sometimes in red.

At the top left corner of the VFO bar, the mode and filter of the currently active receiver is displayed. In Fig. 3.6, the text is **USB Var1** which indicates that the mode is USB using the Var1 filter with variable width (see the **Filter** menu). For the CW (CWU and CWL) modes, the CW speed (in wpm) and the side tone frequency (in Hz) is stated as well. For CW, the filter size may be appended by a „P”, which indicates whether the CW audio peak filter (see the **Filter** menu) is effective on top of the normal filter.

Now we continue line by line, from left to right and find the string **AGC med** printed in yellow. This means that automatic gain control (AGC) is effective in the active receiver, and that the AGC time constant is intermediate. Possible values for the time constant are Long, Slow, Medium and Fast which can be selected in the **AGC** menu. Here one can also disable AGC, in this case the VFO bar shows **AGC off** in grey colour.

Continuing to the left, we see the noise reduction settings, all printed in grey (that is, they are not effective). This can be changed in the **Noise** menu. We have two different noise reduction capabilities **NR1** and **NR2**, these strings are printed in yellow instead of the grey **NR** if they are effective. There are also

two different noise blankers **NB1** and **NB2**, the automatic notch filter **ANF** and the spectral noise blanker **SNB**. Besides enabling/disabling these functions, there are further parameters you can tweak in the **Noise** menu.

The next strings whether Diversity reception is enabled or disabled (**DIV**), or whether an equalizer is effective **EQ**. Since there is a separate equalizer for the RX and TX audio chain, the equalizer indicator, if it is effective, not only turns yellow but reads **RXEQ** while receiving and **TXEQ** while transmitting. This means, if only the TX equalizer is enabled, the indicator will show a grey **EQ** while receiving and a yellow **TXEQ** while transmitting.

The last indicator in the top row is **CAT** which indicates if the CAT module (see the **RIGCTL** menu) has accepted at least one connection. In total, piH-PSDR can be CAT-controlled simultaneously by five different sources, two of them using a serial line and three of them a TCP connection.

The indicators in the middle, between the VFO dials, are related to transmitting. **CMPR** indicates if a speech processor (compressor) is enabled, if so, it prints in yellow, followed by a number between 1 and 20 indicating the compression value in dB. **PS** indicates whether adaptive pre-distortion („PureS-signal“) is enabled, PS settings can be made in the **PS** menu. **VOX** indicates whether VOX (voice control) is enabled. VOX means that if the microphone delivers an amplitude above a certain threshold, the radio is automatically put into TX mode. Enabling/Disabling VOX and setting the correct threshold can be done in the **VOX** menu. Finally, **DUP** indicates whether duplex mode is active. In duplex mode, the receiver(s) continue to work during transmit. Duplex mode when using the same antenna for RX and TX is no fun: you not only hear your own signal with a delay (from the cross-talk at the TRX relay), but this cross-talk signal is usually so strong that it leads to „AGC pumping“, so your receiver is virtually deaf during the first second after TX/RX transition. For satellite operation, on the other hand, duplex mode is very convenient. Here you usually have two separate and well-decoupled antennas for RX and TX.

The bottom line of the VFO bar indicators are related to the VFO status. If the **Locked** string is red, it indicates that the VFO is locked and will not accept changes. There is a **LOCK** action which toggles the **LOCK** status and which can be assigned to a toolbar button or a push-button on a GPIO or MIDI console, but the Lock status can also be set/unset via the **FREQ** menu, accessibly by the main menu window, or just by clicking into the VFO bar.

The next indicator in the bottom line indicates the Zoom factor. If the Zoom factor is 1, the indicator is grey, otherwise it is yellow and also indicates the factor. Then there is a string **CTUN** which indicates whether the CTUN („click to tune“) mode is off or on (the string is yellow in the latter case). The step size of the VFO controlling the active receiver is displayed next, this string is always yellow.

The split status is displayed by the next indicator, which is red in split mode. If split mode is off, transmitting is done on the frequency and the mode of the active receiver (if there are two receivers), or on the frequency/mode of VFO-A (if there is only one receiver). If split mode is on, transmitting occurs on the frequency/mode of the non-active receiver (if there are 2) or on VFO-B (if there is only one receiver).

The next indicator shows the SAT (satellite) mode, which can be off (then the indicator reads **SAT** in grey), or which can be SAT or RSAT (then the indicator displays this string). Once SAT mode is engaged, the two VFOs are tied together such that any frequency change of one of the two VFOs also applies to the other VFO. This is the best way to do cross-band operation with, e.g. the QO-100 satellite which is at a fixed position. In RSAT mode, a frequency change of one of the VFOs is applied to the other VFO with an opposite sign (so if you move up VFO-A by 2 kHz, then VFO-B moves down by the same amount). This is what one needs for low-flying satellites which have inverting transponders which offer some sort of Doppler correction.

Finally there are the **RIT** (receiver incremental tuning) and **XIT** (transmitter incremental tuning) indicators. If RIT is off, receiving occurs on the VFO dial frequency. If RIT is on, the indicator becomes yellow and also indicates the RIT offset, that is, the frequency offset used while receiving. RIT is used, for example, if during your CW QSO the frequency of the transmitter of your QSO partner drifts and you want to follow without altering the frequency of your own transmitted signal. The RIT indicator corresponds to the active receiver. If XIT is active, the indicator becomes yellow and shows the offset of the true TX frequency from the VFO dial frequency.

Finally, in the top right corner you see a symbol with a green and a red line that only occurs if one of the variable filters (**Var1** or **Var2**) have been selected. The green caret indicates the default filter edges, while the red one above denotes the current filter edges.

## 3.8 Meter section

Fig. 3.7 shows the different designs that exist for the meter. To the left (right) there are the digital (analog) meters, while the top panels show the meter during RX and the lower panels during TX.



**Fig. 3.7:** Different designs for the meter.

The design can be switched between digital and analog in the [Meter](#) menu, which can be accessed quickly just by clicking into the meter area. During RX, an S-meter is shown together with the signal level in dBm. Note that -73 dBm corresponds to S9 for frequencies up to 30 MHz, while above 30 MHz, S9 corresponds to -93 dBm. Since the S meter is in steps of 6 dB, a signal level of S1 (below 30 MHz) corresponds to -121 dBm.


During TX, the output power is displayed, provided that the radio actually reports this power. The output power meter can be calibrated (see the [PA](#) menu). If the SWR exceeds a threshold for SWR warnings (the default is 1:3, but this can be changed in the [TX](#) menu), the SWR indicator turns red. If, in addition, SWR protection is enabled in the [TX](#) menu, the output power will be reduced to zero if the SWR exceed that threshold. Furthermore, the ALC (automatic level control) value of the transmitter is shown. Negative ALC values (at least in peak mode) indicate that the volume of the TX input audio could be increased to get full output power.

Further info on the meters (e.g. switching between „peak” and „average” reporting) is described in the [Meter](#) menu.



# Chapter 4

## The Main Menu: introduction

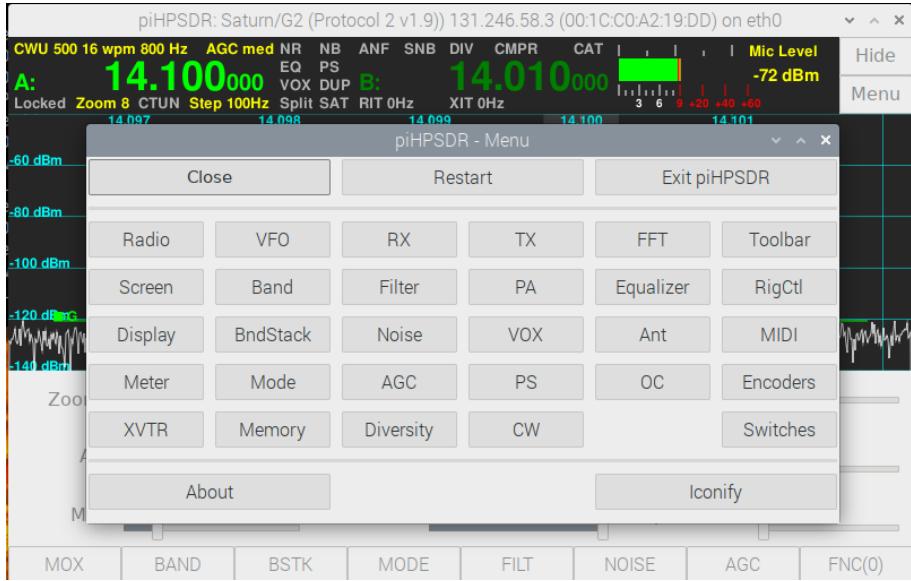

**Fig. 4.1:** The Main men, opened by the **Menu** button.

Now we have a series of chapters that discuss all the piHPDSR menus. Many menus can be opened by a button click (or a push-button on an external controller), e.g. hitting the **MODE**, **FILT**, or **NOISE** button on the toolbar you have seen in the last picture. You already know that the VFO and Meter menus can be opened by clicking into the VFO or meter section at the top of the window. When operating with a mouse, a secondary click in the RX

or TX panadapter opens the RX or TX menu. But there is one place from which *all* piHPSDR menus are at hand, and this is the "Main Menu". It can be opened by clicking into the **Menu** button at the top right corner of the piHPSDR window, the outcome is shown in Fig. 4.1.

Some remarks have to be made about menus in general. Since piHPSDR is optimized for working with small screens, only one menu can be open at a time. If a menu is open and one tries to open another one, the first menu will be destroyed (closed) and the new one will be opened. For example, if you hit the **FILT** button in the toolbar when starting from Fig. 4.1, the main menu closes and the **Filter** menu opens. If you try to open a menu that is already open, then the menu will be closed. So, starting from Fig. 4.1 hitting the **Menu** button again will close the menu. Likewise, when the Filter menu has been opened, either via the Main Menu or with the **FILT** button, then hitting this button again will close the **Filter** menu.


While the menus are looking quite diverse, some effort has been invested to keep some things consistent throughout. For example, at the top left corner of the menu you usually find the "Close" button which closes the menu. The close button is somewhat emphasised (slightly larger letters, and a thin border) so you will always quickly find it. Of course, it is possible to close a menu by deleting the menu window (on RaspberryPi, this is the small cross at the left of the title bar) but this is neither necessary nor recommended.

There are some commands available here that do not directly affect the radio operation, so these commands are found in the top and bottom line of the Main Menu. We first mention the **Restart** button in the middle of the top line. This restarts the radio protocol. While not needed under normal circumstances, it may happen (especially with beta releases of radio FPGA firmware) that the data exchange between piHPSDR and the radio gets out-of-sync. I observed such problems with early versions of the P2 firmware for Orion2 boards and that is the reason the **Restart** button is there, since this made a quick recovery possible without losing the QSO. At the bottom right, there is the **Iconify** button which „minimizes“ the piHPSDR window. Normally, if needed, one can do so by standard methods of the operating system in the title bar of the piHPSDR window. If piHPSDR, however, runs in full-screen mode (this is the case on very small touch screens), then the **Iconify** button to make the piHPSDR window temporarily disappear without breaking the connection to the radio, do some work with the operating

system, and get the piHPSDR window back. Note in earlier versions of piHPSDR this function was associated with the "Hide" button in the top right corner of the main window. Then, there are two menus ([Exit](#) and [About](#)) which are described in due course and which one can open by clicking either [Exit piHPDSR](#) or [About](#) in the main menu.

The other buttons, between the two horizontal separator lines, give access to piHPSDR control and fine tuning. They are organized in six columns, namely radio related menus (first column), VFO related menus (second column), RX and TX related menus (third and fourth column), menus affecting both RX and TX (fifth column) and, finally, menus for adjusting how you can control piHPSDR (sixth column), either via Toolbar, MIDI, or GPIO encoders or switches. „**Encoders**” are knobs which you can turn, and which can be used to change AF volume or TX output power. „**Switches**” are push-buttons which can be used to trigger a function such as transmitting a carrier for tuning, toggle between RX and TX, open a menu, and so forth.

## 4.1 The Exit Menu

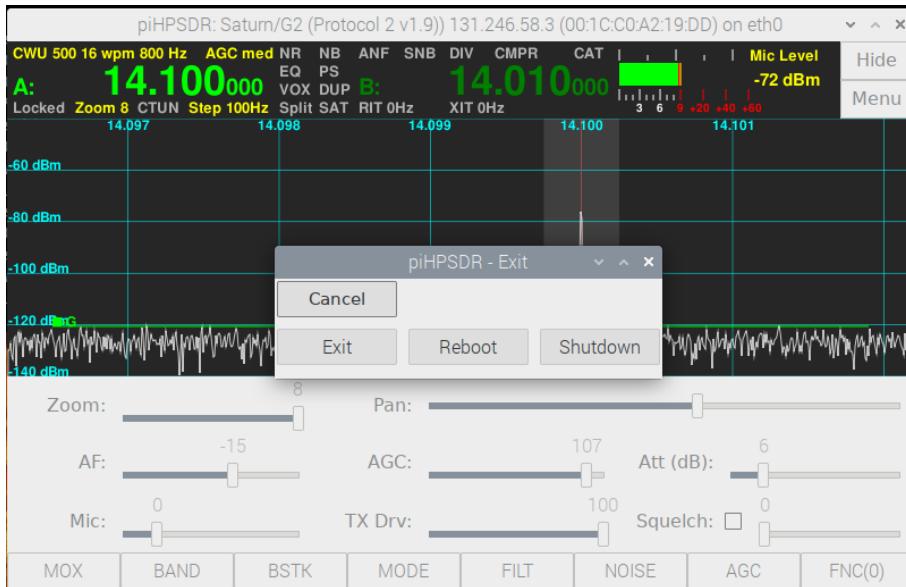

**Fig. 4.2:** The [Exit](#) menu.

Via the **Exit** menu, you can leave the piHPSDR program. When leaving the program, the radio protocol is stopped and all the settings are written to a preferences file. This file is located in the piHPSDR directory and takes the name `xx-xx-xx-xx-xx-xx.progs`, where the xx encode the MAC address for the radio. So the preferences for different radios (if you have more than one) are stored in different files. To leave the program, just click the "Exit" button in this menu. If you decide you want to continue, you can leave the **Exit** menu by clicking the "Cancel" button. This is the button which closes the menu and has the same position and look as the "Close" buttons in all the other menus.

If piHPSDR runs with administrator privileges, you can even leave the program and either re-boot or switch off the computer via the "Reboot" and "Shutdown" buttons. This makes sense for setups where a Raspberry Pi running piHPSDR, a small SDR radio, a touch-screen and several encoders and switches are built into a single common enclosure. On the other hand, when running piHPSDR on desktop or laptop computers, clicking "Reboot" or "Shutdown" both leave the piHPSDR program but no re-boot or shutdown takes place, due to missing administrator privileges.

## 4.2 The About Menu

The about menu gives you some information about piHPSDR, first the original author and an (incomplete) list of persons who contributed to the code, and then a statement which version of piHPSDR is working here, and when it has been compiled. Here you also find the version number of the WDSP library which is the „engine” running under the hood, and which does nearly all of the signal processing. Finally, there is some data on the radio, namely the device type and version numbers, and which protocol is running. For diagnostic purposes, you also see the MAC address of the radio, its IP address and the IP address of the computer running piHPSDR. The MAC address is of interest since the radio-specific preferences are stored in a file whose name is derived from the radio’s MAC address.



Fig. 4.3: The [About](#) menu.



# Chapter 5

## The Main Menu: Radio-related menus

### 5.1 The Radio Menu

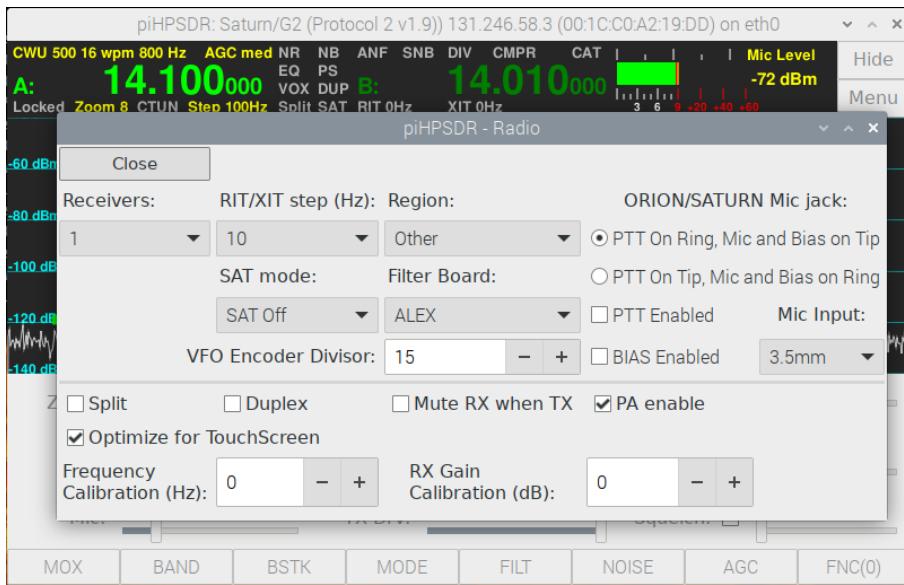


Fig. 5.1: The [Radio](#) menu.

The [Radio](#) menu lets you make settings which affect the general setting, and

the hardware of the radio. The following figure (Fig. 5.1) shows the menu as it opens on an Anan G2 radio. Note this menu looks slightly different for different radios and protocols, this will be discussed at the end of the section. First, we go through all the elements we see in Fig. 5.1, they will be colored red in the following list.

**Receivers:** In the pop-down menu (GTK combo-box) below this string, you can select the number of receivers that are running (well, you can choose between 1 and 2). When the number of receivers change, the radio communication will shortly be stopped and then resumed, so do not be surprised if the spectrum scope freezes for a second or so.

**RIT/XIT step:** In the pop-down menu you can choose among three (1 Hz, 10 Hz, 100 Hz) step sizes for RIT and XIT. For example, if the RIT step is 10 Hz, then you can change the RIT offset in steps of 10 Hz with the RIT+ or RIT- buttons in the toolbar or on the GPIO/MIDI controller.

**Region:** Although not obvious, this selects settings for the 60m band. Possible choices are "Other", "UK" and "WRC15". The **O**ther and **U**K choices implement the channel structure of the 60m band according to the regulations valid in the USA and Great Britain. "WRC15" gives you a small (15 kHz wide) 60m band according to the WRC15 (World Radio Conference 2015) document, which is now implemented in many countries.

**Orion/Saturn Mic jack:** This part of the menu is not shown for pre-Orion boards. The Orion, Orion2, and Saturn boards can switch the connections of the TRS microphone jack in software (hardware jumpers had to be used previously). While the ring of the TRS plug is always connected to ground, the microphone and PTT connections are on the ring and tip and you can choose which one is on the ring and which one on the tip. You can then separately enable the PTT function of the jack, and select whether a bias (DC offset) is applied to the mic connection (this is necessary for condenser microphones and detrimental if a dynamic microphone is connected without a blocking capacitor).

**Mic Input:** This is only shown for Saturn boards. These radios have two jacks for connecting a microphone, either a 3.5mm TRS jack in the front panel, or an XLR connection in the back panel. The pop-down menu lets you choose between these two options.

**SAT mode:** Here you can choose between **SAT off**, **SAT**, and **RSAT**. In **SAT**

mode, frequency moves applied to one of the two VFOs are applied to the other VFO as well. This is convenient for cross-band operation over satellites with (normal) linear transponders. In RSAT mode, frequency moves applied to one of the two VFOs are applied to the other with the sign inversed, that is, if for example you move the frequency of VFO A up by 3 kHz, the frequency of VFO B moves down by the same amount. This is convenient for cross-band operation over satellites with inverted transponders. Inverted transponders are sometimes find in low and fast moving satellites because this leads to some Doppler correction.

**Filter board:** Normally SDRs have some sort of built-in PA with a filter board. Filters in the TX path between the PA and the antenna are always required, and filters in the RX path provide some protection against ADC overloads from strong out-of-band signals. Here you can choose between **NONE**, **ALEX**, **APOLLO**, **CHARLY25**, and **N2ADR**. Choose **NONE** if none of the other cases apply, and hope your radio does things right automatically. **ALEX** is the most frequent choice and applies to the largest part of current HPSDR radios. **APOLLO** is an early design of a PA/filter combination for Hermes boards, choose this if you have one. **CHARLY25** is a filter board used in some RedPitaya based radios (STEMlab and HAMlab). If you choose this, the Attenuator slider will disappear from the Slider area (because this design does not have a step attenuator), instead, you get a combined Attenuator/Preamp check-box which lets you choose between zero, preamp values of 18 and 36 dB, and attenuation values of 12, 24, and 36 dB. **N2ADR**, finally, is the filter board usually used in combination with a HermesLite-II radio. It is controlled by the OC (open collector) bits in the HPSDR protocoll. This means if you use **N2ADR**, this will override your OC settings upon program startup. It is possible to change the OC settings in the **OC** menu, and these settings are saved with the preferences. Upon next program start, however, these preferences will again be overwritten as long as the **N2ADR** filter board is chosen.

**VFO Encoder Divisor:** This option is normally only used for GPIO controllers. Often, the encoders of the main VFO dial generate too many ticks per revolution, such that it is difficult to fine tune on a signal. If the VFO Encoder Divisor, as shown in the example, has a value of 15, only every 15<sup>th</sup> tick will we processed. The Divisor is also effective if you control piHPSDR with an ANDROMEDA console. So, if the frequency moves too fast if you turn the VFO knob, you have to increase the Divisor, and if it moves too

slowly, decrease it.

**Split** Use this checkbox to enable/disable Split mode. In Split mode, the frequency of the non-active receiver (when using two receivers) or the frequency of VFO-B (when using one receiver) controls the TX frequency. In normal (non-Split) mode, it is the frequency of the active receiver (2 RX) or the frequency of VFO-A (1 RX) that matters.

**Duplex** Use this checkbox to enable/disable Duplex mode. In Duplex mode, the receiver(s) continue working during TX. In normal setup, this is detrimental since the very strong signal that originates from the crosstalk at the T/R relay will lead to AGC pumping, making your receiver(s) essentially deaf for a short period after TX/RX switching. However, when using different and well-decoupled antennas for RX and TX (this is typical for some satellite operations), Duplex mode gives you important information, as you can see your own downlink signal. In contrast to what is often stated, Duplex mode does not affect the data stream between the computer and the radio, it *only* determines whether the receivers (within the WDSP library) are shut down during transmit or not.

**Mute RX when TX** This option mutes the RX audio while transmitting. It is important to note that the RX continue to work, so you can see the signals on the RX panel, the S-meter works, etc. This option is largely equivalent to moving the AF slider to the minimum position while transmitting.

**PA enable** This enables/disables the PA in the radio. In addition to this global flag, there is a per-band PA enable option for the transverter bands (see the [XVTR](#) menu).

**Optimize for TouchScreen** The normal procedure to make a selection from a pop-down menu (such as the [Receivers:](#) button on this screen) is to click (and hold) it with a mouse, then drag the mouse to your choice, and then the selection is made by releasing the mouse button. This is very difficult to achieve on a touch screen. Therefore, if **Optimize for TouchScreen** checkbox is checked, the pop-down menus are modified as follows: You click and release on the menu button, then it pops down and stays open. Then you make your selection by a second click/release sequence on your choice. While this is (only a little bit) more involved than the normal procedure when using a mouse, it is a great helper when using a touch screen. Therefore this option is set by default, but you can uncheck it here if you prefer normal mouse

operation. Note that this option becomes effective when the next menu is opened.

**Frequency Calibration** Here you can set a frequency offset (in Hz). This offset will be added to all frequencies sent to the radio. This means that if you discover that a reference signal occurs in your RX panel at 10001 kHz where it should occur at 10000 kHz, you have to set the calibration value to -1000. Note it is an absolute value, which will be applied to all frequencies.

**RX Gain Calibration** Here you can calibrate your RF front end. To this end, you need a highly accurate signal source of, say, -73 dBm. Connect this source to your radio and tune on the signal. If the signal appears at, say, -70 dBm, decrease the calibration value. At -3 dBm, your S-meter should then state the correct signal strength. The value is the amplification/attenuation of a virtual device you would need in your RF front end. Therefore, you need a negative value (attenuation) if the signal shown is too strong. For normal HPSDR radios, the default value is zero. For the HermesLite-II and other radios using the AD9866 chip, the default value is 14.

There are some further check boxes in the [Radio](#) menu that you cannot see in Fig. 5.1, since they only appear for specific radio hardware. They appear to the right of the touch screen optimization check box and will be listed here.

**HL2 audio codec** This box only appears if the radio is a HermesLite-II (HL2). Some of these radios are equipped with an audio codec and a modified firmware. The audio codec must be enabled by setting a specific bit in the HL2 protocol, and this check box enables/disables this bit. Furthermore, if this check box is enabled, RX audio data is sent to the HL2.


**Anan-10E/100B** This box only appears for Hermes boards. While the Anan-10E and the Anan-100B identify themselves as Hermes boards, they have a FPGA with limited resources and this affects the allocation of PureSignal feedback channels. To make PureSignal work on these machines, you have to check this box in the [Radio](#) menu.

**Swap IQ** This box only appears for radios connected via the SoapySDR library. If checked the I and Q samples are exchanged, both in the receivers and in the transmitter. An indication that this is necessary is if you see signals with a frequency above your dial frequency in the left half of the RX panel, or if you have to go to LSB to receive USB signals. If you observe this

behaviour, check this box.

**Hardware AGC** This box only appears for radios connected via the SoapySDR library. If checked, automatic gain control (AGC) that is implemented in hardware in the radio is enabled.

**ATLAS bus options.** For legacy ATLAS bus radios, a number of additional settings have to be made. Therefore, the area where we have seen the Orion microphone options now contains ATLAS bus settings, as shown in Fig. 5.2. You will see this only if the radio identifies itself as a METIS board.

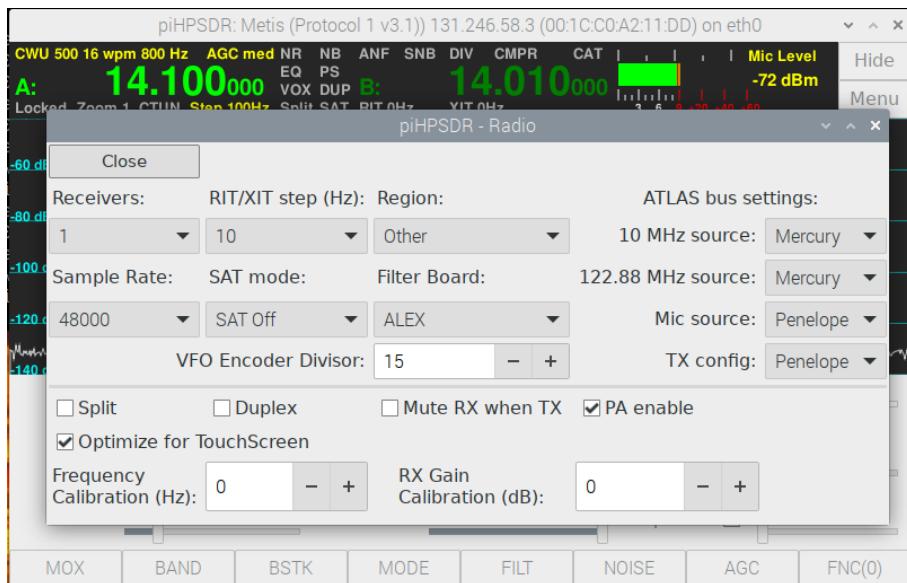

**Fig. 5.2:** The [Radio](#) menu for a legacy HPSDR board.

The first difference you notice is that at the left edge of the menu, in the middle, there is a new **Sample Rate:** pop-down menu. This has nothing to do with the ATLAS bus, this occurs if the radio is connected via P1, as it is often the case for legacy radios. In P1, all receivers share the sample rate, therefore it is set in the [Radio](#) menu. The same applies for SoapySDR radios. In P2 on the other hand, each of the two receivers can have its own sample rate, therefore the sample rate is specified in the [RX](#) menu. The ATLAS bus settings are at the right edge of the menu (see Fig. 5.2. The ATLAS bus has separate receiver and transmitter plug-in boards. To build a radio, they must be synchronized somehow, and therefore their clocks cannot run independently, but there must be a master clock.

**10 Mhz source:** This selects the 10 Mhz master clock, which can be either **ATLAS** (the bus itself is the source), **Penelope** (the transmitter board is the source), or **Mercury** (the receiver board is the source).

**122.88 MHz source:** This selects the 122.88 Mhz master clock, which can be either **Penelope** or **Mercury**.

**Mic source:** This selects where the microphone samples that are sent to the computer originate, that is, where your microphone has to be connected. The default is **Penelope**, this means the microphone is connected to the transmitter board. The other choice is **Janus**. The **Janus** board is simply an ADC/DAC board (not a radio) and used in some very early setups.

**TX config:** This indicates which transmitter board is present on the bus. It can be **No TX**, if this is a receive-only radio, **Penelope** or **Pennylane**. The **Pennylane** is a later version of the Penelope transmitter board, the essential difference is that it can control the output signal level. In the Penelope case, piHPSDR will scale the IQ samples to provide TX drive control.


**Janus Only** This box is for ATLAS systems that only have an OZY and a Janus board, and will only appear for OZY (USB-connected) boards. While this hardware is not a radio, external hardware such as the SDR-1000 can be connected to the Janus interface. If this option is checked, piHPSDR assumes that the radio is controlled outside piHPSDR, and will thus only process the data stream but not try to send any commands to the radio.

Note that I have no access to such legacy radios, so the piHPSDR code to handle these radios is partly built on speculation (that is, studying the specs) and exchanging e-mails with people who still run such hardware. If you meet any inconsistencies, please contact the author.

## 5.2 The Screen Menu

The **Screen** menu lets you dynamically change the size of the piHPSDR main window, and choose between different VFO bar layouts. The possibility to adjust the screen size has been the most frequent feature request in the last years, so I finally decided to implement it. The menu is opened via the main menu and the **Screen** button and is shown in Fig. 5.3.

The window width and height can be chosen with the spin buttons shown.

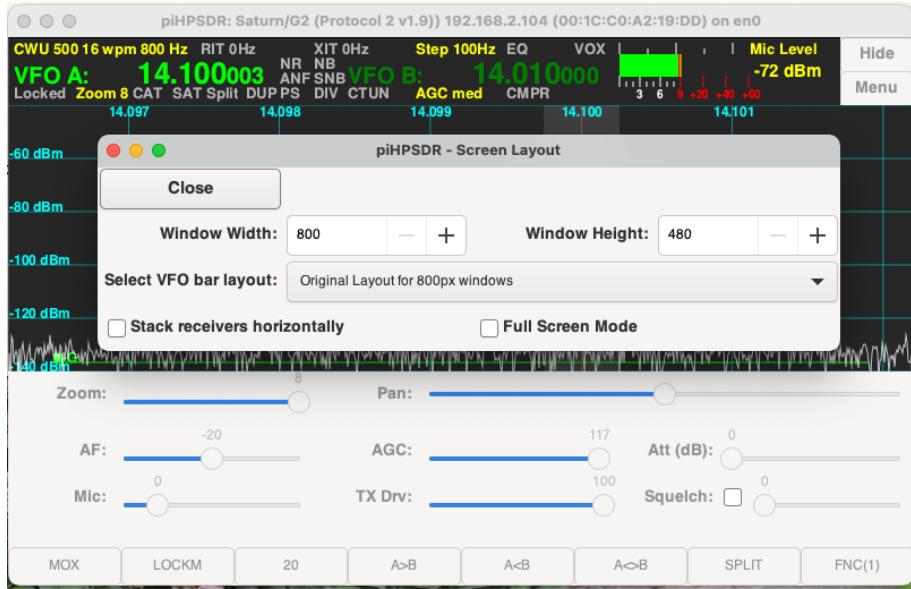

**Fig. 5.3:** The [Screen](#) menu.

The minimum values for width and height are 800 and 480, the maximum values are determined by the resolution of the monitor. If more than one monitor is attached, the dimension of the monitor on which the initial piHPSDR window was opened determines the maximum width and height. Changes made in the spin buttons become effective immediately. If piHPSDR is in full screen mode (see below), you can change the values of the window width and height, but they do not become effective until you leave the full screen mode.

If the window width is decreased such that the VFO bar chosen does no longer fit, the first one in the list that does fit is automatically selected, and the current choice printed in the pop-down menu **Select VFO bar layout** is updated. This menu lets you choose the layout of the VFO bar. In Fig. 5.4 the pre-defined layouts are shown.

The two largest ones require a window width of about 1000 and 900 pixels, while the two small ones can be used with a screen only 800 pixels wide. The VFO bar shown at the bottom of Fig. 5.4 represents the original piHPSDR layout, the second one from the bottom has larger characters for the VFO dials and therefore a few more pixels height. The VFO bar has been described



**Fig. 5.4:** Four choices for the VFO bar built into piHPSDR.

in detail in chapter 3.7. If you choose a VFO bar layout that is wider than the current window width allows, the window width is automatically adjusted.

**Stack receivers horizontally.** If checked, this puts the panels of the two receivers (if two receivers are used) side-by-side instead of on top of each other.


**Full Screen Mode.** If you check this option, piHPSDR goes to full screen mode. In this mode, the window width and height is ignore, instead, piHPSDR occupies the whole area of the screen. In a multi-monitor setup, the area of the monitor on which the piHPSDR window was opened upon program start is filled. If you leave full screen mode, the size of the piHPSDR window is again determined by the width and height chosen above.

## 5.3 The Display Menu

The **Display** menu is used to customize the overall layout of the piHPSDR window and the RX panadapters. Adjustments for the TX panadapter must be done in the **TX** menu. The menu is shown in Fig. 5.5.

**Frames Per Second:** This adjust how often the RX and TX (!) displays are re-drawn. 10 frames per second (the default) is a good value.

**Panadapter High:** This value is the dBm value of the RX signal strength at the top of the RX spectrum scope. A value of -40 dBm corresponds to S9

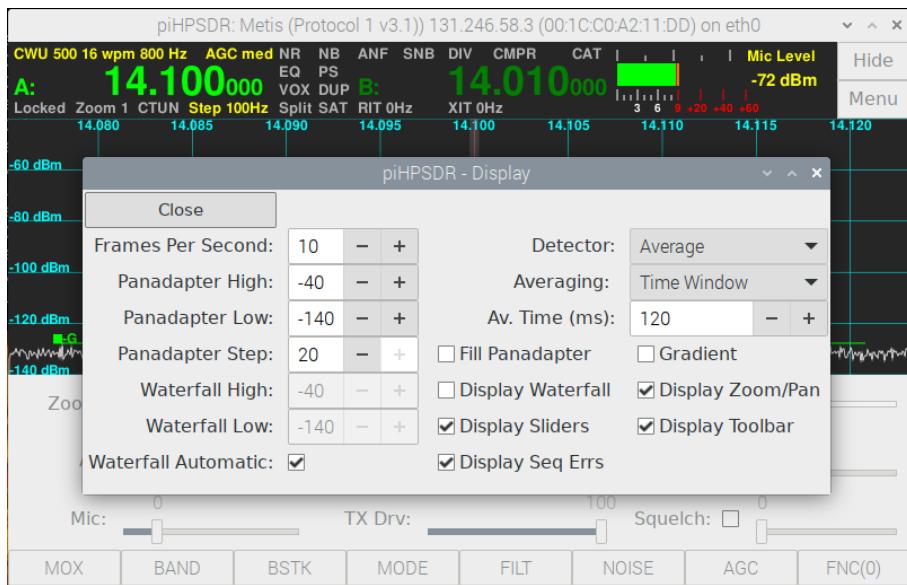

**Fig. 5.5:** The [Display](#) menu.

+ 33 dB for HF signals.

**Panadapter Low:** This value is the dBm value of the RX signal strength at the bottom of the RX spectrum scope. A value of -140 dBm is usually low enough such that the noise floor is still on display.

**Panadapter Step:** This value is the spacing of the horizontal lines on the spectrum scope. Lines are drawn at dBm values that are multiples of the step size.

**Waterfall High:** This is the RX dBm value that will lead to the brightest color (yellow) in the waterfall.

**Waterfall Low:** This is the RX dBm value below which the waterfall will be black.

**Waterfall Automatic:** If this box is checked, the **Waterfall High:** and **Waterfall Low:** controls are inactive and the values are not used. Instead, the lowest and highest signal strength in the RX spectrum are automatically determined and are then used instead of the waterfall High/Low control values.

**Detector:** Here one can choose between Peak, Rosenfell, Average and Sam-

ple. The Rosenfell detector is probably closest to what one knows from a spectrum analyzer. the Average detector is usually preferred since it is less „nervous”.

**Averaging:** Here the possible choices are None, Recursive, Time Window and Log Recursive. For the details, see the WDSP manual.

**Av. Time (ms):** If averaging is used for the spectrum scope, the time constant involved in averaging can be set here.

**Fill Panadapter** This is used to enable/disable the „Filling” option for the RX and TX spectrum scopes (see chapter 3.2).

**Gradient** This is used to enable/disable the „Gradient” option (color coding) for the RX spectrum scope (see chapter 3.2). Note color coding is not available for the TX panel.

**Display Waterfall** This option enables/disables the waterfall display of the RX panels. Note the spectrum scope is always shown.


**Display Zoom/Pan** This option can be used to show/hide the Zoom and Pan slider below the RX or TX panel. If you do not use Zoom, or control Zoom via an external GPIO or MIDI controller, this can be used to save some vertical space.

**Display Sliders** This option can be used to show/hide the slider area (AF through Squelch sliders). Hiding them makes little sense unless you have a GPIO or MIDI controller. For temporarily gaining vertical space, use the **Hide** button at the top right of the main window.

**Display Toolbar** This option can be used to show/hide the toolbar.

**Display Seq Errs** All data packets from the radio to the PC contain a sequence number that is increased for each packet sent. piHPSDR checks for each incoming data packet whether the sequence number is exactly larger by 1 than the number of the previous packet. If this is not the case, this is a *sequence error*. Sequence errors may be caused by loosing packets on the way from the radio to the computer, or (this is what is usually the reason) packets lost within the computer due to the computer being busy with something else (e.g. writing to disk). If the **Display Seq Errs** is checked, a red „Sequence error” message appears in the RX panel for two seconds. Sequence errors during RX often cause cracks in the RX audio. Unless this happens regularly, it is no reason to worry.

## 5.4 The Meter menu

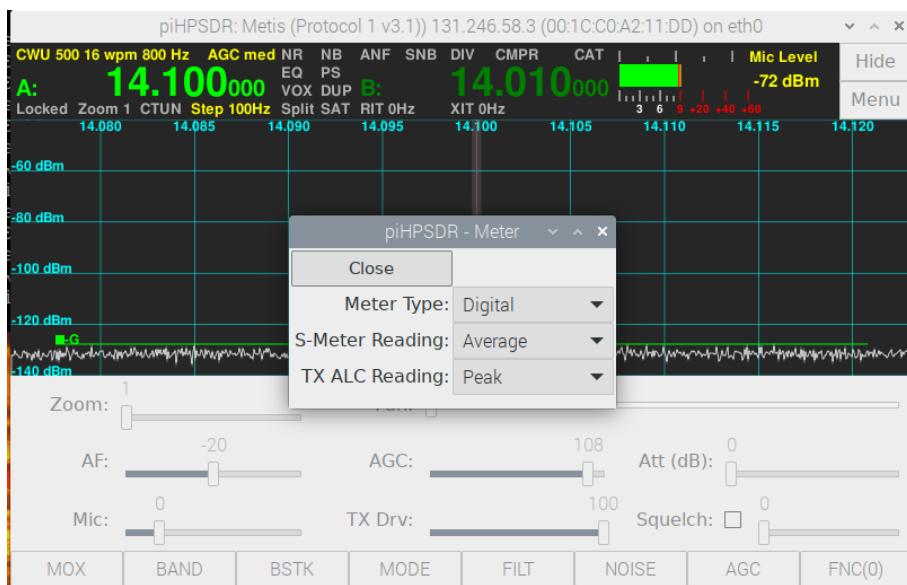

**Fig. 5.6:** The **Meter** menu.

The **Meter** can either be opened simply by clicking in the meter area, or through the main menu. Only few choices can be made here.

**Meter Type:** Here you can select between a digital and an analog meter. The four different designs (either analog or digital, and during RX or TX) have already been shown in Sec. 3.8.

In both cases, there is a choice between Peak and Average reading, which refers to peak envelope power and average power. Here averaging is done over relatively short times. For a two-tone signal for example, the peak reading is 3 dB above the average reading.

**S-Meter Reading:** Here you can choose whether the S-meter reports a Peak or an Average value (default is Average). Note, however, that in order to make the display less „nervous” a moving average with a rather long time constant (about 0.5 sec) has been implemented on top of both the Peak and Average S-meter readings.

**TX ALC reading:** Here, the possible values are Peak, Average, and ALC gain. For a two-tone signal with maximum audio amplitude the Average

ALC value is -3.0 dB, while the Peak value is 0.0 dB. Therefore I personally prefer the Peak value here and made it the default in piHPSDR: if the value is less than zero, one can and should increase either the amplitude of the incoming audio signal (e.g. boost the microphone preamp) or move the Mic gain slider to the right. The reason is, that PureSignal only works if the TX audio input has maximum amplitude, so you can put the drive slider to zero, then put the radio into TX mode, whistle into the microphone and slowly increase the Mic gain until the ALC value shown is only slightly less than zero.

## 5.5 The XVTR (Transverter) Menu

The **XVTR** menu lets you define additional bands that you can work on using transverters. The bands should normally be beyond the standard frequency range of the radio, otherwise the the calculation of a band from a given frequency will sometimes not work. To give an example, suppose you have a transverter which you can drive with frequencies between 28 and 30 MHz and which will convert them to the frequency range 144 to 146 MHz, and which will receive frequencies in that range and mix them down to the 10m band. The data you have to enter in the **XVTR** menu (use the first free entry) are as follows:


**Title** In this column, enter a name for your band. You can choose whatever name you want, this is the one that will be displayed in the **Band** menu. In the present example, use "144" or "144 MHz" or "2m".

**Min Freq** Enter the lowest frequency of the transverter band in MHz, in the present case, 144.

**Max Freq** Enter the highest frequency of the transverter band in MHz, in the present case, 146.

**LO Freq** This is the frequency offset (in MHz) between the radio frequency and the operating frequency. In this case, use 116. From this offset, radio frequencies between 28 and 30 MHz will be used for operating frequencies between 144 and 146 MHz.

**LO Err** This entry can be used for a fine calibration of the frequency. The value (in Hz) is added to the local oscillator (LO) freq in Mhz.

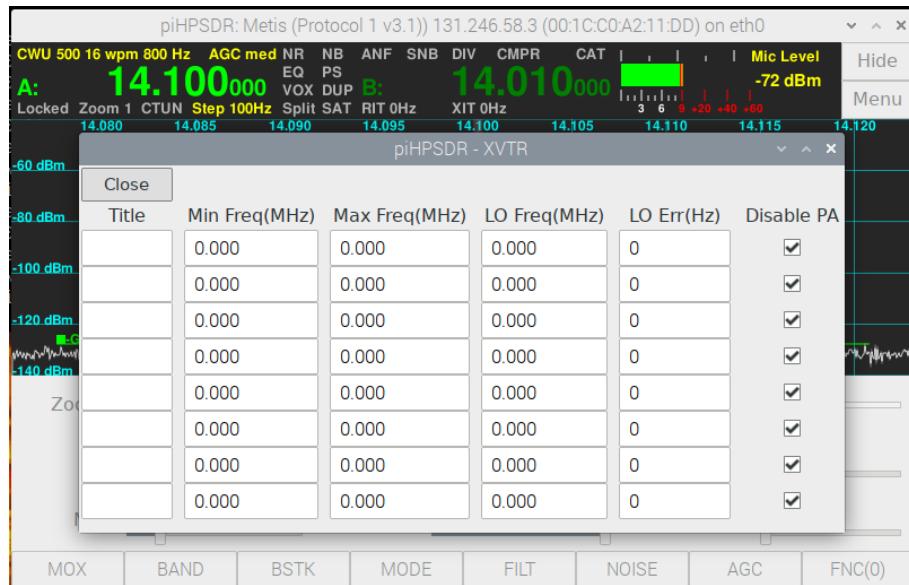

**Fig. 5.7:** The [XVTR](#) (transverter) menu.

**Disable PA** This checkbox indicates that the PA of the radio should be disabled when using the transverter band. This implies that the radio has some sort of low-power output that is used to drive the transverter.

# Chapter 6

## The Main Menu: VFO-related menus

In this chapter we discuss the menus from the second column of the main menu. These are all VFO-related menus.


### 6.1 The VFO menu

The **VFO** menu can be used for direct frequency entry and to enable/disable some frequently used options. If the menu is opened, it refers either to VFO-A or VFO-B. If opened via the main menu, it automatically refers to the VFO controlling the active receiver. The easiest (and therefore recommended) way to open the **VFO** menu is just to make a mouse click (or a touch screen press) into the VFO bar. If clicked in the left half of the VFO bar, the menu is opened for VFO-A and if clicked in the right half, it is opened for VFO-B. The **VFO** menu is shown in Fig. 6.1.

The „keypad” is used for direct frequency entry. You can enter digits and a decimal point. While entering a number the string entered so far is not only shown in the upper part of the **VFO** menu, but also (in yellow digits) in the VFO bar. The other buttons of the „keypad” have a special meaning:

**BS** Backspace. This cancels the last entered character (digit or decimal point).

**Hz** This enters the frequency „as is”.

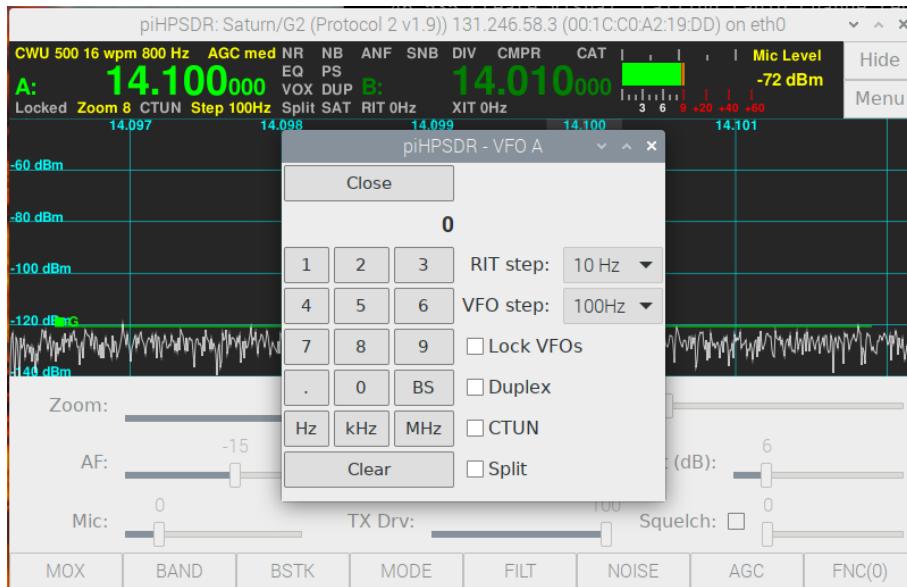

**Fig. 6.1:** The [VFO](#) menu.

**kHz** This multiplies the frequency just entered with 1000 and enters it. This means, the number entered is interpreted as a frequency in kHz.

**MHz** The string typed in so far is interpreted as a frequency in MHz and this frequency is transferred to the VFO.

**Clear** The string typed in so far is deleted, the VFO frequency is not updated. The commands entered by clicking the buttons of the keypad in the VFO menu can also be entered by push-buttons from a GPIO or MIDI controller, see the NumPad commands in Appendix A.

In addition to frequency entry, the VFO menu offers a convenient way of changing some piHPDSR settings, simply because the VFO menu can be opened by a simple mouse click into the VFO bar.

**Rit Step:** In this pop-down menu, the RIT/XIT step size can be chosen (1/10/100 Hz).

**VFO Step:** In this pop-down menu, the VFO step size can be chosen. The VFO step sizes range from 1 Hz to 1 MHz.

**Lock VFOs** With this check box enabled, VFO frequencies cannot be changed

by turning a VFO dial (GPIO or MIDI controller), or by clicking/dragging in the RX panel. Band changes (via the [Band](#) menu) and other VFO related functions still work.

**Duplex** and **Split**. With these check boxes, you can put the radio in Duplex or Split mode, see the [Radio](#) menu.

**CTUN**. With this check-box, you can put the VFO this menu is referring to into CTUN mode. In CTUN mode, the spectrum scope does not move when changing the frequency, rather, the RX „window” moves. CTUN mode does not affect TX operation.

## 6.2 The Band menu

The [Band](#) menu lets you change the band of the active receiver. It is shown in Fig. 6.2. When the menu opens, the button of the current band is highlighted.

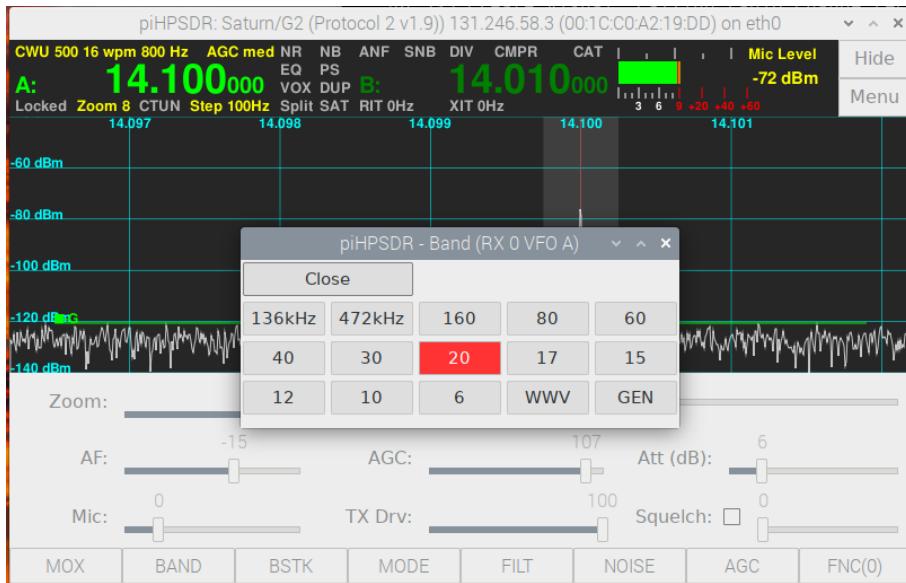


Fig. 6.2: The [Band](#) menu.

Pressing a button corresponding to another band, two things happen: first, if the active receiver is controlled by VFO-A, the current frequency is stored in

the current bandstack (which is thus updated). Then, the new band is chosen, the frequency and mode are from the active bandstack entry of the new band. This means that if you switch to another band and shortly thereafter switch back to the original band, the frequency and mode is restored to what you had before.

If you hit the highlighted button, you will not change the band (since you hit the button of the current band) but instead will cycle through the band stack of that band (see the [BndStack](#) menu).

Note that the band menu may look different from the one shown here: there are many bands (24 bands plus up to 8 transverter bands) defined in piH-PSDR. However, the bands that are outside of the radio's frequency limits are not shown. For example, a radio whose maximum frequency is 30 Mhz will not show the 6m band. The **GEN** (General) band encompasses the whole frequency range of the radio. If you set the frequency (e.g. via the [VFO](#) menu) to a frequency outside of any of the other bands, you will end up in the General band. If you have defined transverter bands (see the [XVTR](#) menu) they will be shown, with the title you have chosen, in the [Band](#) menu.

### 6.3 The BndStack (Bandstack) menu

For each band, the band stack is collection of frequency/mode pairs. The idea is that you can have preferred or recently visited frequencies to which you can easily come back. If you open the [BndStack](#) menu (Fig. 6.3), you see all these frequency/mode pairs, the band stack entry currently selected is highlighted.

If you press the highlighted button, the current frequency/mode is stored in that band stack entry. If you press another (non highlighted) bandstack entry, the current frequency/mode is stored in the highlighted band stack entry, and then the frequency/mode of the new entry becomes effective. Note that bandstack entries are only changed if the active receiver is controlled by VFO-A.

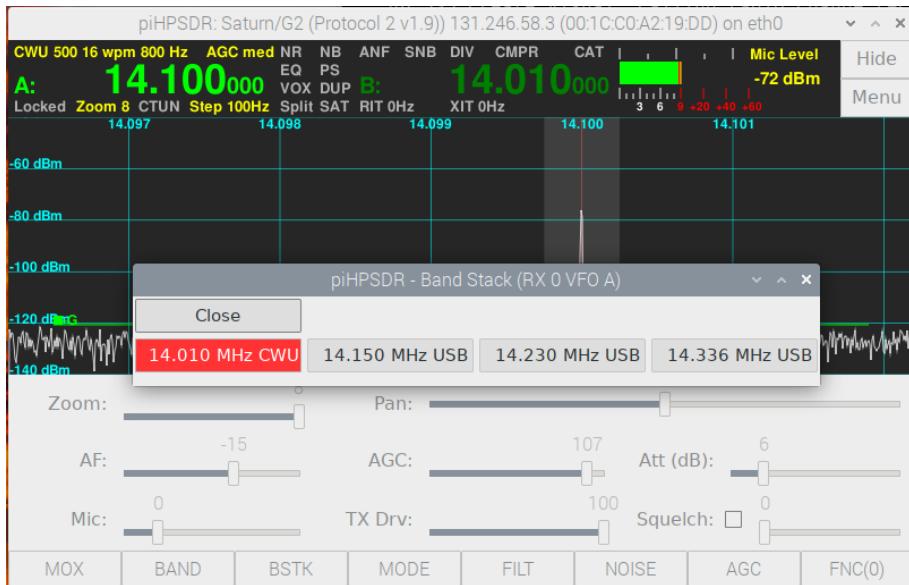


Fig. 6.3: The [BndStack](#) (Bandstack) menu.

## 6.4 The Mode menu

The [Mode](#) menu lets you change the mode of the active receiver, so you can switch, say, from LSB to CWU or DIGU. The mode menu simply lists the available modes, the current one is highlighted (Fig. 6.4).

**Settings stored with the mode.** Many settings such as filter choices, noise reduction and equalizer settings, and TX compressor settings are only reasonable with a specific mode in mind. Therefore, these settings are stored with the mode. If you later switch back to this mode, the settings that were effective the last time you used that mode are restored. This is the main reason why the USB and DIGU modes are separate (although technically they are the same), the same applies for LSB and DIGL. For digital operation, you will normally choose DIGU and have no noise reduction, no TX compressor, and no equalizer. For voice operation (USB/LSB) you may then have the noise reduction, equalizer and TX compressor settings as you like it. Then you can easily switch between DIGU and USB/LSB and have the correct settings automatically. The same applies to CWL/CWU where you will normally use different settings compared to both USB/LSB and DIGU.

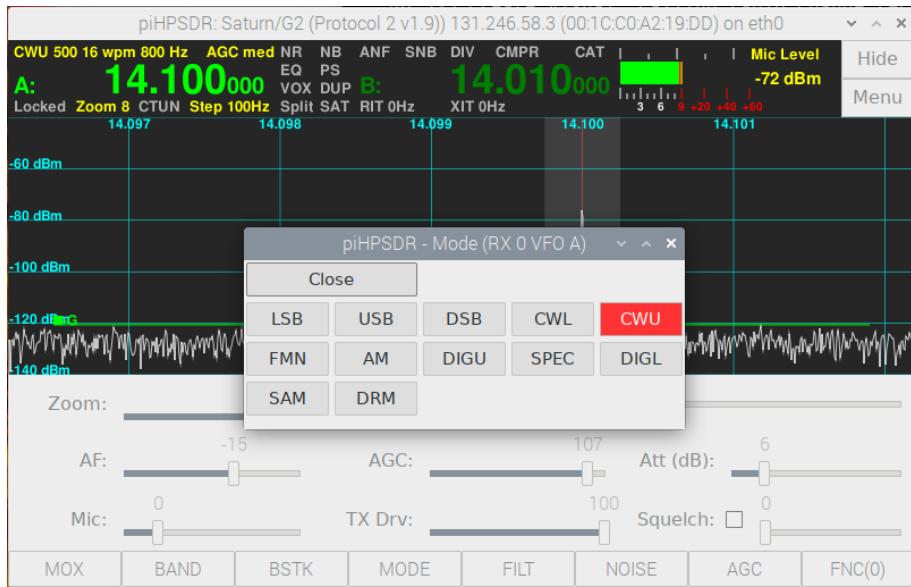


Fig. 6.4: The [Mode](#) menu.

## 6.5 The Memory menu

The [Memory](#) menu gives you access to five memory slots. The menu is shown in Fig. 6.5. You can store the current frequency and mode of the active receiver in any of the five slots by clicking a button in the leftmost columns (e.g. "Store M2"), or you can restore data from any slot. The current memory contents are shown in the right column (frequency, mode, and filter width) and clicking on of the five buttons there will restore the data. So if you have some often used frequencies (e.g. for a net), the [Memory](#) menu allows you to become QRV there with only few mouse clicks.

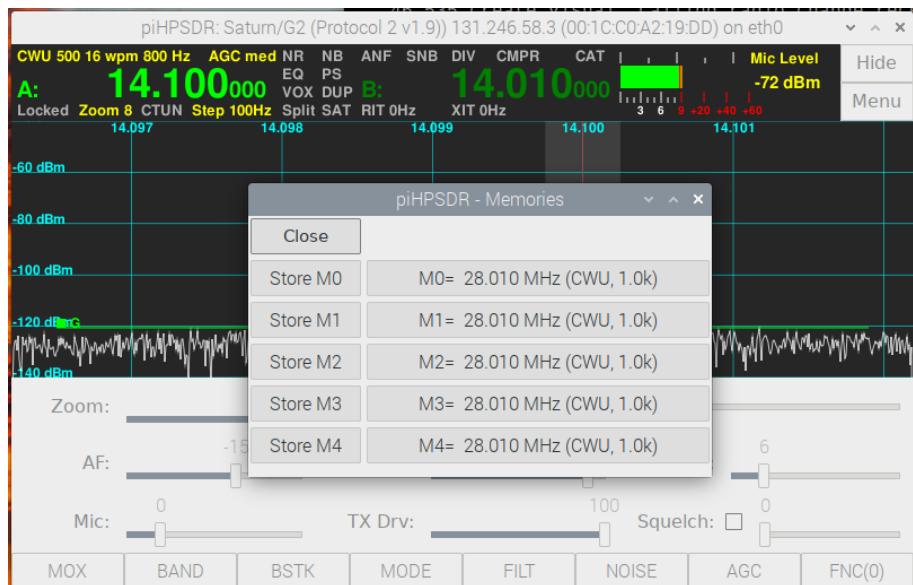


Fig. 6.5: The [Memory](#) menu.



# Chapter 7

## The Main Menu: RX-related menus

The second column of tge main menu contains menus which allow you to change receiver settings.

### 7.1 The RX Menu


Invoking the **RX** menu through the main menu always implies that the settings of the active receiver are to be modified. Using a mouse, you can also open the menu by a secondary click (using the right mouse button) into the receiver panel. This way, if piHPSDR is running two receivers, you can open the **RX** menu for both receivers (the active receiver as well as the other one), depending on in which panel you have right-clicked. Note secondary clicks are usually not possible with a touch screen. The menu is shown in Fig. 7.1.

**Sample Rate** This box is only shown for radios running P2, since only there the receivers can have an individual sample rate. For radios running P1 or radios accessed through the SoapySDR library, the sample rate is a global quantity that is modified throught the **Radio** menu (see above).

**Select ADC** This box is only shown if the radio has more than one analog-to-digital converter (ADC), such as Orion, Orion-II and Saturn boards. These radios have two ADCs so you can choose whether the receiver gets data from

ADC0 or ADC1. For these radios, nearly all antenna jacks go to ADC0, while there is a jack denoted "RX2" (or similar) that is connected with ADC1. In most cases, ADC0 is used for normal operation, while ADC1 can be used for connecting a dedicated RX antenna.

**Note: Diversity.** When using **Diversity** reception, the ADC setting is overridden, since there data streams from ADC0 and ADC1 are combined (mixed).

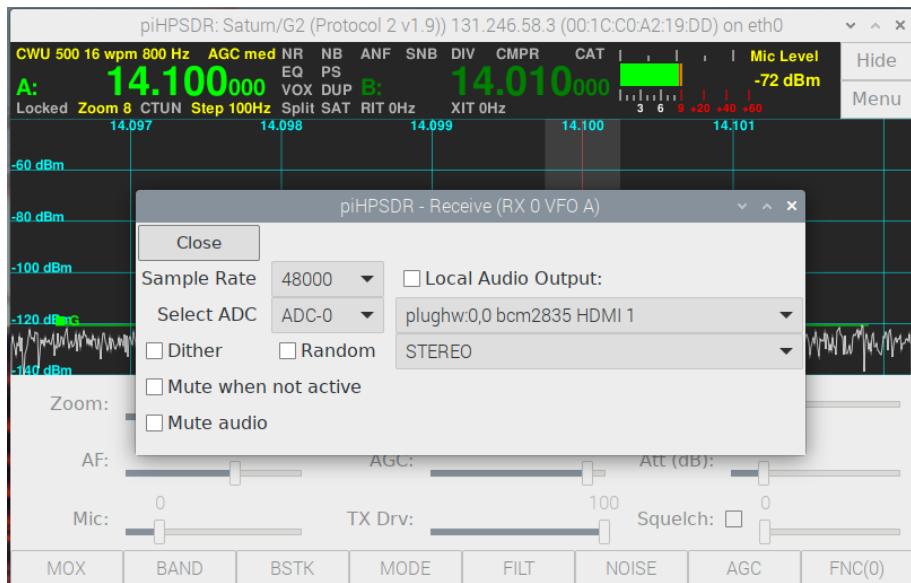

**Fig. 7.1:** The **RX** menu.

**Dither.** When checked, the „dither” bit is set which affects the operation of the ADC converter in some HPSDR boards.

**Random.** When checked, the „random” bit is set which affects the operation of the ADC converter in some HPSDR boards.

**Preamplifier.** This checkbox is not shown in Fig. ??, it only occurs for some legacy HPSDR boards which had a switchable RX preamp.


**Mute when not active.** If checked, the audio from this receiver is muted when it is not the active receiver.

**Mute audio.** If checked, the audio from this receiver is muted, no matter whether it is active or not.

**Local Audio Output:** If checked, the audio from this radio is sent to a local sound card (or virtual audio cable). The sound card itself is selected in the pop-down menu below this check box. One line below, one can select between STEREO, LEFT and RIGHT, and select whether the RX audio should be sent to both channels or to the left or right one only. This way, one can use one sound device for the first receiver and select LEFT, and choose another sound device for the second receiver and choose RIGHT. If one then mixes these two audio streams (either by operating system facilities or in hardware), one gets the first receiver audio on the left ear and the second receiver audio on the right ear, which may help in split operation in DX chasing.

In the example shown, checking the Local Audio box would send the RX audio samples to the HDMI monitor attached to the RaspPi, but one could equally well choose the headphone output or a virtual cable, if one wants to use digital modes.

## 7.2 The Filter menu

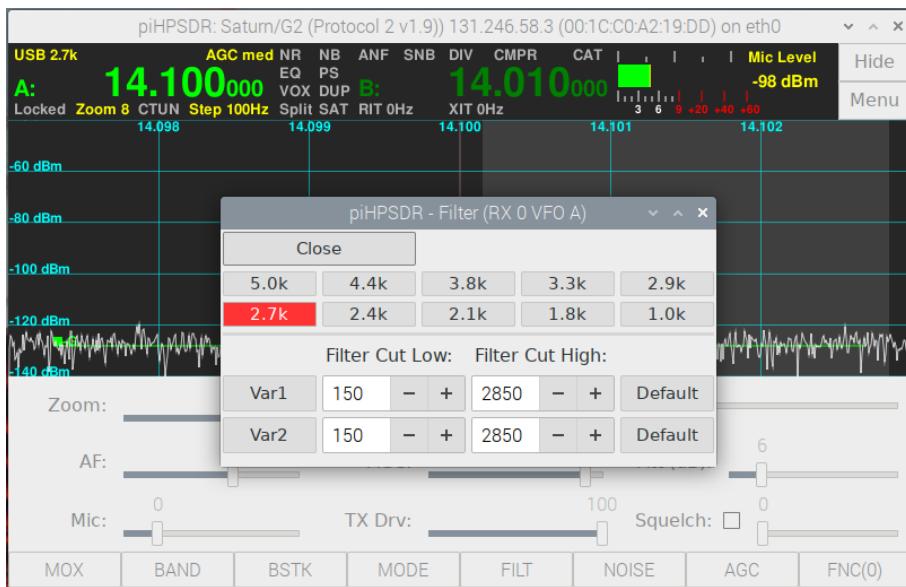


**Fig. 7.2:** The [Filter](#) menu (single side band modes).

With the [Filter](#) menu, you can change the filter of the active receiver. There

are ten fixed filters and two variable filters, see Fig. 7.2. It depends on the current mode which filters are at your disposal, and Fig. 7.2 is what you see for USB and LSB modes. The filter currently active is highlighted, and you can choose another filter simply clicking the button. For USB and LSB, the filters are such the low-frequency cut (in the audio domain) is at 150 Hz, so a 2.7k filter actually encompasses audio frequencies from 150 to 2850 Hz. With the variable filters (Var1 and Var2) you can be more flexible in the low audio frequency range. Here you can individually select the low- and high frequency cut (both frequencies refer to the audio domain, and are thus both positive value for USB and LSB).

The pre-defined filters for the digital modes DIGU and DIGL are a little bit different. For filter widths up to 3 kHz, the filter is centered around 1500 Hz. For example, a 1.0k filter for DIGU/DIGL passes audio frequencies between 1000 and 2000 Hz.

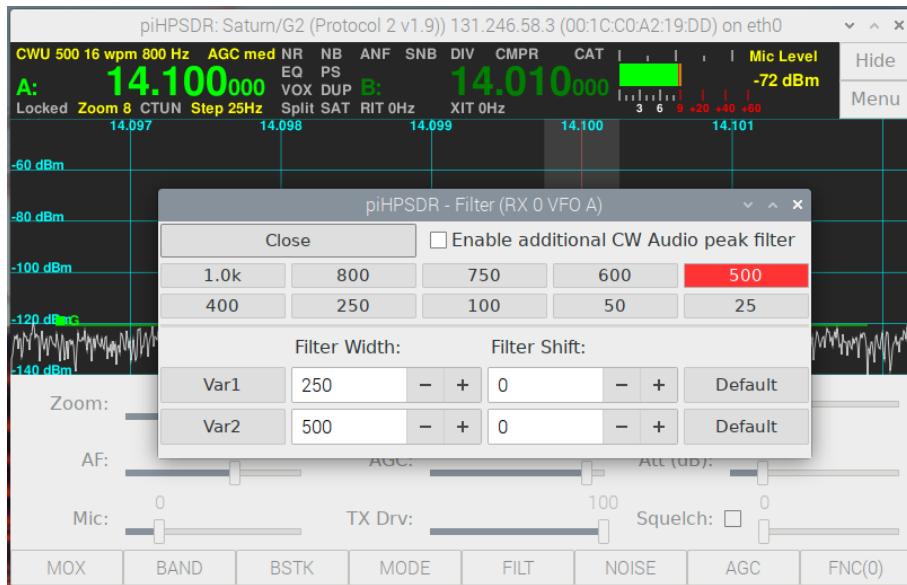

**Fig. 7.3:** The [Filter](#) menu for CWL/CWU.

For modes such as CW and AM, low/high cutoff frequencies have little meaning, so the [Filter](#) menu looks slightly different (Fig. 7.3). The fixed filters are designated by their width, they are centered around zero (for AM) or around the CW side tone frequency (for CWU and CWL). For the variable filters Var1 and Var2, the spin buttons can set the filter width and the filter

shift. Normally you will not want to change the filter shift, but it may help in special cases.

**Enable additional CW Audio peak filter.** If the mode of the active receiver is CWL or CWU, there will be an addition check box in the top row of the menu. Here you can enable/disable an audio peak filter that is applied to the final audio output of the receiver, that is, on top of the regular filtering. The audio peak filter will only be effective in the CW modes, its center frequency is given by the CW side tone frequency and its width is automatically calculated, depending on the width of the primary filter. The audio peak filter can be used to dig out the CW signal from the noise (making the regular filter narrower also does this job). The audio peak filter can also help to tune to the correct frequency: the regular filters have a flat pass band so the received signal equally loud as long as it is in the pass band. The audio peak filter has a marked peak at the side tone frequency so you can tune for maximum signal volume to adjust your frequency to the received signal.

There is the function **CW Audio Peak Filter** that can be mapped on toolbar buttons or GPIO/MIDI buttons so you can quickly enable/disable the audio peak filter.

## 7.3 The Noise Menu


With the **Noise** menu you can select a variety of noise reduction and/or noise blunker capabilities (Fig. 7.4). The upper part of the menu always looks the same, the lower part lets you fine-tune noise reduction or noise blunker parameters. For an in-depth explanation of the noise reduction and noise blunker capabilites, the reader is referred to the WDSP manual.

**SNB** This check box lets you enable/disable the spectral noise blunker.

**ANF** This check box enables/disables the automatic notch filter. The ANF is very good at eliminating a single-tone QRM carrier in SSB modes. It goes without saying that activating the ANF in CW is detrimental rather than beneficial, because here the signal is of the type the ANF tries to eliminate.

**Noise Reduction** With this pop-down menu, you can choose the type of noise reduction (no noise reduction, NR1 or NR2).

**Noise Blanker** With this pop-down menu, you can choose the type of noise

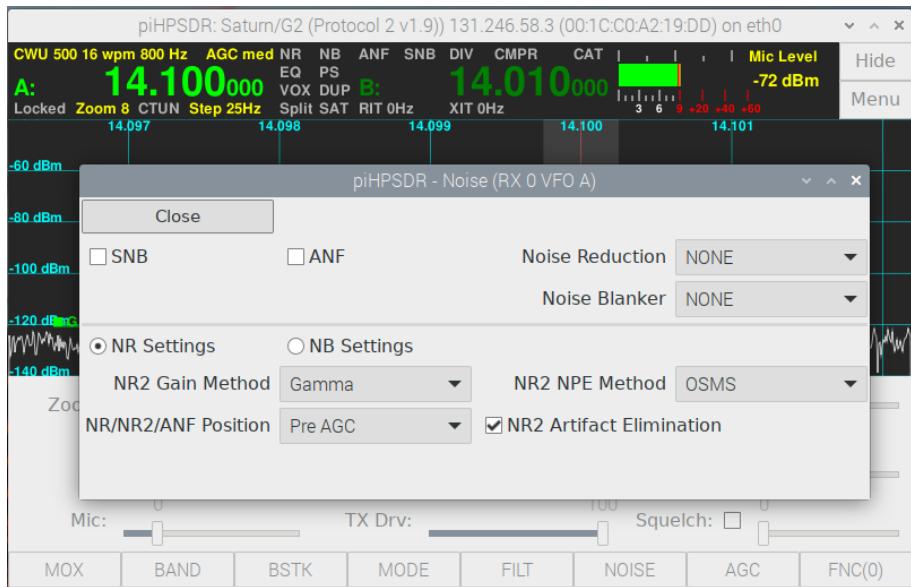

**Fig. 7.4:** The [Noise](#) menu (with NR settings).

blanker (no noise blanker, the preemptive wideband blanker NB or the interpolating widetband blanker NB2 ).

**NR Settings/NB Settings** Choosing one of the two buttons determines whether the lower part of the menu offers fine-tuning of the noise reduction or noise blanker settings. The set up for changing the noise reduction settings is shown in Fig. 7.4, below (Fig 7.5) you find the set up for changing the noise blanker settings. We discuss the noise reduction settings first, but note again for the details you have to study the WDSP manual.


**NR2 Gain Method** The available choices for the NR2 noise reduction here are Linear, Log, and Gamma, where Gamma is the default.

**NR2 NPE Method** The available choices for the NR2 noise reduction here are OSMS and MMSE, where OSMS is the default.

**NR...Position** In the RX chain, the noise reduction can be placed before or after the automatic gain control (AGC). The choice here refers to *all* noise reduction capabilities (SNB, ANF, NR1, NR2).

**NR2 Artifact Elimination** The NR2 noise reduction algorithm is prone to producing artifacts, so there is an option to reduce such artifacts which

should normally be checked (artifact elmination „on”).

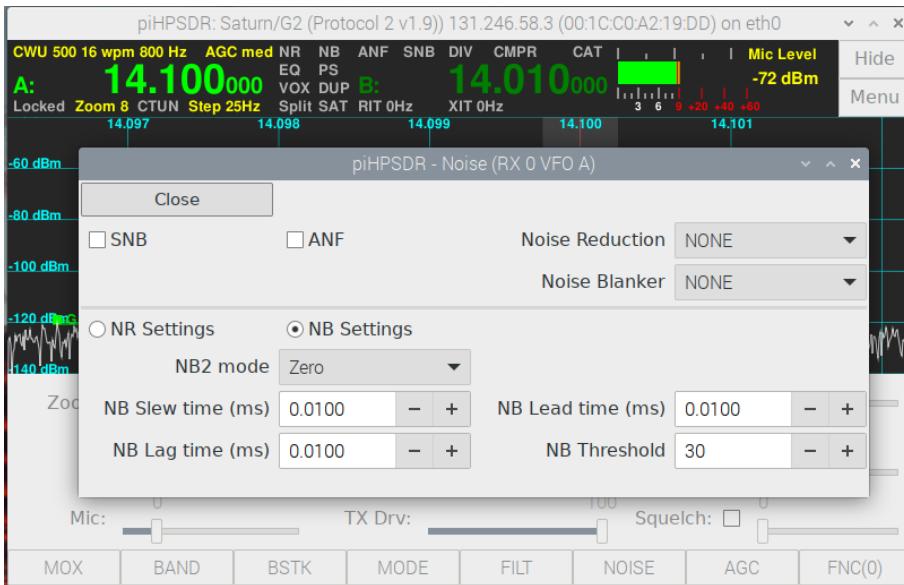

**Fig. 7.5:** The **Noise** menu (with NB settings).

Note the noise blanker works very different from the noise reduction, since noise blanking is applied to the original RX IQ samples before any frequency shifts etc. take place. If you have a single source of noise (e.g. a Plasma TV) that drives you crazy, it is worth the effort to play around with the NB2 parameters, especially the timings. Different QRM sources will require different parameters! The default parameters have been proven useful for many situations, but for you a different setting may produce better results! The options to control the noise blanker algorithms are:


**NB2 Mode** The available choices for the interpolating NB2 noise blanker here are Zero, Sample&Hold, Mean Hold, Hold Sample, and Interpolate.

**NB Slew time/Lag time/Lead time/Threshold** These parameters apply both to NB and NB2. piHPSDR currently does not allow to have a separate set of parameters for NB and NB2.

## 7.4 The AGC Menu

Only few parameters can be controlled via the automatic gain control (AGC) menu. The first is the AGC time constant, which can be Off (no AGC), Long, Slow, Medium, and Fast. A very long AGC time constant protects your ears, but it also means that the receiver becomes „deaf” for a rather long time after a strong QRM burst. This phenomenon is known as ”AGC pumping”. Generally, if you do SSB on a quiet band, the AGC time constant can be longer, for CW on the other hand, I personally prefer short time constants (Medium or Fast).

The **AGC Hang Threshold** is only effective if the AGC time constant is Long or Slow, since the AGC hang time is turned off for Medium and Fast. In this case, the RX spectrum scope not only shows the „normal” AGC line in green, but also the hang threshold line in orange.

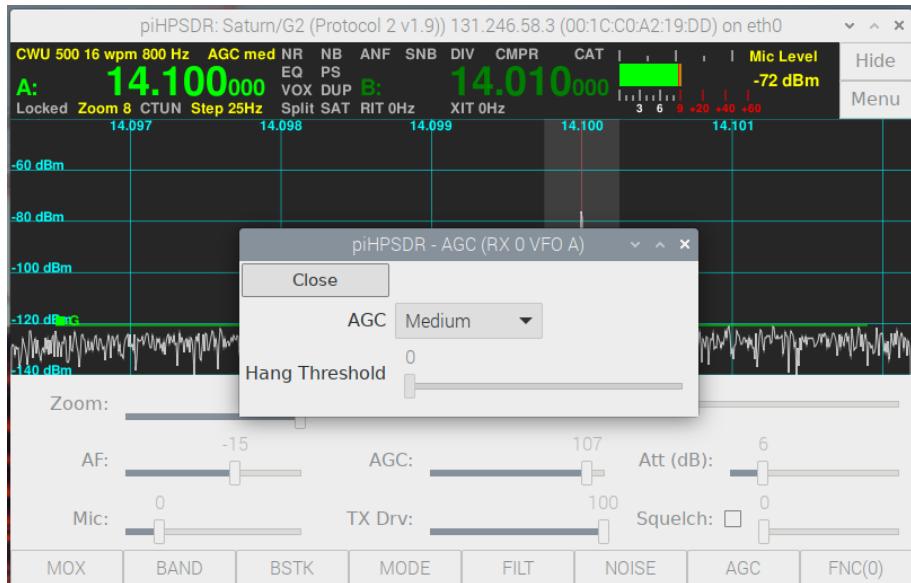

**Fig. 7.6:** The **AGC** menu.

## 7.5 The Diversity Menu

**Diversity** is a very powerful tool to improve reception by using two different antennas and two ADCs. To explain how it works, suppose you live in a house which produces a lot of local QRM. Your „normal” antenna will pick up the wanted DX signals, but also a lot of noise that originates somewhere in your house. Now suppose you have a second receive-only antenna placed in your house that will predominantly pick up your local QRM and only very little DX signal.

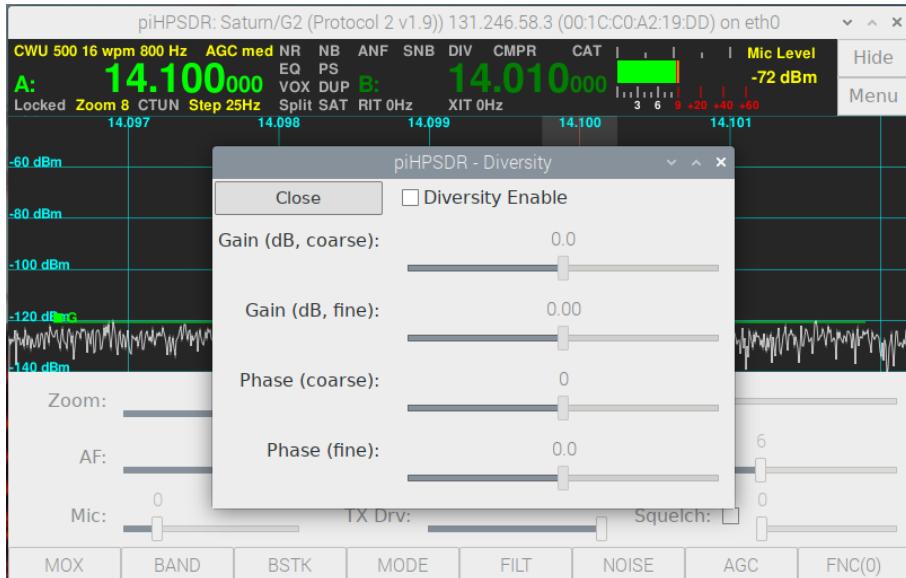


Fig. 7.7: The **Diversity** menu.

Of course, this RX-only antenna does not deliver anything useful at first sight. But, imagine you could shift the phase and the amplitude of the signal of the in-house antenna such that it exactly opposes the local QRM picked up by your DX antenna! Adding this (phase shifted and amplitude adjusted) signal from your in-house antenna to what comes from your DX antenna will produce a signal where the local QRM is largely eliminated while the DX signal is only weakly affected. This is what **Diversity** is all about.



# Chapter 8

## The Main Menu: TX-related menus

### 8.1 The TX Menu

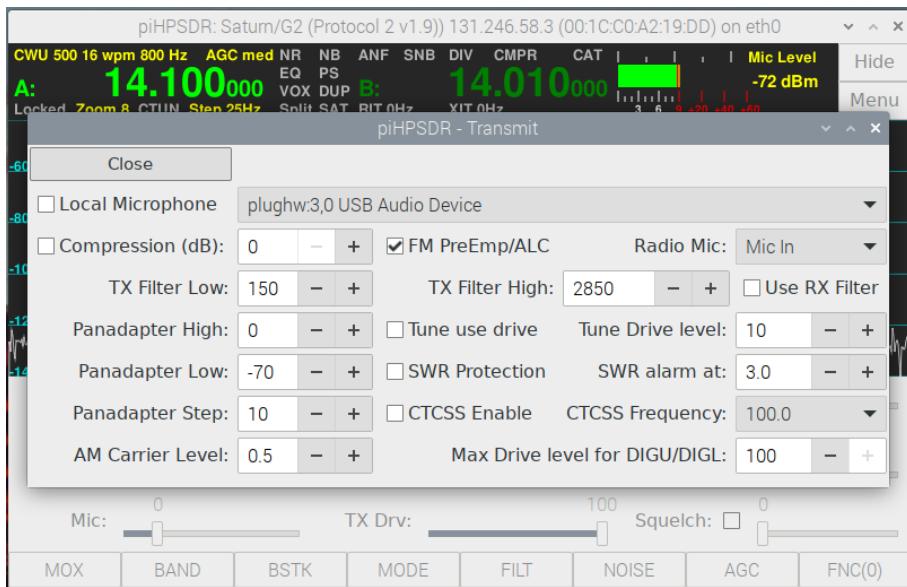


Fig. 8.1: The TX menu.

The TX menu can be opened from the main menu, or just by a secondary

mouse click into the TX panadapter (while transmitting). The menu is shown in Fig. 8.1.

**Local Microphone.** If this box is checked, the TX audio samples come from a soundcard attached to the host computer, or from a virtual audio cable. The sound device can be selected from the pop-down menu to the right. This check box, and the pop-down menu, is absent if there are no output sound devices available.

**Note:** If the radio has the possibility to connect a microphone, and if PTT comes from the radio, the radio microphone samples and the local (sound device) microphone samples are mixed (added). This is very convenient if one does SSB with a microphone attached to the radio, and digital modes with a local sound device or virtual audio cable: when doing SSB, the local sound device normally produces no audio, and while pressing PTT at the microphone, you can work SSB normally. So you can go from digital mode to SSB without the need to change the microphone setup in the TX menu.

**Compression (dB):** With this box the TX compressor can be enabled/disabled. The compression level (0-20 dB) can be chosen in the spin button to the right.

**Note:** The compressor on/off flag, as well as the compression level, is „stored with the mode”. So it is possible to have the compressor enabled for SSB (LSB/USB) and disabled for digi modes (DIGL/DIGU), and when switching modes, the compressor settings for the new mode are automatically restored.

**FM PreEmp/ALC.** When transmitting FM, the audio input signals are „emphasized”. This means that from 300 to 3000 Hz (the usual range of audio frequencies in amateur radio FM), there is a 6 dB per octave (20 dB per decade) that leads to a 20 dB damping of an input signal at 300 Hz (8 dB damping at 1200 Hz, and no damping ad 3000 Hz). This of course distorts the audio, but the reverse process is built into FM demodulators to correct for this. Because there is a lot of damping of the audio signal, piHPDSR applies a 15 dB boost to the TX audio input samples when the mode is FMN.

This boost is nearly ineffective if the FM pre-emphasis takes place *after* the TX ALC stage, since the ALC will cancel most of the extra boost and the FM modulation sounds „thin”. If the **FM PreEmp/ALC** box is checked, FM pre-emphasis takes place *before* the TX ALC, such that the ALC „sees” the TX audio input after applying both the boost and the damping of the pre-

emphasis. This gives the transmitted signal a little more „punch”. It is generally recommended to have this box checked if doing FM.

**Radio Mic:** This text, and the pop-down menu to its right, only occurs if a microphone can be connected to the radio. The pop-down menu lets you choose between **Mic In** which means that a microphone can be connected to the microphone input jack, **Mic Boost**, which additionally switches on a hardware 20 dB mic amp, and **Line In** which means that the "Line In" jack of the radio is used for the audio samples transferred from the radio to the host computer. This is part of the HPSDR protocol, it may well happen that your radio has a microphone jack but no line-in input. The optional 20 dB preamp may be necessary when connecting a dynamic microphone whose input level (few mV) is considerably lower than that of a condenser (electret) microphone, or a dynamic microphone with built-in preamp.

**TX Filter low:** With this spin button you can set the low cut of the TX filter. The frequency refers to the audio domain.

**TX Filter high:** With this spin button you can set the high cut of the TX filter. The frequency refers to the audio domain.

**Use RX Filter** If this check box is enabled, the TX filter low/high cuts are ignored, and the filter edges of the current RX filter are used instead.

**Panadapter Low:** This spin button sets the lower edge (in dBm) of the TX panadapter.

**Panadapter High:** This spin button sets the upper edge (in dBm) of the TX panadapter.

**Panadapter Step:** This spin button determines how many horizontal lines are drawn on the TX panadapter. If set to 10, for example, there will be a horizontal line for every multiple of 10 dBm.

**AM carrier level:** This sets the AM carrier level for the AM modulator. If set to zero, there is no carrier and the signal is a DSB signal. A reasonable value is 0.5 which leads to 100% modulation. Values larger than 0.5 have less than 100% modulation. This means too much power goes into the carrier.

**Tune use Drive** If this box is checked, TUNEing will be done with the power that corresponds to the current position of the drive slider, and the tune drive level is ignored.

**Tune Drive Level** The value that can be adjusted with this spin box is the virtual position of the drive slider while TUNEing. This value is ignored if the **Tune use Drive** box is checked.

**SWR protection** If this box is checked, a very simple SWR protection is enabled. If the SWR exceeds the threshold value (see next point), the drive slider is set to zero. The SWR protection is disabled while TUNEing.

**SWR alarm at** The spin button to the right determines the SWR threshold. If the SWR is beyond the threshold, the SWR reported in the meter turns red. If SWR protection is enabled, the drive slider is set to zero if the SWR exceeds the threshold.

**CTCSS Enable** (FM only!) This checkbox enables/disables CTCSS (continuous tone coded squelch system). If enabled, a low-frequency tone is transmitted together with the normal TX audio. This can be used to trigger repeaters, or any other function implemented on the other side. The frequency itself can be chosen with the following menu point:


**CTCSS Frequency** This pop-down menu lets you choose the CTCSS frequency. This choice has no effect if CTCSS is disabled. The frequency list includes 38 standard TIA/EIA-603-D CTCSS frequencies between 67.0 and 250.3 Hz.

**Mac Drive level for DIGU/DIGL** This spin button restricts the range of the drive slider from 0 to the chosen value for the DIGU and DIGL modes. If the value is 100, this has no effect. The primary use of this menu point is PA protection, since many digital modes (unlike SSB voice) are constantly transmitting at full power.

## 8.2 The PA Menu

In the **PA** menu, you can adjust the output level of your HPSDR board to the PA being used, and you can establish a calibration of the power begin displayed in the meter section while transmitting. The menu presents itself as shown in Fig. 8.2.

In the first line, you can choose the maximum PA power of your radio. The available values are 1, 5, 10, 30, 50, 100, 200, and 500 Watt. If your radio has a different maximum power, choose the next largest value. The choice

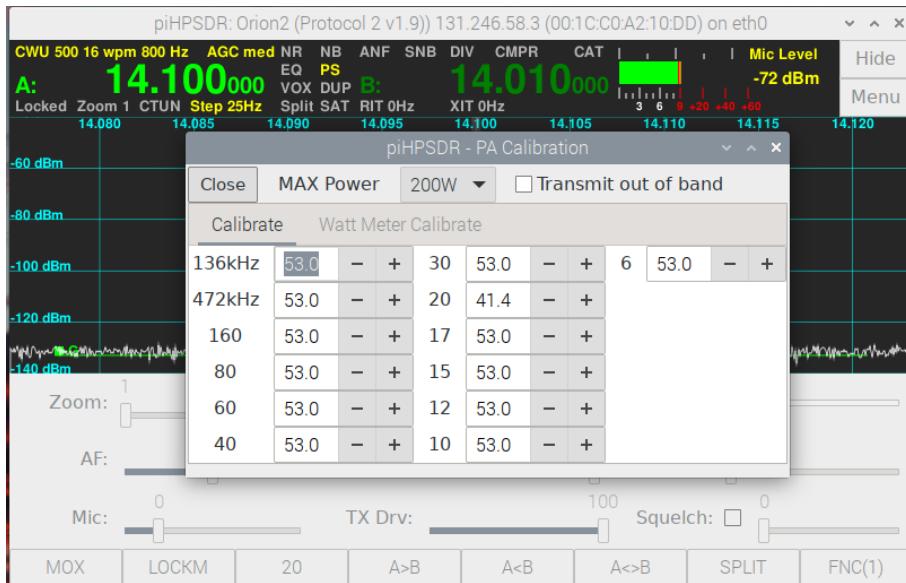

**Fig. 8.2:** The PA menu, PA calibration screen


of this value only affects the watt meter calibration (see below). If the box **Transmit out of band** is checked, this allows piHPSDR to go TX if you are outside of the amateur radio bands.

**PA calibration.** If the **Calibrate** sub-menu is active (as shown in Fig. 8.2) you can adjust your HPSDR board to your PA. This has to be done for each band separately, and you need a dummy load and a watt meter to do so. Most watt meters used by radio amateurs are not highly accurate, so if you can borrow an accurate one, do so. The PA calibration values are the fictitious amplification of the PA. If the value is *increased*, piHPSDR assumes a higher amplification and will thus *decrease* the output power of the HPSDR board. Thus, *increasing* the PA calibration value will *decrease* the output power. A calibration value of 38.8 dB corresponds to the maximum RF output of the HPSDR board, so the allowed range of values starts at 38.8.

To start calibration, go to the **TX** menu and check the box **Tune use Drive**. Then, hit the rightmost toolbar button until one of these buttons reads **TUNE**. This way, when TUNEing, you send a carrier with the power according to the drive slider. For each band, go to the middle of the band, open the PA menu, put the drive (**TX Drv**) slider at 50 and hit the TUNE button. If the output (measured with the Watt meter) is higher than half of your nominal

PA power, increase the PA calibration value of that band, otherwise decrease it. Choose a value such that your Watt meter reads half the nominal output power. For fine adjusting, move the drive slider to 100 and adjust the PA calibration value until your Watt meter shows the nominal output power. The calibration values will (slightly) differ from band to band, often one needs smaller values for the higher bands since the amplification of the PA is smaller there.

**Watt meter calibration.** When PA calibration is complete, you can calibrate the power reading within the meter section of the piHPSDR window. If you open the **PA** menu and click on the text **Watt Meter Calibrate**, the menu changes and looks like in Fig. 8.3.

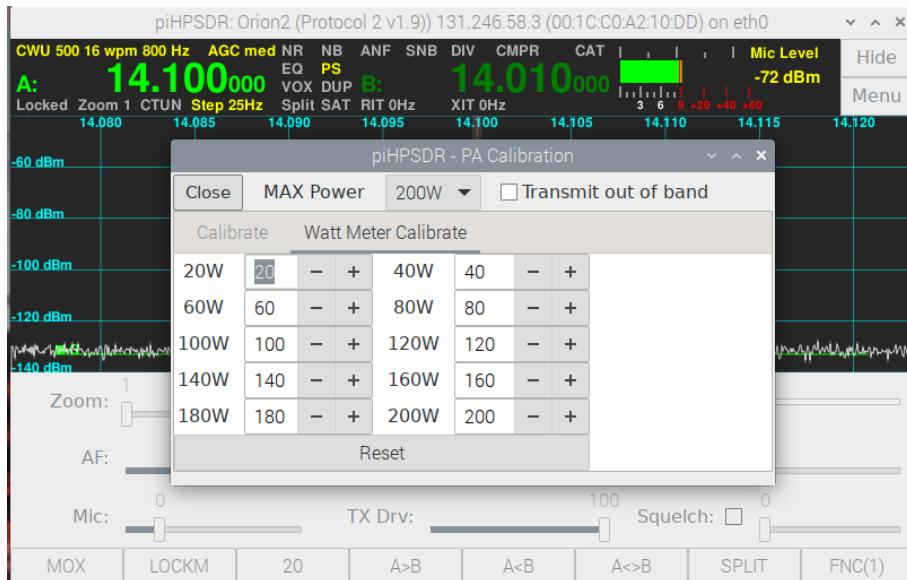

**Fig. 8.3:** The PA menu, Watt meter calibration

You have 10 Watt values from  $\frac{1}{10}$  to the full nominal power. Initially, the values of the spin buttons beside the Watt ratings have the nominal value. The calibration values can always be re-set to these nominal values by hitting the **Reset** button. Watt meter calibration is not done separately for all bands, so it is suggested to perform the following procedure on the 20m band. piHPSDR will convert the „measured” into the „reported” value by linear interpolation between two adjacent calibration values.

Start with resetting the value by hitting the **Reset** button. Then, move the

drive slider to 100 (the unit of the drive slider is per cent, not Watt!) and hit TUNE. After the PA calibration described above, your (external) Watt meter should show the nominal PA output power (e.g. 100 Watt for an ANAN-7000). Now look at the forward power reported in the meter section (top right of the piHPSDR window). Suppose you read "250 W" there although your output is 200 Watt. Then simply insert the number 250 in the spin button to the right of the string **200W**. Now your watt meter reading should be close to 200W, you can fine-tune it with the spin button. Note that *increasing* the calibration value with the spin button will *decrease* the power indicated in the meter section.

You will observe that the calibration values for the lower powers also have changed. This only happens if you start from nominal calibration values and change the calibration value of the highest power. For example, if you have entered 250 in the 200W spin button, then the value in the 100W spin button will read 125. So in a single shot, you have roughly calibrated the Watt meter.

A finer calibration only makes sense if you have a highly accurate Watt meter. If you do, you can now move the drive slider until your Watt meter exactly reads one of the lower power values, and use the corresponding spin button to change the calibration until piHPSDR exactly reports the correct power.


The procedures is the virtually the same if our nominal output power is different. The only complication arises if your radio has a nominal power that is not in the menu, for example 150 Watt.

In this case, choose 200W in the top line of the PA menu. TUNE and move the drive slider until your Watt meter reads the largest value possible that occurs in the Watt meter calibration menu (in this example, it is 140W). Adjust the 140W spin button until piHPSDR reports 140 Watt. Then go to full power (150W) and adjust the 200W spin button until piHPSDR reports 150 Watt. Then, proceed with 120, 100, 80, etc. Watts.

## 8.3 The VOX Menu

VOX (voice control) means that you can just speak into the microphone and the radio goes TX, without the need to press a PTT button. VOX can also be used in digital modes, if there is no possibility that the digimode program

can put piHPSDR into TX mode via CAT commands or hardware lines. The VOX menu is shown in Fig. 8.4.

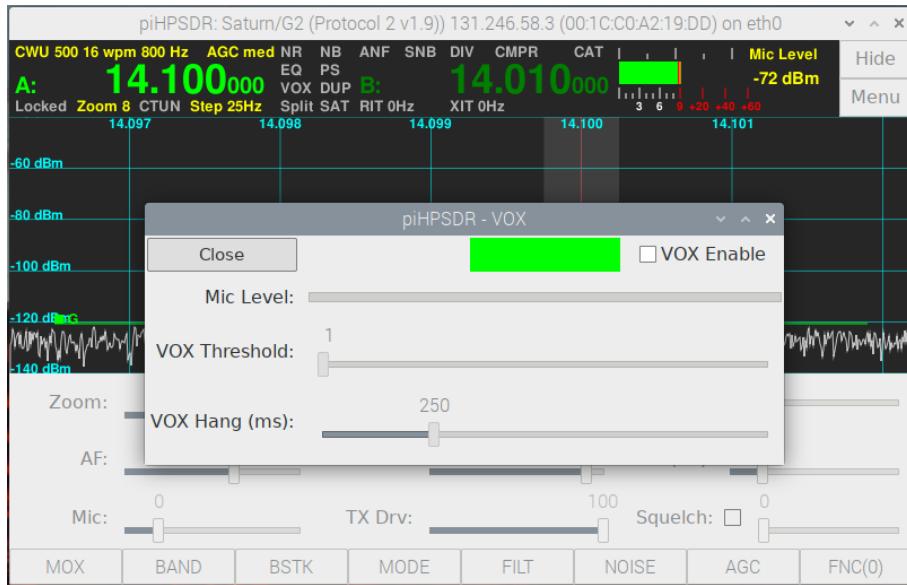


**Fig. 8.4:** The VOX menu

With the **VOX Enable** check box, you can enable/disable VOX. For VOX operation, there are two parameters, namely the VOX threshold and the VOX hang time. The VOX threshold is the microphone amplitude required to trigger a RX/TX transition. If the radio goes TX when the neighbour's hound starts barking, then the VOX threshold is too small. If the radio does not go TX although you speak loudly into the microphone, the threshold is too large. The VOX menu features an indicator which can be green or red (in Fig. 8.4, this is the green bar). This indicator flashes red if the microphone amplitude is above the VOX threshold. Adjust the threshold with the slider such that the indicator becomes red if you speak into the microphone, but stays green if you don't speak.

The VOX hang time determines how long the radio stays in TX mode after the last time the microphone delivered a signal that was above the VOX threshold. Typical values are 250 to 500 milli seconds. If your radio produces relay chatter because it goes RX between your words, increase the hang time. However, this will also increase the turn-around between you finished your message and go RX.

VOX is very nice for rag-chew phone QSOs, I won't recommend it for contest operation.

## 8.4 The PS (PureSignal) Menu

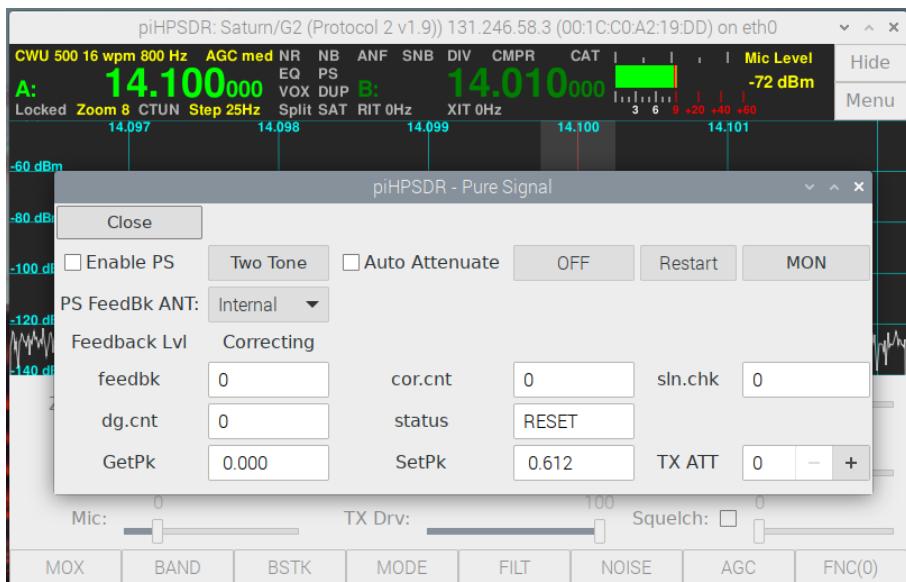

**Fig. 8.5:** The PureSignal (PS) menu

PureSignal is the „street name” for adaptive pre-distortion. What this means is, that the signal from the *output* of the PA (the „antenna signal”) is coupled back (through an attenuator of typically 40-60 dB) to the radio and is analyzed whether it looks like it should. If it is distorted (e.g. by non-linearities of the PA), then the PureSignal algorithm calculates how an input signal to the PA should look like to produce the desired output. This is usually measured and calibrated with a so-called two-tone experiment. In this experiment, two constant carriers, for example 7100 kHz and 7101 kHz, are transmitted. If both carriers contain 25W power, this is a 100W PEP signal. Non-linearities of the PA first lead to the occurrence of harmonics (in this case around 14.2, 21.3, and 28.4 MHz). This is not a problem because such harmonics are damped by the TX low-pass filters. Higher-order non-linear effects, however, lead to additional in-band signals, in our example they occur at 7102/7099, 7103/7098 etc. kHz. The low-pass filters cannot eliminate

these signals, they lead to unwanted signals („splatter”) that disturb QSOs on neighbouring frequencies. With PureSignal, you can greatly reduce these un-wanted signals. If you open the **PS** menu for the first time it looks like shown in Fig. 8.5.

The elements have the following function:

**Enable PS** With this check box, PS can be enabled/disabled.

**Two Tone** With this button, a two-tone experiment can be started/stopped. The button will be highlighted as long as the two-tone signal is transmitted.

**Auto Attenuate** This enables/disables automatic adjustment of the RF input attenuator to give the feedback level the correct strength. It is highly recommended to use this option.

**OFF** With this button, the PS correction can be stopped (the **status** will then change to RESET).

**Restart** With this button, the PS correction can be resumed, for example after it has been stopped.


**MON** With this button, it can be chosen whether the TX spectrum scope shows the signal sent to the PA (MON button not highlighted) or whether the feedback signal from the antenna is shown (MON button highlighted).

**PS Feedback ANT** Here it must be specified which antenna jack is used for the PS feedback signal. It can be **Internal** which means internal feedback (for example as built into the Anan-7000 or simply the cross-talk from the TX/RX relay), or it can be **Ext1** or **ByPass** which refers to the auxiliary antenna jacks.

**Feedback Lvl** When doing a PS calibration through a two-tone experiment, this string turns red if the feedback level is good. It turns yellow if the feedback level is slightly to weak and read if it is too weak. A blue colour indicates a too strong feedback level. The feedback level reported by the PS calibration algorithm is further reported in the „feedbk” field. The optimum value is about 154.

**Correcting** When doing a PS calibration through a two-tone experiment, this string is green if calibration was successful and PS correction takes place, and the string is red if no good calibration could be made.


**TX ATT** If **Auto Attenuate** is not enabled, this is a spin button with which

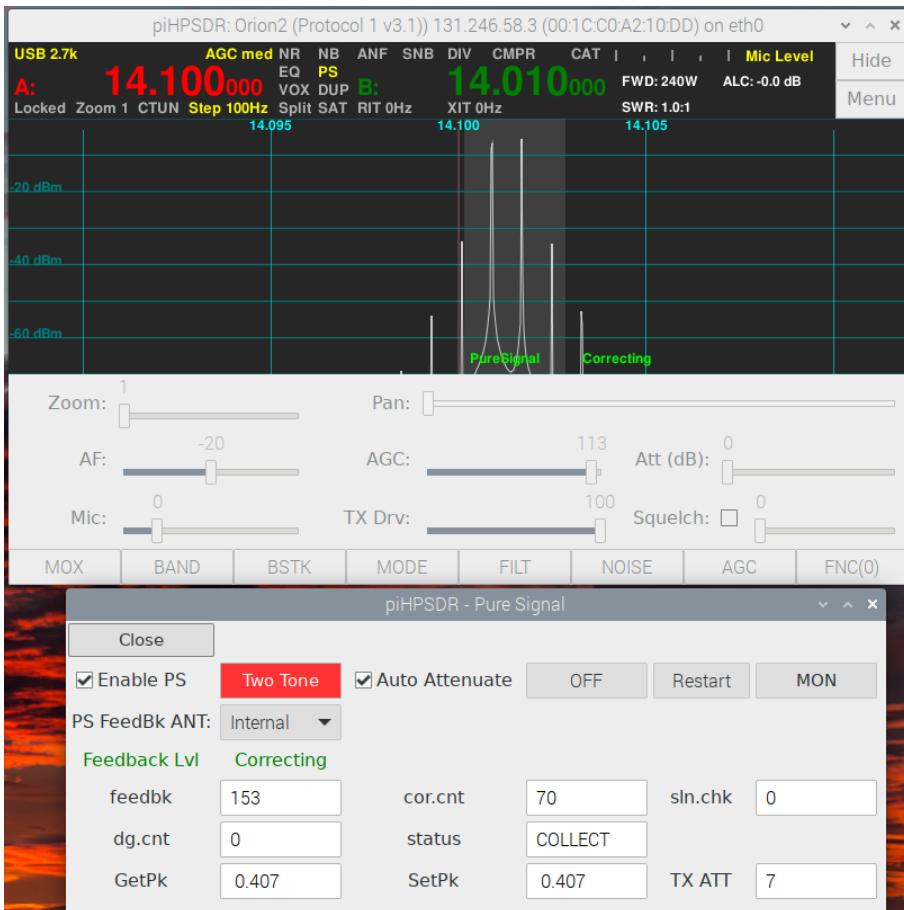

**Fig. 8.6:** PS: TwoTone without MON

you can manually adjust the RF attenuation. For normal HPSDR radios, this is a value between 0 and 31, other radios such as the HermesLite have an extended range from -29 to 31. If the feedback level is too strong, this value must be increased, if it is too strong, it must be decreased. It is, however, recommended to enable **Auto Attenuate**. In this case, the **TX ATT** just shows the current attenuation.


**SetPk** This field shows the currently assumed value of the peak value of the TX DAC feedback signal. piHPSDR chooses is automatically. It should match the value reported by the calibration algorithm in the GetPk field. The value chosen by piHPSDR can be incorrect if you use a highly experimental firmware on your HPSDR board with modified TX DAC filters, but this

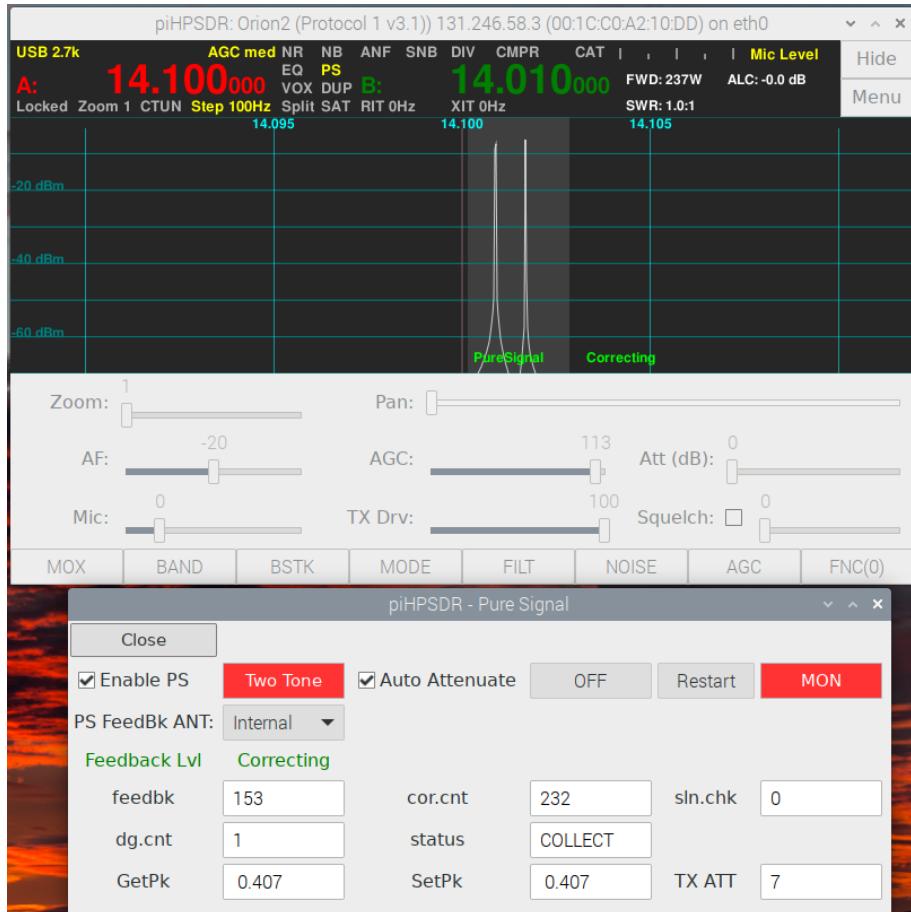

**Fig. 8.7:** PS: TwoTone with MON

should normally not happen.

To demonstrate what happens, I show an example. Checking both **Enable PS** and **Auto Attenuation**, and hitting the **Two Tone** button, it need few seconds to stabilize and then Fig. 8.6 resulted, where the TX spectrum scope and the PS menu window have been arranged such that they do not cover each other. Although both the PS menu and the spectrum scope state that PS is working and correcting, the signal does not look as a good two-tone signal which would only have two peaks! The reason is, that the TX spectrum scope normally shows the signal that is sent to the PA, so we see a distorted signal. However this distortion is magically exactly such that the

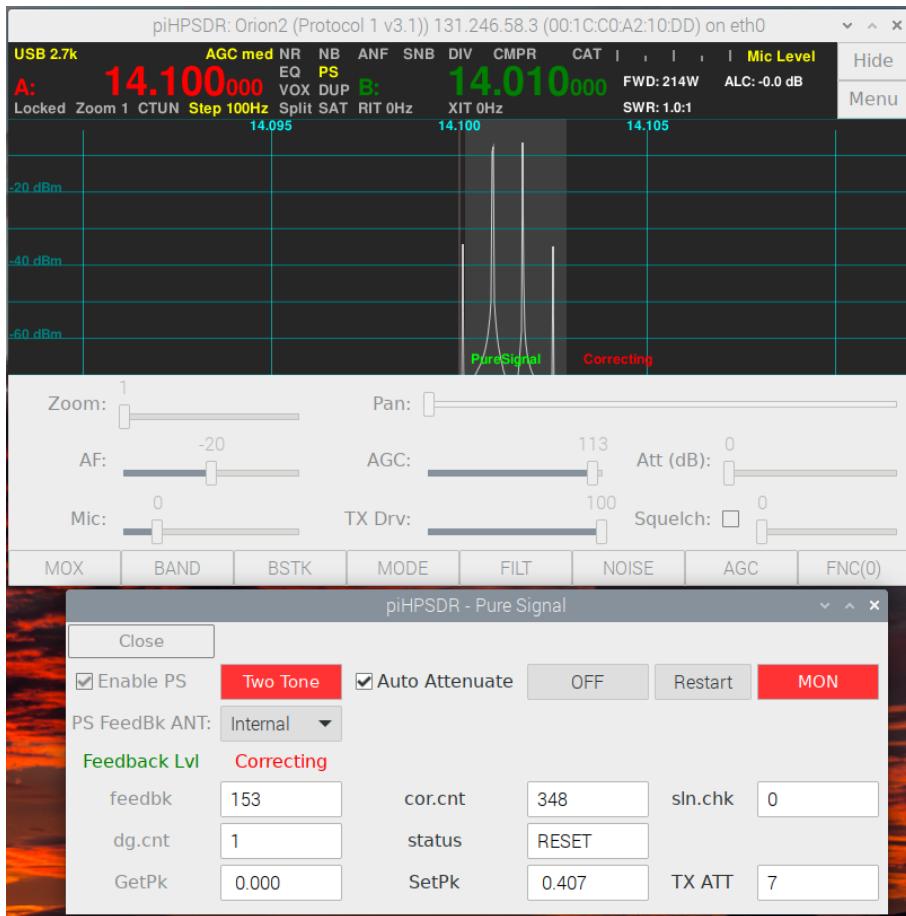


**Fig. 8.8:** PS: after hitting OFF

PA makes a nice signal out of this. If one wants to see what one is actually transmitting, one must push the **MON** button such that it is highlighted. Then one sees that the feedback signal that shows what is going on at the antenna (Fig. 8.7):

Here one sees that the antenna emits a clean two-tone signal (no satellites can be seen, the IM3 value is better than 50 dBc). To demonstrate how effective the PS algorithm is, I have pushed the **OFF** button which stops the PureSignal calibration, the result is shown in Fig. 8.8. Here we see two satellites with an IM3 value of about 30 dBc, which reflects the non-linearity of the PA.

## 8.5 The CW Menu

The CW menu controls parameters related to CW operation. The menu is shown in Fig. 8.9.

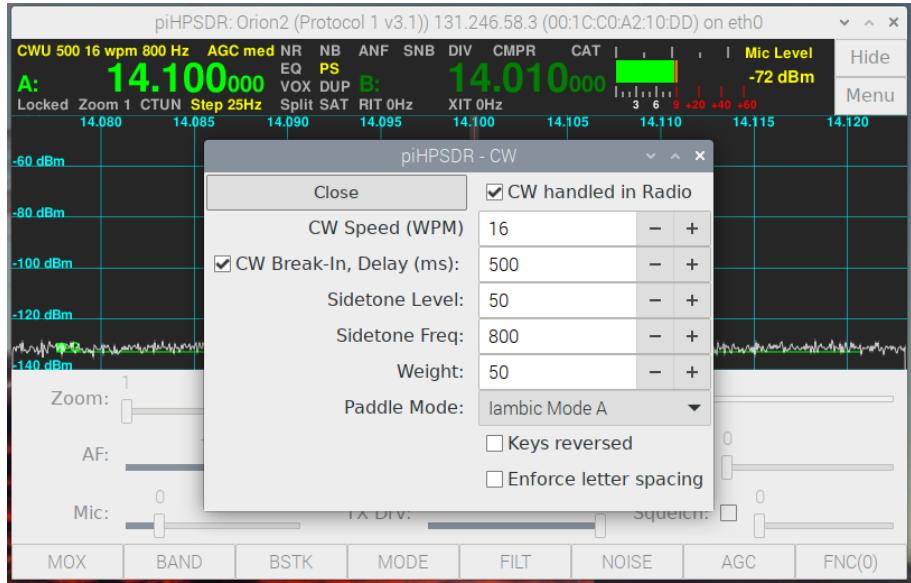

**Fig. 8.9:** The CW menu

Many radios have a connection for a paddle or at least for a straight key, and contain firmware to do CW. CW handling by the radio firmware is enabled by the **CW handled in Radio** check box. If unchecked, CW (that is, generating and forming the RF pulses) is done by piHPSDR, which implies that a Morse paddle, straight key or an external keyer is connected to the host compute (see Appendix D).

**CW Speed.** Here the speed (in wpm) can be chosen. If CW is handled in the Radio, the value is simply sent to the radio firmware, which implements the (iambic) keyer. If CW is done within piHPSDR, this value is used by piHPSDR's built-in iambic keyer. If using a straight key, or an external keyer whose output is then treated like a straight key, the speed has no meaning.

In either case, this speed is operative when sending CW text via CAT commands (KY command), and it can also be changed by CAT (KS command).

**CW Break-In** This implements some sort of „CW-VOX”. In break-in mode,

the radio is automatically switched to TX when a key or paddle is pressed. The delay, to be set by the spin button to the right, is the time the radio goes RX after the last Morse key closure.

**Sidetone Level.** This is the level of the side tone, either generated by the radio (if CW is handled there and the radio has an audio codec) or by piHPSDR (if CW is not handled in the radio). The allowed range is 0-255 (P1) or 0-127 (P1 or SoapySDR).

**Sidetone Freq.** This is the frequency of the side tone and the „BFO offset”. That is, if a CW signal is received exactly at the frequency one transmits on, the CW audio signal has this pitch.

**Weight:** If using a iambic keyer (either in the radio or the builtin keyer), this value (0-100) determines the dash/dot ratio. The normal value is 50, which means that a dash is three times longer than a dot. The dash length is proportional to this value, so it can be from zero to six times the dot length.

**Paddle Mode:** Here the choice is Iambic Mode A, Iambic Mode B, and Straight Key. In Straight Key mode, the key has to be connected to the dash paddle, since the built-in keyer implements a bug mode there (automatic dots from the dot paddle, straight key behaviour for the dash paddle). When using an external keyer, use StraightKey mode and connect the keyer output to the dash paddle input.

**Keys reversed** When checking this box, the dot and dash contacts are reversed.

**Enforce letter spacing** This option forces you to give „cleaner” CW when in iambic mode. If at the end of an inter-element pause no key is pressed, then there is a forced pause of two times a dot length. While this prevents you from sending too short spaces between two letters, this might also corrupt a letter you want to send. For example, when sending the letter “X” and the dot paddle is pressed a little too late, you instead send “TU”. This option might be good for practising, but I personally never use it.



# Chapter 9

## The Main Menu: menus for RX and TX

### 9.1 The FFT (Signal Processing) Menu

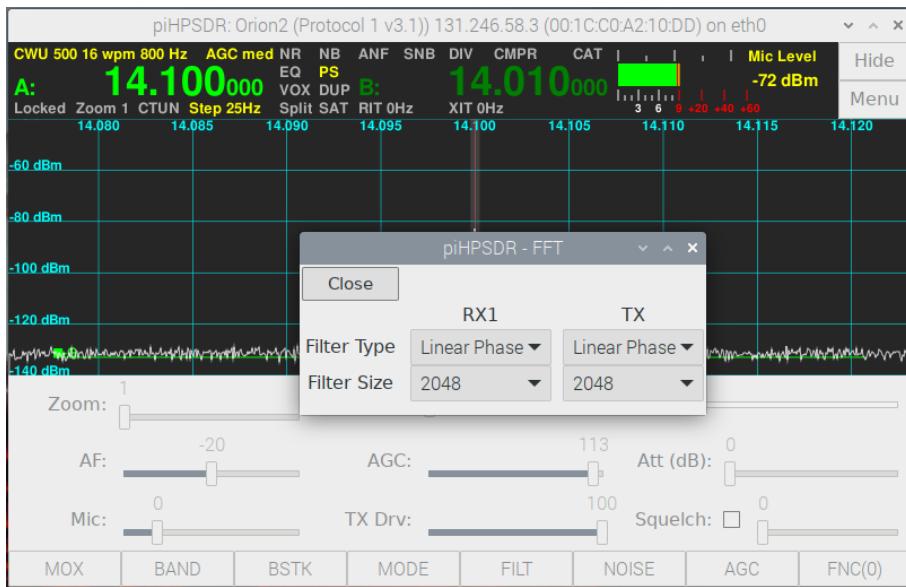


Fig. 9.1: The FFT menu.

## 9.2 The Equalizer Menu



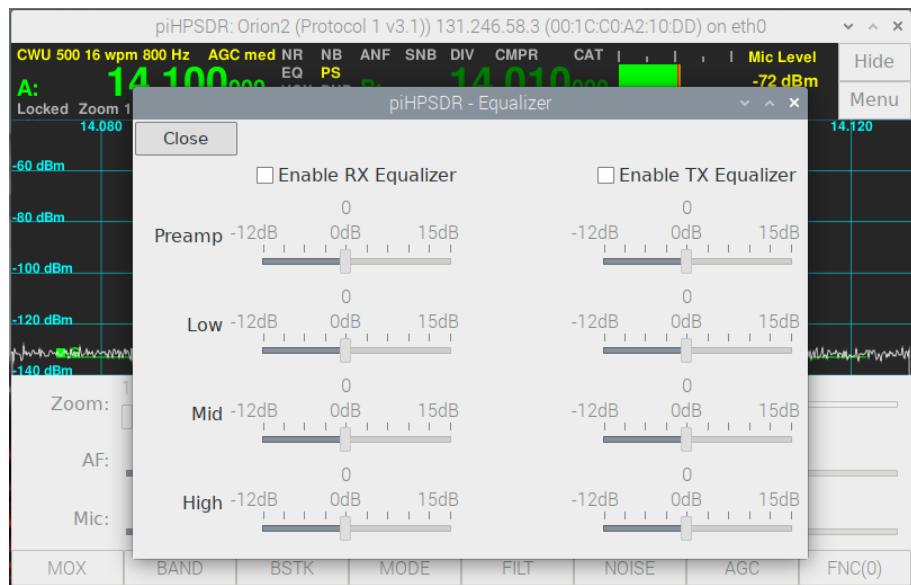


Fig. 9.2: The Equalizer menu

## 9.3 The Ant (Antenna) Menu

## 9.4 The OC (OpenCollector) Menu

**Fig. 9.3:** The ANT (antenna) menu.**Fig. 9.4:** The OC (open collector) menu.

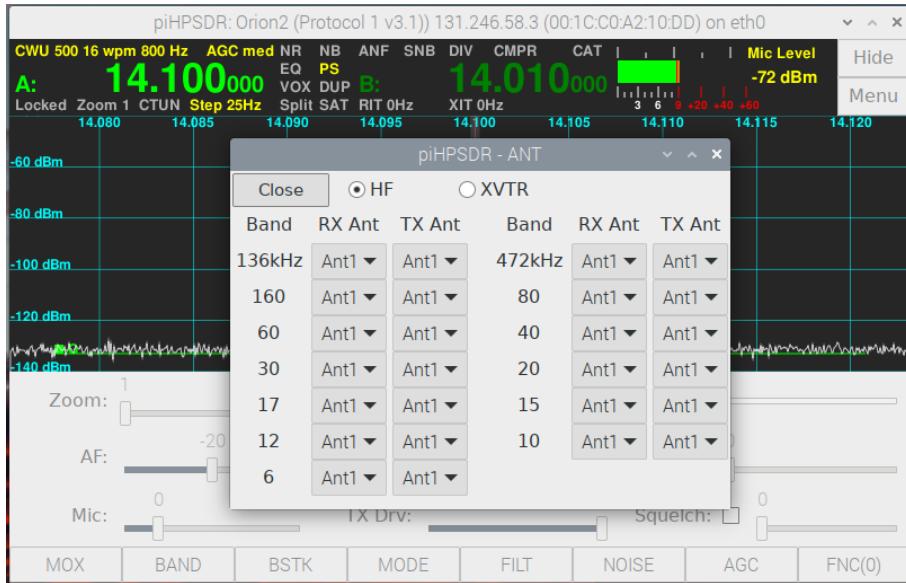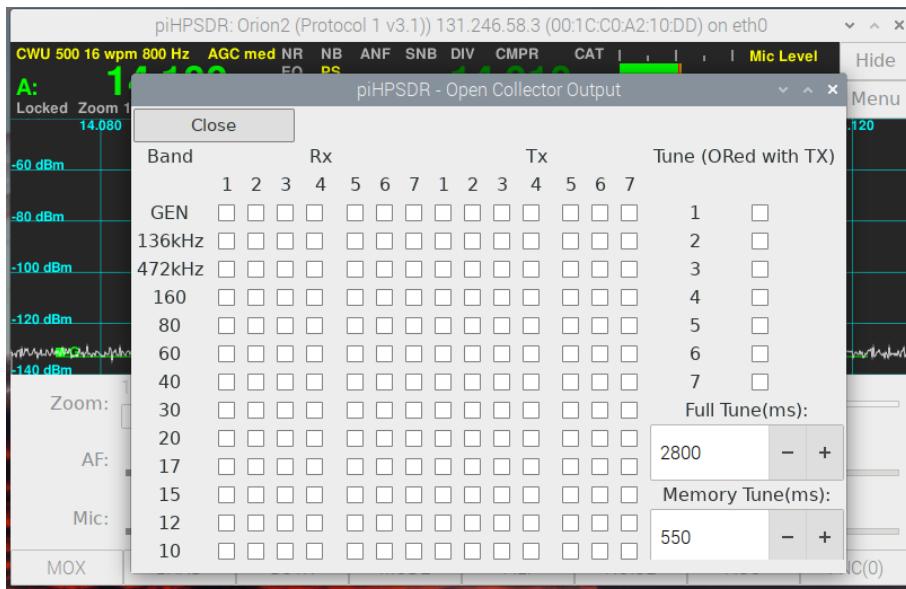

# Chapter 10


## The Main Menu: controlling piHPSDR

In this chapter, the customization of the toolbar (at the bottom of the piHPSDR window), as well as how to configure GPIO and MIDI controllers, is described. Furthermore, in this chapter we discuss the RIGCTL menu which allows controlling piHPSDR by some external program such as a logbook or contest program, via standardized CAT commands that can be sent to piHPSDR either over a serial line or via TCP.


**Note for Controller1 owners:** The eight switches (push-buttons) of the controller, that are positioned below the screen, are bound to the eight toolbar buttons on the screen. Therefore, there is no "Switches" menu for this controller, and the switches are implicitly configured via the Toolbar menu.

### 10.1 The Toolbar Menu

We start with the "Toolbar" menu, that can be found at the top of the rightmost column in the main menu. The toolbar consists of eight buttons that can be assigned to a set of eight functions. There are six such sets, and pressing the rightmost button of the toolbar cycles through these six sets. The text on the rightmost toolbar button, **FNC(0)**, indicates which layer is currently active.

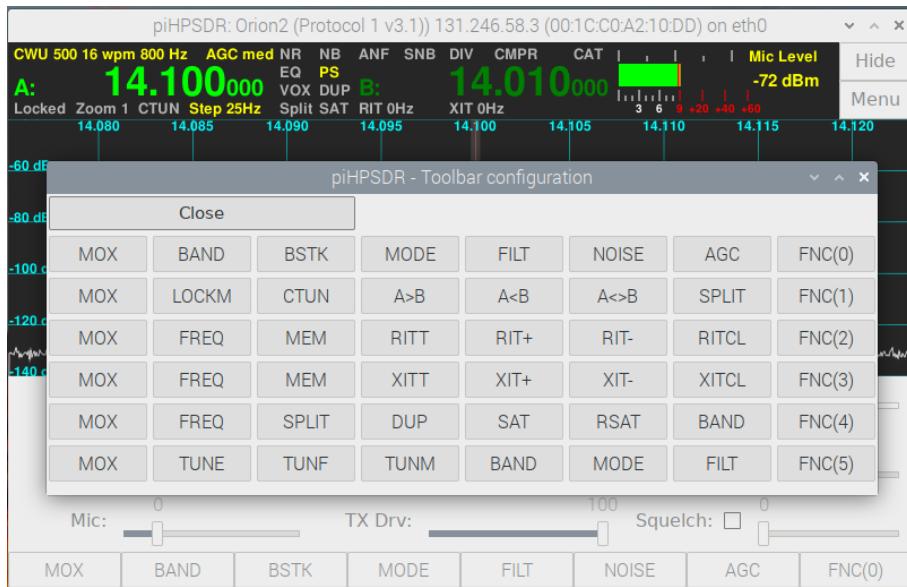


**Fig. 10.1:** The Toolbar menu, just opened.

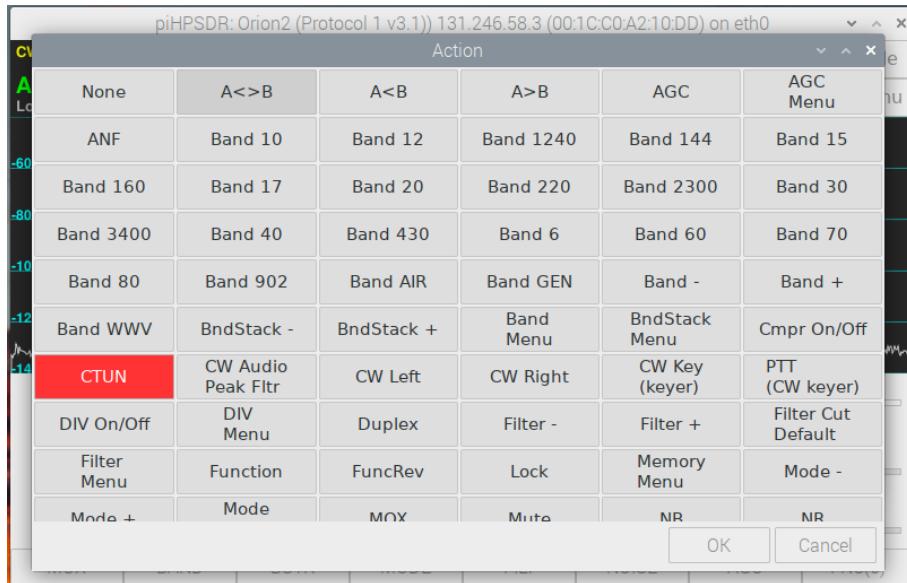

**Fig. 10.2:** Toolbar menu. Changing second button in F1 layer.

If the **Toolbar** menu is opened, it looks like Fig. 10.1. The rows correspond to the six different layers, and the rightmost button in each row indicates to

which layer this row belongs. If one now clicks (just an example) the CTUN button (third button in the second row) an „action dialog” pops up that looks as in Fig. 10.2.

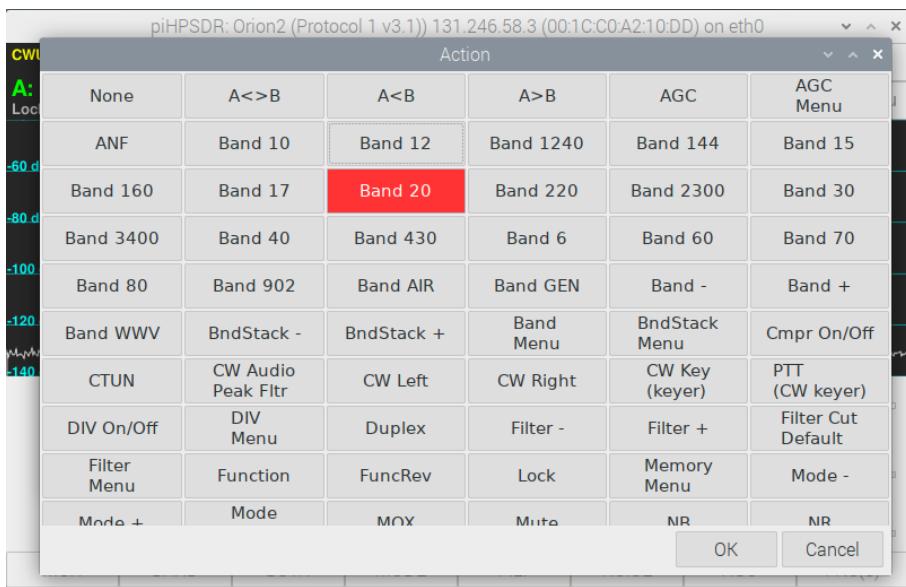


**Fig. 10.3:** Just selected Band20.


The current action selected (CTUN) is high-lighted. Lists of possible actions can be rather long, so it might be necessary that you have to scroll up or down in such an action dialog until you have found what you were looking for. Now (again just an example) the button Band 20 has been clicked in the action dialog, such that it gets high-lighted (Fig. 10.3).

If one now closes the action dialog by clicking the OK button, the action select menu closes and one sees that in the toolbar menu now reappearing (Fig. 10.4), the third button in the second line of the toolbar menu has changed, it now gives the short text (20) of the action, which will switch the active receiver to the 20m band (see the explanation of all the actions in Appendix A).

You also see that the toolbar itself has not changed, because we have just changed the FNC(1) set, while currently the FNC(0) set is active. If one now, however, clicks the rightmost toolbar button with the text FNC(0) one advances to the next set and the toolbar labels are updated (Fig. 10.5).

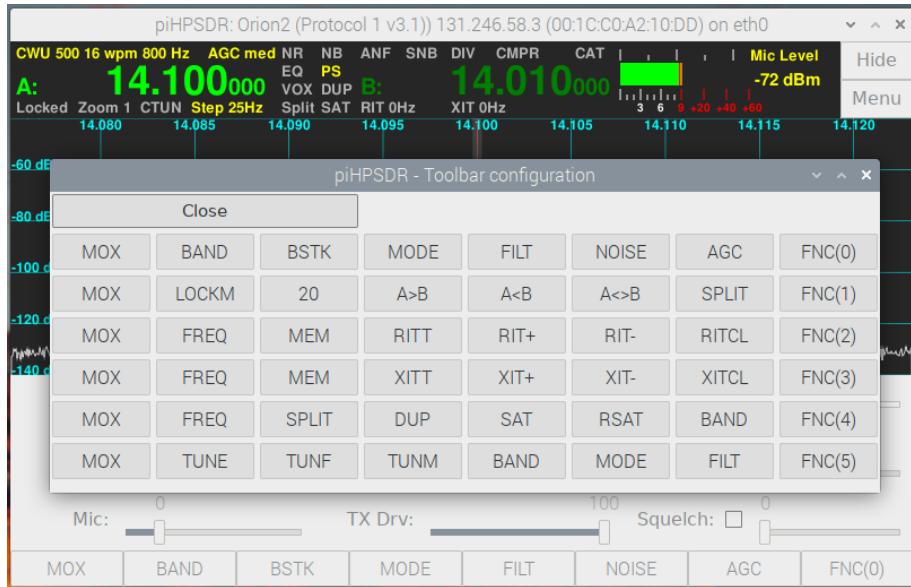

**Fig. 10.4:** Toolbar assignment accomplished.

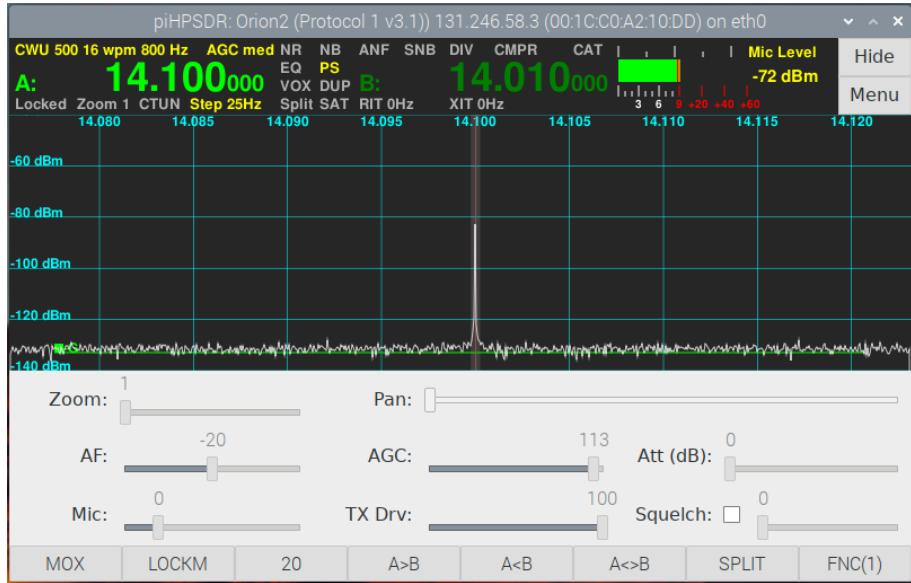


**Fig. 10.5:** The new F1 layer is operative.

It can be seen that the text of the first seven toolbar buttons has changed to reflect the functions of the F1 set, and also the rightmost button (which

is always mapped to **Function**) has changed to FNC(1) in order to indicate the F1 layer is now active. For mouse users (only), a secondary click on the rightmost toolbar button cycles through the layers in reverse order.

Note that it is not possible to change the assignment of the rightmost button of the toolbar, it will always be assigned to FUNC, since if one has no access to this function, one no longer cycle through the sets.

## 10.2 The RigCtl (Rig control, or CAT) Menu

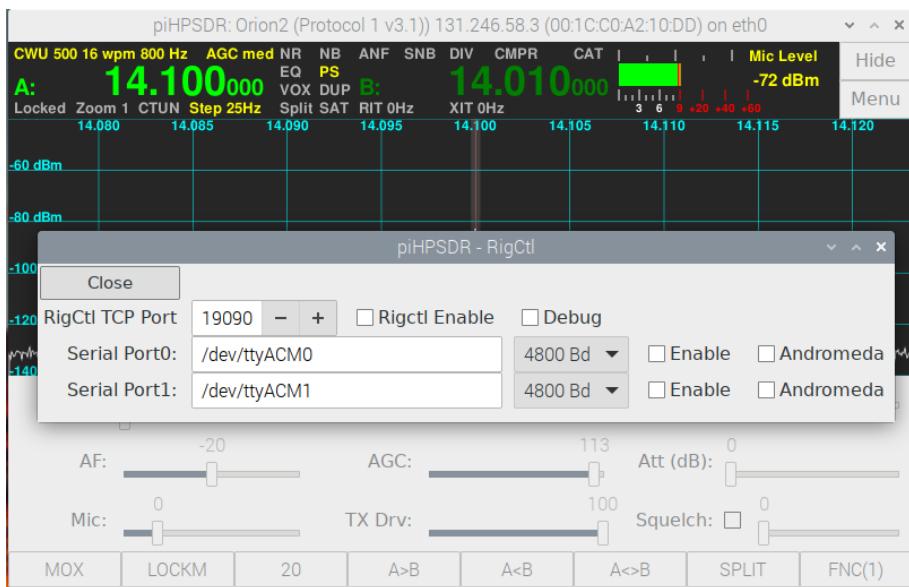


**Fig. 10.6:** The RigCtl (Rig Control) menu.


## 10.3 The MIDI Menu

## 10.4 The Encoders Menu

## 10.5 The Switches Menu

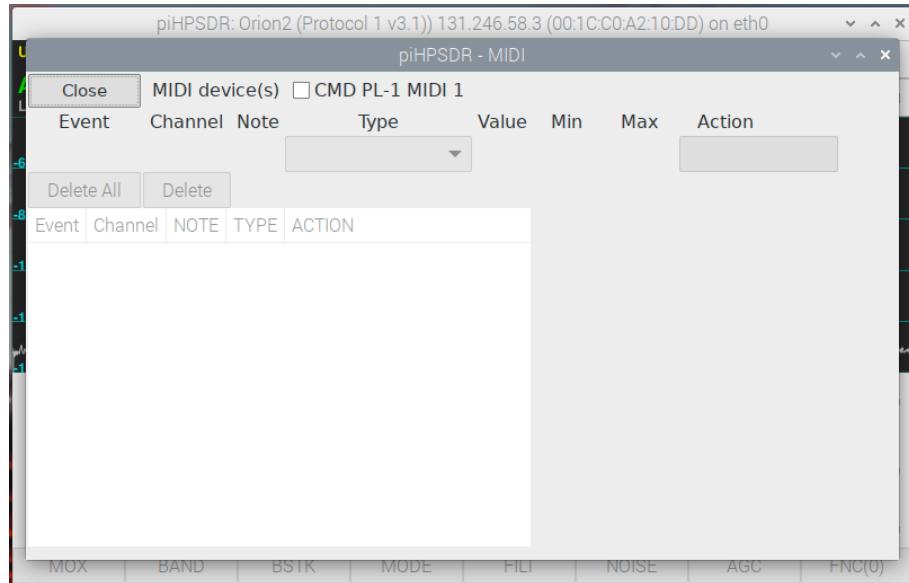


**Fig. 10.7:** The (virgin) MIDI menu.

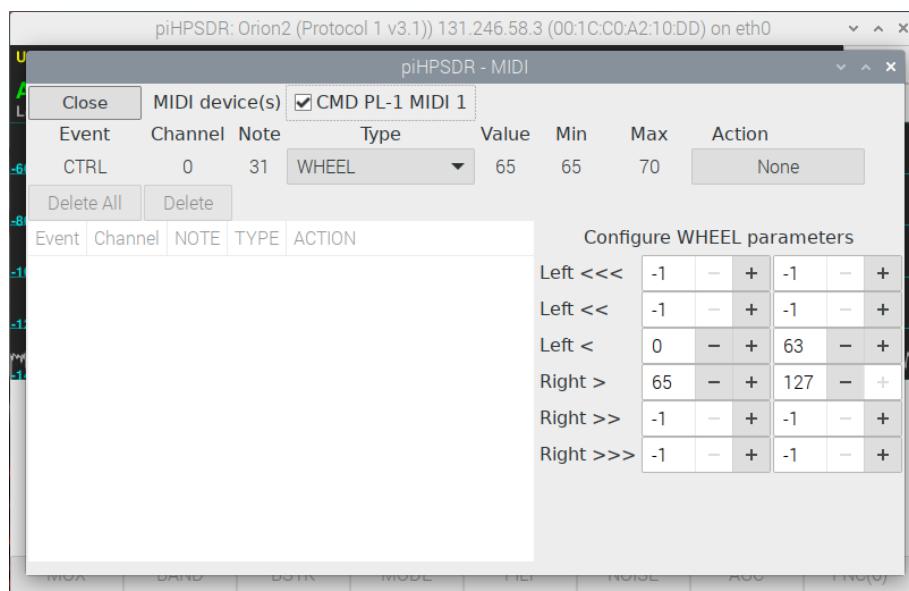


**Fig. 10.8:** The MIDI menu, VFO wheel turned.




**Fig. 10.9:** The MIDI menu, selecting VFO action

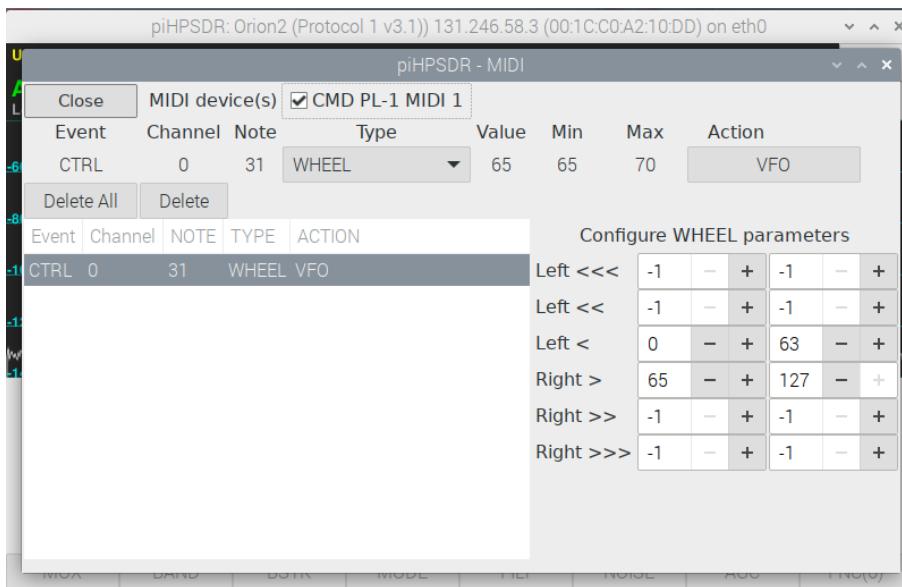


**Fig. 10.10:** The MIDI menu, VFO action selected

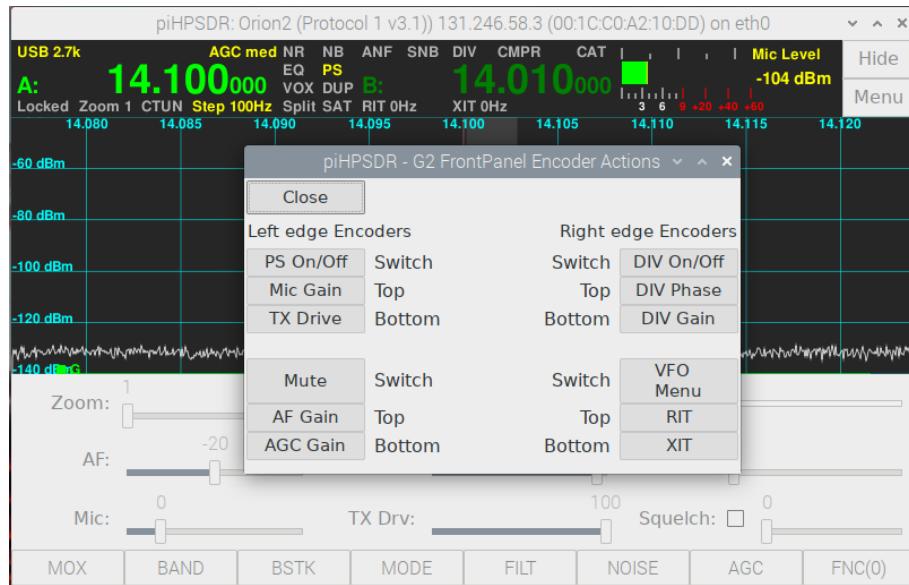


**Fig. 10.11:** The Encoder menu for the G2 frontpanel controller

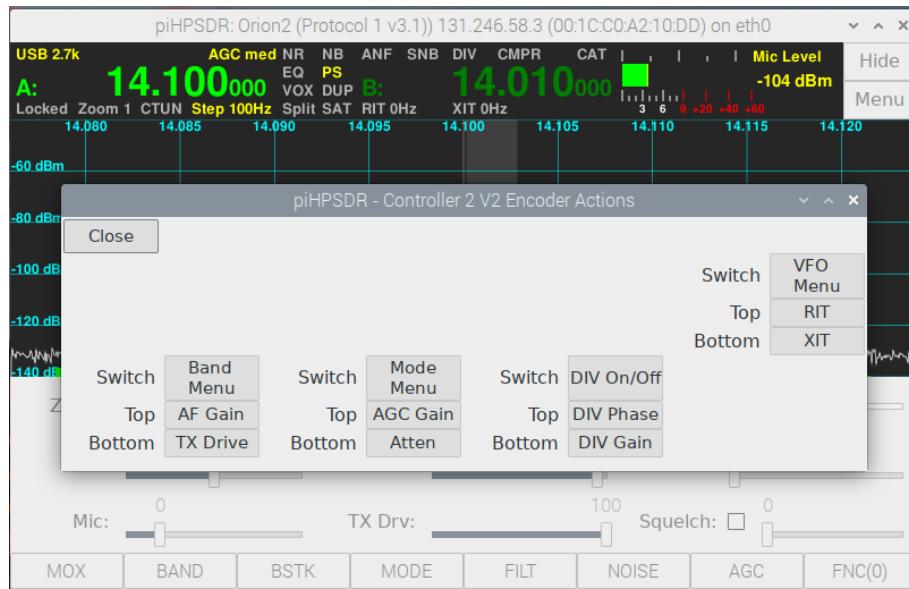


**Fig. 10.12:** The Encoder menu for the V2 controller

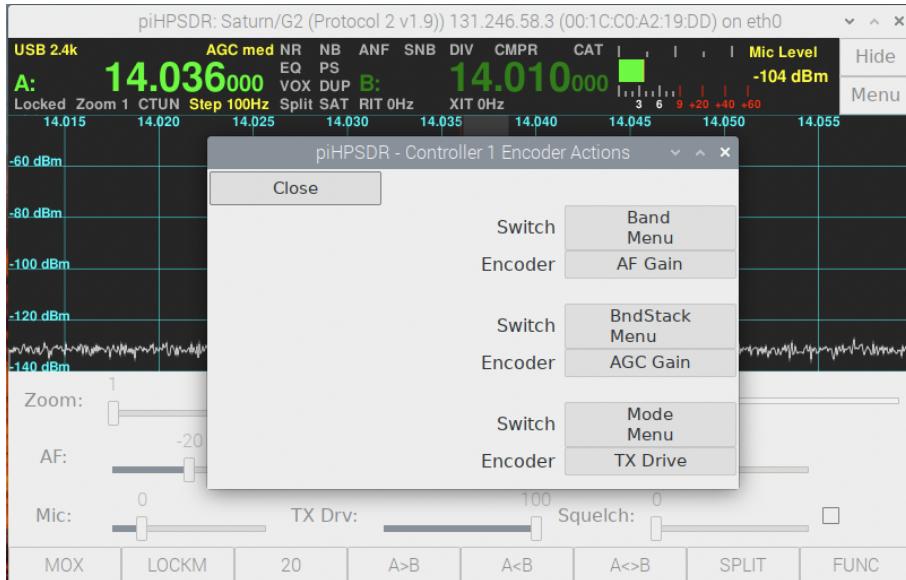

**Fig. 10.13:** The Encoder menu for the V1 controller

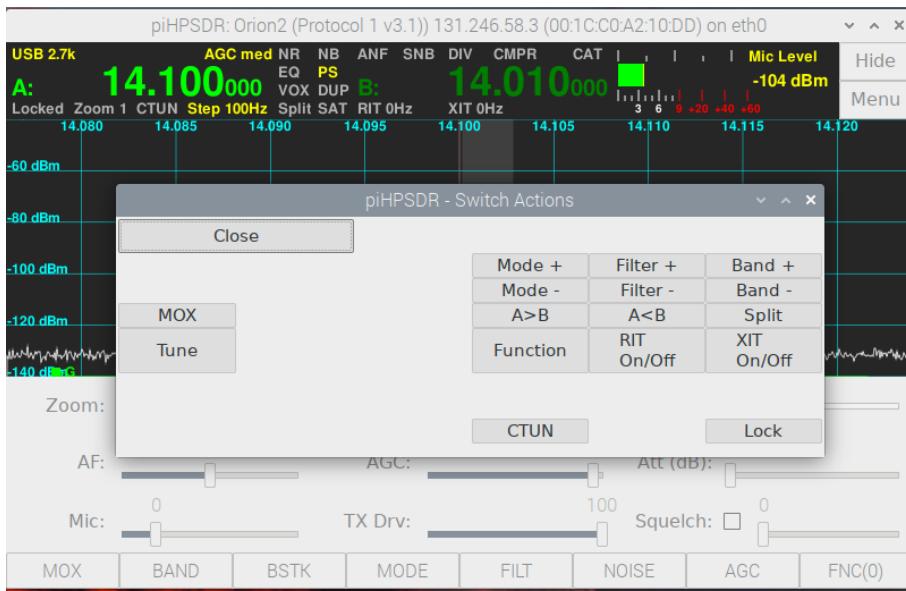

**Fig. 10.14:** The Switches menu for the G2 frontpanel controller.

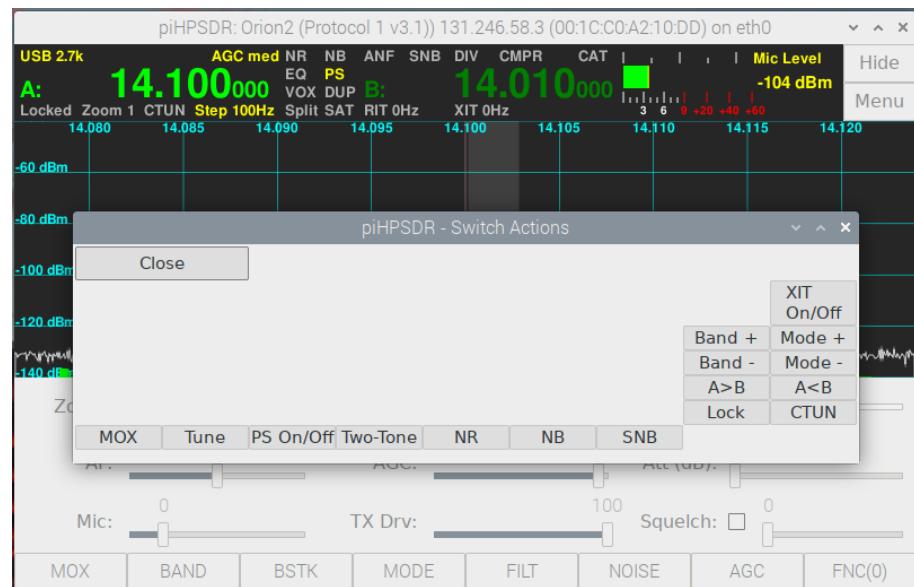

**Fig. 10.15:** The Switches menu for the V2 controller.

# Appendix A

## List of piHPSDR „Actions”

In this chapter, we give a list of „actions” implemented in the piHPSDR program. These actions can be assigned to toolbar buttons on the screen, or pushbuttons/encoders of a GPIO-connected or MIDI controller. Not all actions can be assigned to all control elements. Changing the AF volume, for example, can only be assigned to a knob which you can turn, while switching RIT on/off can only be assigned to a button that you can push. For each action in the following table, there is a long and a short string assigned. The long string will be used when there is enough space, while the short string is used for small buttons and to store actions in preference files (therefore the short strings never contain a blank character or a line break). Then, for each action we give the type of control element allowed for this action as a combination of the letters B, P, E, which stand for

- B ”Button”: A button in the toolbar, or a push-button or switch on a GPIO or MIDI connected console
- P ”Potentiometer”: A potentiometer or a slider on a MIDI connected console
- E ”Encoder”: A rotary encoder on a GPIO or MIDI connected console

The main difference between a ”potentiometer” and an ”encoder” is, that the former has a min and max position, while an encoder can be turned in either direction without stopping. This means that a potentiometer reports a value between min and max, while an encoder reports an increment,

that is, whether it has been turned clock wise or counter clock wise. The existing GPIO consoles do not have potentiometers (most likely because of the lack of analog inputs), but many MIDI consoles do have, and Arduino-based MIDI controllers might have it because there analog inputs to read out potentiometers are available.

To give an example, controlling the TX drive can be done both with a slider and with an encoder. While for a slider/potentiometer, the values from min to max are simply mapped to the TX drive values from 0 to 100, the signals from an encoder will just increase or decrease the value until one of a limits has been reached.

In the following, the actions are alphabetically sorted by their long name, with the "empty" action listed first.

NONE	NONE	BPE
This is an action which does nothing. It can be assigned to buttons or encoders that are often accidentally operated. Some MIDI consoles, for example, report a button press event if the VFO knob is touched, and this we want to ignore.		

A<>B	A<>B	B
Swap VFOs A and B. This will not only swap the frequencies, but also all other settings associated with that VFO, such as mode, filter, CTUN, and RIT settings.		

A<B	A<B	B
Copy VFO B to VFO A.		

A>B	A>B	B
Copy VFO A to VFO B.		

AF Gain	AFGAIN	PE
Change the AF gain (headphone volume) of the active receiver.		

<b>AF Gain RX1</b>	AFGAIN1	PE
Change the AF gain (headphone volume) of the RX1 receiver.		

<b>AF Gain RX2</b>	AFGAIN2	PE
Change the AF gain (headphone volume) of the RX2 receiver.		

<b>AGC Menu</b>	AGC	B
Opens the AGC menu.		

<b>ANF</b>	ANF	B
Toggles the state (on/off) of the automatic notch filter for the active receiver.		

<b>Atten</b>	ATTEN	PE
Changes the value (0-31 dB) of the step attenuator of the active receiver. This function is only available for radios that have such an attenuator.		

<b>Band 10</b>	10	B
Change band of the active receiver to the 10m band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 12</b>	12	B
Change band of the active receiver to the 12m band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 1240</b>	1240	B
Change band of the active receiver to the 1240 MHz (23 cm) band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 144</b>	144	B
Change band of the active receiver to the 144 MHz (2m) band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 15</b>	15	B
Change band of the active receiver to the 15m band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 160</b>	160	B
Change band of the active receiver to the 160m band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 17</b>	17	B
Change band of the active receiver to the 15m band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 20</b>	20	B
Change band of the active receiver to the 15m band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 220</b>	220	B
Change band of the active receiver to the 220 MHz (1.25 m) band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 2300</b>	2300	B
Change band of the active receiver to the 2300MHz (13 cm) band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 30</b>	30	B
Change band of the active receiver to the 30m band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 3400</b>	3400	B
Change band of the active receiver to the 3400 Mhz (9 cm) band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 40</b>	40	B
Change band of the active receiver to the 40m band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 430</b>	430	B
Change band of the active receiver to the 430 MHz (70 cm) band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 6</b>	6	B
Change band of the active receiver to the 6m band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 60</b>	60	B
Change band of the active receiver to the 60m band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 70</b>	70	B
Change band of the active receiver to the 70 MHz (4m) band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 80</b>	80	B
Change band of the active receiver to the 80m band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band 902</b>	902	B
Change band of the active receiver to the 902 MHz (33 cm) band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band AIR</b>	AIR	B
Change band of the active receiver to the 108 MHz band, used for aircraft communication. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band GEN</b>	GEN	B
Change band of the active receiver to the current bandstack entry of the "general" band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>Band -</b>	BND-	B
Change band of the active receiver to the next lower band in the list of bands. If already at the lowest band, switch to the highest band (including transverter bands which have been defined) whose frequency is with the radio's frequency range.		

<b>Band +</b>	BND+	B
Change band of the active receiver to the next higher band in the list of bands (including transverter bands that have been defined). If already at the highest band, switch to the lowest band whose frequency is with the radio's frequency range.		

<b>Band WWV</b>	WWV	B
Change band of the active receiver to the current bandstack entry of the WWV band. If already on that band, move to the next bandstack entry. This action is a no-op if the frequency of the band falls outside the frequency range of the radio.		

<b>BndStack -</b>	BSTK-	B
Cycle backward through the bandstack entries of the active receiver.		

<b>BndStack +</b>	BSTK+	B
Cycle forward through the bandstack entries of the active receiver.		

<b>Band Menu</b>	BAND	B
Open the BAND menu.		

<b>BndStack MENU</b>	BSTK	B
Open the BANDSTACK menu.		

<b>Cmpr On/Off</b>	COMP	B
Toggle the state (on/off) of the compressor used in the TX audio input.		

<b>Cmpr Level</b>	COMPVAL	PE
Change the value of the compressor (0-20 dB) used in the TX audio input. The compressor is automaticall switched on (off) if the "new" value of the compressor is larger then (equal to) zero.		

<b>CTUN</b>	CTUN	B
Toggle the state (on/off) of the CTUN state of the active receiver. CTUN stands for "click to tune". In CTUN mode, you can move the RX frequency over the whole spectrum scope, whose center then remains at a fixed frequency.		

<b>CW Audio Peak Fltr</b>	CW-APF	B
Toggle (on/off) the CW audio peak filter for the active receiver. Note that the width of this filter (default: 75 Hz) can only be modified through the <b>CW</b> menu.		

<b>CW Frequency</b>	CWFREQ	PE
Change the CW side tone frequency in the range 300-1000 Hz. This also changes the BFO frequency upon receive.		

<b>CW Left</b>	CWL	B
This action indicates the closure/opening of the left paddle of a CW key. It is usually assigned to a GPIO line or a MIDI controller to which a Morse paddle is attached, and works with the iambic keyer that is built into piHPSDR. This keyer is only active if CW is <i>not</i> handled in the radio (see CW menu).		

<b>CW Right</b>	CWR	B
This action indicates the closure/opening of the right paddle of a CW key. It is usually assigned to a GPIO line or a MIDI controller to which a Morse paddle is attached, and works with the iambic keyer that is built into piH-PSDR. This keyer is only active if CW is <i>not</i> handled in the radio (see CW menu).		

<b>CW Speed</b>	CWSPD	PE
Change the CW side tone frequency in the range 1-60 wpm. This affect the built-in iambic keyer or the keyer inside the radio, depending on whether CW is handled in the radio or not (see CW menu).		

<b>CW Key (keyer)</b>	CWKy	B
Straight key key-down or key-up event. Usually assigned to a GPIO line or a MIDI controller to which a straight key or an external keyer is attached. Note that this action does not automatically switch to TX, so it must be used together with either manual RX/TX switching, or with the "PTT (CW Keyer)" action.		

<b>PTT (keyer)</b>	CWKyPTT	B
This very similar to the PTT action (see below) with the exception that CW handling in the radio is temporarily disabled (thus, CW handling in piH-PSDR is enabled). This allows to have, e.g. a paddle attached to the radio while a contest logging program „talks” to piHPSDR.		

<b>DIV On/Off</b>	DIVT	B
Toggles (enabled/disabled) DIVERSITY reception.		

<b>DIV Gain</b>	DIVG	E
Adjust DIVERSITY gain. One tick of the encoder increments or decrements the gain by an amount of 0.5		

<b>DIV Gain Coarse</b>	DIVGC	E
Adjust DIVERSITY gain (coarse adjustment). One tick of the encoder increments of decrements the gain by an amount of 2.5		

<b>DIV Gain Fine</b>	DIVGF	E
Adjust DIVERSITY gain (fine adjustment). One tick of the encoder increments of decrements the gain by an amount of 0.1. Since adjusting the DIVERSITY gain (or phase) is sometimes difficult, assigning one encoder to a coarse and another encoder to a fine adjustment may help in locating the „sweet spot”.		

<b>DIV Phase</b>	DIVP	E
Adjust DIVERSITY phase (fine adjustment). One tick of the encoder increments of decrements the gain by an amount of 0.5		

<b>DIV Phase Coarse</b>	DIVPC	E
Adjust DIVERSITY gain (coarse adjustment). One tick of the encoder increments of decrements the gain by an amount of 2.5		

<b>DIV Phase Fine</b>	DIVPF	E
Adjust DIVERSITY gain (coarse adjustment). One tick of the encoder increments of decrements the gain by an amount of 20.1		

<b>DIV Menu</b>	DIV	B
Open the DIVERSITY menu.		

<b>Duplex</b>	DUP	B
Toggle (on/off) DUPLEX status. IN the DUPLEX mode, the receivers continue to work during TX, and the RX panels are not removed during TX. Instead, a separate TX window opens during transmitting. Generally, DUPLEX only make sense when using different and well decoupled RX and TX antennas.		

<b>Filter -</b>	FL-	B
Cycle forward (!) through the list of filters for the current mode of the active receiver. Normally, this means switching to a narrower filter (hence the name FILTER -). When reaching the last filter in the list, further cycling switches to the first (widest) filter.		

<b>Filter +</b>	FL+	B
Cycle backward (!) through the list of filters for the current mode of the active receiver. Normally, this means switching to a wider filter (hence the name FILTER +). When reaching the first filter in the list, further cycling switches to the last filter which is the variable Var2 filter.		

<b>Filter Cut Low</b>	FCUTL	E
Adjust the low-cut of the current filter. Note that the notion of „low” edge of the filter refers to audio frequencies for the single side band modes LSB, CWL, DIGL. This action is a no-op unless the current filter is one of the two variable filters Var1 or Var2.		

<b>Filter Cut High</b>	FCUTL	E
Adjust the high-cut of the current filter. Note that the notion of „high” edge of the filter refers to audio frequencies for the single side band modes LSB, CWL, DIGL. This action is a no-op unless the current filter is one of the two variable filters Var1 or Var2.		

<b>Filter Cut Default</b>	FCUTDEF	B
Reset the low and high cut of the current filter to the default values. This action is a no-op unless the current filter is one of the two variable filters Var1 or Var2.		

<b>Filter Menu</b>	FILT	B
This opens the Filter menu.		

<b>VFO Menu</b>	<b>FREQ</b>	B
This opens the FREQ (VFO) menu.		

<b>Function</b>	<b>FUNC</b>	B
Cycle through the six toolbar sets. For the piHPSDR GPIO controller V1, where the eight switches follow the toolbar buttons, this also affects the function of the switches. Note that this action is <i>always</i> connected with the right-most toolbar button.		

<b>FuncRev</b>	<b>FUNC-</b>	B
Cycle backwards through the six toolbar sets. For the piHPSDR GPIO controller V1, where the eight switches follow the toolbar buttons, this also affects the function of the switches. When using a mouse, this action can be invoked by a secondary mouse click on the rightmost toolbar button.		

<b>IF Shift</b>	<b>IFSHFT</b>	E
This command is effective only if one of the variable filters Var1 or Var2 is currently used in the active receiver, and shifts the filter, that is, it affects the low and high cut in the same way.		

<b>IF Shift RX1</b>	<b>IFSHFT1</b>	E
This command is effective only if one of the variable filters Var1 or Var2 is currently used in VFO-A, and shifts the filter, that is, it affects the low and high cut in the same way.		

<b>IF Shift RX2</b>	<b>IFSHFT2</b>	E
This command is effective only if one of the variable filters Var1 or Var2 is currently used in VFO-B, and shifts the filter, that is, it affects the low and high cut in the same way.		

<b>IF Width</b>	<b>IFWIDTH</b>	<b>E</b>
This command is effective only if one of the variable filters Var1 or Var2 is currently used in the active receiver, and changes the filter width, that is, it affects the low and high cut in an opposite way.		

<b>IF Width RX1</b>	<b>IFWIDTH1</b>	<b>E</b>
This command is effective only if one of the variable filters Var1 or Var2 is currently used in VFO-A, and changes the filter width, that is, it affects the low and high cut in an opposite way.		

action IF Width RX2 IFWIDTH2 E  
 This command is effective only if one of the variable filters Var1 or Var2 is currently used in VFO-B, and changes the filter width, that is, it affects the low and high cut in an opposite way.

<b>Linein Gain</b>	<b>LIGAIN</b>	<b>PE</b>
Change the line-in gain of the radio. If the radio does not have a line-in input, this control has no effect.		

<b>Lock</b>	<b>LOCK</b>	<b>B</b>
Lock the VFOs. A locked VFO will not accept VFO frequency steps in either direction, and cannot be moved by dragging with the mouse. Band changes etc. are still possible, though. The command is intended to guard against accidentally moving the VFO dial.		

<b>Memory Menu</b>	<b>MEM</b>	<b>B</b>
Open the MEM (Memory) menu.		

<b>Mic Gain</b>	<b>MICGAIN</b>	<b>PE</b>
Change the mic gain (from -12 to 50 dB). The amplification of the microphone audio data is done in software, and applies to the TX audio input samples wherever they come from. (See the discussion of local microphones in the TX menu.)		

<b>Mode -</b>	MD-	B
Cycle backwards through the list of modes for the active receiver. When the first mode (LSB) has been reached, jump to the last one (DRM). Note that when changing the mode, the current filter, noise reduction, equalizer, VFO step size, and TX compressor settings are stored for the old mode, and the settings last used with the new mode are restored. This allows to quickly switch between SSB and CW, or between SSB and digi modes, without re-adjusting these settings.		

<b>Mode +</b>	MD+	B
Cycle forward through the list of modes for the active receiver. When the last mode (DRM) has been reached, jump to the first one (LSB). Note that when changing the mode, the current filter, noise reduction, equalizer, VFO step size, and TX compressor settings are stored for the old mode, and the settings last used with the new mode are restored. This allows to quickly switch between SSB and CW, or between SSB and digi modes, without re-adjusting these settings.		

<b>Mode Menu</b>	MODE	B
Open the <b>Mode</b> menu.		

<b>MOX</b>	MOX	B
Toggle between TX and RX. Unlike the PTT action, which puts the radio into TX when pressed and into RX when released, this button toggles the PTT state when pressed.		

<b>Mute</b>	MUTE	B
Toggles the „mute” state of the active receiver. If a receiver is muted, it produces zero-amplitude audio output.		

<b>NB</b>	NB	B
Cycles through the noise blanker states (NB off/NB1/NB2).		

<b>NR</b>	<b>NR</b>	<b>B</b>
Cycles through the noise reduction states (NR off/NR1/NR2).		

<b>Noise Menu</b>	<b>NOISE</b>	<b>B</b>
Opens the NOISE menu.		

<b>NumPad 0</b>	<b>0</b>	<b>B</b>
Used for direct frequency entry. This is the same as hitting the corresponding button „0“ in the VFO (VFO) menu.		

<b>NumPad 1</b>	<b>1</b>	<b>B</b>
Used for direct frequency entry. This is the same as hitting the corresponding button „1“ in the VFO menu.		

<b>NumPad 2</b>	<b>2</b>	<b>B</b>
Used for direct frequency entry. This is the same as hitting the corresponding button „2“ in the VFO menu.		

<b>NumPad 3</b>	<b>3</b>	<b>B</b>
Used for direct frequency entry. This is the same as hitting the corresponding button „3“ in the VFO menu.		

<b>NumPad 4</b>	<b>4</b>	<b>B</b>
Used for direct frequency entry. This is the same as hitting the corresponding button „4“ in the VFO menu.		

<b>NumPad 5</b>	<b>5</b>	<b>B</b>
Used for direct frequency entry. This is the same as hitting the corresponding button „5“ in the VFO menu.		

<b>NumPad 6</b>	6	B
Used for direct frequency entry. This is the same as hitting the corresponding button „6” in the VFO menu.		
<b>NumPad 7</b>	7	B
Used for direct frequency entry. This is the same as hitting the corresponding button „7” in the VFO menu.		
<b>NumPad 8</b>	8	B
(Used for direct frequency entry. This is the same as hitting the corresponding button „8” in the VFO menu.		
<b>NumPad 9</b>	9	B
Used for direct frequency entry. This is the same as hitting the corresponding button „9” in the VFO menu.		
<b>NumPad BS</b>	BS	B
Used for direct frequency entry (BS = backstep). This is the same as hitting the corresponding button in the VFO menu. It cancels the last-entered digit.		
<b>NumPad CL</b>	CL	B
Used for direct frequency entry (CL = clear). This is the same as hitting the corresponding button in the VFO menu. It cancels all entered digits so far.		
<b>NumPad Dec</b>	DEC	B
Used for direct frequency entry (DEC = decimal point). This is the same as hitting the corresponding button in the VFO menu.		
<b>NumPad kHz</b>	KHZ	B
Used for direct frequency entry. This is the same as hitting the corresponding button in the VFO menu. The VFO frequency is changed to the value entered so far, multiplied with 1,000. For example, to go to 7.040 MHz, one can enter the sequence „7”, „0”, „4”, „0”, „KHZ”.		

<b>NumPad MHz</b>	MHZ	B
Used for direct frequency entry. This is the same as hitting the corresponding button in the VFO menu. The VFO frequency is changed to the value entered so far, multiplied with 1,000,000. For example, to go to 7.040 MHz, one can enter the sequence „7“, „DEC“, „0“, „4“, „MHz“.		

<b>NumPad Enter</b>	EN	B
Used for direct frequency entry. This is the same as hitting the corresponding button in the VFO menu. The VFO frequency is changed to the value entered so far. For example, to go to 7.040 MHz, one can enter the sequence „7“, „0“, „4“, „0“, „0“, „0“, „0“. This is rarely used but offers Hz-resolution for the direct frequency entry.		

<b>PanZoom</b>	PAN	E
Change the Pan value. This control is only effective when the Zoom value is larger than 1.		

<b>Pan-</b>	PAN-	B
Decrease the PAN value by 100. This control is only effective when the Zoom value is larger than 1.		

<b>Pan+</b>	PAN+	B
Increase the PAN value by 100. This control is only effective when the Zoom value is larger than 1.		

<b>Panadapter High</b>	PANH	PE
Change the dBm value (from -60 to +20) at the top of the spectrum scope of the active receiver. Values outside this range can be set in the DISPLAY menu.		

<b>Panadapter Low</b>	PANL	PE
Change the dBm value (from -160 to -60) at the bottom of the spectrum scope of the active receiver. Values outside this range can be set in the DISPLAY menu.		

<b>Panadapter Step</b>	PANS	PE
Change the step size (from 5 to 30) of the panadapter of the active receiver. This is the spacing of the thin horizontal lines in the spectrum scope.		

<b>Preamp On/Off</b>	PRE	B
Toggle the preamp of the active receiver. Although the preamp switching is part of the HPSDR protocol, this has no effect in current radio models since the preamp is hard-wired „on”.		

<b>PS On/Off</b>	PST	B
Toggle (on/off) adaptive predistortion (PureSignal).		

<b>PS Menu</b>	PS	B
Open the PS (PureSignal) menu.		

<b>PTT</b>	PTT	B
Put the radio into TX mode when the button is pressed, and go back to RX when the button is released. This is one of the few actions where a button release event is significant. When attaching, say, the PTT contact of a microphone to a GPIO line for this purpose, take care of proper debouncing, since piHPSDR is not good at debouncing switches where both the press and release events are significant.		

<b>RF Gain</b>	RFGAIN	PE
Set the gain of the RF front end of the active receiver. Only effective for radios that have such a gain control. Most HPSDR radios do not have RF gain, they have a step attenuator in the RF front end instead. Small SDR radios using the AD9866 chip (HermesLite, RadioBerry) and radios connected via the SoapySDR library usually do have an RF gain control.		

<b>RF Gain RX1</b>	RFGAIN1	PE
Set the gain of the RF front end of RX1. Only effective for radios that have such a gain control. Most HPSDR radios do not have RF gain, they have a step attenuator in the RF front end instead. Small SDR radios using the AD9866 chip (HermesLite, RadioBerry) and radios connected via the SoapySDR library usually do have an RF gain control.		

<b>RF Gain RX2</b>	RFGAIN2	PE
Set the gain of the RF front end of RX2. Only effective for radios that have such a gain control. Most HPSDR radios do not have RF gain, they have a step attenuator in the RF front end instead. Small SDR radios using the AD9866 chip (HermesLite, RadioBerry) and radios connected via the SoapySDR library usually do have an RF gain control.		

<b>RIT</b>	RIT	E
Change the RIT value of the active receiver in the range -9999 to 9999 Hz. If a zero value is set, RIT is automatically disabled, if a non-zero value is set, RIT is enabled.		

<b>RIT Clear</b>	RITCL	B
Set the RIT value of the active receiver to zero. As a side effect, RIT is disabled for the active receiver		

<b>RIT On/Off</b>	RITT	B
Toggle RIT (enabled/disabled) for the active receiver. Note the RIT value is not changed, so you can temporarily disable RIT, and then enable it with the same offset (RIT value) used before.		

<b>RIT -</b>	<b>RIT-</b>	B
Decrement the RIT value of the active receiver by the RIT step size, in the range -9999 to 9999 Hz. If a value of zero is reached, RIT is automatically disabled, and if a nonzero value is reached, RIT is automatically enabled. Note that this action belongs to the few ones for which a button release event has an effect. If you press and hold RIT- (either on the toolbar, or on a GPIO or MIDI console), there is an auto-repeat such that the action will be repeated every 250 msec until the RIT- button is released.		
<b>RIT +</b>	<b>RIT+</b>	B
Increment the RIT value of the active receiver by the RIT step size, in the range -9999 to 9999 Hz. If a value of zero is reached, RIT is automatically disabled, and if a nonzero value is reached, RIT is automatically enabled. Note that this action belongs to the few ones for which a button release event has an effect. If you press and hold RIT+ (either on the toolbar, or on a GPIO or MIDI console), there is an auto-repeat such that the action will be repeated every 250 msec until the RIT+ button is released.		
<b>RIT RX1</b>	<b>RIT1</b>	E
Change the RIT value of RX1 in the range -9999 to 9999 Hz. If a zero value is set, RIT is automatically disabled, if a non-zero value is set, RIT is enabled.		
<b>RIT RX2</b>	<b>RIT2</b>	E
Change the RIT value of RX2 in the range -9999 to 9999 Hz. If a zero value is set, RIT is automatically disabled, if a non-zero value is set, RIT is enabled.		
<b>RIT Step</b>	<b>RITST</b>	B
Cycle through the possible values (1 Hz, 10 Hz, 100 Hz) of the RIT step.		
<b>RSAT</b>	<b>RSAT</b>	B
If the SAT mode is either Off or SAT, change it to RSAT. If the SAT mode is RSAT, change it to Off. In RSAT mode all VFO frequency <i>changes</i> applied to one of the two VFOs will be applied to the other VFO with the sign reversed.		

<b>SAT</b>	SAT	B
If the SAT mode is either Off or RSAT, change it to SAT. If the SAT mode is SAT, change it to Off. In SAT mode all VFO frequency <i>changes</i> applied to one of the two VFOs will be applied to the other VFO as well.		

<b>SNB</b>	SNB	B
Toggle (enable/disable) the spectral noise blanker for the active receiver.		

<b>Split</b>	SPLIT	B
Toggle (on/off) the split status of the radio.		

<b>Squelch</b>	SQUELCH	PE
Change the squelch threshold value of the active receiver. Squelch is automatically enabled (disabled) if the resulting value is non-zero (zero).		

<b>Squelch RX1</b>	SQUELCH1	PE
Change the squelch threshold value of RX1. Squelch is automatically enabled (disabled) if the resulting value is non-zero (zero).		

<b>Squelch RX2</b>	SQUELCH2	PE
Change the squelch threshold value of RX2. Squelch is automatically enabled (disabled) if the resulting value is non-zero (zero).		

<b>Swap RX</b>	SWAPRX	B
Make the inactive receiver the active one. This action is only effective if piHPDSR is running two receivers.		

<b>Tune</b>	TUNE	B
Toggle (on/off) TUNE. If selected in the OC menu, an OC output will become active (low). This can then be used to start an external automatic tuner.		

<b>Tune Drv</b>	TUNDRV	E
Change the drive level (0-100) used for TUNEing. This is equivalent to changing the "Tune drive level" spin button in the TX menu <b>and</b> to check the "Tune use drive" box.		

<b>Tune Full</b>	TUNF	B
Set the "full tune" flag and clear the "memory tune" flag. If an OC output is assigned to the TUNE state, it will be cleared (go high again) 2800 msec after starting TUNE (this time can also be adjusted in the OC menu).		

<b>Tune Mem</b>	TUNM	B
Set the "memory tune" flag and clear the "full tune" flag. If an OC output is assigned to the TUNE state, it will be cleared (go high again) 550 msec after starting TUNE (this time can also be adjusted in the OC menu).		

<b>TX Drive</b>	TXDRV	PE
Set the TX drive level (0-100).		

<b>Two-Tone</b>	2TONE	B
Toggle (on/off) the two-tone state of the transmitter. If the two-tone state is engaged, the radio will go TX and emit a two-tone signal.		

<b>VFO</b>	VFO	E
This is the VFO frequency control of the active receiver.		

<b>VFO A</b>	VFOA	E
This is the VFO frequency control of VFO-A.		

<b>VFO B</b>	VFOB	E
This is the VFO frequency control of VFO-B.		

<b>VOX On/Off</b>	VOX	B
Toggle (on/off) vox status. If vox is enabled, you can automatically key the transmitter by talking into the microphone, without the need to press a PTT button. See the VOX menu.		

<b>VOX Level</b>	VOXLEV	E
Change the VOX level threshold. If you operate vox, and the radio does not go TX while talking into the microphone, decrease the VOX threshold. If the radio goes TX simply because the neighbour's hound starts barking, increase the VOX threshold.		

<b>Wfall High</b>	WFALLH	E
Change the "high" level (-100 dBm ... 0 dBm) of the waterfalls. Signal levels between low and high are colour coded from black to yellow, while signals above "high" are yellow and signals below "low" are black. This value has no effect if the automatic waterfall coloring is chosen ("waterfall automatic"), which is usually preferable.		

<b>Wfall Low</b>	WFALLL	E
Change the "low" level (-150 dBm ... -50 dBm) of the waterfalls. Signal levels between low and high are colour coded from black to yellow, while signals above "high" are yellow and signals below "low" are black. This value has no effect if the automatic waterfall coloring is chosen ("waterfall automatic"), which is usually preferable.		

<b>XIT</b>	XIT	E
Change the XIT value of the transceiver in the range -9999 to 9999 Hz. If a zero value is set, XIT is automatically disabled, if a non-zero value is set, XIT is enabled.		

<b>XIT Clear</b>	XITCL	B
Set the XIT value of the transmitter to zero. As a side effect, XIT is disabled.		

<b>XIT On/Off</b>	XITT	B
Toggle XIT (enabled/disabled) for the transceiver. Note the XIT value is not changed, so you can temporarily disable XIT, and then enable it with the same offset (XIT value) used before.		

<b>XIT -</b>	XIT-	B
Decrement the XIT value of the transmitter by the RIT (!) step size, in the range -9999 to 9999 Hz. If a value of zero is reached, XIT is automatically disabled, and if a nonzero value is reached, XIT is automatically enabled. Note that this action belongs to the few ones for which a button release event has an effect. If you press and hold XIT- (either on the toolbar, or on a GPIO or MIDI console), there is an auto-repeat such that the action will be repeated every 250 msec until the XIT- button is released.		

<b>XIT +</b>	XIT+	B
Increment the XIT value of the transmitter by the RIT (!) step size, in the range -9999 to 9999 Hz. If a value of zero is reached, XIT is automatically disabled, and if a nonzero value is reached, XIT is automatically enabled. Note that this action belongs to the few ones for which a button release event has an effect. If you press and hold XIT+ (either on the toolbar, or on a GPIO or MIDI console), there is an auto-repeat such that the action will be repeated every 250 msec until the XIT+ button is released.		

<b>Zoom</b>	ZOOM	PE
Change the ZOOM value (1...8) of the active receiver.		

<b>Zoom -</b>	ZOOM-	B
Decrease the ZOOM value of the active receiver by one. If the ZOOM value was already 1, this is a no-op.		

<b>Zoom -</b>	ZOOM-	B
Increase the ZOOM value of the active receiver by one. If the ZOOM value was already 8, this is a no-op.		

## Appendix B

### piHPSDR keyboard bindings



# Appendix C

## piHPSDR CAT commands

The CAT model of piHPSDR largely follows that for other SDR programs. It is based upon the Kenwood TS-2000 CAT command set, which can easily be found on the internet (see the Appendix of the Kenwood TS-2000 instruction manual) and will not be reproduced here for copyright reasons. So if you want to connect a logbook or contest logging program to piHPSDR, you will normally tell this program that it has to control a Kenwood TS-2000.

In the SDR community, there exist a heavily extended TS-2000 CAT command set known as the „PowerSDR CAT command set”, the original source is probably

[https://www.flexradio.com/documentation/  
powersdr-cat-command-reference-guide/](https://www.flexradio.com/documentation/powersdr-cat-command-reference-guide/)

Many (but probably not all) of the commands listed there are implemented in piHPSDR, because it seems that there exist SDR controllers which communicate over the serial line. In recent years, such an open-source controller, the ANDROMEDA controller, has been developed by Laurence Barker G8NJJ, see

[https://github.com/laurencebarker/Andromeda\\_front\\_panel](https://github.com/laurencebarker/Andromeda_front_panel)

This controller uses some additional CAT commands to communicate with the radio, and these commands have also been implemented into the RIGCTL module of piHPSDR by Rick Koch N1GP (thanks Rick). These are the ZZZD and ZZZU commands for moving the VFO frequency down/up, and

the ZZZP and ZZZE commands for sending information about push-buttons and encoders, and a ZZZS command which contains information on the ANDROMEDA version. Furthermore, if "Andromeda" is selected in the RIGCTL menu, piHPSDR will constantly *send* status information to the ANDROMEDA controller using a ZZSI command. Status information is sent if something changes (active receiver, diversity status, PTT status, TUNE mode, PS status, CTUN mode, RIT and XIT status, and LOCK status), such that the ANDROMEDA controller can update the corresponding LEDs.

## **Appendix D**

**How to connect a Morse key or paddle**

122 APPENDIX D. HOW TO CONNECT A MORSE KEY OR PADDLE

## Appendix E

### Running piHPSDR alongside with DigiMode programs

124 APPENDIX E. RUNNING PIHPSDR ALONGSIDE WITH DIGIMODE PROGRAMS

# Appendix F

## Compile-time options

There is a number of compile-time options that are shown on the initial screen. If you are using a binary version, you have what you have. If you compile from the sources, you can choose which options you want (or want not). It is possible to change the options without actually changing one of the files in the piHPSDR repository. Simply go (in a terminal window) to the directory where you compile piHPSDR and type in

```
cp Makefile GNUmakefile
```

This „trick” takes care the further compilations use the file `GNUmakefile` rather than `Makefile`, and changing the compile time options is accomplished by changing the file `GNUmakefile` with a text editor. In the `GNUmakefile` in the first 50 lines, you will find a lot of assignments of the form

```
#AAAAAA=BBBBB  
XXXXXX=YYYYY
```

together with some comments what they are good for. The first form, with a number sign in the first column, means that option BBBB is not active, the second form, without a number sign, means that option YYYY is active. Here we give a list of available options:

**GPIO.** This option is needed on a RaspberryPi if you want to use GPIO input/output lines from within piHPSDR, for example since you have a controller (Controller1, Controller2, or G2 frontpanel) attached or want to use GPIO lines for CW or PTT. **It is important to deactivate this option**

**if you compile for a Desktop PC running LINUX!**. This is so because Desktop PCs/Laptops do not have GPIO lines. For MacOS, this option is automatically disabled.

**MIDI**. This option activates the possibility to control piHPSDR via MIDI devices. It should normally be activated, unless you port piHPSDR to some other operating system without MIDI support.

**SATURN**. This option is for piHPSDR running on the CM4 module within a SATURN/G2 radio. It allows piHPSDR to directly communicate with the FPGA via XDMA. While it does no harm to have this option activated on other systems, it also has no function there.

**USBOZY**. This option includes support for legacy HPSDR hardware connected via USB.

**SOAPYSDR**. This option enables piHPSDR to communicate with radios through the SoapySDR library.

**STEMLAB**. This is an option for RedPitaya based radios. These have an SDR app that must be started before one can connect. If you have a RedPitaya exclusively being used as a radio, this app is most likely auto-started when powering up the RedPitaya so you do not need the STEMLAB option. This option allows to start the SDR application on the RedPitaya through the web interface. If you have a RedPitaya and no autostart of the SDR application there, and not compiled piHPSDR with the STEMLAB option, you can open a web browser, start the SDR application on the RedPitaya, and then start piHPSDR. With the STEMLAB option, this can all be done by piHPSDR.

**ALSA**. This option is only effective for LINUX systems including the Raspberry Pi. If this option is active, local audio output is done via the standard LINUX ALSA library, otherwise pulseaudio is used. On MacOS, this option has no effect since the portaudio library is used in any case.

**EXTNR**. There is a special version of the WDSP library that contains additional noise reduction facilities `rnnnoise` and `libspectbleach`, see [github.com/vu3rdd/wdsp](https://github.com/vu3rdd/wdsp). If you have such a version of WDSP installed, these extended noise reduction facilities can be used with piHPSDR if the EXTNR option is active.


**SERVER**. This is not yet completed but is mentioned here anyway. There are plans to have a client/server model in piHPSDR such that you can have a

,,distant” radio with a computer running piHPDSR connected to that radio, and a „local” computer running piHPSDR, and an internet connection between the two computers. All the time-critical data exchange happens between the „distant” radio and the „distant” computer using a straight internet cable connection, while the user interface data is exchanged between the two copies of piHPSDR running on the two computers.



# Appendix G

## RaspPi: Activating the I2C interface

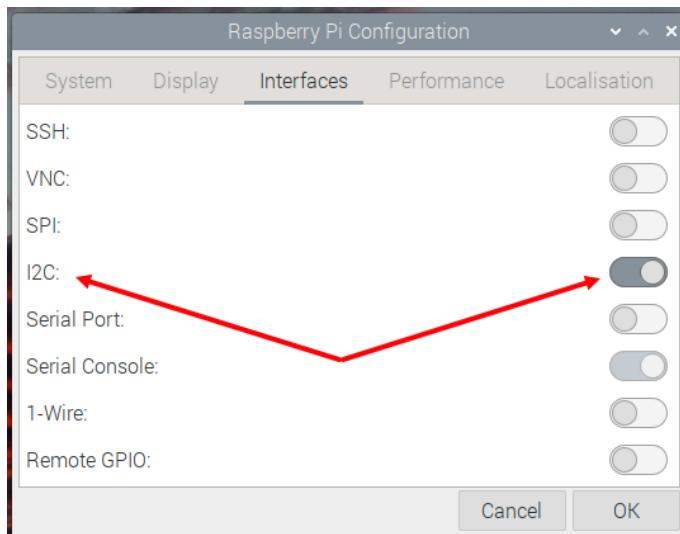

**Fig. G.1:** Enabling the I2C controller.

If you want to use the Controller2 or the G2 controller, the Raspberry Pi I2C interface must be enabled. This is done by opening **Menu**→**Preferences**→**Raspberry Pi Configuration** and moving to the **Interfaces** tab (shown in Fig. G.1. In the I2C line, move the button to the right (marked by the red arrows) and restart the computer. Do not change the buttons in the other

lines, the need not be as shown here.

# Appendix H

## Binary installation of piHPSDR (RaspPi only)

*This procedure has been tested on a Pi 4B, with a fresh and plain vanilla operating system (32-bit „BullsEye”, released May 3rd 2023, Kernel version 6.1) obtained from*

<https://www.raspberrypi.com/software/operating-systems/>.

For new-bees, an easy binary-only installation is provided. This binary has the following properties:

- It runs on a 32-bit Raspberry Pi OS, currently the ”bullseye” version.
- It has the GPIO, MIDI, SATURN, and ALSA options built in, so it does not use pulseaudio. See Appendix F for a detailed description of the compile time options. If you want another set of options, you have to compile from the sources.
- It can be down-loaded using a web browser, and then only two commands have to be entered in a terminal window.

The following *caveat* applies both to the binary installation and the compilation from the source code: If you want to use the Controller2 or the G2 controller, the Raspberry Pi I2C interface must be enabled, as described in Appendix G.

Before you shout at me, because your most-wanted compile time option is deactivated in the binary installation, let me explain that I want to satisfy the maximum number of people but with minimum complexity in the installation process. Things such as using SoapySDR devices, or using pulseaudio, involve heavy installation work (special libraries, etc. etc.) that make the installation more complicated. So the decision was to offer a binary installation on *as is* basis, and refer to compilation from the sources (explained in Appendix I) for every feature beyond.


Probably the easiest way do download the binary installation file `pihpsdr.tar` is to clone the complete repository (as you would also do it for an installation from source code) since the binary installation file is contained therein. So open a terminal window. If you do so, you get a prompt and are in your home directory. It is assumed that no directory named `pihpsdr` exists. If it does, and if you are a new-bee, then this is likely a left-over from some previous attempt to install the program and then it should be deleted.

again assuming that no file or directory named `JUNK` exists (if so, just replace this name by another one). But look, if you are a new-bee, then most likely these last two commands are not necessary since why should a `pihpsdr` directory exist at top level in your home directory?

The binary installation is then done via the following four commands, which have to be typed in exactly as given here:

```
git clone https://github.com/dl1ycf/pihpsdr
cd pihpsdr/release
tar xvf pihpsdr.tar
pihpsdr/install.sh
```

The last command takes some time (depending on the speed of your internet connection), since a lot of software need be installed that piHPSDR depends on. At the end, a piHPSDR desktop icon should appear. In principle, you can start piHPSDR now by double-clicking the icon. However (at least on my test system) I get always asked *how* I want to start the program (right away, in a terminal window, etc.). To get rid of this question, open the file manager and go to the the `Desktop` directory in your home directory, where you should see the desktop icon with name `piHPSDR`. Select this by single-click and go to `Edit→Preferences` (Fig. H.1). Activate the check

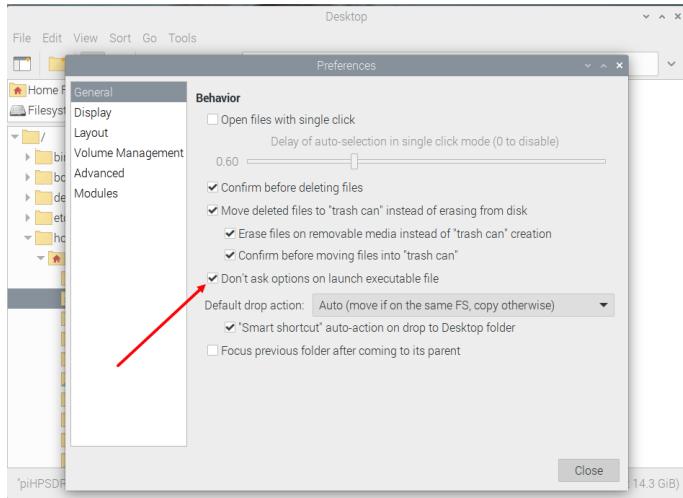

**Fig. H.1:** Suppress being asked options when clicking the piHPSDR desktop icon.

box where it is indicated by the red arrow and that's it.

**Note:** Immediately after running the install script, the piHPSDR desktop icon looks quite generic and does not show the HPSDR logo. Log out and then log in again and the logo is there.



# Appendix I

## Installation of piHPSDR from the sources (Linux, RaspPi)

*This procedure has been tested on a Pi 4B, with a fresh and plain vanilla operating system (32-bit „BullsEye”, released May 3rd 2023, Kernel version 6.1) obtained from*

<https://www.raspberrypi.com/software/operating-systems/>.

Installation from the sources is the preferred way of installing piHPSDR, for the following reasons

- You get binaries that exactly „fit” to your operating system, it is not important which version of the operating system you use.
- The procedure is the same for 32-bit and 64-bit systems, so it does not matter which of the two variants you run.
- For all the compile time options (see Appendix F) you can individually choose whether you want to activate or deactivate this option.
- This implies that if you want to use SoapySDR devices (like the Adalm Pluto or RTL SDR sticks), or if you want to use pulseaudio as the backend for local RX audio, you *have to* compile from the sources, since these compile time options are not activated in the binary installation package.

The following *caveat* applies both to the binary installation and the compilation from the source code: If you want to use the Controller2 or the G2 controller, the Raspberry Pi I2C interface must be enabled, as described in Appendix G.

To install from the sources, open a terminal window. If you do so, you get a prompt and are in your home directory. It is assumed that no directory named `pihpsdr` exists. If it does, then this is likely a left-over from some previous attempt to install the program and then it should be moved elsewhere, since it may contain files with saved preferences (`*.props`) which you may want to re-use.

The piHPSDR repository is downloaded, and support libraries are installed, with the commands

```
git clone https://github.com/dl1ycf/pihpsdr  
cd pihpsdr  
LINUX/libinstall.sh
```

Depending on the internet speed (and the speed of your SD card or hard disk), the first and the last command may take some time. The first command loads the complete piHPSDR repository from my github account. The last command (`libinstall.sh`) contains all the magic, it not only loads all required RaspberryPi OS packages, but also loads and installs further libraries piHPSDR depends on, such as the WDSP library, and the SoapySDR library as well as SoapySDR modules for the Adalm Pluto and RTL SDR sticks.

**Note.** The SoapySDR library, and all SoapySDR modules, must be compiled from the sources (and the `libinstall.sh` script does so). The reason is, that SoapySDR in the standard repository is quite outdated (version 0.7) while piHPDSR requires a more recent version (0.8) because the SoapySDR API has changed from 0.7 to 0.8.

The `libinstall` procedure also does some other things for you, including creating a desktop icon for piHPSDR. If you are on a Desktop PC running LINUX, you will get error messages about libraries such as `libgpiod` that are missing in the repository, which you can ignore.

**Note:** If you install on a Desktop PC running LINUX, or if you are on a RaspPi but use the GPIO I/O lines for some other purpose, you must de-activate the GPIO compile time option first, as described in Appendix F.

It is clear that double-clicking the piHPSDR desktop icon at this stage leads nowhere, since first you need to compile the program. However, this is simply done by the three commands

```
cd $HOME/pihpsdr
make clean
make
```

and that's it! The first two commands are even not necessary (since you are in the pihpsdr directory at that point, and since there is nothing to be cleaned up). But if you make changes (e.g. changing the compile time options as described in Appendix F, or apply some code modifications) and want to recompile later, this sequence is the safest way to create a new binary, namely go to the pihpsdr directory, clean up, and recompile.

At this stage, double-clicking the piHPSDR desktop icon should start the program. See the end of Appendix H how to get rid of a window popping up and asking you how to execute the program.

**Checking the SoapySDR installation.** The installation of the SoapySDR core and the modules for the Adalm Pluto and for RTL SDR sticks is the most complicated task performed by the `libinstall.sh` command. Although I tried hard to let everything be done auto-magically, you may want to check if everything went well. If not, and if you do not plan to activate the SOAPYSDR compile time option, you can simply ignore this. To check the SoapySDR installation, open a new terminal window and just type the command (be careful to use the correct capitalization!)

`SoapySDRUtil -info`

On my test system, this command produced the following output:

```
#####
## Soapy SDR -- the SDR abstraction library ##
#####

Lib Version: v0.8.1-gbb33b2d2
API Version: v0.8.200
ABI Version: v0.8-3
Install root: /usr/local
Search path: /usr/local/lib/arm-linux-gnueabihf/SoapySDR/modules0.8-3
Module found: /usr/local/lib/arm-linux-gnueabihf/SoapySDR/modules0.8-3/libPlutoSDRSupport.so (0.2.1-b906b27)
Module found: /usr/local/lib/arm-linux-gnueabihf/SoapySDR/modules0.8-3/librtlsdrSupport.so (0.3.3-068aa77)
Available factories... plutosdr, rtlsdr
Available converters...
- CF32 -> [CF32, CS16, CS8, CU16, CU8]
- CS16 -> [CF32, CS16, CS8, CU16, CU8]
- CS32 -> [CS32]
- CS8 -> [CF32, CS16, CS8, CU16, CU8]
- CU16 -> [CF32, CS16, CS8]
- CU8 -> [CF32, CS16, CS8]
- F32 -> [F32, S16, S8, U16, U8]
```

```
- S16 -> [F32, S16, S8, U16, U8]
- S32 -> [S32]
- S8 -> [F32, S16, S8, U16, U8]
- U16 -> [F32, S16, S8]
- U8 -> [F32, S16, S8]
```

(Sorry for the tiny want, I did not want to wrap output lines.) Note the API/ABI version (0.8). If you see 0.7 then you probably have installed SoapySDR on your computer from the standard repositories, and this is not going to work. The `libinstall.sh` command has been designed to work (and has been tested on) a plain vanilla operating system, not on a „spoiled” one where the user has manually installed additional software packages that may induce incompatibilities. The best way out of such a problem is to re-install Linux (on a RaspPi, simply use a new SD card to do so).

# Appendix J

## Installation of piHPSDR from the sources (MacOS)

*This procedure has been tested on a fairly recent MacBookAir (2020 model, M1 Silicon CPU, running MacOS Ventura 13.5.2) and on old iMac (late 2013 model, Intel CPU, running MacOS Catalina 10.15.7. For the old iMac the installation procedure takes very long, because most of the HomeBrew packages are no longer available in pre-compiled form and have to be compiled from the sources – but it works!*

If you want to run piHPDSR on an Apple Macintosh computer (iMac, Mac Mini, iBook Air, PowerBook), then you *have to* compile from the sources. The author personally uses piHPSDR on an iMac, and would like to provide piHPSDR as a program that you simply copy on your computer and double-click. However, this is rather involved for an application built upon the GTK graphical user interface. If you know how to do this, any help is welcome. But for the time being, compiling from the sources is the only option.

The whole installation procedure depends on that your user account is an administrator account, such that you can execute „sudo” commands in the terminal window. You may be asked the administrator password. If your user account does not qualify for administrator work, then you are simply not allowed to install the „HomeBrew” universe which is the prerequisite for compiling piHPSDR. In normal cases (you own the Mac) you should have administrator privileges.

I still do not know whether this is necessary or not, but the recommendation is to start installing an X Window manager on the Macintosh. To the end, in a web browser open the link

[www.xquartz.org](http://www.xquartz.org)

and install the most recent package file found there. At the time of this writing, this is version 2.8.5 released in January 26, 2023. The package is good both for Intel and Silicon Macs. Download the package file (e.g. XQuartz-2.8.5.pkg) to your desktop and run it by double-clicking.

Compiling piHPSDR on a Mac requires some basic LINUX/Unix skills. The most important program to use is the Terminal application (`Terminal.app`), that can be found in the Utilities folder that resides in the Applications folder. It is suggested to drag this application into the „dock” so you have quick access. Although MacOS has a complete Unix „under the hood”, one needs additional software to do Linux-style programming. The most popular such „Unix enabler” packages are `MacPorts` and `HomeBrew`, I am using `HomeBrew` but I know that piHPSDR can be compiled and run successfully with `MacPorts` as well. The deal is as simple as follows: if you use `MacPorts` then you are on your own, or have to rely on piHPSDR installations done by the `MacPorts` folks. For `HomeBrew`, I provide semi-automatic installation scripts that do all the complicated stuff for you.

To install from the sources, open a terminal window. If you do so, you get a prompt and are in your home directory. It is assumed that no directory named `pihpsdr` exists. If it does, then this is likely a left-over from some previous attempt to install the program and then it should be moved elsewhere, since it may contain files with saved preferences (`*.props`) which you may want to re-use.

The piHPSDR repository is downloaded, and support libraries are installed, with the commands

```
git clone https://github.com/dl1ycf/pihpsdr  
cd pihpsdr  
MacOS/libinstall.sh
```

The last command starts with installing Apple’s command line tools, in particular the Apple C and C++ compilers. You may get an error message from `xcode-select` that the tools are already installed, which you can safely ig-

nore. Then, the **HomeBrew** universe is installed, and the installation starts with asking you for the administrator password, tells you what it wants to do and requires hitting **Enter** to proceed. On Apple Silicon Macs, you will be asked the administrator password another three times, since here we have to create three symbolic links in **/usr/local** (see the end of this section), each of which requires administrator privileges.

Do not worry if **HomeBrew** was already installed on your computer, the installation procedure works in this case as well and does no harm. In addition to the **HomeBrew** core, additional libraries that piHPSDR depends on (e.g. GTK+3), the SoapySDR core and SoapySDR modules for several radios are installed. The WDSP library is also downloaded, compiled, and stored as **/usr/local/lib/libwdsp.dylib**.

In case something went wrong, or simply to check that **HomeBrew** has been correctly installed, open a *new* terminal window and type the command

**brew config**

This should give you lots of information on the currently installed version of **HomeBrew**, but also on the CPU of your machine, the compilers and MacOS version info, etc. If the command fails stating that the "brew" command has not been found, something is wrong, since the automatic installation procedure should have taken care to update your shell profiles such that the "brew" command is found. This is the reason why you have to open a new terminal window to make this test, since in the originally opened window the update of the command search path is not yet effective.

If you want to use SoapySDR, please check the Soapy installation. Open a new terminal window and simply type the command (be careful to use the correct capitalization!)

**SoapySDRUtil -info**

On my test system, this command produced the following output:

```
#####
##   Soapy SDR -- the SDR abstraction library   ##
#####

Lib Version: v0.8.1-release
API Version: v0.8.0
ABI Version: v0.8
Install root: /usr/local
Search path: /usr/local/lib/SoapySDR/modules0.8
Module found: /usr/local/lib/SoapySDR/modules0.8/libHackRFSupport.so    (0.3.3)
Module found: /usr/local/lib/SoapySDR/modules0.8/libLMS7Support.so    (20.10.0)
Module found: /usr/local/lib/SoapySDR/modules0.8/libPlutoSDRSupport.so (0.2.1)
```

```

Module found: /usr/local/lib/SoapySDR/modules0.8/libRedPitaya.so      (0.1.1)
Module found: /usr/local/lib/SoapySDR/modules0.8/libairspySupport.so   (0.2.0)
Module found: /usr/local/lib/SoapySDR/modules0.8/libairspyhfSupport.so (0.2.0)
Module found: /usr/local/lib/SoapySDR/modules0.8/librtlSdrSupport.so (0.3.2)
Available factories... airspy, airspyhf, hackrf, lime, plutosdr, redpitaya, rtlSdr
Available converters...
- CF32 -> [CF32, CS16, CS8, CU16, CU8]
- CS16 -> [CF32, CS16, CS8, CU16, CU8]
- CS32 -> [CS32]
- CS8 -> [CF32, CS16, CS8, CU16, CU8]
- CU16 -> [CF32, CS16, CS8]
- CU8 -> [CF32, CS16, CS8]
- F32 -> [F32, S16, S8, U16, U8]
- S16 -> [F32, S16, S8, U16, U8]
- S32 -> [S32]
- S8 -> [F32, S16, S8, U16, U8]
- U16 -> [F32, S16, S8]
- U8 -> [F32, S16, S8]

```

and probably even more modules are available in `HomeBrew`. In contrast to the RaspPi installation, SoapySDR is already at version 0.8 in the `HomeBrew` repository so the modules can very simply be installed and need not be compiled from the sources. If anything went wrong with the SoapySDR installation, you can safely ignore this if you do not plan to compile piHPSDR with the `SOAPYSDR` option. You also do not need to manually disable the `GPIO` option since on Macos, the `GPIO` and `SATURN` options do not apply and are automatically deactivated. Without changing the compile time options (see Appendix F) the `MIDI` option is the only one you get on Macos.

Compiling the program then only requires three commands

```

cd $HOME/pihpsdr
make clean
make app

```

and that's it! The first two commands are even not necessary at this point, since you are in the `pihpsdr` directory at that point, and since there is nothing to be cleaned up. But if you make changes in the future (e.g. changing the compile time options as described in Appendix F, or apply some code modifications) and want to re-compile later, this sequence of commands is the safest way to create a new binary.

Note that saying `make app` instead of just saying `make` has the bonus that a Macos „app” bundle is automatically created within the `piHPSDR` directory. You can drag this bundle in the Finder, say, from the `piHPSDR` directory in your home directory, to the Desktop, this can also be accomplished with the additional command

```
mv pihpsdr.app $HOME/Desktop
```

(take care that any older piHPSDR application on the Desktop is moved or deleted first).

**Note on HomeBrew installation on Macintosh computers with Intel and Silicon processors.** On Mac computers with Intel processors, HomeBrew is installed in `/usr/local`, while on Mac computers with Silicon (M1, M2, M2 pro) processors, it is installed in `/opt/homebrew`. However, the WDSP library is not aware of this and installs its library and include file as `/usr/local/lib/libwdsp.dylib` and `/usr/local/include/wdsp.h`. There is nothing wrong with this, but on a Silicon Mac `/usr/local` may not contain any sub-directories. Therefore, the installation procedure, after completing the HomeBrew installation, looks whether certain directories exist in `/usr/local` and, if not, places symbolic links there that point to

```
/usr/local/lib      → /opt/homebrew/lib  
/usr/local/include → /opt/homebrew/include  
/usr/local/bin     → /opt/homebrew/bin
```

This also solves many problems with compiling packages, since the directories in `/usr/local` are usually in the standard compiler search paths, while `/opt/homebrew` is not.