


PRINTWAYS
BY FAV

Digital
**EQUIPMENTS
& SUPPLIES**



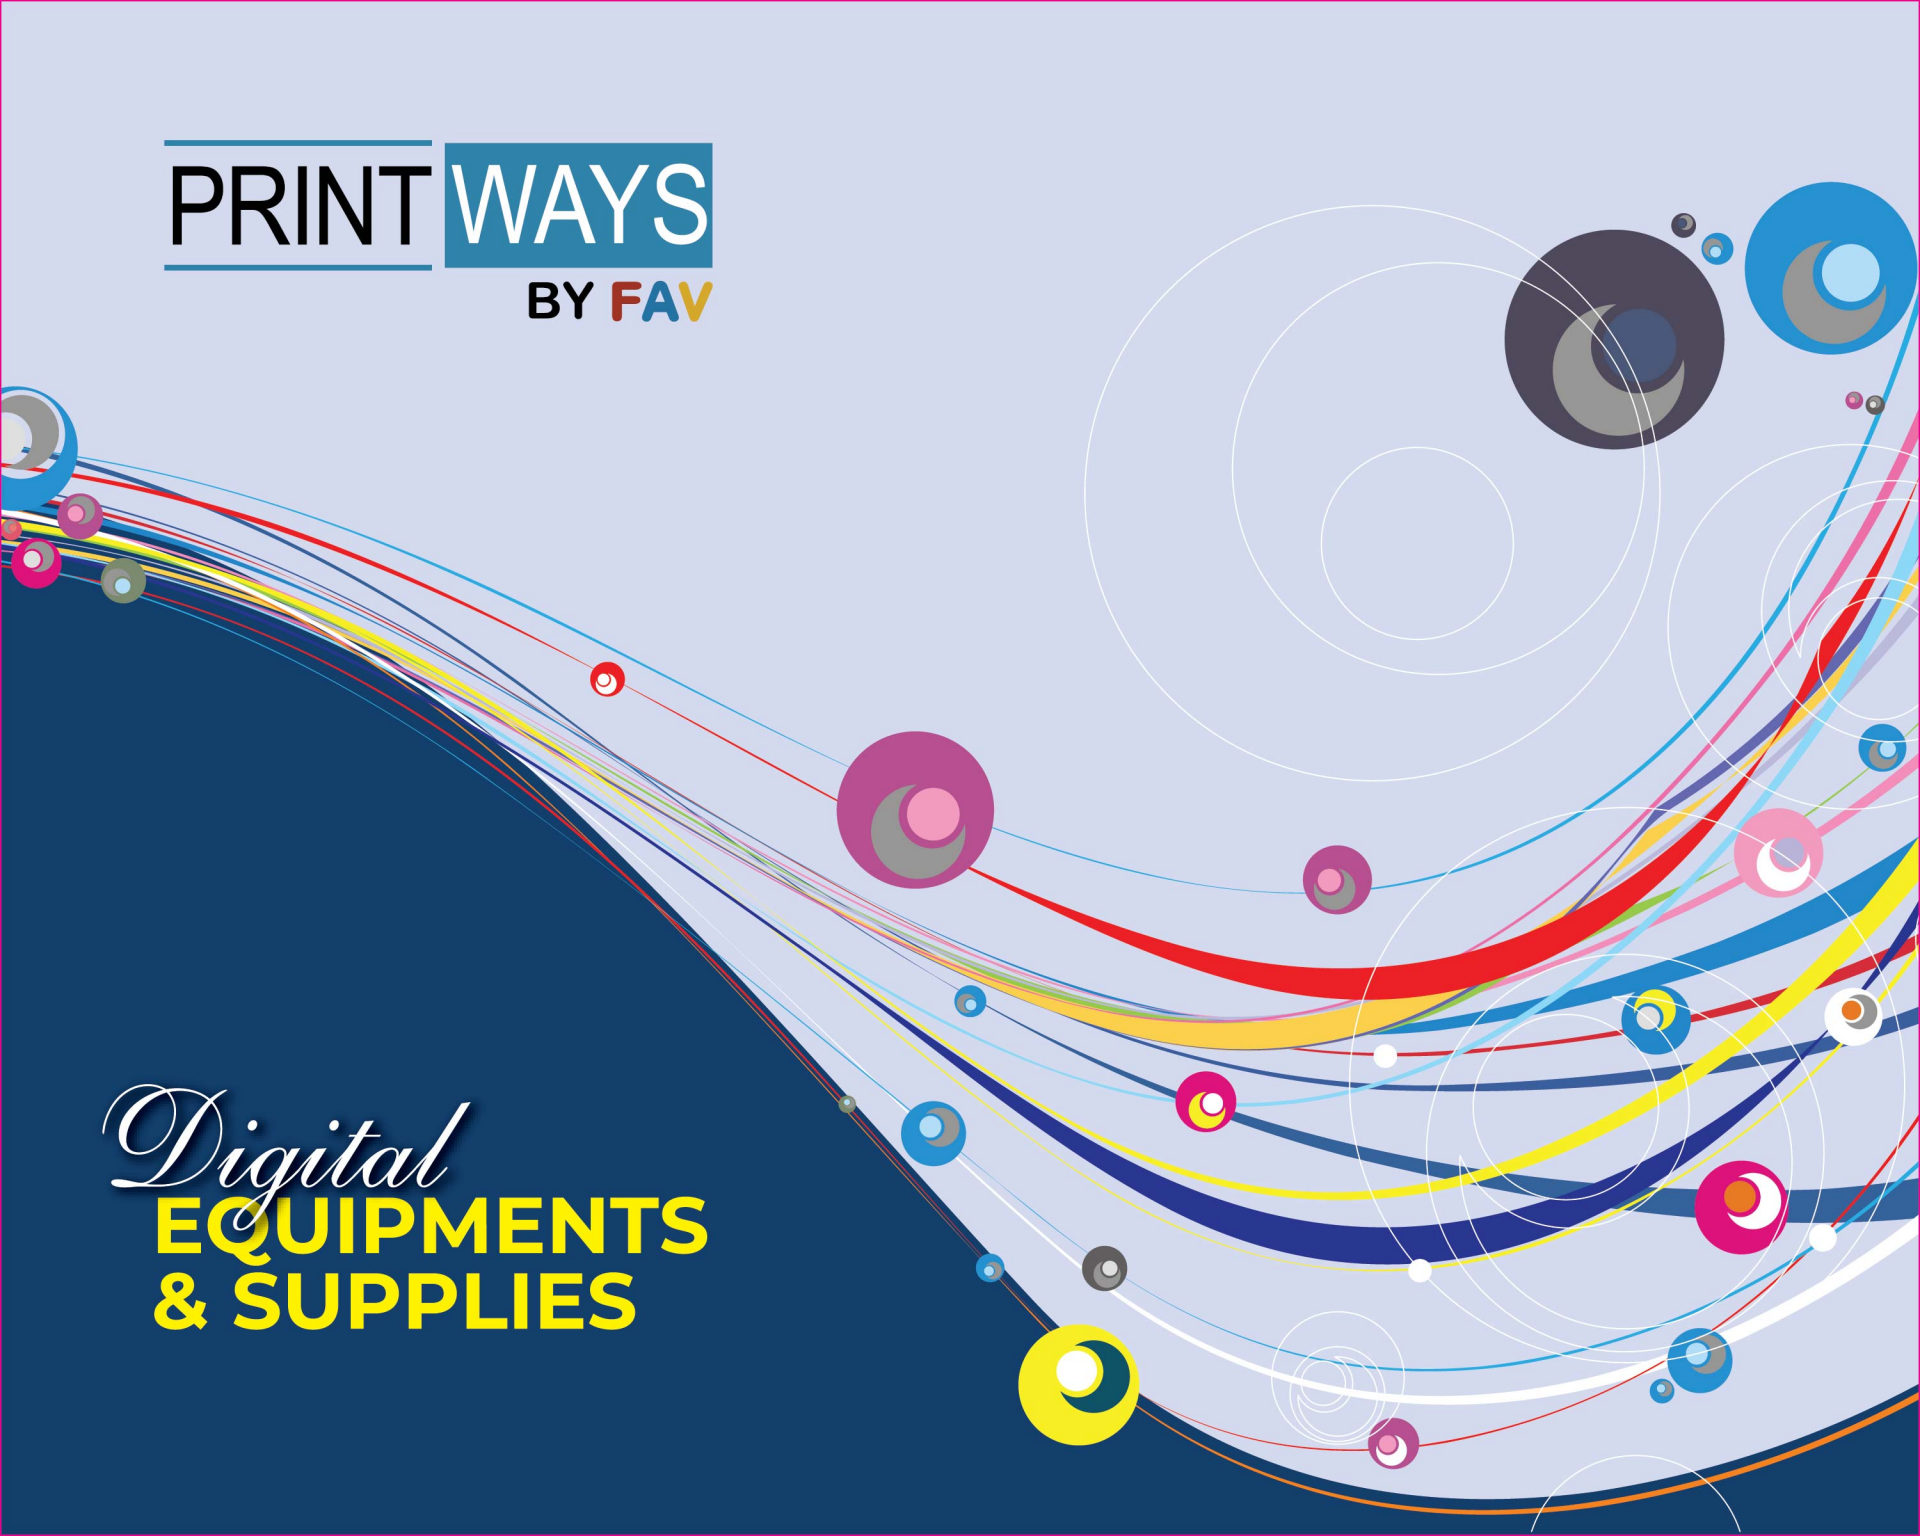

Digital Equipments & Supplies

DTF Inks | DTF Rolls | DTF Powder | Head Cleaner | Heads A1/E1 (I3200/XP600) & Others Accessories

Sublimation Inks | Sublimation Rolls

Eco Solvent Inks



DTF Printer H-602



TECHNICAL SPECIFICATIONS

Model	H-602 Hoson	
Print Head	2-6 Print Heads	
Printing Technology	Piezoelectric Inkjet	
Acceptable Media	Width	620 mm
	Thickness	Maximum 39 mil(1 mm)
Printing Width	600 mm	
Ink Cartridges	Type	Transfer Pigment Ink
	Capacity	Continual Ink Supply System (220ML)
	Color	2/4/5 Heads - 5 Colors , 3 Heads - 9 Colors CMYK / LcLm / Fluorescent Colors Optional
Applicable Medium	Transfer Film	
Color Manage	ICC or Density Curve	
Media Heating System	Powder & Color Fixing Machine	
Interface	RJ-45/LAN	
RIP Software	Maintop, BYHX,RIIN, Photoprint (Optional)	
Power Supply	50HZ/60HZ,220V/110V/10A	
Environment	Temperature	20 ℃ to 28 ℃
	Humidity	65% to 75%
Printer Dimensions(With Stand)	L1840mm*W780mm*H1400mm	
Packing Dimensions	L1900mm*W930mm*H1320mm	
Weight	165kg	
Applicable Medium	Nylon, Chemical Fiber, Cotton, Leather, Swimwear, Wetsuit, PVC, EVA, etc.	
Powder Control	Powder shake control, powder control, powder direction and volume control	
Heating & Drying Function	Multi-stage heating system, drying, cold air fan function	
Rewind Function	Automatic induction winding	
Electrical Parameters	Rated Voltage: 220V	Rated Current: 20A
	Rated Power: 3.42KW	Power Consumption: 1KW-2.5KW
Packing Size & Weight	1900* 1120* 1180mm	
	G.W. 235kg N.W.210kg	
Powder Shaker Size	1780*980*1040mm / 1780*1100*1040mm (Built-in smoke filter)	

DTF Printer H-602



TECHNICAL SPECIFICATIONS

Product	602 DTF Printer
Printhead	2*EPSON I3200-A1/3*EPSON 13200-A1
Model	602
Printing Speed	Output (sqm/h)
4 PASS	12
6 PASS	10
Max Media Width	730mm
Max Print Width	680mm
Ink Type	Waterbased Pigment Ink
Color	5 colors (C, M, Y, K, W)/Fluorescent
Ink Supply System	Continuous Ink Supply System
White Ink Cycle	Equiped
Media Type	PET Film
Media Thickness	1mm
Heating System	Intelligent Embedded Heating System
	Powder Melt Machine
Feed Up System	Equiped
Take Up System	Equiped
Capping&Moisturizing	Auto Capping System & Moisturizing System
Data Interface	CAT6 Lan Cable
RIP Software	Maintop, BYHX,Hoson, Photoprint (Optional)
Input Power	AC220V, 50Hz/60Hz 350W-3400W
Working Environment	Temperature : 18-32℃ Humidity : 46-65%
Machine Size	Printer: 1850*795*1600mm; 180Kgs
	Shacker: 2105*1092*110mm; 240Kgs
Package Size	Printer: 2060*890*790mm; 222Kgs
	Shacker: 2200*1120*1136mm; 300Kgs
Applicable Medium	Nylon, Chemical Fiber, Cotton, Leather, Swimwear, Wetsuit, PVC, EVA, etc.
Powder Control	Powder shake control, powder control, powder direction and volume control
Heating & Drying Function	Multi-stage heating system, drying, cold air fan function
Rewind Function	Automatic induction winding
Electrical Parameters	Rated Voltage: 220V Rated Current: 20A Rated Power: 3.42KW Power Consumption: 1KW-2.5KW

H-602 DTF Printer



TECHNICAL SPECIFICATIONS

Model No.	H-602 DTF Printer
Device type	2-head printer
Print width	60cm
Print accuracy	720dpi*1800dpi 6pass/720dpi*2400dpi 8pass
Printing software	BetterPrinter/Hosonsoft
RIP software	MainTop
Maintenance	Automatic cleaning,automatic moisturizing
Print Speed	6pass 8-15m ² /h 8 pass5-12m ² /h
Ink type & Configuration	Pigment Ink CMYKW
Printhead Model	Epson i3200-A1*2
Working environment	Temperature:20°C-28°C Humidity:65-75%
Working power supply	220V50HZ/60HZ 3.5A
Outside dimensions	1800*750*1750mm LWH
Packing size	1950*920*960mm LWH
The weight of	170kg 220kg
Power	750W

DTF 30 Pro Desktop



TECHNICAL SPECIFICATIONS

Product Model	DTF-30 Pro Desktop
Print Head	Epson F1080
Number Of Print Heads	1
Max Print Size	330mm
Ink Colors	5 Colors (Cmyk+w)
Ink Type	Keditec Dt-201ink
Anti Sedimentation System	White Ink Filtration & Circulation System
Support Wireless Connection	
Mobile Phone Software App Support	
Direct Printing Technology For Photos Without Rip	

PW-4060CB UV Printer



TECHNICAL SPECIFICATIONS

Product Model	PW-4060CB UV Printer
Printing size	40*60mm/Roll Length
Printing height	0~150mm
Print head	i1600
Printing technology	Variable Droplet Technology
Hot Stamping	Supports High-Load-Bearing Suction Platform
Printing platform	One-way/Two-Way
Printing direction	Embossing/Varnish
Special effects	Multi-Channel Real-Time Ink Low Alarm
Ink Volume detection	UV Inks: C/M/Y/K/W/V/LW/LC/Lk/LLK
Black water type	Imported Linear Guides
Guide rail	XY-Axis Guides+Motor
Transmission mode	Fully Automatic Repeatable Printing
Automatic mode	UV Curing, Instant Drying
Curing mode	Automatic Changing Code/Name/Date,etc. (Optional)
Dynamic printing	Temperature 15-35°C
Working environment	Humidity 20~30%
Operating system	Win 7,8,10
Equipment dimensions	109*51*59cm/135KG
Packaging dimensions	115*115*83cm

PW-603UV DTF



TECHNICAL SPECIFICATIONS

Model	PW-603 UV DTF
Printhead	Type: EPSON I1600-U1/I3200-U1 Quantity:3-4
Print Speed	4PASS: 9.5m ² /h 6PASS: 8m ² /h
Ink Type	UV Ink or Hard Ink
Print Color	3 heads: CMYK+W+V 4 heads: CMYK+W+CMYK+V
Print Width	600mm
Power	220V/110V 50Hz/60Hz
Gross Weight	262kg
Print Interface	Gigabit Port
Print Media	600mm AB Film
Image Format	JPG, TIF, PDF, etc.
System Configuration	WIN7 and Above
Work Environment	Temp.: 15°C~30°C Humidity: 35%~65%
RIP Software	FlexiPRINT (Standard), Riin(Optional), Maintop, CADlink(Fiery), etc.
Package Size	2110*1160*940mm

9060 UV Flatbed Printer



TECHNICAL SPECIFICATIONS

Mode of Equipment	UV9060
Print head type	Epson i3200
Printing color	CMYK+W/CMYK+W+V
Printing Height	0-180mm
Printer Dimension	1996.90mm*1331.88mm*787mm
RIP software	Photo print
Data interface	RJ45
Operation Environment	Temperature: 20°C-25°C/Humidity: 40-60%
Lifting function	Continuous ink supply/ink tank 2000ml/subtank constant temperature and pressure/white auto stirring
Printing Size	900mm*600mm
Print head quantity	2/3(can be customized)
Printing Precision	720*1200,720*1800,720*2400,720*3600DPI
File format	PDF / JPG / JPEG / TIF / TIFF
Power requirements	AC220/110V±10,50HZ-60HZ
Driver Software	Windows 7, Windows 10, Windows 11.64-bit
Printer Weight	155KG

PW-1215 UV Printer



TECHNICAL SPECIFICATIONS

Mode of Equipment	PW-1215
Print head type	Ricoh G5i / Epson i3200
Printing color	CMYK+LCLM+W+V
Printing Height	0-300mm (can be customized)
Printer Weight	800KG
Operation Environment	Temperature: 20°C-30°C/Humidity: 40-70%
Printing Precision	720*600DPI/720*900DPI/720*1200DPI/960*200DPI
Ink System	Ink Tank 2000ml
Printing Size	1200*600mm
Print head quantity	2-4
Driver Software	Microsoft Windows 10 pro
File format	TIFF(RGB&CMYK)BMP,PDF,EPS,JPEG etc.
Power Requirements	AC220V 50Hz P:5000W
Power Dimension	3071mm*2260mm*1500mm
RIP Software	Riprint
Data Interface	Gigabit Network Interface

Sublimation Printer



TECHNICAL SPECIFICATIONS

Print head	EPSON i3200
Number of printhead(PC)	2
Maximum print width(M)	1.8Meter
Color	CMYK 4Color
Compatible ink	Eco-solventink/Sublimation Ink etc
Drying system	1440 dpi
Cleaning of printhead	Automatic
Heating system	Front/ Back
Infrared	Optional
Fan	Equipped
Auto media take-up system	Equipped
Platform suction control	Equipped
Working environment	15-30°C
Relative humidity	40-60%
Draft mode	20m ²
Production	17m ²
Quality mode	15m ²
RIP software	Maintop
Operating system	WinXP/Win7
Power supply	AC220V50-60HZ
Package size(mm)	2900x740x670
Weight	210kg
Printer size(mm)	2837x455x1300
Printer weight	160kg

PW1804 SUBLIMATION Printer



TECHNICAL SPECIFICATIONS

Mode		KMZ-4
Print head	Print head	Epson I3200-A1
	Printer head quantity	4pcs
	Printhead Attributes	Printhead Attributes: Automatic cleaning, automatic flash - spray moisturizing function
Printing DPI and Speed		360X12002PASS:180m/h 360X18003PASS:120m/h 360X2400&720X12004PASS:90m/h
ink	color	CMYK
	type	Sublimation
	Ink Supply Method	Siphon Ink Supply
Printing width		1900mm
Printing medium		Sublimation Paper
Medium Conveyance		Pressure Wheel Conveyance
Drying Method		External Intelligent Wind - Heat Integrated Dryer
Moisturizing Mode		Fully - sealed automatic moisturizing and cleaning
RIP software		Maintop6.1, photoprint, ONYX, NeoStampa,etc Standard configuration Maintop6.1
Supported Image Formats:		JPG,TIF,PDF,etc.
Computer Configuration	Operating System:	Win7 64 - bit / Win10 64 - bit
	Hardware Requirements	Hardware Requirements: Hard disk: above 500G (solid - state hard disk is recommended), running memory: 8G, graphics card: ATI Radeon with 4G memory, CPU: Intel Quad - core i5/i7 processor
	Transmission Interface:	Gigabit Network Port
Standard Configuration		Intelligent drying system, liquid level alarm system
Working Environment		Humidity: 35% - 65%, Temperature: 18°C - 30 °C
Power Supply Requirements	Input Voltage	210-230VAC 40A
	Total Power of Equipment	8.8KW
	Drying System	7 200W
Machine Dimensions	Overall Dimensions	3180*1100*1700mm
	Packing Dimensions	3360*850*1110mm

PW-FB04 DTG Printer



TECHNICAL SPECIFICATIONS

Model	PW-FB04
Head Type	Epson i3200-A1*4/i3200-A1*2
Foot Platform	450*550*10
Size	1.3m*6/8/10m
Printing Height	2.5-80mm Arbitrary Adjustment
Printing Accuracy	Optimized 720*2400dpi Lowest 360*600dpi
Printing Speed	i3200-A1*4: A4size: 210 pcs/h i3200-A1*2:120pcs/h
Optional Configuration	Ink capsule heating
Process Type	Full color direct spray/white color at the same time
The Printing Speed Capacity model	i3200-A1*4: 4Pass 720*1200dpi (A4size: 20 second) i3200-A1*2: 4Pass 720*1200dpi (A4size: 35 second)
Automatic lifting of spray truck	Adjust Printing height according to process
Working Environment	10-30°C 55%-75%
RIP Software	Maintop
Image Type	JPG/TIFF RGB/CMYK
Power Supply	AC220V/50Hz 10A 2200w
Packing size	2200*1520*2500mm,2900*1100*900mm
Weight	Net weight 700kg Export Packaging: 800kg

PW-DP16 DTG Printer



TECHNICAL SPECIFICATIONS

Product Model	PW-DP16
Printhead Configuration	Japan EPSON i3200-A1 Nozzle 16 heads (Optional 8 heads)
Ink	4 color (CMYK)
Capacity (4 Color)	360x1200dpi/2pass 360x1800dpi/3pass
Capacity (8 Color)	720x900dpi/3pass 720x1200dpi/4pass
Printhead height	3mm~25mm
Optimum Spray height	3mm
Software	Neostampa Maintop
Ink barrel volume	5L
Air Consumption	0.6MPa,50L/Min
Working Environment	Temperature:20~28°C Huidity: 50%~65%
Alarm System	Ink Shortage,Stroke Protection
Maximum Print Width	1810mm/2610mm
Host Size/Weight	4000*2200*1750mm 2300KG
Tunnel Drying Size	2430*3300*1170mm 950KG
Power Requirements	380V 50Hz/60Hz
PC Configuration	Windows 7,8,10bit pro USB3.0


Date Printer



TECHNICAL SPECIFICATIONS

Mater qualityial	Stainless steel+engineering plastics
Jet Printing performance	1-4Row(7x5lattice) 1-5Row(5x5lattice) Maximum speed=344m/min@5x5
Array Configuration	Singleline:5x5,7x5,9x16,12x8,16x11,19x14,24x17, 32x22Doubleline:5x5,7x5,9x6,12x8,16x11 Threerows:5x5,7x5,9x6, Fourrows: 5x5,7x5. Five elements: 5x5
Jet printing distance	Character height: 1-15mm Jet printing distance: 2mm to 30mm Optimum Jet Printing distance: 10mm
Operating system	The optimized LT-Touch operating system based on Linux Kernel supports multiple language
Jettable character	English,barcode,logo,specialcharacter
Data interface	USB,RS485, Ethernet
Language word	TraditionalChinese,customization support
Information storage	1000+
The Protection Grades	IP55 standard
Spurt Head	Ultra-flexible, 3m long thermostatic nozzle, 60u m.
Jet printing direction	360 omni-directional
Ink/solvent	Ink cartridge (500ml) Diluent box (750ml)
Temperature/humidity	0-45 °C Relative humidity 0-95%
Electrical requirements	100-120/200-240V~, 100W

Eco Solvent Printer

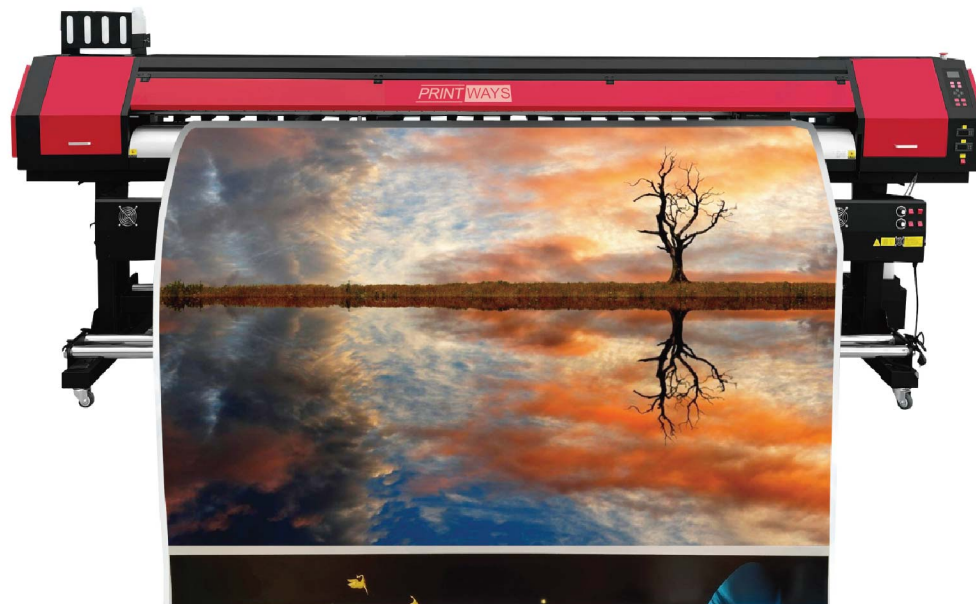

TECHNICAL SPECIFICATIONS

Model	A 3.2M Printer
Sprinkler Head	i3200 2 Head
Number of nozzles	2 Piece
Model description	3.2M wide eco solvent printer
Print orientation	Bidirectional printing / Unidirectional printing
Nozzle height	2mm-3mm
Nozzle cleaning	Fully automatic cleaning, with anti-blocking flash spray function and automatic moisturizing function
Production mode	4pass: 45m2/h
Quality mode	6pass: 30m2/h
Precision mode	8pass: 18m2/h
Type	Eco-solvent ink/water-based ink
Color	4 (CMYK)
Ink supply method	Negative pressure continous ink supply
Capacity	2000ml large capacity continous supply system
Heating system	Front and rear platform heating
Drying system	Infrared drying system + cold air drying
Print width	3200mm
Print media	Outdoor PP/lamp cloth/photo paper/oil painting cloth/reflective film/car sticker/PP adhesive/light box cloth and other rolls
Maximum roll weight	200kg
Operation language	Chinese / English
Operation system	WindowsXP/Win7/Win 10
Operating enviroment	Best environment: 18-25oC,humidity 35%-65%RH
Print interface	USB
Printing software	Maintop/photoprint
Power supply	AC-220V-110V,50Hz/60Hz
Power	Standby power 32W,maximum power 5000W
Box size	4.42*0.74*0.76m(L*W*H)
Machine weight	450kg

Screen Printing Machine



TECHNICAL SPECIFICATIONS

Model	GY-4060	GY-5070	GY-6090	GY-70100
Working table size(mm)	500*700	600*800	700*1000	800*1100
Max printing size(mm)	400*600	500*700	600*900	700*1000
Max frame size(mm)	700*1000	800*1100	900*1300	1000*14000
Mini frame size(mm)	200*400	200*400	200*400	200*400
Printing thickness(mm)	0-20/0-50	0-20/0-50	0-20/0-50	0-20/0-50
Printing speed(pcs/h)	500-900	500-900	500-800	500-800
Working pressure(Mpa)	0.3-0.6	0.3-0.6	0.3-0.6	0.5-0.6
Air consumption(L/pcs)	13/pcs	13/pcs	13/pcs	35L/min
Power(kw)	2.8	2.8	2.8	3.2kw
Dimension(mm)	1200*1000*1650	1300*1060*1640	1500*1160*1640	1600*1250*1670
Weight(kg)	410	480	550	600
Rated voltage (V/Hz)	220v	220v	380v	380v

Oval Printing Machine



TECHNICAL SPECIFICATIONS

S-60-85

Mode	Unit	8S	10S	12S	14S	16S	18S	20S
Plate Quantities	Piece	20	34	40	46	52	58	64
Print Number (Color)	Color	8	10	12	14	16	18	20
Printing size	Cm	60x85(Plate Size) (58x72)						
Max Frame	Cm	75x99						
Length	M	10.64	12.7	14.76	16.82	18.88	21.04	23.2
Width	M	3.2						
Height	M	1.6						
Weight	Kg	3500	4000	4500	5000	5500	6000	6500
Air Consumption		0.2	0.25	0.3	0.35	0.4	0.45	0.5
Air Pressure		0.6 Mpa/0.8Mpa after drying and filtering can be used						
Print Head Driver	W	Single printing head servomotor (400W)						
Total Power Consumption	KW	5	5.8	7	7.9	9.6	10.4	11.2
Power Supply Parameter		Three phase 380v 50hz						
Capacity	Pc/Hr	800						

S-70-95

Mode	Unit	8S	10S	12S	14S	16S	18S	20S
Plate Quantities	Piece	28	34	40	46	52	58	64
Print Number (Color)	Color	8	10	12	14	16	18	20
Printing size	Cm	60x85(Plate Size) (58x72)						
Max Frame	Cm	75x99						
Length	M	13.6	16	18.6	21.2	23.8	26.4	29
Width	M	3.2						
Height	M	1.6						
Weight	Kg	3800	4300	4800	5300	5800	6300	6800
Air Consumption		0.2	0.25	0.3	0.35	0.4	0.45	0.5
Air Pressure		0.6 Mpa/0.8Mpa after drying and filtering can be used						
Print Head Driver	W	Single printing head servomotor (400W)						
Total Power Consumption	KW	5	5.8	7	7.8	9.6	10.4	11.2
Power Supply Parameter		Three phase 380v 50hz						
Capacity	Pc/Hr	800						

3040 Co2 Laser Engraving Machine



TECHNICAL SPECIFICATIONS

Motherboard	M3, Rd6442/6445, Trocen7813, Topwisdon A1/a3
Electric Machines	42stepping Motor
Guide Rail	X Axis 12mm Linear Square Rail
Processing Speed	Sculpture Speed 0-500mm/s,
Cutting Speed	0-100mm/s
Auxiliary Functions	Red Light, Blow Air, Manual Lifting And Lowering
Desktop	300*400mm
Machine Dimension	80*50*27cm
Power	40w-50w

6090 Double Head Co2 Laser Engraving Machine



TECHNICAL SPECIFICATIONS

Working Format	600x900
Laser Power	80-300w
Repetitive Positioning Accuracy	0.01mm
Minimum Formed Text	1*1mm
Maximum Carving Speed	800m/s
Maximum Cutting Speed	200mm
Cutting Thickness	0-30mm
Drive Mode	High Speed Dsp Controls Stepper Motor
Cooling Method	Water Cooling

Co2 Laser Marking Machine



TECHNICAL SPECIFICATIONS

Focusing device	3D Dynamic focus
Working deflection angle (O)	Positive or negative 11
Writing speed (1)	《7000mm/s
Dry run speed	《7000mm/s
Follow the error	<0.4 ms
nonlinear (2)	0.03% max
8 hours of continuous work drift	《0.5mrad
Repeatable marking accuracy (urad)	8
Maximum position drift (uard)	30
The name of the system	parameter
CO2 LASER	RECI W6(130W-150W) GIASS
Dynamic focusing system	Sino -galvo BL2830-3D-800
Water cooler	CW5200
Software	markingmate
operating system	The IPC comes with a Windows system
Marking system	800MM*800MM
Maximum marking line speed	7000mm/s
System operating environment requirements	Ambient temperature requirements +10°C ~ 30°C
Ambient humidity requirements	Less than 70% without condensation
Power supply	220V/50Hz 110V/60HZ
The whole machine consumes electricity	1000W


TN24CCD Vinyl Cutting Machine



TECHNICAL SPECIFICATIONS

Function	With Built-in CCD Camera, Automatic Contour Cutting
Motor	High Speed, Big Power Step Motor, Micro-step driver
Control Panel	4.3 Inch Full Touch Screen4.3
Interfaces	USB/ U disk/ Serial Port USB/U
Plotter Instruction	Compatible DM/PL, HP/GL DM/PL, HP/GL
Main Board	32-bit Arm7 Cpu, 128mb, High-speed Cache Memory 32 Cpu,128mb Cache
Cutting Force	10-1000g (Digital Adjustable)
Cutting Speed	800mm/s
Maximum Cutting Thickness	1mm
Gross Weight	22kg
Package Size	1090*340*400
Mechanical Precision	0.025mm
Type Of Plotter Pen	All Type Diameter 11.4mm Plotter Pen

Sublimation Roll Transfer Machine

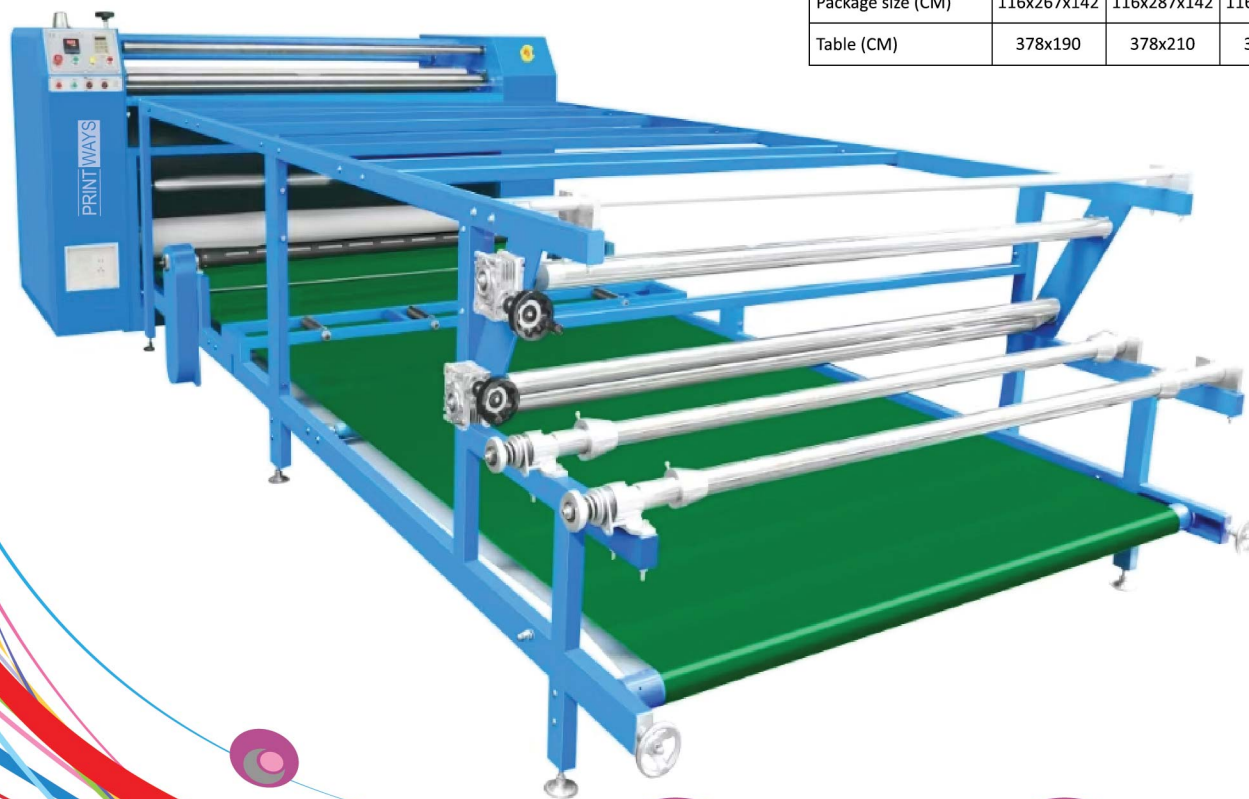

TECHNICAL SPECIFICATIONS

Roller Width(MM)	1800	2000	3200	1800	2000	3200
Roller Diameter(MM)	420	420	420	600	600	600
Voltage (V)	380 (Three-phase four-wire)					
Power (KW)	30	33	48	51.6	57	84
Temperature range(°C)	0~260					
Weight (KG)	2030	2250	3000	2500	3000	4000
Package size (CM)	116x267x142	116x287x142	116x407x142	134x267x157	134x287x157	134x407x157
Table (CM)	378x190	378x210	378x330	378x190	378x210	378x330

[illegible]

HEAD OFFICE

B-66/A, S.I.T.E., Area,
Karachi-75700, Pakistan.
+92 (21) 32550093-98
info@vawda.com

LAHORE OFFICE

307/E, Nadir street, Ferry Meadowlane,
West canal Bank, Lahore-54590, Pakistan.
+92 (42) 36113239
lhr@vawda.com

FAISALABAD OFFICE

P-68, Vawda House, Vawda Street 4,
Zia Town Faisalabad-38000, Pakistan.
+92 (41) 8524576
fsd@vawda.com

MULTAN OFFICE

Plot # 62/A, Phase-1
Industrial Estate Multan.
+92 (61) 6538131
mul@vawda.com

