

# PoE SWITCHES

FF-B42B &  
FF-Q42A

FF-B82A &  
FF-Q82A

FF-B2421B

FF-B12A


FF-Q822B

FF-IOT82A & FF-IOT82Q & FF-IOT82G

FF-Q162A



Outdoor PoE Switch  
FF-FS821G

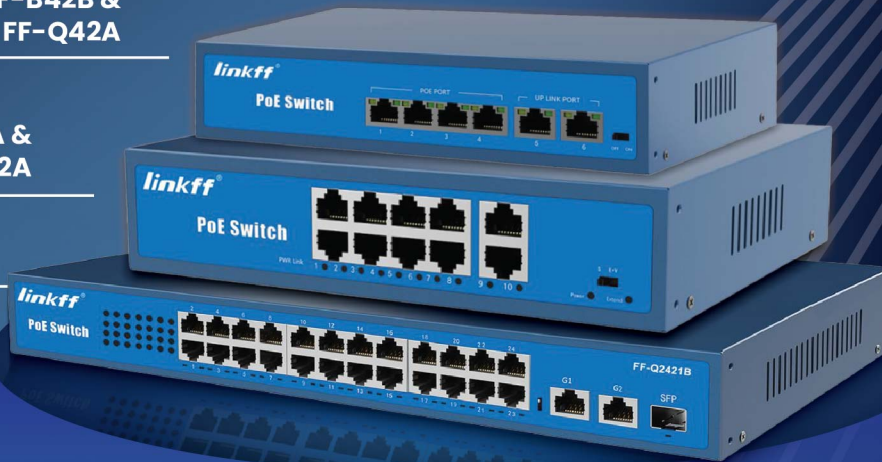

| Model.           | Specification                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>FF-B42B</b>   | ◆4*100M POE Port+2*100M Uplinked ◆One Port≤30W Full Port≤65W<br>◆AC 100V-240V Short circuit protection ◆Distance: ≤250M ◆AI Extended Mode                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>FF-Q42A</b>   | ◆4*1000M POE Port+2*1000M Uplinked ◆ One Port≤30W Full Port≤65W<br>◆ AC 100V-240V Short circuit protection ◆ Distance: ≤250M ◆ AI Extended Mode                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>FF-B82A</b>   | ◆ 8+2-PORT POE 10/100Mbps ◆ One Port≤30W Full Port≤120W DC 52V 2.3A Built-in Power ◆ UP LINK Port: 2CH RJ45 10/100Mbps ◆ Distance: ≤250M 1-3 PORT                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>FF-Q82A</b>   | ◆8*100M POE Port+2*1000M Uplinked ◆ One Port≤30W Full Port≤120W<br>◆ AC 100V-240V Short circuit protection ◆ Distance: ≤250M ◆ AI Extended Mode                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>FF-Q822B</b>  | ◆8*1000M POE Port+2*1000M Uplinked +2SFP ◆ One Port≤30W Full Port≤120W<br>◆ AC 100V-240V Short circuit protection ◆ Distance: ≤150M ◆ AI Extended Mode                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>FF-Q162A</b>  | ◆16*100M POE Port+2*1000M Uplinked ◆ One Port≤30W Full Port≤260W<br>◆ AC 100V-240V Short circuit protection ◆ Distance: ≤250M ◆ AI Extended Mode                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>FF-B2421B</b> | ◆24*100M POE Port+2*1000M Uplinked +1SFP ◆ One Port≤30W Full Port≤350W<br>◆ AC 100V-240V Short circuit protection ◆ Distance: ≤250M ◆ AI Extended Mode                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>FF-IOT82A</b> | ◆8*100M POE Port+2*100M Uplinked ◆ One Port≤30W Full Port≤150W<br>◆the max PoE output is 60W for the 8 <sup>th</sup> port ◆ AC 100V-240VShort circuit protection<br>◆ AI Extended Mode ◆ 4 DIP switches 1.LPP/BPS: Loop protection and Broadcast storm protection 2. Extend: The Max extend distance is 250 meters at 10Mbps for 1-8 ports 3. Vlan: 1-8 ports isolation 4. AI: <b>Watchdog function</b> : auto-detect the data communication status of all PoE ports in real-time, and restart PoE IP camera timely if the camera is halted   |
| <b>FF-IOT82Q</b> | ◆ 8*100M POE Port+2*1000M Uplinked ◆ One Port≤30W Full Port≤150W<br>◆the max PoE output is 60W for the 8 <sup>th</sup> port ◆AC 100V-240VShort circuit protection<br>◆ AI Extended Mode ◆ 4 DIP switches 1. LPP/BPS: Loop protection and Broadcast storm protection 2. Extend: The Max extend distance is 250 meters at 10Mbps for 1-8 ports 3. Vlan: 1-8 ports isolation 4. AI: <b>Watchdog function</b> : auto-detect the data communication status of all PoE ports in real-time, and restart PoE IP camera timely if the camera is halted |
| <b>FF-IOT82G</b> | ◆ 8*1000M POE Port+2*1000M Uplinked ◆ One Port≤30W Full Port≤150W<br>◆ the max PoE output is 60W for the 8 <sup>th</sup> port ◆AC 100V-240V Short circuit protection ◆ AI Extended Mode ◆ 4 DIP switches 1. LPP/BPS: Loop protection and Broadcast storm protection 2. Extend: The Max extend distance is 250 meters at 10Mbps for 1-8 ports 3. Vlan: 1-8 ports isolation 4. AI: <b>Watchdog function</b> : auto-detect the data communication status of all PoE ports in real-time, and restart PoE IP camera timely if the camera is halted |
| <b>FF-B12A</b>   | <b>PoE Repeater</b> ◆ 1 TO 2x100M ◆ PoE Protocol: IEEE802.3AF/AF<br>◆ Output Power: 0-30W ◆ Distance: ≤250m                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>FF-FS821G</b> | <b>Outdoor/Weatherproof/Dustproof/Waterproof</b> ◆ 8*1000M POE Port+2*1000M Uplinked +1SFP ◆ One Port≤30W Full Port≤120W<br>◆ AC 100V-240V Short circuit protection ◆ Distance: ≤120M<br>◆ AI Extended Mode, IP66 rated, weather and dust sealed                                                                                                                                                                                                                                                                                              |

