

LOW VOLTAGE WALL MOUNTED & RACK MOUNTED RESIDENTIAL BATTERY

PRODUCT CHARACTERISTICS

10X Capacity
- Supports up to 10 sets in parallel to meet your energy needs

Stable and Reliable
- Built-in intelligent battery management system to ensure Power stability and reliability

Wall-Mounted & Rack-Mounted
- Flat design,support wall-mounted or 19inch rack, saving installation space.

Real-time Monitoring
- With APP real-time data monitoring function and Intelligent solution configuration

Convenient and Fast
- Wall mounted or floor stand options for quick and easy installation

Eco-Friendly
- Use environmental protection materials, the whole module non-toxic, pollution-free.





TECHNICAL INDEX

System Parameters				
Optional Inverter Power	51.2 V	51.2 V	51.2 V	51.2 V
Battery Module	1	3	5	10
Energy	5.121 kWh	15.36 kWh	25.6 kWh	51.21 kWh
Nominal Capacity	100 Ah	300 Ah	500 Ah	1000 Ah

PRODUCT CHARACTERISTICS



Safe and Reliable
- A grade LFP cells (LiFePO4) for high stability and long lifespan

Flexible Configuration
- Connect up to 31 units in parallel for even more capacity and power, or start small and expand as needed


Strong Compatibility
- Equipped with CAN and RS485 interfaces, fully compatible with mainstream inverter brands

Advance BMS
- Automatic Protection Against Extreme temperatures, overvoltage, overcurrent, shortcircuts, and surge currents

TECHNICAL INDEX

Product Model	FAV-LS-5-A
System Parameters	
Cell Technology	LFP (LiFePO4)
Energy	5.12kWh
Rated Capacity	100Ah
Rated power	5120Watt
Rated Voltage	51.2V
Operating Voltage Range	44.8-58.4V
Rated Charge/Discharge Current	50A
Maximum Charge/Discharge Current	100A
Peak Discharge Current (30s)	200A
Cycle Life	≥6000 (at 80% Do D, 0.5C, 25° C)
General Parameters	
Dimension (W*D*H)	550 X 440 X 135mm (21.6 X 17.3 X 5.3 Inch)
Weight	48kg (105 lb)
IP Grade	IP20
Cooling	Natural Cooling
Operating Temperature	Charging: 0° C~+55° C ; Discharging -20° C~+55° C
Relative Humidity	10%~90%RH
Installation	Rack-mounted/Cabinet
Communication	Inverter Compatible
SOC	LED Indicator
Scalability	MAX. 12 in parallel (60Kwh)
Standard & Certifications	
Transportation	UN38.3

PRODUCT TOPOLOGY

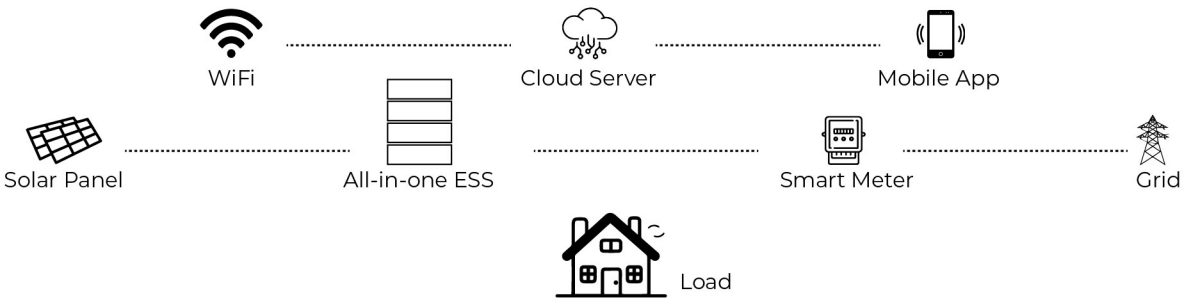

HEAD OFFICE
B-66/A, S.I.T.E., Area, Karachi-75700,Pakistan.
+92 (21) 32550093-98
info@vawda.com

LAHORE OFFICE
307/E, Nadir street, Ferry Meadowlane, West canal Bank, Lahore-54590,Pakistan.
+92 (42) 36113239
lhr@vawda.com

FAISALABAD OFFICE
P-68, Vawda House, Vawda Street 4, Zia Town Faisalabad-38000, Pakistan.
+92 (41) 8524576
fsd@vawda.com

MULTAN OFFICE
Plot # 62/A, Phase-1 Industrial Estate Multan.
+92 (61) 6538131
mul@vawda.com

FAV GROUP OF COMPANIES
WWW.VAWDA.COM