FAV Group of Companies

Head Office
B-66/A, S.I.T.E., Area, Karachi-75700, Pakistan.
+92 (21) 32550093-98 info@vawda.com

Lahore Office
307/E, Nadir street, Ferry Meadowlane, West canal Bank, Lahore-54590, Pakistan.
+92 (42) 36113239
lhr@vawda.com

Faisalabad Office
P-68, Vawda House, Vawda Street 4, Zia Town Faisalabad-38000, Pakistan.
+92 (41) 8524576
fsd@vawda.com

Multan Office
Plot # 62/A, Phase-1 Industrial Estate Multan-60000, Pakistan.
+92 (61) 6538131
mul@vawda.com

FAVOPRINT ECONOMICAL RANGE

Color Palette

Veechem Industries (Pvt.) Ltd

Veechem Industries (Pvt.) Ltd

STANDARD PRINTING RECIPES

Stock Paste:

Water	g/kg		
BINDER	80-150	g/kg	
UREA	10-20 g/kg		
Crosslinking agent	5-10	g/kg	
Ammonia (25%)	1-2	g/kg	(adjust pH 8.5-9.0)
THICKNER	25-30 g/kg		

(to achieve viscosity 7000-9000CPS)

TOTAL 1000 g

Printing Paste

FAVOPRINT Pigment	10-60 g/kg	
Stock Paste	990-940	g/kg

TOTAL 1000 g

Print Process:

Print

Dry at 100-120◦C for 1-2min

Cure at 150◦C for 5min

Note:

1- pH of print paste should be **8-9**

2- Viscosity of print paste should be **7000-9000 cps**

3- If necessary use Antifoam, Modifier & Dispering agent as per prescribed by their supplier

SUITABILITY FOR PIGMENT DYEING

Favoprint Pigments are suitable for dyeing by Continuous application as well as for Exhaust dyeing of knitted fabrics.

Key:

1/1 : Full print
1/9 : Reduction
• : Suitable
○ : Not stable
N.D : Not Defined

NOTE:

Developing shades using a combination of **Favoprint Orange** and **Favoprint Black Pigments** is not recommended, as this combination may lead to the formation of restricted amines (azo), which could be detected during testing.

Veechem Industries (Pvt.) Ltd

INFORMATION ABOUT FASTNESS PROPERTIES

LIGHT FASTNESS: Light Fastness test carried out with Xenone light fastness tester.
according to ISO 105 BO2 for 24hrs.

THERMAL STABILITY : Thermal stability being carried out according to ISO 105 PO1at 180°C x 1min
Only Shade change has obseved.

DRY-CLEANING FASTNESS: Staining of solvent not considered, only shade change observed according to ISO 105-DO1

PVC FASTNESS: Migration of pigment into PVC film is observed staining according to test ISO 105 X 10

SUITABLITY IN DISCHARGE: Results are based on testing the print 30g/kg pigment dispersion with discharging agent.
• stable, ○ not stable

Veechem Industries (Pvt.) Ltd

PRODUCTS

S No.	30g/kg	1:9	S.D 1/1 (gm/kg)	Fastness to light ISO 105 BO2 (24 hrs)	
				1/1	1/9
1			30	4	3-4
	FAVOPRINT YELLOW FD-L				
2			30	4	4
	FAVOPRINT YELLOW FD-G				
3			30	6	5-6
	FAVOPRINT YELLOW FD-P				
4			30	5	4
	FAVOPRINT ORANGE FD-R				

Fastness to Dry Cleaning. ISO 105 DO1	Fastness to Hypochlorite Bleach ISO 105 NO1		Fastness to Chlorine ISO 105 EO3-100ppm		Fastness to PVC ISO 105 X-10	Heat stability 1min @ 180°C ISO 105 PO1	Suitiblity in discharge (80g/kg Rongalit)	Oeko Tex Standard 100 (MAK Amines limit ppm)
1/9	1/1	1/9	1/1	1/9	60g/kg	30g/kg		
1-2	4	3	4-5	4	3-4	4	•	•
1-2	4	3-4	4-5	4	3	4	•	•
2-3	4	3-4	4	4	4	4	•	•
1-2	4	3-4	4-5	4	3	4-5	•	•

Veechem Industries (Pvt.) Ltd

PRODUCTS

S No.	30g/kg	1:9	S.D 1/1 (gm/kg)	Fastness to light ISO 105 BO2 (24 hrs)		Fastness to Dry Cleaning. ISO 105 DO1	Fastness to Hypochlorite Bleach ISO 105 NO1		Fastness to Chlorine ISO 105 EO3-100ppm		Fastness to PVC ISO 105 X-10	Heat stability 1min @ 180°C ISO 105 PO1	Suitiblity in discharge (80g/kg Rongalit)	Oeko Tex Standard 100 (MAK Amines limit ppm)
				1/1	1/9	1/9	1/1	1/9	1/1	1/9	60g/kg	30g/kg		
5			30	5	4-5	3	4	3-4	3-4	3-4	3	4	•	•
	FAVOPRINT RED FD-B													
6			30	6	4-5	3	4	3-4	4-5	4	3	4	•	•
	FAVOPRINT RED FD-G													
7			30	6	6	3-4	4	3-4	4-5	4	4	4	•	•
	FAVOPRINT RED FD-M													
8			30	7	6-7	4-5	2	1-2	2	1-2	4-5	4-5	•	•
	FAVOPRINT PINK FD-BL													

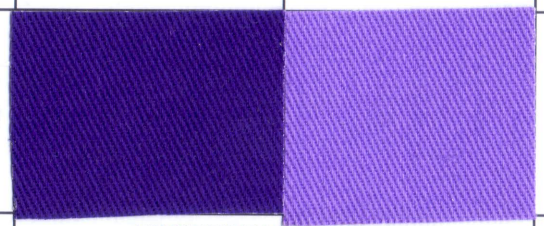
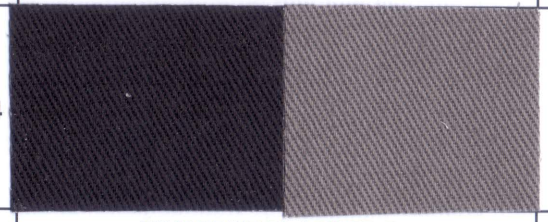
Veechem Industries (Pvt.) Ltd

PRODUCTS

S No.	30g/kg	1:9	S.D 1/1 (gm/kg)	Fastness to light ISO 105 BO2 (24 hrs)		Fastness to Dry Cleaning. ISO 105 DO1	Fastness to Hypochlorite Bleach ISO 105 NO1		Fastness to Chlorine ISO 105 EO3-100ppm		Fastness to PVC ISO 105 X-10	Heat stability 1min @ 180°C ISO 105 PO1	Suitiblity in discharge (80g/kg Rongalit)	Oeko Tex Standard 100 (MAK Amines limit ppm)
				1/1	1/9	1/9	1/1	1/9	1/1	1/9	60g/kg	30g/kg		
9			30	4	3-4	3	3-4	3	4	3-4	2-3	4	•	•
	FAVOPRINT PINK FDN													
10			30	7-8	7	4	4-5	4-5	4-5	4-5	4-5	4-5	•	•
	FAVOPRINT GREEN FD-G													
11			30	7	6-7	4	4	4	4-5	4	4	4-5	•	•
	FAVOPRINT TURQ BLUE FDN													
12			30	6	5	3-4	3-4	3	4	4	3	4-5	•	•
	FAVOPRINT BLUE FD-H													

Veechem Industries (Pvt.) Ltd

PRODUCTS

S No.	30g/kg	1:9	S.D 1/1 (gm/kg)	Fastness to light ISO 105 BO2 (24 hrs)		Fastness to Dry Cleaning. ISO 105 DO1	Fastness to Hypochlorite Bleach ISO 105 NO1		Fastness to Chlorine ISO 105 EO3-100ppm		Fastness to PVC ISO 105 X-10	Heat stability 1 min @ 180°C ISO 105 PO1	Suitiblity in discharge (80g/kg Rongalit)	Oeko Tex Standard 100 (MAK Amines limit ppm)
				1/1	1/9	1/9	1/1	1/9	1/1	1/9	60g/kg	30g/kg		
13			30	6	5	3	4	3-4	4	3-4	3	4-5	•	•
	FAVOPRINT VIOLET FD-R													
14			30	7	6-7	4-5	4-5	4	4-5	4-5	4-5	4-5	•	•
	FAVOPRINT BLACK FD-B													