Karachi:
B-66/A, SITE Area, Karachi – 75700,
Pakistan
T: +92 (21) 32550093-98
F: +92 (21) 32550099
info@vawda.com
www.vawda.com

Lahore:
307/E, Nadir Street, Ferry Meadowlane,
West Canal Bank, Lahore
T: +92 (42) 36113239, 35292819
F: +92 (42) 35292819
lhr@vawda.com

Faisalabad:
Vawda House, Plot # 68, Vawda Street No. 4,
Zia Town, Faisalabad
T: +92 (41) 8524576
F: +92 (41) 8524947
fsd@vawda.com

Veechem Industries (Pvt.) Ltd

FAVOPRINT Textile Pigments

Farid Ahmed Vawda & Co.



Veechem Industries (Pvt.) Ltd

FAVOPRINT
Textile Pigments

Farid Ahmed Vawda & Co.

Veechem Industries (Pvt.) Ltd

FAVOPRINT ECO FRIENDLY TEXTILE PIGMENTS

	30g/kg	1:9
Favoprint L.Yellow AF-GN		
Favoprint Yellow AF-2GN		
Favoprint Yellow AF-3GN (GOTS Approved)		
Favoprint Yellow AF-GRP (GOTS Approved)		
Favoprint G.Yellow AF-GK		
Favoprint Orange AF-RF (GOTS Approved)		

S.D 1/1 (gm/kg)	C.I.NO	Fastness to light ISO 105 BO2 for 24hrs		Fastness to Dry cleaning ISO 105 DO1		Fastness to Chlorine ISO 105 E03 100ppm		Fastness to Hypochlorite bleach ISO 105 NO1		Fastness to PVC ISO 105 X10	Heat stability ISO 105 PO1 for 1min @ 180C	Suitibility in discharge (80g/kg Rongalit)	Oeko Tex Standard 100 (MAK Amines limit ppm)
		1/1	1/9	1/1	1/9	1/1	1/9	1/1	1/9	1/1	1/1		
30	Y-12	5-6	4-5	3-4	2-3	4-5	4	4	4	4	4	•	•
30	Y-14	6	5	4-5	4	4-5	4	4	4	4	4-5	•	•
30	Y-17	7	6	4-5	4-5	5	4-5	4-5	4-5	3	4-5	•	•
30	Y-83	7-8	6-7	4-5	4-5	4-5	4	4-5	4	4	4-5	•	•
30	N.D	6	4-5	2-3	2	4	4	4	3-4	3	4	•	•
30	O-13	6	5	3	2-3	4-5	4	4	4	3-4	4-5	•	•

Veechem Industries (Pvt.) Ltd

FAVOPRINT ECO FRIENDLY TEXTILE PIGMENTS

30g/kg	1:9	S.D 1/1 (gm/kg)	C.I.NO	Fastness to light ISO 105 BO2 for 24hrs		Fastness to Dry cleaning ISO 105 DO1		Fastness to Chlorine ISO 105 E03 100ppm		Fastness to Hypochlorite bleach ISO 105 NO1		Fastness to PVC ISO 105 X10	Heat stability ISO 105 PO1 for 1min @ 180C	Suitiblity in discharge (80g/kg Rongalit)	Oeko Tex Standard 100 (MAK Amines limit ppm)
				1/1	1/9	1/1	1/9	1/1	1/9	1/1	1/9	1/1	1/1		
		30	O-34	7-8	5-6	3-4	3	4-5	4	4	4	4	4-5	•	•
Favoprint Orange AF-GS (GOTS Approved)															
		30	N.D	6-7	4-5	4	4	4-5	4	4	4	3-4	4-5	•	•
Favoprint Red AF-GR															
		30	R-119	7	5-6	4	4	4	4	4	3-4	3-4	4-5	•	•
Favoprint Red AF-BLF															
		30	R-146	7	6	4	4	4	3-4	4-5	4	3	4-5	•	•
Favoprint Red AF-RC															
		30	N.D	6	5	4-5	4-5	4-5	4-5	4-5	4-5	4	4-5	•	•
Favoprint Red AF-MG															
		30	R-170	6	4	4	4	4-5	4-5	4-5	4	4-5	4-5	•	•
Favoprint Red AF-KCSP (GOTS Approved)															

Veechem Industries (Pvt.) Ltd

FAVOPRINT ECO FRIENDLY TEXTILE PIGMENTS

30g/kg	1:9
	

Favoprint Pink AF-5BN New (GOTS Approved)

Favoprint Pink AF-3BL (GOTS Approved)

Favoprint Violet AF-RT (GOTS Approved)

Favoprint Violet AF-RSN

Favoprint Violet AF-HS (GOTS Approved)

Favoprint Blue AF-FR (GOTS Approved)

S.D 1/1 (gm/kg)	C.I.NO	Fastness to light ISO 105 BO2 for 24hrs		Fastness to Dry cleaning ISO 105 DO1		Fastness to Chlorine ISO 105 E03 100ppm		Fastness to Hypochlorite bleach ISO 105 NO1		Fastness to PVC ISO 105 X10	Heat stability ISO 105 PO1 for 1min @ 180C	Suitibility in discharge (80g/kg Rongalit)	Oeko Tex Standard 100 (MAK Amines limit ppm)
		1/1	1/9	1/1	1/9	1/1	1/9	1/1	1/9	1/1	1/1		
30	R-238	5	4	4	4	4	3-4	4	4	2-3	4-5	•	•
30	R-122	7	6-7	4-5	4-5	4	4	1-2	1-2	4	4-5	•	•
30	V-23	7-8	7	4-5	4	4-5	4-5	4-5	4	4	4-5	•	•
30	mix	6	5-6	4	3-4	4-5	4	4	4	3-4	4-5	•	•
30	V-23	7-8	7	4-5	4	4-5	4-5	4-5	4-5	4	4-5	•	•
30	B-15	7	6-7	4-5	4	4-5	4	4	4	4	4-5	•	•

Veechem Industries (Pvt.) Ltd


FAVOPRINT ECO FRIENDLY TEXTILE PIGMENTS

S.D 1/1 (gm/kg)	C.I.NO	Fastness to light ISO 105 BO2 for 24hrs		Fastness to Dry cleaning ISO 105 DO1		Fastness to Chlorine ISO 105 E03 100ppm		Fastness to Hypochlorite bleach ISO 105 NO1		Fastness to PVC ISO 105 X10	Heat stability ISO 105 PO1 for 1min @ 180C	Suitiblity in discharge (80g/kg Rongalit)	Oeko Tex Standard 100 (MAK Amines limit ppm)
		1/1	1/9	1/1	1/9	1/1	1/9	1/1	1/9	1/1	1/1		
30	B-15	7	6-7	4	3-4	4-5	4	4	4	4	4-5	•	•
30	B-15:3	7	6-7	4-5	4	4-5	4	4	4-5	4	4-5	•	•
30	B-15:3	7	6-7	4	4	4-5	4	4	4-5	4	4-5	•	•
30	GR-7	7-8	7	4-5	4-5	4-5	4-5	4-5	4-5	4	4-5	•	•
60	BL-7	7-8	7	4-5	4-5	4-5	4-5	4-5	4-5	4-5	5	○	•
60	BL-7	7-8	7	4-5	4-5	4-5	4-5	4-5	4-5	4-5	5	○	•


30g/kg 1:9




Favoprint Blue AF-RHB (GOTS Approved)

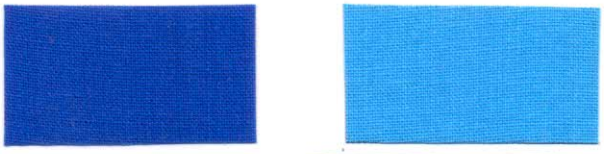


Favoprint Turq Blue AF-RG (GOTS Approved)

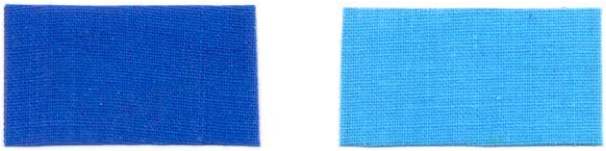

Favoprint Turq Blue AF-RNB (GOTS Approved)

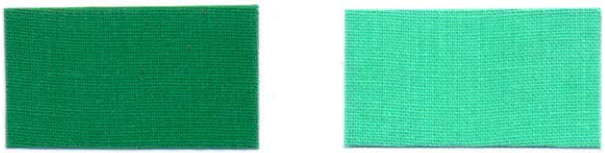

Favoprint Green AF-G2B (GOTS Approved)

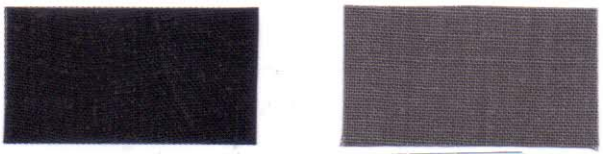

Favoprint Black AF-BB (GOTS Approved)



Favoprint Black AF-SP (GOTS Approved)

INFORMATION ABOUT FASTNESS PROPERTIES:

LIGHT FASTNESS:
Light Fastness test carried out with Q-sun Xenone light fastness tester. according to **ISO 105 BO2 for 24 hrs.**

THERMO STABILITY :
Thermostability being carried out according to **ISO 105 PO1at 180°C x 1min** Only Shade change has obseved.

DRY-CLEANING FASTNESS:
Staining of solvent not considerd , only shade change observed according to **ISO 105-DO1**

PVC FASTNESS:
Migration of pigment on PVC film is observed staining according to **ISO 105 X 10**

SUITABLITY IN DISCHARGE:
Results are based on testing the print 30g/kg pigment dispersion with discharging agent.

Standard Printing Recipes:

Stock Paste:

Water	x	g/kg
Binder SF-45	80-150	g/kg
UREA	10-20	g/kg
Crosslinking agent	5-10	g/kg
Ammonia (25%)	1-2	g/kg (adjust pH 8.5-9.0
Thickner PTFW	25-30	g/kg (to achieve viscosity 7000-8000CPS by brookfield Model no. DV.I PRIME)
TOTAL	**1000**	**g**

Printing paste:

FAVOPRINT Pigment	x	g/kg
Stock Paste	990-960	g/kg
Total	**1000**	**g**

Print Process:

Print	
Dry at 100-120°C for	1-2min
Cure at 150°C for	5min

Note:

1- pH of print paste should be **8-9**

2- Viscosity of print paste should be **7500-8000 cps**

3- If necessary use Antifoam, Modifier & Dispering agent as prescribed by their supplier

Key:

1/1 : Full print

1/9 : Reduction

• : Suitable

○ : Not stable

N.D : Not Defined

Note :

The data is based on our current knowledge and is proposed to provide general information on our products and application.

It should not be consider as the guarantee on the particular property of described products or the particular applications.

The actual data confirmed by customers through testing.