
PRINT WAYS
BY FAV



Digital EQUIPMENTS & SUPPLIES

Advance Technology

Reliable Performance.

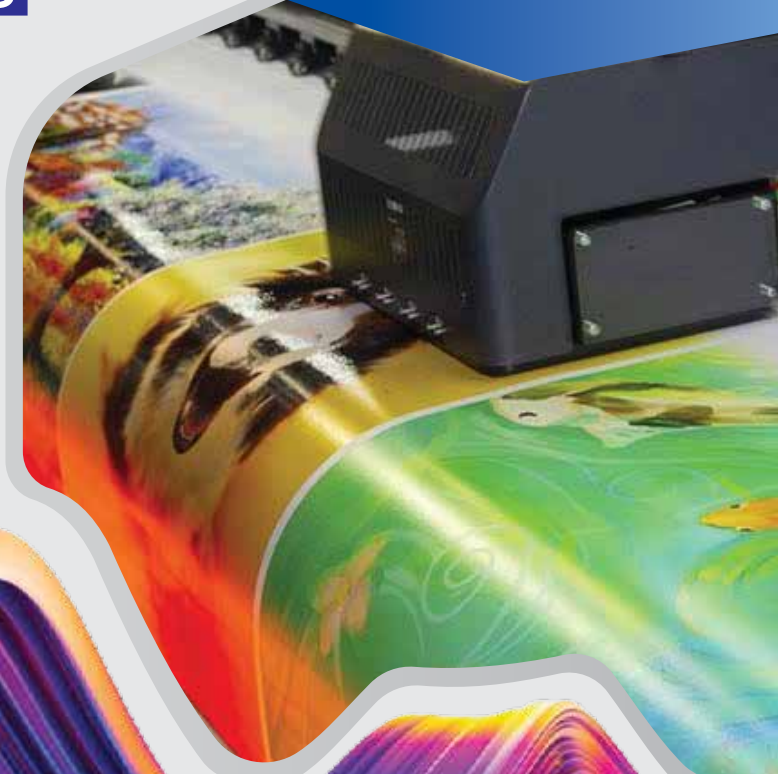



PRINTWAYS

MULTI
Product Usage



PRINTWAYS

Digital Equipments & Supplies

DTF Inks | DTF Rolls | DTF Powder | Head Cleaner |
Heads A1/E1 (I3200/XP600) & Others Accessories
Sublimation Inks | Sublimation Rolls
Eco Solvent Inks


















/ Machine advantages

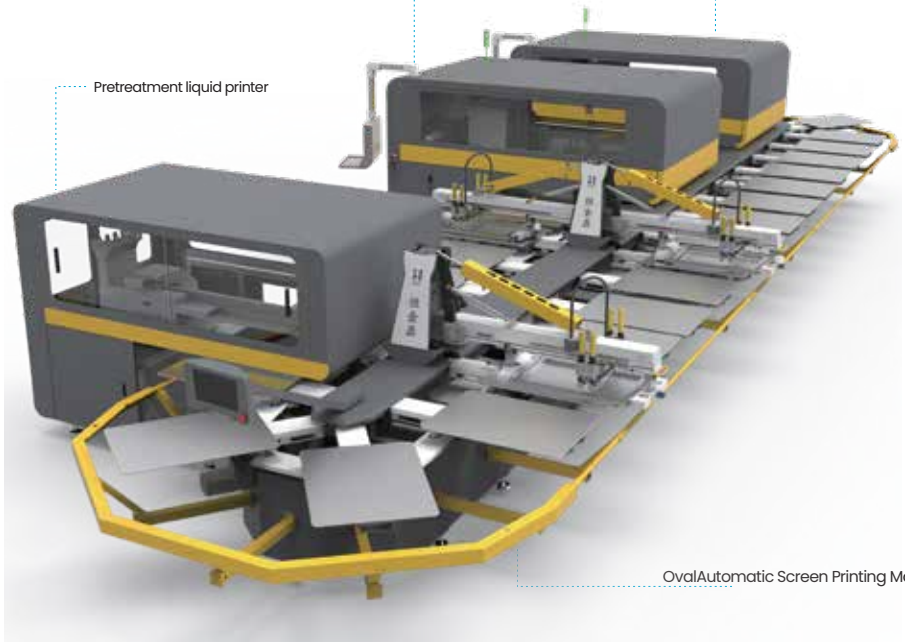



Fujifilm servo motor




Japan THK linear guide rail



magnetic levitation
motor drive system

Technological process


Digital Integrated printer color ink direct injection process flow chart

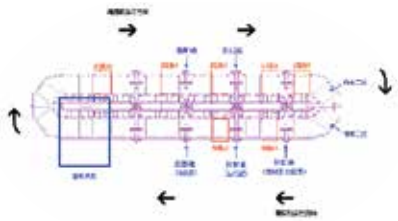

Process description

Laying → scraping the bottom once → drying → scraping the bottom twice → drying → scraping the bottom three times → Digital printing (wet printing) → pre-drying once → re-drying → cover scraping once → re-drying → cover scraping the second time → Pre-drying once → re-drying → Finished product receiving

Hengjinding Elliptical Digital Machine Processing Liquid+White+Color Direct Spray Solution

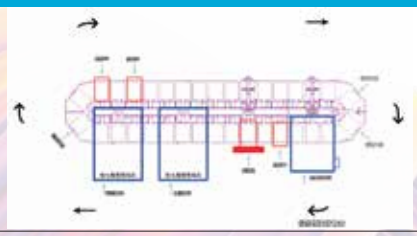

Process description

Laying cloth → Processing liquid direct spray (Epson) → Drying → Pressing and ironing the cloth surface → White ink direct spray (Starlight/Brother) → Color ink direct spray (Ricoh/Kyocera) → Drying and fixing → Drying and fixing again → Collecting finished fabric
(Supports optional POD fully automatic scanning and printing solution)

Machine parameters

Product model		HJD-DP01-1					
Printhead configuration		Japan Ricoh (7PL two-color) industrial printhead			1024MA（25PL）/Starfire 1024MA (25PL)		
		10、12、16/pcs	15/pcs	16、24/pcs	5/pcs	6/pcs	5/pcs
Ink		(CMYK) 4-color (CMYK) Pig Ink	(CMYKOB) 6-color (CMYKOB) Pig Ink	(CMYKORGB) 8-color（CMYKORGB）Pig Ink	White (starlfire special) Pig Ink		K、C、M、Y、W Coating Ink (StarFire Special)
Suitable for fabrics		(80%) Cotton, linen, blended fabrics, etc. (fabrics with cotton content ≥80% are all applicable)					
Capacity	Fast mode	635X1200Dpi/4pass/3.5s/pcs			635X800 Dpi-2Pass 3s/pcs		635X1200 Dpi-3Pass 30s/pcs
	Production mode (recommended)	635X1800Dpi/6pass/5s/pcs			635X1600 Dpi-4Pass 5s/pcs		635X1600 Dpi-4Pass 40s/pcs
	Fine mode	635X2400Dpi/8pass/6.5s/pcs			635X2400 Dpi-6Pass 8s/pcs		635X3200 Dpi-6Pass 60s/pcs
Dwell mode step height	10 Printhead configuration	250mm	/	/	/1pass Printing Height Printhead：5/pcs 300mm（300mm） 300mm (The above speed applies to patterns within 300mm) 60mm（A3） 60mm (The above speed is for A3 size patterns) /Printhead：6/pcs 360mm（360mm） 360mm (The above speed applies to patterns within 360mm)		
	12 Printhead configuration	300mm	/	/			
	15 Printhead configuration	/	/	250mm			
	16 Printhead configuration	400mm	200mm	/			
	24 Printhead configuration	/	300mm	400mm			
Elliptical installation requirements		Must be equipped with a digital special station, the maximum error of the elliptical table ≤ 20 wires					
Printhead to medium height		1.5mm-25mm可调adjustable					
Optimum spray height		3mm					
Maximum print width		700X820)mm 700 (oval table width) X820 (oval table height) mm (depending on the position of the outer guardrail of the elliptical digital station)			700X800 mm 700 (oval table width) X800 (oval table height) mm (depending on the position of the outer guardrail of the elliptical digital station)		700X750mm 700 (platen width) × 750 (platen height) mm
Board		/BYHX					
RIP RIP software		SPIDER RIP Maintop/standard/Neostampa			SPIDER RIP 7.0UV Maintop RIP 7.0 UV Version		
Printhead maintenance		Automatic moisturizing tray			Automatic Humidification Standby Flash Spray		
Printhead Cleaning		Automatic cleaning Automatic wiper ink scraping			Automatic Cleaning;/Automatic Ink Wiping Automatic Printhead Humidification (Auto humidification in idle state)		
Ink supply system		0.01 Industrial pneumatic negative pressure ink supply system, the fastest air supply only takes 0.01 seconds			R-jet Industrial pneumatic negative pressure ink supply system, circulating dual negative pressure ink internal circulation for R-jet printhead.		
Drivetrain	X X-axis	THKSIKO Magnetic levitation linear motor/Japan Panasonic servo drive/Japan THK linear guide/Germany SIKO magnetic grid head					
	Y Y-axis	THK Taiwan TBI precision silent ball screw / Japan Fuji servo motor, drive / Japan THK linear guide					
	Z Z-axis	Lessa hybrid servo motor/Japan OMRON positioning sensor					
	Moisturizing tray	Drawer-type retractable moisturizing tray (partial models) / Lifting type moisturizing tray			Drawer-type retractable moisturizing tray		
Air consumption		0.6Mpa,50L/Min(dry, oil-free, moisture-free)					
Air filtration device		The air inlet is equipped with an oil-water separator					
Working environment		Temperature: 20-28 °C (should be low); Humidity: 45%-65% (should be high)					
Alarm system		Low Ink Alarm, Servo Motor Overload Alarm, Carriage Anti-Collision, Y-axis Stroke Protection, Carriage Lifting Protection					
Featured features		Independent oval machine signal interaction; single-color pressure ink cleaning; no ink leakage or printhead clogging after arbitrary shutdown, and long-term shutdown is available after printhead moisturizing; air cutoff printhead protection device: no impact at all if the main air source cuts off during printing or standby mode.			Independent signal interaction with oval machine;Liquid level drop type printhead internal circulation ink supply system;Single-group pressure ink cleaning;Special designed cleaning and exhaust device for StarFire printheads;No ink leakage or nozzle clogging after random shutdown, and long-term shutdown is supported after printhead moisturizing;Air cutoff printhead protection device: the main air source cutoff during printing or standby will not cause any impact.		
The power of the whole machine		220V/6KW/28A;G5/12 6.5kw;1024MA 5.5kw Single-phase 220V/6KW/28A;Ricoh G5/12: 6.5kW;Starfire 1024MA: 5.5kW					
Device dimensions and Device weight		Floor size：3000mm(L)*2200mm(W)*2200mm(H)；packing size：3300mm（L）*2150mm（W）*2100mm（H） Net weight：1200kg；Packing weight：1350kg					
Consumption of consumables		Base Priming: Color Ink：4.5ml/pcs/A3Size Digital White Base/：40g/pcs/A3Size /Digital Clear Base：30g/pcs/A3Size /Digital Top Coat：10g/pcs/A3Size		Digital Discharge: Color Ink：4.5ml/pcs/A3Size Discharge Pre-treat Liquid：15ml/pcs/A3Size Discharge Paste：15g/pcs/A3Size		Dot Breathable: Color Ink：4.5ml/pcs/A3Size Dot Digital Paste：15g/pcs/A3Size	

Elliptical printing machine supporting equipment and tools



◆高端闪烘炉(380V/25A) Portable Curing Devicer



◆椭圆压烫机(220V/15A) Automatic press press



规格500*600*260 / 电压220V / 功率2KW / 输入电流0-1A
Specifications 500*600*260 / input voltage 220V /power 2KVA/ input current 0-1A
◆植绒机（植毛面积350x450mm）
Flocking machine (Flocking area350x450mm)



◆吹毛机(220V/2A) Blowing willow



◆机械手（揭布）
Manipulator(uncovering)





◆铺布投影/激光定位二选一
Spread the cloth projection/Laser positioning



◆压布辊 Presser roll

Machine parameters

Product model: HJD-A1

项目 Model	标准板on-gauge plate														大台板Big bedplate												超大台板 Super bedplate										
	2S	4S	6S	8S	10S	12S	14S	16S	18S	20S	22S	24S	26S	28S	2S	4S	6S	8S	10S	12S	14S	16S	18S	20S	22S	24S	2S	4S	6S	8S	10S	12S	14S	16S	18S	20S	22S
台板数目 Plate Quantities	10	16	22	28	34	40	46	52	58	64	70	76	82	88	12	18	24	30	36	42	48	54	60	66	72	78	12	18	24	30	36	42	48	54	60	66	72
可印数目 Printing Number	2	4	6	8	10	12	14	16	18	20	22	24	26	28	2	4	6	8	10	12	14	16	18	20	22	24	2	4	6	8	10	12	14	16	18	20	22
印刷面积(cm) Printing Size	57*70														63*90												88*115										
台板面积(cm) Nax Frame	63*86.5														70*105												95*130										
机器长度(cm) Machine length(cm)		712	935	1158	1381	1604	1827	2050	2273	2496	2719	2942	3165	3388	648	894	1140	1386	1632	1878	2124	2370	2616	2862	3108	3354	748	1046	1344	1642	1940	2238	2536	2834	3132	3430	3728
机器宽度(cm) Machine width	330														367												403										
机器高度(cm) Machine Height	156														161												161										
机器重量(千克) Machine weight(kg)		1828	2583	3338	4093	4848	5603	6358	7113	7868	8623	9378	10133	10888	1650	2495	3340	4185	5030	5875	6720	7565	8410	9255	10100	10945	2130	3160	4190	5220	6250	7280	8310	9340	10370	11400	12430
耗气量m³/分钟 Air consumption (m3/minute)	0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.45	0.5	0.55	0.6	0.65	0.7	0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.45	0.5	0.55	0.6	0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.45	0.5	0.55
总耗电量(千瓦小时) Total power Consumption (KWhour)	2.7	3.5	4.3	5.2	5.9	6.7	7.5	8.5	9.8	10.6	11.4	12.2	13	13.8	2.7	3.5	4.3	5.2	5.9	6.7	7.5	8.5	9.8	10.6	11.4	13.8	2.7	3.5	4.3	5.2	5.9	6.7	7.5	8.5	9.8	10.6	11.4
供电参数 Power supply parameters	三相380V/50HZ (Three phase 380V/50HZ)																																				
气压规格 Air pressure Specification	0.6-0.8Mpa (必须经过干燥处理和过滤It must be dried and filtered)																																				
印头驱动 Print Head Driver	单印头伺服电机400 WSingle head servo motor 400W																																				
最大产能 Pradu ction capacity	500-700 件/小时 (pieces/hour)																																				
最大部件尺寸 Maximum component size	271*150*156cm														246*150*161cm												298*182*161cm										
最大部件重量 Maximum unit weight	420kg														480kg												595kg										

Brother-KS1680H（3.5-19PL）X 8 Pcs



Machine features

① 8
② 300, 150, 200
③ 8

Equipped with hot stamping function and supports discharge printing; finished printed products are breathable and comfortable.
High production efficiency:
① 8 platens operate alternately, allowing immediate printing after scraping, delivering outstanding efficiency;
② 8-head full-color model: capacity of up to 300 pieces for black and white fabrics; 4-white & 4-color model: capacity of 150 pieces for black fabrics and 200 pieces for white fabrics;
③ Standard with 8 print heads, available in Epson or Brother brands, offering flexible configuration.

Machine advantages



X-axis magnetic levitation motor: high-speed, silent, responsive, durable and long-lasting



CNC
Integrated CNC Precision Machined Steel Machine Base, with Stable High-Speed Operation and Unbending Base




THK CNC
0.03
THK silent precision guide rail matched with CNC precision machined aluminum alloy beam, with a linear flatness of 0.03 and stable accuracy during high-speed operation without jamming



Y, 0.018
Y-axis servo motor with high-precision grinding screw drive, reliable high-speed operation, screw accuracy of 0.018 ensures fine and accurate printing patterns

Technological process

8
8-Printhead Brother Hybrid dtg printer White+Color Process Flow



Process description

Lay fabric → Apply pre-treatment solution → Table dry → Digital printing → Collect fabric → Tunnel drying → Finished product

Machine parameters

产品型号 Product model		HJD-DP01-2		
Printhead configuration		Brother-KS1680H (3.5-19PL)*8 Pcs		
Ink		(CMYK) Four color (CMYK) Pig Ink	(W) White (W) Pig Ink	+ (CMYK+W) Four color+white(CMYK+W) Pig Ink
Suitable for fabrics		Cotton, linen, polyester, nylon, etc		
Production capacity	Rapid mode	900X1200Dpi / 2pass / 3.5s/pcs		900X1200Dpi / 2pass / 22s/pcs
	Production mode (recommended)	900X1800Dpi / 3pass / 6s/pcs		900X1800Dpi / 3pass / 34s/pcs
	Fine mode	900X2400Dpi / 4pass / 6.5s/pcs		900X2400Dpi / 4pass / 46s/pcs
Step height	Resident printing	270mm		135mm（White+Color Traversal Mode）
	Scanning printing	40mm（2pass）		20mm（2pass）
Installation requirements for elliptical machine		20 Dismantle the single-sided scraping arm of the elliptical machine or the matching elliptical digital special work station, with a maximum error of ≤20 threads for the elliptical table board		
From nozzle to medium height		1.5mm~25mm /Adjustable		
Optimal spray height		4mm		
Max print width		600x650mm,750x750mm Regular: 600x650mm,Extended: 750x750mm(Subject to the outer guardrail position of oval digital machine station)		
Board		Hosonsoft		
RIP RIP software		SPIDER RIP(standard) Neostampa /Maintop		
Spray nozzle maintenance		Fully automatic moisturizing tray		
Spray nozzle cleaning		Fully automatic cleaning, fully automatic ink scraping		
Ink supply system		Siphon ink supply system with automatic exhaust device		
Transmission system	X- X-axis	THK / SIKO Magnetic levitation linear motor/Israeli high-tech servo drive/Japanese THK linear guide/German SIKO magnetic grid head		
	Y- Y-axis	TBI / THK Taiwan, China TBI precision silent ball screw/Japan Fuji servo motor, driver/Japan THK linear guide		
	Z- Z-axis	Lei Sai hybrid servo motor/Omron positioning sensor from Japan		
	Moisturizing plate	Lift-type maintenance-free integrated moisturizing tray		
Working environment		：20~28℃（）；：45%~65% Temperature: 20-28 °C (preferably low); Humidity: 45%~65% (preferably high)		
Alarm system		Low ink alarm, Servo motor overload alarm, Carriage anti-collision, Y-axis stroke protection, Carriage lifting protection		
Featured features		Independent elliptical machine signal interaction; /Water cooling circulation system for printhead; PLC /PLC human-machine interaction control interface; 8mm /8mm high drop medium printing;		
Total machine power		≤3.5KW		
Device dimensions and Device weight		/Footorint : 4300(L)*4200*(W)1700(H)mm Packing Dimensions：/Monochrome ellipse：2500(L)*1500(W)*1600(H)mm；/Digital ellipse：2700(L)*1850(W)*1900(H)mm		
Consumable consumption		Color Ink 1.8ml/pcs ; /White Ink: 3.8ml/pcs ; Scraping paste: 15g/pcs		


Product application



(Epson i3200-A1*4)



Technological process

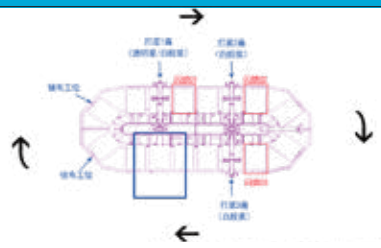Four head oval digital machine - digital primer process flow chart	Process description
 3+ Example: 3-color oval digital machine + four-head oval digital direct injection machine	Spreading → scraping the bottom once → drying → scraping the bottom twice → drying → scraping the bottom three times → Digital printing (wet printing) → Finished product receiving Post-treatment: Pull the whole vehicle into the high-temperature oven or single tunnel drying treatment

Machine features

50-300

1.Full servo motor drive: stable, high precision and long life.
2.Electric lifting of the nozzle allows for direct setting of the current printing height within the software, making it more convenient and stable. It also has a wide range of media thickness adaptability;
3.multi process screen printing + three-dimensional high-definition digital printing, one machine to solve;
4.low cost, high efficiency, one can install two digital machines, the highest cost performance plan.
5.It can print printed garments and cut pieces and special locations with concave convex surfaces(such as chest bags, trouser bags, etc.).
6.simplify the process of the version, no matter small batch (50-300 pieces) or proofing is very convenient and fast. You can make big samples on that day.(white plate making is very simple, no color separation).
7.The digital printing unit is based on the printing machine as the printing platform, combined with the scraping position of the printing machine, it can work with water slurry, glue, ink and thick plate. Combining traditional techniques such as printing, foaming and electrostatic flocking, the printing products are colorful and distinctive.

Machine parameters

Product model		HJD-DP01	
Print head configuration		Japan Epson i3200-A1*4/pcs	Japan Epson i3200-A1*8/pcs
Ink		（CMYK）/Pigment ink / 8（CMYKORGB)/Pigment ink /（OP）/ （W)/Pigment ink	
Suitable for fabrics		Cotton, linen, polyester, nylon and other cut fabrics (can be used for more textile fabrics with base coating)	
production speed	4 4 colors/all white/treatment liquid direct spray	360X2400 Dpi/ 4pass / 18s / Pcs（A3/Size)	360X2400Dpi/ 4pass - 10s / Pcs（A3/Size）
	8 8 colors	720X1200 Dpi/ 4pass / 45s / Pcs（A3/Size)	360X2400Dpi/4Pass - 18s / Pcs（A3/Size）
	（4） White color output (4 colors)	360X2400 Dpi/ 4pass / 60s / Pcs（A3/Size)	360X2400Dpi/4Pass - 30s / Pcs（A3/Size）
	（8） White color output (8 colors)	360X2400 Dpi/ 4pass / 90s / Pcs（A3/Size)	360X2400Dpi/4Pass - 60s / Pcs（A3/Size）
Installation requirements for elliptical machine		≤20 The maximum error of the elliptical table is ≤ 20 threads. Remove a scraper arm or install an elliptical machine digital dedicated position as an option	≤10 The maximum error of the elliptical tabletop is ≤ 10 threads, and a digital dedicated slot for the elliptical machine must be installed
Printhead to media height		1.5mm~100mm Adjustable from 1.5mm to 100mm	1.5mm~30mm Adjustable from 1.5mm to 30mm
Optimal spray height		3mm	
Max print width		650X650mm 650 (width of elliptical table) X650 (height of elliptical table) mm (depending on the position of the external guardrail of the digital workstation of the elliptical machine)	650X700mm 650 (width of elliptical table) X700 (height of elliptical table) mm (depending on the position of the external guardrail of the digital workstation of the elliptical machine)
Board		BetterPrinter	Hosonsoft
RIP/RIP software		PP（Optional）、Neostampa（/Optional）、RIIN（/Optional）、Maintop（/Standard）	
Spray nozzle maintenance		/Integrated maintenance free lifting ink stack	
Spray nozzle cleaning		Fully automatic cleaning, fully automatic ink scraping	Fully automatic cleaning, fully automatic ink scraping, fully automatic moisturizing
Ink system		Siphon type, with automatic defoaming function of ink path	Siphon large-volume ink supply system
Drivetrain	X/X-axis	Xinjie servo motor, servo driver/Taiwan, China CSK linear guide	Magnetic Levitation Linear Motor, Teknic Servo Drive / Japan THK Linear Guide Rail
	Y/Y-axis	PMI/CSK Taiwan China PMI Precision Silent Ball Screw / Xinje Servo Motor & Servo Driver / Taiwan China CSK Linear Guide Rail	PMI（Y）/THK Taiwan China PMI Precision Silent Ball Screw (Dual Y-Axis) / Japan Fuji Servo Motor & Servo Driver / Japan THK Linear Guide Rail
	Z/Z-axis	Integrated electric lifting for the whole machine / Stepper motor head lifting	IStepper motor driven print head lifting
Data interface		USB3.0 /USB / 3.0 or Gigabit Ethernet port	
Working environment		/Temperature：20-28°C（/lower is better）；/Humidity：45%-65%（/higher is better）	
Alarm system		/Spray car collision prevention, Y-axis travel protection, lifting protection	
Featured Features		Independent cleaning function of ink absorbing pad; Embedded computer operating platform; Patent integrated electric lift for the whole machine; Independent elliptical signal interaction system;	Embedded computer operation platform; Touch screen human-machine interaction; Industrial-style print head resident printing mode; Independent oval signal interaction system; Ink alarm system.
Overall machine power		≤1.6KW	≤4.5KW
Size		Equipment footprint dimensions：2400mm(L)*1950mm(W)*1950mm(H)； Packaging dimensions：2550mm(L)*1970mm(W)*2150mm(H)	
Weight		/Net weight :640kg ；/Export packaging:690kg	
Consumables consumption		/Color Ink：1.5ml/pcs；/White Ink：3.2ml/pcs；/Pretreatment：20ml/pcs；/Underbase paste：15g/pcs	

Product application






Machine advantages



Enclosed all aluminum alloy tabletop support, stable tabletop flatness<0.05, ensuring precise pattern printing and positioning



Y+
Y-axis Leisai stepper drive system+dual guide rail



XBYXsoftware automatically generates white channels to save ink



X
X-axis mutelinear guide rail

echnological process

①



- Universal for dark and light-colored white fabrics, no dilution required

Treatment liquid dilution ratio

②



- 1603
  Tunnel at 160 degrees for 3 minutes
- 150/20-30
  High temperature oven at 150 degrees Celsius for 20-30 minutes

Tunnel/high-temperature oven drying

③



/Press fabric to flat

- 150度6/ Pre-drying setting: 150℃,6s

④



Printer prints patterns

⑤



- : 160/3
  130-150/30
- :
  Dark fabric:
  tunnel dryer 160°3 minutes;
  oven 130-150°, 30 minutes
  White fabrics:
  can lower temperature and extend heating time depending on color effect

Tunnel/high-temperature oven color fixing

⑥



Finished product display

Machine parameters

Product model		HJD-DP03		
Printhead configuration		Epson i3200 - A1*2	Epson F1080 -A1(XP600) *2	BrotherKS1680H*2
Ink		（CMYK）	/Textile pigment ink+ (W)	/Textile pigment ink
Suitable fabrics		Cotton, linen, denim, sweatshirt fabric and other cotton -containing materials		
Capacity	Production mode	720X1200Dpi /4pass-1.33min/Pcs(A3图/size)	720X1080Dpi/ 6pass-2.5min/Pcs(A3/size)	900X900 Dpi/3pass-0.8min/Pcs(A3图/size)
	Precision mode	720X1800Dpi/ 6pass-2min/Pcs(A3图/size)	720X1440Dpi/ 8pass-4min/Pcs(A3/size)	900X1200Dpi/ 4pass-1.2min/Pcs（A3图/size)
Printhead to media height		3mm~20mm /Adjustable		
Optimum jetting height		3mm		4mm
RIP/Software		SPIDER RIP		
Controller Card		BetterPrinter/ Hosonsoft	BetterPrinter	XYK ControllerCard
Print head maintenance		Maintenance -free integrated lifting ink stack		
Print head cleaning		Fully automatic cleaning, fully automatic ink scraping		
Ink supply system		Siphon positive and negative pressure ink supply system		
Transmission system	X/X-axis	CSK Leadshine integrated stepper motor, CSKlinear guide, silent slider		
	Y/Y-axis	Leadshine integrated stepper motor, CSK linear guide, silent slider, high -precision silent timing belt		
	Z/Z-axis	Stepper motor		
Ink tank volume		1500ml		
Working environment		Temperature:20~28℃ /preferably low) humidity:45%~65%(preferably high)		
Alarm system		Stroke protection, carriage lifting protection, real-time protection during printing		
Special features		One-key start printing; automatic printhead cleaning atidle; out - of - ink alarm; high-drop printing (for brother printheads); visual positioning printing		
Maximum printing width		: 35X45CM Standard machine: 35x45 cm (other sizes of platens are available upon request)		
Total power		1500W		
Main unit dimensions		1200*1250*740mm		
Main unit weight		130KG		
Power requirements		Two -phase 220V ± 5% , 50Hz/60Hz		
Computer Configuration	Operating system	windows7 8、10 64bit professional edition		
	Hardware requirements	240G 8G 2400hz 1G i5 2.8Ghz 240g or larger ssd, 8g dual-channel ram with 2400hz or higher frequency, 1G or larger dedicated graphics card, intel core i5 processor (2.8ghz or higher frequency recommended)		
	Transmission interface	USB3.0 / Usb3.0 interface gigabit network interface		

Product application






Machine advantages



<0.05,
Enclosed all aluminum alloy tabletop support, stable tabletop flatness<0.05, ensuring precise pattern printing and positioning



Y+
Y-axis Leisai stepper drive system+dual guide rail



XBYXsoftware automatically generates white channels to save ink




X
X-axis mutelinear guide rail

Technological process

① 

- Universal for dark and light-colored white fabrics, no dilution required

Treatment liquid dilution ratio

② 

- 160-3
  Tunnel at 160 degrees for 3 minutes
- 150-20-30
  High temperature oven at 150 degrees Celsius for 20-30 minutes

Tunnel/high-temperature oven drying


③ 

Press fabric to flat

- 150-6-/ Pre-drying setting: 150℃,6s

④ 

Printer prints patterns

⑤ 

- 160-3
  130-150-30
- Dark fabric:
  tunnel dryer 160°3 minutes;
  oven 130-150°, 30 minutes
  White fabrics:
  can lower temperature and extend heating time depending on color effect

Tunnel/high-temperature oven color fixing

⑥ 

Finished product display

Machine parameters

Product model		HJD-DP03			
Printhead configuration		/Epson i3200-A1*4/pcs	/Epson i3200-A1*6/pcs	(KS1680H) X 4 Brother (KS1680H) Printhead X 4	(KS1680H) X 8 Brother (KS1680H) Printhead X 8
Ink configuration		(CMYK) / (CMYKORGB) + (W) Pigment Ink	(CMYK) / (CMYKORGB / (CMYKORGBFmFyFrFg) + (W) Pigment Ink	(CMYK) + (W) Pigment Ink/ (CMYKORGB) + (W) Pigment Ink	(CMYK) + (W) Pigment Ink/ (CMYKORGB) + (W) Pigment Ink
Capacity (CMYK mode)	High speed mode	360X2400 Dpi/ 4pass - 0.6min/pcs (A3Size)	720X1800 Dpi/ 2pass -0.6min/pcs (A3Size)	/	/
	Production mode	720X1800 Dpi/ 6pass -1min/pcs (A3Size)	360X5400 Dpi/ 3pass -0.9min/pcs (A3Size)	900X1200 Dpi/ 2pass - 80pcs/h (A3Size)	900X1200 Dpi/ 2pass - 160pcs/h (A3Size)
	Precision mode	720X2400 Dpi / 8pass -2min/pcs (A3Size)	720X3600 Dpi / 4pass -1.2min/pcs (A3Size)	900X1800 Dpi / 3pass -50pcs/h (A3Size)	900X1800 Dpi / 3pass -100pcs/h (A3Size)
Capacity (8-color mode)	High speed mode	360X2400 Dpi/ 4pass - 1min/pcs (A3Size)	360X1800 Dpi/ 2pass - 0.6min/pcs (A3Size)	/	/
	Production mode	720X1800 Dpi/ 6pass -2min/pcs (A3Size)	720X1800 Dpi / 4pass -1.2min/pcs (A3Size)	900X1200 Dpi/ 4pass - 60pcs/h (A3Size)	900X1200 Dpi/ 4pass - 80pcs/h (A3Size)
	Precision mode	720X2400 Dpi / 8pass -3.5min/pcs (A3Size)	720X3600 Dpi / 8pass -2min/pcs (A3Size)	900X1800 Dpi / 6pass -40pcs/h (A3Size)	900X1800 Dpi / 6pass -50pcs/h (A3Size)
Capacity (12-color mode)	High speed mode	/	360X2400 Dpi/ 4pass - 1.5min/pcs (A3Size)	/	/
	Production mode	/	720X1800 Dpi/ 6pass - 2min/pcs (A3Size)	/	/
	Precision mode	/	720X2400 Dpi / 8pass -3.5min/pcs (A3Size)	/	/
Suitable fabric		100% 100% pure cotton, or fabrics with high cotton content, ready to wear, linen, denim, hoodies, etc		Cotton, linen, denim, sweatshirt fabric and other cotton-containing fabrics	
Board		Hosonsoft		/Suzhou	
RIP software		SPIDER RIP/Standard) RIIN-Tshirt Optional)			
Printhead to media height		3mm~30mm Adjustable from 3mm to 30mm		5mm~30mm Adjustable from 5mm to 30mm	
Optimal spray height		3mm		4mm	
Printhead maintenance and cleaning		Maintenance-free integrated lifting ink stack, fully automatic cleaning, automatic scraping			
Ink system		Siphon positive and negative pressure ink supply system			
Drivetrain	X/X-axis	CSK Resai stepper integrated motor/CSK linear guide, silent slider		CSK Resai stepper integrated motor/CSK linear guide, silent slider	Israel High Precision Linear Motors/ THK Linear Guides, Silent Sliders
	Y/Y-axis	CSK Resai stepper integrated motor/CSK linear guide, silent slider		CSK Resai stepper integrated motor/CSK linear guide, silent slider	
	Z/Z-axis	Stepper motor			
Ink barrel volume		1500ml		1500ml	3000ml
Working environment		Temperature: 20-28°C (prefer lower) /Humidity: 45%-65% (prefer higher)			
Alarm system		Stroke protection, spray lift protection, instant protection in printing			
Featured Features		One-click printing start; intelligent platen interactive cyclic printing without repeated operations; automatic nozzle cleaning in idle state.Supports ink cost calculation; reduces white ink volume for dark patterns and increases white ink volume for light patterns. Automatically removes background colors via Xiaobai Yinxing software.		8mm One-click start printing; intelligent platen interactive cycle printing with no repeated operations. Automatic nozzle cleaning during idle time.Dual-station simultaneous in-and-out printing mode. Printhead water cooling circulation system.8mm height drop printing.	
Print width		350*450mm (Small), 490*590mm (Large), 600*800mm(Extra Large)			
Platen size		360*460mm (Small), 500*600mm (Large) , 650*850mm (Extra Large)			
Overall machine power		1000W		1500W	2500W
Dimensions / Weight		Occupancy: 2700*1850*1800mm; pack: 2900*2000*1950mm; Net weight: 520kg; Packing weight: 610kg		Occupancy: 1900*1400*800mm; Net weight: 240Kg	Occupancy: 2850*2100*1780mm; Net weight: 660Kg
Consumption of consumables		3pcs/4pcs: /White Ink: 3.2ml/pcs/A3Size ; Color Ink: 1.5ml/pcs/A3Size : 20ml/pcs/A3Size 4pcs : 8/Color: White Ink: 3.2ml/pcs/A3Size ; Color Ink: 3ml/pcs/A3Size : 20ml/pcs/A3Size		Color Ink: 1.5ml/pcs ; White Ink: 3.2ml/pcs ; 20ml/pcs ; Scraping paste: 15g/pcs	
Power requirements		Two phases220V±5% 50Hz/60Hz 8A			
PC configuration		windows7.8.10 64bit ; 240G; 16G-2400hz; 2G; 2.8Ghz) ; USB3.0 Windows 7, 8, 10 64-bit Professional Edition,240G or above Solid State Drive (SSD); 16G Dual-channel Memory Module with 2400Hz or above Frequency, 2G or above Independent Video Memory; Intel Core i7 Processor (2.8Ghz or above frequency is recommended); USB 3.0 High-speed Interface;			


Coating machine

Machine parameters

Product model		HJD-DP06
Drivetrain	Y Y-axis	Resai stepper integrated motor/CSK linear guide, silent slider
Maximum working width		600mm×1000mm
Overall machine power		250W
Size/Weight		1000*1000*1200mm(L)*(W)*(H) 1200*1200*1500mm(L)*(W)*(H) 120kg Net weight: 120kg: 130kg Packing: 130kg
Power requirements		220V 50Hz 1.5A
Characteristic function		xi One key cleaning, adjustable speed, fan spray evenly save slurry



(i3200-A1*8: Dry printing ; i3200-A1*6: Wet printing)

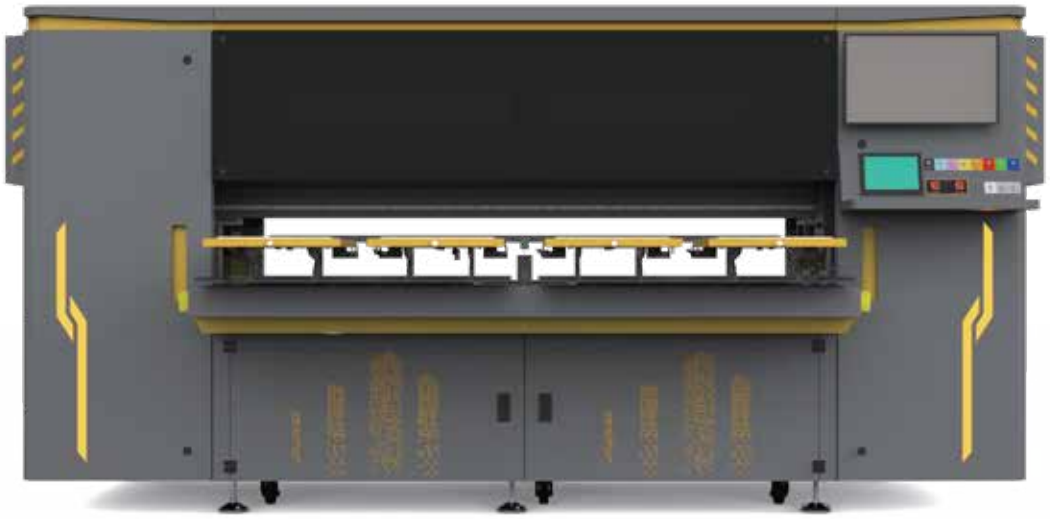

■ Technological process

(i3200-A1*8) : /White color production process flow (i3200-A1*8):

①



- Universal for dark and light-colored white fabrics, no dilution required

Treatment liquid dilution ratio

②



- 160-3-
  Tunnel at 160 degrees for 3 minutes
- 150-20-30
  High temperature oven at 150 degrees Celsius for 20-30 minutes

Tunnel/high-temperature oven drying

③



Press fabric to flat

- 150-6- Pre-drying setting: 150℃,6s

④



Printer prints patterns

⑤



- 160-3
  130-150-30
- Dark fabric:
  tunnel dryer 160°3 minutes;
  oven 130-150°, 30 minutes
  White fabrics:
  can lower temperature and extend heating time depending on color effect

Tunnel/high-temperature oven color fixing

⑥



Finished product display

(i3200-A1*6) : /Process flow of direct injection of processing liquid (i3200-A1*6):



Laying cloth



Printing processing solution, printing white ink and color ink



- 160-3
  130-150-30
- Dark fabric:
  tunnel dryer 160°3 minutes;
  oven 130-150°, 30 minutes
  White fabrics:
  can lower temperature and extend heating time depending on color effect

Tunnel/high-temperature oven color fixing



Finished product display

(i3200-A1*8： Dry printing ; i3200-A1*6： Wet printing)

Machine parameters

Product model		HJD-DP05	
Printhead configuration		i3200-A1*6(2+2-2) Epson i3200-A1 Nozzle*6pcs(2 processingsolutions+2 white and 2 color)	i3200-A1*8(4-4) Epson i3200-A1 Nozzle *8pcs (4 white and 4color)
Ink		(CMYK)(CMYKORGB)+ (w)/Pigment ink + /DTG pre-treatment liquid	(CMYK)/(CMYKORGB)+ (w)/Pigment ink
Capacity	High speed mode	360X2400 Dpi/ 4pass - 0.6min/Pcs（A3Size）	360X2400 Dpi/ 4pass - 0.3min/Pcs（A3Size）
	Production mode	720X1800 Dpi/ 6pass -1min/Pcs（A3Size）	720X1800 Dpi/ 6pass -0.5min/Pcs（A3Size）
	Precision mode	720X2400 Dpi / 8pass -2min/Pcs（A3Size）	720X2400 Dpi / 8pass -1min/Pcs（A3Size）
Capacity	High speed mode	360X2400 Dpi/ 4pass - 1min/Pcs（A3Size）	360X2400 Dpi/ 4pass - 0.5min/Pcs（A3Size）
	Production mode	720X1800 Dpi/ 6pass -2min/Pcs（A3Size）	720X1800 Dpi/ 6pass -1min/Pcs（A3Size）
	Precision mode	720X2400 Dpi / 8pass -3.5min/Pcs（A3Size）	720X2400 Dpi / 8pass -1.75min/Pcs（A3Size）
Suitable fabric		100% 100% pure cotton, or fabrics with high cotton content, ready to wear, linen, denim, hoodies, etc	
Printhead to media height		3mm~20mm Adjustable from 3mm to 20mm	
Optimal spray height		3mm	
Board		Hosonsoft	
RIP software		PP、PF XiaobaiImpression (standard), Ruiyin T-shirt version, PP, PF, etc	
Spray nozzle maintenance		Integrated lifting ink stack unit	
Spray nozzle cleaning		Automatic cleaning, automatic ink scraping	
Ink system		Siphon type automatic ink supply	
Drivetrain	X/X-axis	CSK Xinjie servo motor/CSK linear guide, silent slider	
	Y/Y-axis		
	Z/Z-axis	Leisai stepper motor	
Ink barrel volume		1.6L	
Working environment		Temperature：20-28℃（Low recommended）；/Humidity：45%-65%（/higher recommended）	
Alarm system		Travel protection, carriage lifting protection, real-time protection during printing	
Featured Features		Quick detachable replaceable tabletop (customizable), automatic alternating printing cartintelligent tabletop interactive cyclic printing without repeated operation; Automaticallyclean the nozzle during leisure time, Four station same in and out printing mode.Automatically clean the nozzle during leisure time; Dual station same in and out printing mode;	
Print width		360*460-4PCS/Standard configuration: 360 * 460-4PCS	
Overall machine power		3KW	
Size/Weight		Host size：3580mm(L)*2050mm(W)*1720mm(H) ;Packaging size:3650mm(L)*2050mm(W)*1800mm(H) Host weight：1100Kg ； Packaging weight：1200Kg	
Consumption of Consumables		Color Ink：1.5ml/pcs;White Ink:3.2ml/pcs;Pre-treatment Liquid：2.0ml/pcs	
Power requirements		Two phases220V±5% 50Hz/60Hz 8A	
PC configuration	operating system	windows7、8、10 64bit/Professional Edition	
	hardwa rerequirements	240G、16G2400hz、2G、i7(2.8Ghz) 240GB or above solid-state drive, 16GB dual channel memory module with a clock speedof 2400Hz or above, 2GB or above independent video memory, Core i7 processor(recommended frequency of 2.8GHz or above)	
	Interface	*2/Gigabit network interface *2	

Product application











Technological process

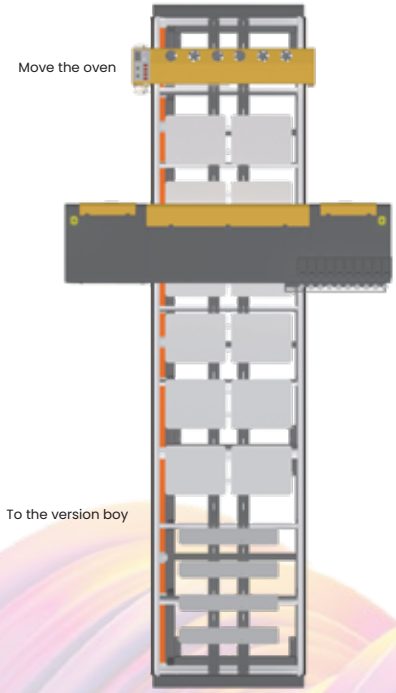

New high-end flat panel process flow diagram


①



4H/staggered

Solution 1: Full-color ink paint direct injection priming process
Spread the cloth→ base 1 time→ dry the base 2 times→ digital printing→ film collection and fall on the mille-layer rack→ a high -temperature oven to dry → cool the finished films

②



4Hside by side

2:

Scheme 2: White color with paint direct injection process
Cloth pretreatment→ cloth spreading→ digital printing white color with the → of the film and the → of the mille-layer shelf High-temperature oven/tunnel drying → cooling of the finished product

Machine parameters

Product model		HJD-DP2		
Printhead configuration		Epson i3200-A1* 2/pcs	Epson i3200-A1*4/pcs	Epson i3200-A1 * 6/pcs
Ink		C/M/Y/K Pigment Ink	C/M/Y/K/W Pigment Ink	C/M/Y/K/W PTL Pigment Ink
Suitable fabric		Cotton, linen, polyester, nylon and other cut fabrics (suitable for more textile fabrics with base coating), etc;		
(A3) Production Capacity (A3 Size)	HFull color mode	360X2400 Dpi/4pass -80 Pcs/H	360X2400 Dpi/4pass -160 Pcs/H	360X2400 Dpi/4pass -220 Pcs/H
	White color mode (with glue included)	720X1800 Dpi/6pass -50 Pcs/H	720X1800 Dpi/6pass -80 Pcs/H	720X1800 Dpi/6pass -80 Pcs/H
Printing method		Full color	2 + 2 Fullcolor or 2white+2colors	+ 2 + 2 Full color or 2 processing solutions+2 white+2 colors
Foot platform		450*550*10mm/Mesa of glass plate ; 6m(14pcs), 8m(22pcs), 10m(28pcs)		
Printhead to media height		3mm~50mm / Adjustable		
Optimal spray height		3mm		
RIP software		PP/ Maintop (standard), Xiaobai Impression (optional), PP (optional)		
Board		BetterPrinter		
Spray nozzle maintenance		Integrated Lifting Ink Station		
Spray nozzle cleaning		Fully automatic cleaning, fully automatic ink scraping, fully automatic moisturizing		
Ink system		Siphon ink supply system		
Drivetrain	X /X-axis	Airtac /Airtac linear guide + Leisai servo motor		
	Y /Y-axis	CSK / CSK linear guide + high-precision rack + Xinjie servo motor		
	Z /Z-axis	Electric double sided synchronous lifting		
Curing Method		Reciprocating treadmill oven for heating and drying		
Ink barrel volume		1.5L		
Working environment		Temperature: 20~28℃(preferably low) ; Humidity: 45%~65% (preferably high)		
Alarm system		Carriage collision prevention, ink shortage alarm, travel limit protection, real-time protection during printing		
Featured Functions		Unlimited extension design, customizable as required;Compatible with printing on various shapes and materials, configurable with ready-to-wear platens, full glass panels, aluminum panels + heat presses, pants platens, etc.; Ink shortage alarm system;Fixed-point printing system (printing can be started at any stop position);Rotary printing; Plate exposure lamp (optional);Screen printing registration pin positioning;		
Max print width		1300mm / Standard machine: 1300mm (customizable)		
Host size/Weight		Machine Dimensions : 6220mm(L)*2884mm(W)*1244mm(H) (6(M)) ; Machine Weight : 980KG (6M)		
Extended host size and weight		Size : 2000mm (L)*1376mm(W)* 652mm(H) ;Weight : 250kg /Section		
Size of treadmill oven		1651mm(L)*320mm(W)*300mm (H)		
Overall machine power		Overall machine power:2000W ; Power of treadmill oven:2kw, 3.3kmDryer)		
Consumables Dosage		Color Ink:1.5ml ; /White Ink:3.2ml ; /Pre-treatment Liquid:2.0ml/pcs		
Power requirements		AC 220V±5%，50Hz-60Hz		
Computer configuration (configuring laptop)	operating system	windows7、8、10 64bit /Professional		
	Hardware Requirements	240G 、8G 2400hz 、2G, i5 (2.8Ghz) 240GB or above solid-state drive, 8GB dual channel memory module with a clock speed of 2400Hz or above, 2GB or above independent video memory, Core i5 processor (recommended frequency of 2.8GHz or above)		
	Interface	USB3.0 / USB 3.0 interface/Gigabit network interface		

Product application



（200）



200*1000/1300



200*1700/1900

■ Machine parameters

（HJD-DP07-01） Multi-function standard machine configuration and parameters		
Model	200×1000/1300	200×1700/1900
Power configuration	Single Phase 220V50Hz	Single Phase 220V50Hz
power	6.5KW	9KW
Heating method	Heating tube oil temperature type	Heating tube oil temperature type
Drum diameter	200mm	200mm
Print effective area	1000/1300mm	1700/1900mm
Transfer production	0-30m/h	0-30m/h
Full of oil	100%/100% full of oil	100%/100% full of oil
How the tank is placed	Exterior open	Exterior open
Oil level display	Yes	Yes
Roller coating	Teflon	Teflon
Mode of operation	button actions	button actions
Automatic power on and off	Shut down regularly	Shut down regularly
Felt material	30%/70%，8mm/30% Nomex, 70% polyester, 8mm	100%,8mm/100% Nomex,8mm
Felt automatic guiding system	/Yes	/Yes
Relevant dimensions	Footprint dimensions 1850/2150*1800*1500mm Package dimensions 1940/2240*1000*1650mm	Footprint dimensions :240*2550/2770 *1160 Package dimensions /2800/3000*1000*1800/2800/3000*1340*1600
Weight	Net weight: 400/450kg , Gross weight :480/530kg	Net weight: 900/1100kg , Gross weight :1100/1300kg
Table length	1/1m (with built-in iron plate)	1m（/Tempered glass supplied by user：1000*1780/2000*10 pc）
Bearing dispenser	/	Easy to add oil to the heating roller bearings to extend their lifespan and prevent them from locking up
Slip Ring	Upgrade the carbon brush type to an integrated collector ring, eliminating issues such as carbon brush wear, carbon deposition, and abnormal temperature fluctuations	/
Pressure roll	No	/
Automatic winding	Three releases and two collections	Three releases and two collections

200×1000/1300 Upgradeable configuration

1. Inflatable shaft: Upgrade the receiving shaft to an inflatable shaft
2. Anti pinch: prevent operators from getting burned by pinching their hands during operation
3. Touch screen: button control changed to touch screen control, adding functions such as 7 × 24-hour automatic power on/off and constant temperature shutdown
4. Bag groove: The fabric does not need to be threaded, just put it into the sliding groove
5. Wifi function: After connecting to the Wifi function, you can use your phone to remotely control it
6. Independent electrical box: The electrical box extends the service life of electrical appliances by having an independent host outside
7. Correction of upper fabric: The feeding is centered for easy collection
8. Fabric water cooling: Thick/special fabric, fast cooling to prevent deformation and pollution
9. Smoke hood: collects the oil mist generated by ink sublimation during the transfer printing process

200×1700/1900 Upgradeable configuration

1. Automatic winding: an independent automatic winding machine or integrated on the workbench, which can be wound in one step without the need for a winding machine
2. Clutch: Manual clutch can be upgraded to 1. Magnetic powder clutch 2. Pneumatic clutch, visual tension adjustment to avoid feeding wrinkles
3. Touch screen: button control changed to touch screen control, adding functions such as 7 × 24-hour automatic power on/off and constant temperature shutdown
4. Automatic separation: The felt automatically tightens and separates, reducing waiting time for cooling
5. Anti pinch: prevent operators from getting burned by pinching their hands during operation
6. Smoke exhaust system: reduce the oil fume generated during indoor transfer printing
7. Safety chuck: The inflation shaft is easy to install and can effectively prevent hand clamping
8. Bag groove: The fabric does not need to be threaded, just put it into the sliding groove
9. Inflatable shaft: 4 pieces of aluminum: 1 piece for placing drawing paper, 1 piece for collecting drawing paper, 1 piece for placing backing paper, and 1 piece for collecting backing paper (diameter 73)
10. WiFi function: After connecting to WiFi function, you can use your phone to remotely control it
11. Independent electrical box: The electrical box extends the service life of electrical appliances by having an independent host outside
12. High and low power switching: meet the high and low power needs of customers in different regions
13. Silicone roller: Iron roller upgraded to silicone roller
14. Correction of upper fabric: The feeding is centered for easy collection
15. Water cooling of fabrics: Thick/special fabrics, fast cooling to prevent deformation and pollution
16. Smoke hood: collects the oil mist generated by ink sublimation during the transfer printing process

（270）



Machine parameters

(HJD-DP07-02) Multi-function standard machine configuration and parameters	
Model	270×1700/1900
Power configuration	380V50Hz（220V50Hz）Three phase four wire 380V50Hz (or single 220V50Hz as specified in the contract)
power	16KW
Heating method	Heating tube oil temperature type
Drum diameter	270mm
Print effective area	1700/1900mm
Transfer production	0 - 100m/h
Full of oil	100%/100% full of oil
How the tank is placed	Exterior open
Oil level display	Yes
Roller coating	Teflon
Mode of operation	button actions
Automatic power on and off	Shut down regularly
Felt material	100%Nomex，8mm
Felt automatic guiding system	Yes
Footprint dimensions	3240*2550/2770*1160mm
Package dimensions	(FCL)：2800/3000*1000*1800mm；(LCL)：2800/3000*1340*1600mm
Weight	Net weight：1000/1500kg/；Gross weight：1200/1700kg
Table length	2m（/User-supplied tempered glass：2000*1780/2000*10 一块/pcs）
Air rising shaft	4（73） 4 pieces of aluminum: 1 drawing paper, 1 drawing paper, 1 backing paper, 1 backing paper (diameter 73)
Bearing dispenser	Easy to add oil to the heating roller bearings to extend their lifespan and prevent them from locking up
Pressure roll	1/pcs

Upgradeable configuration

1. Automatic winding: an independent automatic winding machine or integrated on the workbench, which can be wound in one step without the need for a winding machine
2. Clutch: Manual clutch can be upgraded to 1. Magnetic powder clutch 2. Pneumatic clutch, visual tension adjustment to avoid feeding wrinkles
3. Touch screen: button control changed to touch screen control, adding functions such as 7 × 24-hour automatic power on/off and constant temperature shutdown
4. Automatic separation: The felt automatically tightens and separates, reducing waiting time for cooling
5. Anti pinch: prevent operators from getting burned by pinching their hands during operation
6. Smoke exhaust system: reduce the oil fume generated during indoor transfer printing
7. Safety chuck: The inflation shaft is easy to install and can effectively prevent hand clamping
8. Bag groove: The fabric does not need to be threaded, just put it into the sliding groove
9. Inflatable shaft: 4 pieces of aluminum: 1 piece for placing drawing paper, 1 piece for collecting drawing paper, 1 piece for placing backing paper, and 1 piece for collecting backing paper (diameter 73)
10. WiFi function: After connecting to WiFi function, you can use your phone to remotely control it
11. Independent electrical box: The electrical box extends the service life of electrical appliances by having an independent host outside
12. High and low power switching: meet the high and low power needs of customers in different regions
13. Silicone roller: Iron roller upgraded to silicone roller
14. Correction of upper fabric: The feeding is centered for easy collection
15. Water cooling of fabrics: Thick/special fabrics, fast cooling to prevent deformation and pollution
16. Smoke hood: collects the oil mist generated by ink sublimation during the transfer printing process

（420）



Machine parameters


(HJD-DP07-03) Multi-function standard machine configuration and parameters	
Model	420×1700/1900
Power configuration	380V50Hz/ Three-phase four-wire 380V50Hz
power	25KW
Heating method	Heating tube oil temperature type
Drum diameter	420mm
Print effective area	1700/1900mm
Transfer production	0-180m/h
Full of oil	100%/100% full of oil
How the tank is placed	Exterior open
Oil level display	Yes
Roller coating	Teflon
Mode of operation	button actions
Automatic power on and off	Shut down regularly
Felt material	100%Nomex，8mm / 100% Aramid Nomex, 8mm
Felt automatic guiding system	Yes
Footprint dimensions	3200*2700/2950*1700mm
Package dimensions	(FCL)：2800/3000*1100*2100mm；(LCL)：2800/3000*1560*1900mm
Weight	Net weight ：1500/2000kg ；Gross weight ：1700/2200kg
Table length	2m（User-supplied tempered glass：2000*1780/2000*10 /pcs）
Air rising shaft	3（73） 3 pieces of aluminum: 1 piece of receiving paper, 1 piece of placing paper, and 1 piece of receiving liner paper (diameter 73)
Bearing dispenser	Easy to add oil to the heating roller bearings to extend their lifespan and prevent them from locking up
Draw paper to feed the shaft	Upgrade to an air expanding shaft for material discharge to avoid high ink content causing scratches and smooth feeding to prevent wrinkles
Pressure roll	1/pcs
Upgradeable configuration	

1. Automatic winding: an independent automatic winding machine or integrated on the workbench, which can be wound in one step without the need for a winding machine
2. Clutch: Manual clutch can be upgraded to 1. Magnetic powder clutch 2. Pneumatic clutch, visual tension adjustment to avoid feeding wrinkles
3. Touch screen: button control changed to touch screen control, adding functions such as 7 × 24-hour automatic power on/off and constant temperature shutdown
4. Automatic separation: The felt automatically tightens and separates, reducing waiting time for cooling
5. Anti pinch: prevent operators from getting burned by pinching their hands during operation
6. Smoke exhaust system: reduce the oil fume generated during indoor transfer printing
7. Safety chuck: The inflation shaft is easy to install and can effectively prevent hand clamping
8. Bag groove: The fabric does not need to be threaded, just put it into the sliding groove
9. Foot pedal: convenient for cutting and laying operations
10. WiFi function: After connecting to WiFi function, you can use your phone to remotely control it
11. Independent electrical box: The electrical box extends the service life of electrical appliances by having an independent host outside
12. High and low power switching: meet the high and low power needs of customers in different regions
13. Silicone roller: Iron roller upgraded to silicone roller
14. Correction of upper fabric: The feeding is centered for easy collection
15. Water cooling of fabrics: Thick/special fabrics, fast cooling to prevent deformation and pollution
16. Smoke hood: collects the oil mist generated by ink sublimation during the transfer printing process

（600）



Roll-to-roll standard machine

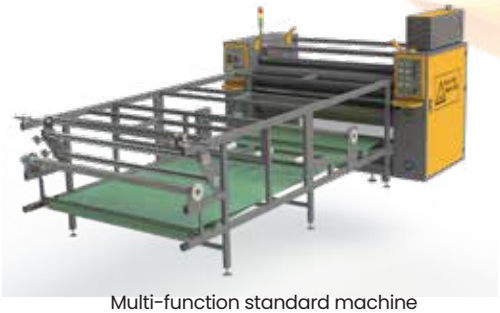

Multi-function standard machine

Machine parameters

600（HJD-DP07-04） Multi-function standard machine configuration and parameters		
Power configuration	380V50Hz/ Three-phase four-wire 380V50Hz	
Heating method	Heating tube oil temperature type	
Drum diameter	600mm	
Transfer production	0-230m/h	
Full of oil	100%/100% full of oil	
How the tank is placed	Exterior open	
Oil level display	Yes	
Mode of operation	button actions	
Automatic power on and off	Shut down regularly	
Felt automatic guiding system	Yes	
Bearing dispenser	Easy to add oil to the heating roller bearings to extend their lifespan and prevent them from locking up	
	Roll-to-roll standard machine	Multi-function standard machine
Model	600×1900/2600/3200	600×1700/1900/2600/3200
power	50/70/90KW	50KW/50KW/75KW/90KW
Print effective area	1900/2600/3200mm	1700/1900/2600/3200mm
Roller coating	Teflon	Teflon
Felt material	100%芳纶Nomex，8/8/10mm	100%Nomex，8/8/10/10mm
Footprint dimensions	/	4800*2900/3150/3850/4550*1800mm
Package dimensions	/	(FCL)：2800/3000/3700/4300*1150*2300mm (LCL)：2800/3000/3700/4300*1700*2000mm
Weight	Net weight：3000/3500/4200kg	Net weight：2500/3000/3800/4500kg Gross weight：2700/3200/4000/4700kg
Table length	/	3（/User-supplied tempered glass：1500*1780/2000/2700/3300*10 2/pc）
Pressure roll	1/pcs	1/pcs
Air rising shaft	5/(73) 5 pieces of aluminum/iron: 1 drawing paper, 1 drawing paper, 1 backing paper, 1 backing paper, 1 cloth (diameter 73)	3 (73) 3 pieces of aluminum: 1 piece of receiving paper, 1 piece of placing paper, and 1 piece of receiving liner paper (diameter 73)
Draw paper to feed the shaft	/	Upgrade to an air expanding shaft for material discharge to avoid high ink content causing scratches and smooth feeding to prevent wrinkles

Volume to volume upgradable configuration

1. Automatic winding: an independent automatic winding machine or integrated on the workbench, which can be wound in one step without the need for a winding machine
2. Clutch: Manual clutch can be upgraded to 1. Magnetic powder clutch 2. Pneumatic clutch, visual tension adjustment to avoid feeding wrinkles
3. Touch screen: button control changed to touch screen control, adding functions such as 7 × 24-hour automatic power on/off and constant temperature shutdown
4. Anti pinch: prevent operators from getting burned by pinching their hands during operation
5. Pedal: Operation of laying dry cut pieces
6. Smoke exhaust system: reduce the oil fume generated during indoor transfer printing
7. Safety chuck: The inflation shaft is easy to install and can effectively prevent hand clamping
8. WiFi function: After connecting to WiFi function, you can use your phone to remotely control it

Multi functional upgradable configuration

1. Automatic winding: an independent automatic winding machine or integrated on the workbench, which can be wound in one step without the need for a winding machine
2. Clutch: Manual clutch can be upgraded to 1. Magnetic powder clutch 2. Pneumatic clutch, visual tension adjustment to avoid feeding wrinkles
3. Touch screen: button control changed to touch screen control, adding functions such as 7 × 24-hour automatic power on/off and constant temperature shutdown
4. Automatic separation: The felt automatically tightens and separates, reducing waiting time for cooling
5. Anti pinch: prevent operators from getting burned by pinching their hands during operation
6. Pedal: Operation of laying dry cut pieces
7. Smoke exhaust system: reduce the oil fume generated during indoor transfer printing
8. Safety chuck: The inflation shaft is easy to install and can effectively prevent hand clamping
9. Bag groove: The fabric does not need to be threaded, just put it into the sliding groove
10. WiFi function: After connecting to WiFi function, you can use your phone to remotely control it
11. Independent electrical box: The electrical box extends the service life of electrical appliances by having an independent host outside
12. High and low power switching: meet the high and low power needs of customers in different regions
13. Silicone roller: Iron roller upgraded to silicone roller
14. Correction of upper fabric: The feeding is centered for easy collection
15. Water cooling of fabrics: Thick/special fabrics, fast cooling to prevent deformation and pollution
16. Smoke hood: collects the oil mist generated by ink sublimation during the transfer printing process
17. Palletizing Hoist Frame: For hoisting large-diameter cushioning paper rolls, reducing cushioning paper procurement costs

（800）



Roll-to-roll standard machine



Multi-function standard machine

Machine parameters

800（HJD-DP07-05） Multi-function standard machine configuration and parameters		
Power configuration	380V50Hz/ Three-phase four-wire 380V50Hz	
Heating method	Heating tube oil temperature type	
Drum diameter	800mm	
Transfer production	0-800m/h	
Full of oil	100%100% full of oil	
How the tank is placed	Exterior open	
Oil level display	Yes	
Mode of operation	button actions	
Automatic power on and off	Shut down regularly	
Felt automatic guiding system	Yes	
Bearing dispenser	Easy to add oil to the heating roller bearings to extend their lifespan and prevent them from locking up	
Anti pinch hands	Prevent operators from getting burned by pinching their hands during operation	
	Roll-to-roll standard machine	Multi-function standard machine
Model	800×1900/2600/3200	800×1700/1900/2600/3200
power	70KW/98KW/120KW	75KW/75KW/100KW/120KW
Print effective area	1900/2600/3200mm	1700/1900/2600/3200mm
Roller coating	Bluing process +vapor phase rust proof paper protection	Teflon
Felt material	100%Nomex，8/10/10mm	100%Nomex，10mm
Footprint dimensions	/	4900*2800/3000/3800/4400*2000mm
Package dimensions	/	2800/3000/3700/4300*1590*2400mm
Weight	Net weight ：500/4000/4800kg	Net weight :3500/3800/4500/5200kg Gross weight :3700/4000/4700/5400kg
Table length	/	2m（User-supplied tempered glass：2000*1780/2000/2700/3300*10 -/pcs）
Air rising shaft	5 pieces of aluminum/iron: 1 drawing paper, 1 drawing paper, 1 backing paper, 1 backing paper, 1 cloth (diameter 73)	5 pieces of aluminum: 2 pieces of drawing paper, 1 piece of collecting paper, 1 piece of backing paper, 1 piece of backing paper (diameter 73)
Foot pedals	No	Standard
Pressure roll	pcs	2/pcs
touch screen	The button control was changed to touch screen control, and functions such as a utomatic power on and off and constant temperature shutdown were added × 7	No

Volume to volume upgradable configuration

1.Auto Rewinding: Independent auto rewinder or workbench integrated design; one-step finishing, no extra rewinding equipment needed.

2.Clutch: Manual clutch can be upgraded to ①Magnetic Powder Clutch ②Pneumatic Clutch; visualized tension adjustment to avoid feeding wrinkles.

3.Smoke Exhaust System: Reduces oil fume generated during heat transfer operation.

4.Safety Chuck: Easy installation with air expansion shaft; effectively prevents hand pinching injuries.

5.Wi-Fi Function: Supports Wi-Fi connection for mobile remote control.


Multi functional upgradable configuration

1. Automatic winding: an independent automatic winding machine or integrated on the workbench, which can be wound in one step without the need for a winding machine
2. Clutch: Manual clutch can be upgraded to 1. Magnetic powder clutch 2. Pneumatic clutch, visual tension adjustment to avoid feeding wrinkles
3. Touch screen: button control changed to touch screen control, adding functions such as 7 × 24-hour automatic power on/off and constant temperature shutdown
4. Automatic separation: The felt automatically tightens and separates, reducing waiting time for cooling
5. Smoke exhaust system: reduce the oil fume generated during indoor transfer printing
6. Safety chuck: The inflation shaft is easy to install and can effectively prevent hand clamping
7. Bag groove: The fabric does not need to be threaded, just put it into the sliding groove
8. Wifi function: After connecting to the Wifi function, you can use your phone to remotely control it
9. Independent electrical box: The electrical box extends the service life of electrical appliances by having an independent host outside
10. High and low power switching: meet the high and low power needs of customers in different regions
11. Silicone roller: Iron roller upgraded to silicone roller
12. Correction of upper fabric: The feeding is centered for easy collection
13. Fabric water cooling: Thick/special fabric, fast cooling to prevent deformation and pollution
14. Smoke hood: collects the oil mist generated by ink sublimation during the transfer printing process

（1000）



Roll-to-roll standard machine

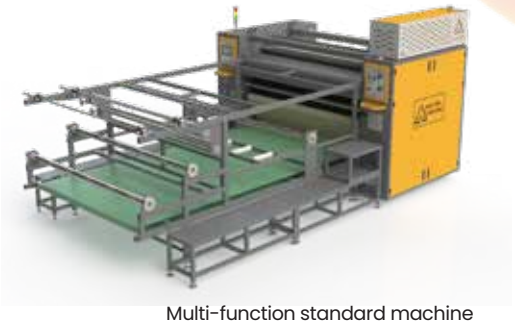

Multi-function standard machine

■ Machine parameters

1000（HJD-DP07-06） Multi-function standard machine configuration and parameters		
Power configuration	380V50Hz/ Three-phase four-wire 380V50Hz	
Heating method	Heating tube oil temperature type	
Drum diameter	1000mm	
Transfer production	0-1200/h	
Full of oil	100%/100% full of oil	
How the tank is placed	Exterior open	
Oil level display	Yes	
Mode of operation	button actions	
Automatic power on and off	Shut down regularly	
Felt automatic guiding system	Yes	
Bearing dispenser	Easy to add oil to the heating roller bearings to extend their lifespan and prevent them from locking up	
Anti pinch hands	Prevent operators from getting burned by pinching their hands during operation	
	Roll-to-roll standard machine	Multi-function standard machine
Model	1000x1900/2600/3200	1000x1900
power	85/120/150KW	85KW
Print effective area	1900/2600/3200mm	1900mm
Roller coating	Bluing process +vapor phase rust proof paper protection	Bluing process +vapor phase rust proof paper protection
Felt material	100%Nomex，10/10/12mm	100%Nomex，10mm
Footprint dimensions	/	5300*3100*2300mm
Package dimensions	/	3100*1850*2500mm
Weight	/Net weight 3500/4000/4800kg	/Net weight：4500kg；/Gross weight： 4700kg
Table length	/	2m（User-supplied tempered glass：2000*2000*10 /pc）
Air rising shaft	5（73） 5 pieces of aluminum/iron: 1 drawing paper,] drawing paper, 1 backing paper, 1 backing paper, 1 cloth (diameter 73)	52（73） 5 pieces of aluminum: 2 pieces of drawing paper, 1 piece of collecting paper, 1 piece of backing paper, 1 piece of backing paper (diameter 73)
Foot pedals	/	Standard
Pressure roll	2/pcs	2/pcs
touch screen	/	7×24 Button control upgraded to touchscreen control; added 7×24h auto power on/off, temperature-set shutdown and other functions
Anti-pinch hand	Prevent the operator from burning his hands	Prevent the operator from burning his hands
Bearing dispenser	Easy to add oil to the heating roller bearings to extend their lifespan and prevent them from locking up	Easy to add oil to the heating roller bearings to extend their lifespan and prevent them from locking up

Volume to volume upgradable configuration	Multi functional upgradable configuration
1. Automatic winding: an independent automatic winding machine or integrated on the workbench, which can be wound in one step without the need for a winding machine 2. Clutch: Manual clutch can be upgraded to 1. Magnetic powder clutch 2. Pneumatic clutch, visual tension adjustment to avoid feeding wrinkles 3. Smoke exhaust system: reduce the oil fume generated during indoor transfer printing 4. Safety chuck: The inflation shaft is easy to install and can effectively prevent hand clamping 5. Wifi function: After connecting to the Wifi function, you can use your phone to remotely control it	1. Automatic winding: an independent automatic winding machine or integrated on the workbench, which can be wound in one step without the need for a winding machine 2. Clutch: Manual clutch can be upgraded to 1. Magnetic powder clutch 2. Pneumatic clutch, visual tension adjustment to avoid feeding wrinkles 3. Smoke exhaust system: reduce the oil fume generated during indoor transfer printing 4. Safety chuck: The inflation shaft is easy to install and can effectively prevent hand clamping 5. Bag groove: The fabric does not need to be threaded, just put it into the sliding groove 6. Wifi function: After connecting to the Wifi function, you can use your phone to remotely control it 7. Independent electrical box: The electrical box extends the service life of electrical appliances by having an independent host outside 8. High and low power switching: meet the high and low power needs of customers in different regions 9. Silicone roller: Iron roller upgraded to silicone roller 10. Correction of upper fabric: The feeding is centered for easy collection 11. Water cooling of fabrics: Thick/special fabrics, fast cooling to prevent deformation and pollution 12. Smoke hood: collects the oil mist generated by ink sublimation during the transfer printing process

Narrow fabric sublimation transfer machine



Machine parameters

(HJD-DP09) Narrow fabric sublimation transfer machine	
Model	420x600/600x900
Power configuration	380V50Hz/ Three-phase four-wire 380V50Hz
power	14/27KW
Heating method	Heating tube oil temperature type
Drum diameter	420/600mm
Print effective area	600/900mm
Full of oil	100% full of oil
How the tank is placed	Exterior open
Oil level display	Yes
Roller coating	Teflon
Mode of operation	Key control
Automatic power on and off	Shut down regularly
Felt material	100%Nomex，8mm / 100% Aramid Nomex, 8mm
Felt automatic guiding system	Yes
Ancient land size	4000*1600*2400mm/4500*2000*2550mmm
net weight	1700/2000kg
Air rising shaft	4(73) 4 pieces of aluminum: 1 piece of drawing paper, 1 piece of drawing paper, 1 piece of backing paper, and 1 piece of backing paper (diameter 73)
Bearing oiler	Easy to add oil to the heating roller bearings to extend their lifespan and prevent them from locking up
pressure roller	1/pcs
	Upgradeable configuration
Anti pinch hands	Prevent operators from getting burned by pinching their hands during operation
clutch	Pneumatic clutch, visual tension adjustment to avoid feeding wrinkles
touch screen	7x24 Change button control to touch screen control, add 7x24 hour automatic power on/off and constant temperature shutdown functions
Automatic smoke exhaust	The drum comes with a built-in smoke exhaust system to reduce indoor air pollution
Automatic separation	Felt automatically tightens and separates, reducing waiting time for cooling
Wifi function	Wif After connecting to the WiFi function, remote control can be achieved using a mobile phone
Independent electrical box	Extending the lifespan of electrical appliances outside the independent host of the electrical box
High and low power switching	Meet the high and low power demands of customers in different regions
Silicone roller	TUpgrade iron roller to silicon rubber roller
exhaust fume collecting hood	TCollect the oil mist generated by ink sublimation during the transfer printing process



Machine parameters

(HJD-DP08) Roller Press Carpet Printing Machine			
Model	600x2600/3200/4200	800x2600/3200/4200	1000x2600/3200/4200
Power configuration	380V50Hz / Three-phase four-wire 380V50Hz		
power	80/97/125KW	105/125/165KW	130/155/200kw
Heating method	Heating tube oil temperature type		
Drum diameter	600/800/1000mm		
Print effective area	2600/3200/4200mm		
Full of oil	100% full of oil		
How the tank is placed	Exterior open		
Oil level display	Yes		
Mode of operation	Touch screen operation		
Automatic power on and off	Timed startup, timed shutdown		
Felt material	100%Nomex， 10mm/ 100% Aramid Nomex, 10mm		
Felt automatic guiding system	Yes		
Air rising shaft	5(73) 5 pieces of steel: 2 pieces of drawing paper, 1 piece of drawing paper, 1 piece of backing paper, and 1 piece of backing paper (diameter 73)		
Anti-pinch hand	Prevent the operator from burning his hands		
Bearing dispenser	Easy to add oil to the heating roller bearings to extend their lifespan and prevent them from locking up		
clutch	Pneumatic clutch, visual tension adjustment to avoid feeding wrinkles		
Roll up and roll up machine	Large size coil electric feeding saves time and effort		
Electric crane	Large roll materials that are difficult to transport can be easily moved using a crane		
	Upgradeable configuration		
Automatic smoke exhaust	The drum comes with a built-in smoke exhaust system to reduce indoor air pollution		
Wifi function	After connecting to the WiFi function, remote control can be achieved using a mobile phone		



Machine parameters

(HJD-DP07-1) Configuration and Parameters of Industrial Roller Printing Machine	
Model	（HJD-DP07-06）1000×1900/2600/3200 （HJD-DP07-07）1200×1900/2600/3200 （HJD-DP07-08）1500×1900/2600/3200
Power configuration	380V50Hz/Three-phase four-wire 380V50Hz
power	85/130/150KW 110/160/190KW 140/190/235kw
Heating method	Heating tube oil temperature type
Drum diameter	1000/1200/1500mm
Print effective area	1900/2600/3200mm
Full of oil	100% full of oil
How the tank is placed	Exterior open
Oil level display	Yes
Mode of operation	Touch screen operation
Automatic power on and off	Turn it on at a fixed time and turn it off at a fixed temperature
Felt material	100%Nomex，10mm
Felt automatic guiding system	Yes
Air rising shaft	9（73） 9 pieces of aluminum: 2 pieces of drawing paper, 2 pieces of drawing paper, 3 pieces of lining paper, 1 piece of lining paper, 1 piece of fabric (diameter 73)
Anti-pinch hand	Prevent the operator from hand scald during operation
Bearing refueling machine	Easy to add oil to the bearing of the heating roll to prolong the life of the bearing and prevent locking
clutch	Pneumatic clutch, visual tension adjustment to avoid feed folds
Upgradable configuration	1. Winding machine: large size grey cloth coil electric discharging saves time and effort 2. Stretch cloth feeding motor: for the stretch cloth motor feeding to prevent tensile deformation 3. Electric crane: The large coil is not easy to move with the crane 4. Cooling roller: cooling immediately after discharge to prevent stacking wrinkle pollution 5. Mercy rack: mercy material is easy to bag and ship 6. Coiling machine: Direct coiling is easy to bag and ship


Optional Features:

Unwinder

Rewinder

Water Cooling

Air Purification

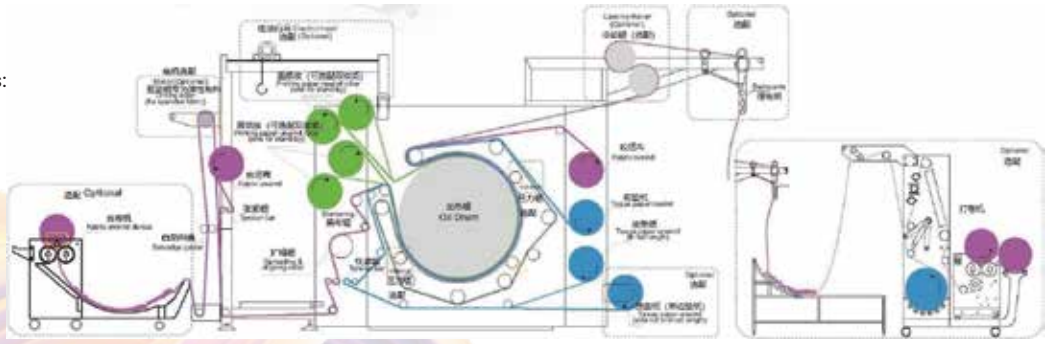

Multiple options to meet customers' personalized customization requirements

Optional Equipment

Lapping machine



Advantages: Fabric feeding, flattening, and alignment correction

Corrective winding machine




After the transfer printing is completed, it can be automatically rolled and directly bagged for shipment orrection function, saving labor

Unwinding machine



Automatic feeding of elastic fabric to prevent stretching and deformation of the fabric

Cloth receiving machine

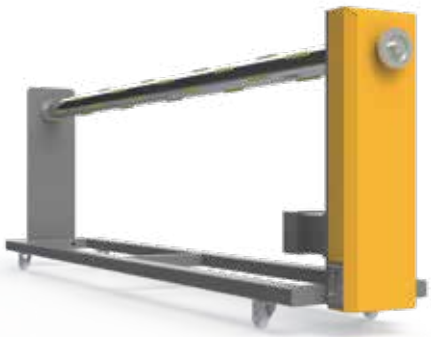

Advantage: After the transfer printing is completed, it can be directly wound up or used as unwinding, saving labor (only applicable to non elastic fabrics)



Machine parameters

(HJD-DP10) Laser cutting machine configuration and parameters		
Model	1816/1816 model	1918/1918 model
Laser type	CO2/Glass tube sealed CO2 laser tube	
Laser power	140-155W(12）/140-155W (12-month warranty)	
Engraving speed	0-1800mm/s	
Cutting area	1.8*1.4M() Width 1.8 * Length 1.4M (actual cutting area)	1.9*1.6M Width 1.9 * Length 1.6M (actual cutting area)
Cutting speed	0-600mm/s	
Repeatability accuracy	±0.05mm	
Motor system	CNC/CNC control system	
Cooling system	Industrial constant temperature water cooling	
Electricity demand	AC220V±10% ,50/60HZ ,10Amax	
Total machine power	≤4000W	
Operating Temperature	0°C-45°C	
Operating Humidity	5%-95%	
Control software	Fanwen Laser Software	
Overall dimensions	2450mm(W)*2000mm(L)*2650mm(H)	
Configuration	1. Imported movement servo motor; 2. Aviation aluminum guide rails; 3. The optical system adopts fully imported laser lenses from Singapore; 4. Imported stepper belts from Japan; 5. Domestic brand laser tube 140-155W (F7), with a 12-month warranty (first-line brand micro giant laser tube); 6. HSLASER control system; 7. Dual transmission mode: USB 2.0. U disk; 8. Chinese and English LCD display, user-friendly button control board; 9. Automatic feeding herringbone mesh belt; 10. Other accessories: 750W fan, electromagnetic air compressor, refrigeration constant temperature water tank, etc; 11. CAD can output directly; 12. Supports graphic and textual formats such as DWD, DXF, JPEG, AI, TIFF, PLT, CDR, BMP, and GIF. 13. Feed roller brush; 14. Silicone layer feeding roller; 15. Canon digital camera model imported from Jaan: R100.	
Application Industry	Widely used in industries such as sportswear, cycling clothes, swimsuits, dance clothes, printed clothing, home textiles, footwear, lace, handbags, gloves, sofas, bags, car seats, leather products, plush toys, advertising decoration, packaging printing, paper products, etc.	



Machine advantages



Forward deployment of ultra-high warning, scanning of both sides of the front of the vehicle for ultra-high protection, etc



Adopting steel aluminum composite beams, the track surface has high precision, stable structure, and durability



Add a scraper device to clean the residual cloth debris on the guide tape, reduce the time and temperature required for drying to achieve better cleaning results



When the fabric is too high, the car will quickly stop in place and raise the spray car to the highest position before returning to the origin for moisture preservation. After handling the abnormalfabric, printing can continue

Machine features

Industrial belt guide features:
Follow-up spreading roller device;
Monochrome pressing ink;
Real-time height monitoring system;
Anti-rubbing sprinkler head automatically rises;
One key shutdown;
Guide belt automatic gluing;
Automatic belt cleaning;
Shortcut keys spray car/scraper convenient maintenance;
Any stop does not flow ink plug and can be long-term shutdown;
Alarm state can mute with one key;
Cloth warped high temporary to avoid high;
Negative pressure independent switch;

■ Machine parameters

Product model		HJD-DP13	
Printhead configuration		(KJ4B-EX600)16 Japan Kyocera (KJ4B-EX600) Industrial Printhead 16 heads	(KJ4B-EX600)32 Japan Kyocera (KJ4B-EX600) Industrial Printhead32heads
ink	Pigment (standard)	（CMYK）| （CMYKORBK） Four color (CMYK) paint ink	Eight color (CMYKORBK double black) Paint ink (spot color, light color optional)	
	Reactive	（CMYK）| （CMYKORGB）（ Four-color (CMYK) reactive ink / eight-color (CMYKORGB) reactive ink (selectable spot color, light color)	
	Acid	（CMYK）（CMYKORGB） Four-color (CMYK) acid ink / eight-color (CMYKORGB) acid ink (optional fluorescent, spot, light)	
	Hi/gh temperature dispersion	（CMYK）（CMYKORGB） Four-color (CMYK) high-temperature disperse ink / eight-color (CMYKORGB) high-temperature disperse ink (optional fluorescent, spot, light)	
Suitable for fabrics		Cotton, Linen, Wool, Silk, Polyester, Blended, Nylon	
Capacity (four-color mode)	Fast mode	508X1200 Dpi /1pass - 540 ㎡/H	508X1200 Dpi /1pass - 1010 ㎡/H
	Production mode (recommended)	508X2400 Dpi / 2pass -270 ㎡/H	508X2400 Dpi / 2pass -505 ㎡/H
Capacity (8-color mode)	Fast mode	600X600 Dpi / 1pass -450 ㎡/H	600X600 Dpi / 1pass -850 ㎡/H
	Production mode (recommended)	600X1200 Dpi /2pass -225 ㎡/H	600X1200 Dpi /2pass -450 ㎡/H
Printhead to medium height		2.0mm~20mm可调/adjustable	
Optimum spray height		3mm	
Control Board		BYHX、Hosonsoft	
RIPsoftware		Neostampa、Maintop	
Printhead maintenance		Fully automatic moisturizing tray	
Printhead cleaning		Full automatic cleaning and ink scraping	
Ink supply system		Industrial negative pressure ink supply, ink degassing system (equipped with original American PALL degassing membrane)	
Drivetrain	X/axis	Dietz magnetic levitation linear motor / Kollmorgen servo drive / Japanese THK linear guide / imported German SIKO magnetic head	
	Y/axis	Japanese Nyoshichi precision reducer / Xinje servo motor / imported Swiss guide belt / servo unwinding & winding with driving & driven air shafts	
	Z/axis	Stepper motor/Japanese Omron positioning sensor	
	Cloth thickness altimeter	German Pepperl+Fuchs ultrasonic sensor / Japanese Keyence laser sensor	
	Moisturizing tray	Active cylinder-type lifting moisturizing tray / independent ink scraping device / Japanese Omron positioning sensor	
Water supply pressure		0.6Mpa，1m³/H	
Ink barrel volume		5L	15L
Air consumption		0.6MPa，50L/Min（dry, oil-free, moisture-free）	
Air filtration device		The air inlet is equipped with an oil-water separator	
Working environment		Temperature：20~28℃（should be low）；Humidity：45%~65%（should be high）	
Alarm system		Ink shortage alarm, travel protection, print head lift protection, fabric over-height protection, real-time protection during printing	
Featured features		Touch screen human-machine signal interaction;Follow-up cloth spreading roller device;Single-color ink pressure cleaning;Real-time cloth height monitoring system; Nozzle collision prevention;Fully automatic guide belt gluing; Fully automatic guide belt cleaning;No ink leakage or nozzle clogging during shutdown, with long-term shutdown moisturizing; One-key mute for alarm status;Independent negative pressure switch;Nozzle water-cooled circulation heat dissipation system (installed on both sides of nozzles);Visual positioning printing system (optional);Cloth feeding centering device (optional)	
Maximum print width		1810mm/2610mm（/Optional）/3210mm（/Optional）	
The power of the whole machine		7KW / 10KW/12KW Printer - 7KW/Guide Belt Dryer - 10KW Tunnel Dryer - 12KW	10KW / 10KW/18KW Printer - 10KW/Guide Belt Dryer - 10KW Tunnel Dryer - 18KW
Host size/weight		4360*2600*2000mm /3300KG	5160*2600*2000mm /4500KG
Tunnel drying size/weight		2430*3300*1170mm /950KG	2700*3300*1170 mm/1200KG
Belt MachineTunnel drying size/weight		3.2mBelt Machine PackingSize：6830*2340*2300mm———Weight：7/ tons	
Consumables usage		Color ink：18ml/ ㎡ Processing liquid：150ml/ ㎡	
Power requirements		380V±5%，50Hz/60Hz / Three-phase 380V±5%, 50Hz/60Hz	
PC configuration	operating system	windows7、8、10 64bit/Professional	
	Hardware requirements	512G、32G（DDR4） 2Gi7-12 High-speed solid-state drive of 512GB or above, 32GB (DDR4) dual-channel memory module, graphics card with independent video memory of 2GB or above, Intel Core i7 12th generation or higher processor	512G32G（DDR4） 2Gi7-12 High-speed solid-state drive of 512GB or above, 32GB (DDR4) dual-channel memory module, graphics card with independent video memory of 2GB or above, Intel Core i7 12th generation or higher processor
	Transport interface	USB3.0High-speed interface	USB3.0x2/High-speed interfacex2

Machine parameters

Product model		HJD-DP13	
Printhead configuration		6/8 Japan Ricoh G6 industrial nozzle 16 heads (optional 8 heads)	G6/32/8/16 Japan Ricoh G6 industrial nozzle 32 heads (optional 8/16 heads)
ink	Pigment (standard)	（CMYK）/（CMYKORGB） Four-color (CMYK) paint ink / eight-color (CMYKORGB) paint ink (selectable spot color, light color, double black)	
	Reactive	（CMYK）（CMYKORGB） Four-color (CMYK) reactive ink / eight-color (CMYKORGB) reactive ink (selectable spot color, light color)	
	Acid	（CMYK）（CMYKORGB） Four-color (CMYK) acid ink / eight-color (CMYKORGB) acid ink (optional fluorescent, spot, light)	
	High temperature dispersion	（CMYK）/（CMYKORGB） Four-color (CMYK) high-temperature disperse ink / eight-color (CMYKORGB) high-temperature disperse ink (optional fluorescent, spot, light)	
Suitable for fabrics		棉、麻、丝、涤纶、混纺、尼龙等/Cotton, linen, silk, polyester, blend, nylon, etc	
Capacity (four-color mode)	Fast mode	508X600 Dpi /2pass - 317㎡/H	508X600 Dpi /2pass - 610㎡/H
	Production mode (recommended)	508X900 Dpi / 3pass -210㎡/H	508X900 Dpi / 3pass -380㎡/H
	Fine-grained mode	508X1200 Dpi / 4pass -158㎡/H	508X1200 Dpi / 4pass -300㎡/H
Capacity (8-color mode)	Fast mode	635X900 Dpi / 3pass -210㎡/H	635X900 Dpi / 3pass -410㎡/H
	Production mode (recommended)	635X1200 Dpi / 4pass-158㎡/H	635X1200 Dpi / 4pass-300㎡/H
	Fine-grained mode	635X1800 Dpi / 6pass-80㎡/H	635X1800 Dpi / 6pass-150㎡/H
Printhead to medium height		3mm~25mm可调/adjustable	
Optimum spray height		3mm	
Control Board		BYHX	
RIP/software		Neostampa、Maintop	
Printhead maintenance		Fully automatic moisturizing tray	
Printhead cleaning		Fully automatic cleaning, automatic ink scraping	
Ink supply system		0.01 Industrial pneumatic negative pressure ink supply and degassing system, the fastest replenishment only takes 0.01 seconds	
Optional configuration		The cartridge is heated	
Drivetrain	X/axis	Dietz magnetic levitation linear motor/high-tech servo drive/ German imported Lux linear guide/SIKO/German imported SIKO magnetic grid head	
	Y/axis	NyoshichiJapan Nyoshichi precision reducer / Xinje servo motor / Swiss Habast guide belt / Servo Wind/Unwind with Driving & Driven Air Shafts	
	Z/axis	Stepper motor/Japanese Omron positioning sensor	
	Cloth thickness altimeter	Ultrasonic sensors imported from Germany / Keyence laser sensors imported from Japan	
	Moisturizing tray	Four-axis lifting moisturizing disc / Raysai hybrid servo motor / Japan OMRON positioning sensor	
Water supply pressure		0.6Mpa，1m³/H	
Ink barrel volume		5L / 15L / 5L (8 colors) / 15L (4 colors)	
Air consumption		0.6MPa，50L/Min（dry, oil-free, moisture-free）	
Air filtration device		The air inlet is equipped with an oil-water separator	
Working environment		Temperature：20~28℃（should be low）；Humidity：45%~65%（should be high）	
Alarm system		Lack of ink alarm, stroke protection, spray car lift protection, fabric ultra-high protection instant protection in printing	
Featured features		Touch screen HMI signal interaction; Follow-up fabric spreading roller device; Automatic detection of roll diameter and fabric thickness; Single color ink pressure control; Real-time fabric height monitoring system; No rubbing on fabric, automatic nozzle height rise; Custom print length stop control; One-click shutdown; Fully automatic guide belt gluing; Fully automatic guide belt cleaning; Shortcut keys for carriage/scraper, easy maintenance; No ink leakage and no nozzle clogging at arbitrary stop, support long-time shutdown; One-click alarm silence; Temporary height avoidance for warped over-height fabric; Independent negative pressure	
Maximum print width		1810mm	2610mm
The power of the whole machine		printer-6.5KW Conduction belt drying-10KW Tunnel dryer-12KW	printer-8.5KW Conduction belt drying-12KW Tunnel dryer-18KW
Host size/weight Tunnel drying size/weight		4950*2650*2000 mm 3300KG 2430*3300*1170 mm 950KG	5760*2650*2000 mm 4000KG 2700*3300*1170 mm 1200KG
Consumables usage		：20ml：150ml / Color ink: 20ml/ m2 Processing liquid: 150ml/ m2	
Power requirements		Three-phase380V±5%，50Hz/60Hz 8kw	Three-phase380V±5%，50Hz/60Hz 11kw
PC configuration	operating system	windows7、8、10 64bitProfessional	
	Hardware requirements	500G、16G2400hz、2G（2.8Ghz） 500G or more SSD, 16G dual-channel memory module with a clock frequency of 2400hz or more, independent video memory above 2G, Core i7 processor (recommended frequency above 2.8Ghz)	
	Transport interface	USB3.0/high-speed interface	




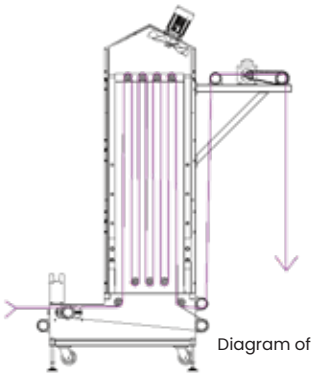


Diagram of feeding

Machine parameters

Product model:HJD-DP15				
Device name	Steamer		Power supply and power	380V,30kw
Device dimensions	3550*1650*2500mm (L*W*H)	2750*1650*2500mm (L*W*H)	Maximum operating temperature	190°C 190°C (with steam participation) with steam generator
Working cloth	2.5/2.7 2.5 meters, 2.7 meters wide through	1.8/1.9 1.8meters, 1.9 meters wide through	Capacity	4/240/ 4 minutes/m, about 240 m/h
Device weight	1320KG	1020KG	Steam box capacity	15meters
Routing method	Stainless steel chain or interlined leads,Work is carried out after using needle nails		velocity	Stepless frequency conversion speed regulation, no in the whole process The tension runs synchronously
In and out of the cloth way	A. Roll into the cloth mechanism and overhead edge suction device side into the cloth double configuration B. High cloth rack out of cloth			
Product features and advantages	1. This equipment is suitable for textile printing and dyeing and finishing, chemical dye auxiliaries enterprise laboratory or workshop for fabric dyeing and printing or steam fixing after sizing, and the dye and textile fiber are completed The combination of beauty makes the color of the product bright, and the hair color and color fixing effect are significantly stable. 2. The equipment occupies a small area, which can meet the multi-variety, personalized, and small batch production order needs of various textile and garment fabrics with low pollution, low consumption, low emissions and high added value and other characteristics, greatly reduce the fixing cost of unit rice cloth			

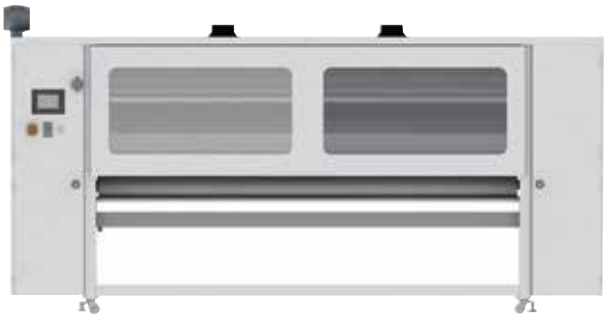


Machine parameters

产品型号Product model:HJD-DP14				
Device name	Sizing machine		Power supply and power	380V,6kw
Device dimensions	3850*1000*1800mm (L*W*H)	3050*1000*1800mm (L*W*H)	Barometric pressure requirements	≥0.4Mpa
Working cloth	2.5/2.7 2.5 meters, 2.7 meters wide through	1.8/1.9 1.8meters, 1.9meters wide through	Device weight	1410KG
Feed volume	50-1800ml/m/min		Capacity	5-10m/min
Product features and advantages	1, double cavity spray slurry, so that the cloth surface fully absorbs the slurry, save more than 30% of the slurry, reduce costs, can also spray two slurries at the same time 2. The amount of slurry can be set according to the process requirements, and the system automatically adjusts the amount of spray liquid according to the change of machine speed during operation to ensure uniform spraying of slurry 3. The equipment is equipped with a slurry recovery system to receive and reuse the slurry that is not absorbed outside the fabric width 4. This equipment is reserved for automatic intelligent cleaning system, high efficiency, simple operation and convenient maintenance.			

(Epson i3200-A1*16)



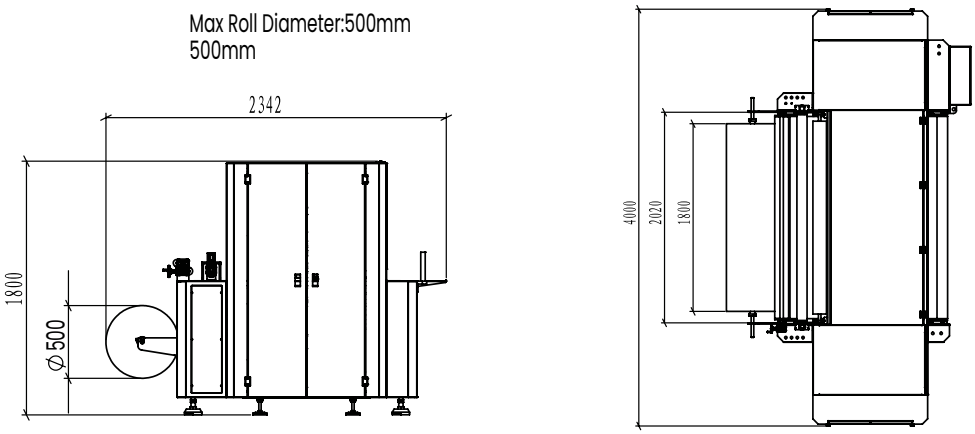

Machine schematic diagram

Machine features

1.X-axis is driven by magnetic levitation linear motor, more smoothly, silently, and free of maintenance for life;
2.Y-axis is with Japan DESBOER high-precision planetary helical gear reducer, stable stepper axis control, ultra-high durability, and ultra-low noise;
3.Integrated cleaning and moisturizing tank and cylinder-type scraper seat can scrape all nozzles at one time, saving time. High liquid level ensures long-lasting moisture;
4.The guide belt is Swiss RAPPLON, which is durable and high-precision, and can last for a lifetime;
5.Ink shortage alarm function can alarm you before the ink is used up;
6.Industrial-grade negative pressure ink supply system ensures high-speed printing in various environments;
7.Quadruple nozzle protection system: laser sensor for real-time monitoring of cloth height, anti-collision on both sides of the trolley, ultra-height sensor at the cloth outlet, and anti-overpull protection roller at the cloth outlet;
8.The printing width ranges from 1.8 to 3.2 meters. Can be used in a variety of processes: pigment, reactive, disperse and acid ink printing.
9.4-color or 8-color output; 8, 12, 16 or 24 heads can be installed; The maximum speed exceeds 300 m²/h.

Machine parameters

Product model		HJD-DP13-1	
Printhead configuration		i3200-A1/16(8)/Japan EPSON i3200-A1 Nozzle 16 heads (optional 8 heads)	
ink	Pigment (standard)	（CMYK） （CMYKORBK） Four-color (CMYK) paint ink / CMYKORBK paint ink (optional spot color, light color)	
	Reactive	（CMYK） （CMYKORGB） Four-color (CMYK) reactive ink / eight-color (CMYKORGB) reactive ink (selectable spot color, light color)	
	Acid	（CMYK） （CMYKORGB） Four-color (CMYK) acid ink / eight-color (CMYKORGB) acid ink (optional fluorescent, spot, light)	
	High temperature dispersion	（CMYK） （CMYKORGB） Four-color (CMYK) high-temperature disperse ink / eight-color (CMYKORGB) high-temperature disperse ink (optional fluorescent, spot, light)	
Suitable for fabrics		Cotton, linen, silk, polyester, blend, nylon, etc	
Capacity (4-color mode)	Fast mode	360X1200 Dpi /2pass - 180㎡/H	
	Production mode (recommended)	360X1800 Dpi / 3pass -130㎡/H	
	Fine-grained mode	——	
Capacity (8-color mode)	Fast mode	720X900 Dpi / 3pass -130㎡/H	
	Production mode (recommended)	720X1200 Dpi / 4pass-90㎡/H	
	Fine-grained mode	——	
Printhead to medium height		3mm-25mm可调/adjustable	
Optimum spray height		3mm	
Board		BYHX	
RIP/software		Neostampa、Maintop	
Printhead maintenance		Fully automatic moisturizing tray	
Printhead cleaning		Fully automatic cleaning, automatic ink scraping	
Ink supply system		Industrial pneumatic negative pressure ink supply , the fastest replenishment only takes 0.01 seconds	
Optional configuration		The cartridge is heated	
Drivetrain	X/axis	Dietz magnetic levitation linear motor/high-tech servo drive/German imported Lux linear guide/ German imported SIKO magnetic grid head	
	Y/axis	Nyoshichi/Japan Nyoshichi precision reducer/Sunjet servo motor/ Switzerland Habast guide belt/main and slave pneumatic shaft servo rewinding	
	Z/axis	Stepper motor/Japanese Omron positioning sensor	
	Cloth thickness altimeter	Ultrasonic sensors imported from Germany / Keyence laser sensors imported from Japan	
	Moisturizing tray	Four-axis lifting moisturizing disc / Raysai hybrid servo motor / Japan OMRON positioning sensor	
Water supply pressure		0.6Mpa，1m³/H	
Ink barrel volume		5L	
Air consumption		0.6MPa，50L/Min（dry, oil-free, moisture-free）	
Air filtration device		The air inlet is equipped with an oil-water separator	
Working environment		Temperature：20~28℃（should be low）；Humidity：50%~65%（should be high）	
Alarm system		Ink shortage alarm, stroke protection, spray car lifting protection, instant protection in printing	
Featured features		Monochrome ink pressure; Fully automatic gluing of the tape guide; Fully automatic tape cleaning; Any shutdown without ink flow or blockage, and can be stopped for a long time; Negative pressure independent switch;	
Maximum print width		1810mm/2610mm	
The power of the whole machine		printe-5.5KW Conduction belt drying -7KW /Tunnel dryer-10KW	printer-5.5KW Conduction belt drying-9KW Tunnel dryer-12KW
Host size/weight		4000*2200*1750 mm 2300KG	4800*2200*1750 mm 3000KG
Tunnel drying size/weight		2430*3300*1170 mm 950KG	2700*3300*1170 mm 1200KG
Consumables usage		12ml/m²	
Power requirements		380V±5%，50Hz/60Hz 3-phase AC 380V±5%, 50Hz/60Hz	
PC configuration	operating system	windows7、8、10 64bit/bit Pro	
	Hardware requirements	500G、16G/2400hz、2G（2.8Ghz） 500G or more SSD, 16G dual-channel memory module with a clock frequency of 2400hz or more, independent video memory above 2G, Core i7 processor (recommended frequency above 2.8Ghz)	
	Transport interface	USB3.0	



Machine features

1.It adopts spiral electric heating tubes to heat air. Driven by fans, hot air sprays downward from the top and penetrates fabrics via hot air circulation for drying.
2.The heating unit is completely isolated from cut pieces, featuring high safety and working efficiency.
3.Hot air circulation replenishes heat timely, maintaining stable and even furnace temperature and boosting heat utilization rate.
4.Three-section heating chamber equipped with heating tubes heats up rapidly. The builtin thermal insulation layer keeps temperature steady effectively.
5.Contact automatic deviation correction system ensures stable operation of mesh belt.
6.Excellent drying performance adapts to various special printing effects, including thick thermal curing ink, discharge printing, flocking printing, glue paste and water-based paste.

Machine parameters

Product model							
Device Name	(L* W* H) The equipment size	Temperature	Heating mode	Power	Length of fabric inlet	Length of fabric outlet	Mesh Belt Width
Single layer oven	1.8m: 2670*2300*1500mm 2.6m: 2670*3100*1500mm	0-160℃	Spiral finned heating tube	1.9m380V/11KW 2.6m380V/17KW	0.2m	0.2m	1900mm/2600mm



Machine parameters

Product model			
Device Name	(L* W* H) The equipment size	Temperature	Heating mode
Three-layer Conveyor Oven	3700*2600*1900mm	0-160℃	Spiral finned heating tube
Power	Mesh Belt Width	Length of fabric inlet	Length of fabric outlet
380V/50Kw	1900mm	500mm	400mm




Machine parameters

Product model			
Device Name	Device Max Dimensions	Dimensions of drying zone	Max width of cloth
Hanging oven	(L)*(W)*(H): 6200*4020*3100mm	(L)*(W)*(H): 3300*3250*3100*1900mm	2600mm

Machine features

1. The hanging oven has a smaller size and occupies less factory floor space compared with traditional ovens.
2. It features better sealing performance. Its opening area is 30% of that of traditional ovens, which effectively reduces heat loss and achieves superior energy saving and heat preservation.
3. Equipped with temperature sensors to detect temperature changes in real time and automatically adjust the internal temperature.
4. Four internal viewing windows are installed on the cabinet for real-time observation of the internal operating status.
5. Four circulating fans are fitted to ensure uniform temperature across the drying area.
6. Photoelectric sensing is adopted for fabric feeding, realizing synchronous control of fabric infeed and outfeed.
7. The top-mounted moisture removal system can automatically regulate the internal humidity.
8. Adopts an adjustable swing arm fabric winding structure to meet various winding requirements.
9. The isolated electric heating system is safe and reliable.

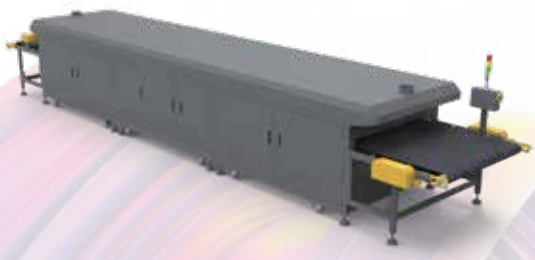

Machine parameters

Product model:HJD-L2			
Device Name	(L* W* H) The equipment size	Temperature	Heating mode
High end tunnel dryer	8175*1670*1300mm	0-180℃	Spiral electric heating tube
Power	Length of drying zone	Mesh Belt Width	Belt Length(L*W)
380V/74A/46KW	6000mm	1200mm	8000*1200mm



(HJD-K503)40*60
Semi automatic ironing machine 40*60



(HJD-K601)40*60
Fully automatic ironing machine 40*60




(HJD-K602)40*60
Fully automatic ironing machine 40*60

■ Machine parameters

Model	Heating area	Tem	Time range	Voltage	Power	/Host machine size Packing size	Net weight Gross weight	Compatible air pump
HJD-K501	15*15cm	~260℃ Room temperature	0-999s	220V/2A 220V / Single-phase / 2A	600W	480*420*380mm 580*470*540mm	NW:30kg GW:41.5kg	750W
HJD-K502	40*50cm	~260℃ Room temperature	0-999s	220V/14A 220V / Single-phase / 14A	3KW	1120*790*1300mm 1220*750*650mm	NW:110kg GW:130kg	750W
HJD-K503	40*60cm	~260℃ Room temperature	0-999s	220V/15A 220V / Single-phase / 15A	3.5KW	1000*790*1400mm 1100*890*850mm	NW:135kg GW:150kg	750W
HJD-K601	40*60cm	~260℃ Room temperature	0-999s	220V/15A 220V / Single-phase / 15A	3.5KW	1000*790*1400mm 1100*890*850mm	NW:135kg GW:150kg	
HJD-K602	40*60cm	~260℃ Room temperature	0-999s	220V/20A 220V / Single-phase / 20A	4.3KW	1250*950*1550mm 1320*1050*1050mm	NW:220kg GW:270kg	
HJD-K504	50*70cm	~260℃ Room temperature	0-999s	380V/9A 380V / Three-phase / 9A	5.5KW	1420*950*1320mm 1800*980*1500mm	NW:180kg GW:370kg	750W
HJD-K505	60*80cm	~260℃ Room temperature	0-999s	380V/12A 380V / Three-phase / 12A	6KW	1800*800*1420mm 1900*1000*1500mm	NW:200kg GW:390kg	750W



(HJD-K10)
Cap heat press machine



(HJD-K9)
Double head Four station hot press machine



(HJD-K801/802/803)
Large hot press machine

■ Machine parameters

Model	Heating area	Max tem	Time range	Power	Power	Host machine size /Packing size	NW GW	Max pressure	Platen quantity	Power system
HJD-K10	15*15cm	~260℃ Room temperature	0-999s	220V/32A 220V / Three-phase / 32A	500W	670*550*670mm 770*650*870mm	NW:50kg GW:65kg	0.7mpa	2	Pneumatic
HJD-K9	40*60cm	~260℃ Room temperature	0-999s	220V/32A 220V / Three-phase / 32A	5.5KW	1780*1780*1430mm 1880*1880*1650mm	NW:320kg GW:340kg	0.7mpa	4	Pneumatic
HJD-K801	80*100cm	~260℃ Room temperature	0-999s	380V/14A 380V / Three-phase / 14A	10KW	1340*1100*1500mm 1440*1000*1600mm	NW:510kg GW:525kg	0.7mpa	2	Pneumatic/hydraulic pressure(optional)
HJD-K802	100*120cm	~260℃ Room temperature	0-999s	380V/20A 380V / Three-phase / 20A	11KW	1630*1310*1500mm 1640*1700*1660mm	NW:515kg GW:530kg	0.7mpa	2	Pneumatic/hydraulic pressure(optional)
HJD-K803	120*150cm	~260℃ Room temperature	0-999s	380V/28A 380V / Three-phase / 28A	20KW	1930*1510*1500mm 1700*1950*1500mm	NW:785kg GW:800kg	0.7mpa	2	Pneumatic/hydraulic pressure(optional)

(Epson i3200-A1*4)



Machine advantages



Adopt maintenance-free integrated lifting capping station for print head moisturizing , It features long service life and reliable protection for print heads.



THK silent linear guide rail from Japan runs smoothly and has a longer lifespan. It can effectively reduce the resistance and noise of the printing cart during high-speed operation, and improve printing accuracy



This device is installed on both sides of the print carriage. It will automatically halt printing upon encountering obstacles to protect the print heads.



The Y-axis drive adopts imported three-wheel fluororubber pressing rollers, ensuring smooth media feeding and preventing skew and indentations.

Machine features

The Japanese dual THK silent linear guide rail ensures smooth movement and longer lifespan, effectively reducing resistance and noise during high-speed operation of the ink truck.

Industrial steel main structure: high-strength quenching process base, main engine, wall panel thickness not less than 12mm, machine operation is more stable.

High standard steel aluminum composite bottom beam, beam adjustment and multi-point platform adjustment structure, ensuring beam and platform accuracy, and higher printing accuracy

Adopting a constant tension swing rod type paper feeding and unloading control system: ensuring uniform force on the paper throughout the printing process, smooth and compact paper feeding, and avoiding loose feeding.

Advanced intelligent nozzle cleaning and moisturizing device provides safe and convenient nozzle cleaning and maintenance functions, making operation and maintenance more convenient.

(Epson i3200-A1*4)

■ Machine features

Product model		HJD- DP11
Print head configuration		Japan Epson i3200-A1*4/pcs
Ink		(CMYK)/Four color high concentration (CMYK) sublimation ink
		(CMYKLcLmLkLlk或CMYKOBFmFy)/Eight color high concentration (CMYKLcmLkLlk or CMYKOBFmFy) sublimation ink
Max print width		≤1.9m
Printhead to medium height		1.5mm~3mm/Adjustable
Optimum injection height		2mm
Suitable paper		≥40g
Support image format		JPG/TIF/PDF/etc.
Ink supply system		Siphon ink supply system
(4) Capacity (4-color Mode)	Production mode (recommended)	360X2400 Dpi / 4Pass / 90㎡/h
	Fine mode	720X1800 Dpi / 6Pass / 60㎡/h
(8) Capacity (8-color Mode)	Production mode (recommended)	360X2400 Dpi / 4Pass / 45㎡/h
	Fine mode	720X1800 Dpi/ 6pass / 30㎡/h
Maximum winding diameter of paper		1000 /m
Working environment		20~28℃45%~70% Temperature: 20~28℃ (low); Humidity: 45%~70% (high)
Transmission system	X X-axis	Leisai stepper motor/THK linear guide rail from Japan
	Y Y-axis	Imported fluororubber press paper wheel/Renesas stepper integrated motor
	Paper retracting system	Constant tension retractable paper system (100 meters)
Manipulation of the interface		Drainage-type air suction channel, multi-support-point platform calibration structure
The operating system		Intelligent air-heat integrated dryer
Board		Hosonsoft
RIP software		7.0 （RIP X）、Neostampa Standard configuration includes Montel 7.0 Professional Edition (compatible with RIP X Color Correction System) and Neostampa (optional Delta Color Correction System)
Alarm system		Lack of ink alarm, spray car collision prevention, stroke protection, lack of paper stop
The power supply		200W, 50hz
Power consumption		1.8KW / 4KW Printer -1.8KW/Dryer -4KW
Main engine size		3220(L)*850(W)*11800(H)mm
Package Size		3420(L)*1020(W)*970(H)mm
Weigh		Net weight：480kg ； Gross weight:530kg ；
Spray nozzle maintenance		Maintenance free integrated lifting ink stack
Spray nozzle cleaning		Fully automatic cleaning, fully automatic ink scraping, fully automatic moisturizing
Consumable usage		12ml/m²
Computer configuration	Operating system	windows7、8、10 64bit/Professional Version
	Hardware requirements	240G、8G/2400hz（16G）、1G、i5（2.5Ghz） 240GB or above solid-state drive, 8GB/2400Hz memory module (recommended 16GB), 1GB or above independent video memory, Core i5 processor (recommended 2.5GHz or above frequency)
	Transmission interface	Gigabit network interface
Roll size / Roll weight		Integrated (included within the host)
Drying system		Intelligent wind and heat integrated dryer


(Epson i3200-A1*8)




Machine advantages



Inflatable shaft type retractable system+ double clamping rubber strip roller, By utilizing the pressure of the air, automatic adjustment is made to ensure even force distribution, resulting in smoother and more compact paper feeding, and avoiding loose retraction



THK silent linear guide rail from Japan runs smoothly and has a longer lifespan. It can effectively reduce the resistance and noise of the printing cart during high-speed operation, and improve printing accuracy



Automatic paper detection design, automatically detects when the medium is used up, and printing automatically pauses



The pressure wheel is made of high-quality wear-resistant materials with hard inner and soft outer rubber wheels, ensuring smooth paper feeding and avoiding skewing and indentation

Machine features

The Japanese dual THK silent linear guide rail ensures smooth movement and longer lifespan, effectively reducing resistance and noise during high-speed operation of the ink truck.

Industrial steel main structure: high-strength quenching process base, main engine, wall panel thickness not less than 12mm, machine operation is more stable.

High standard steel aluminum composite bottom beam, beam adjustment and multi-point platform adjustment structure, ensuring beam and platform accuracy, and higher printing accuracy

Adopting a constant tension swing rod type paper feeding and unloading control system: ensuring uniform force on the paper throughout the printing process, smooth and compact paper feeding, and avoiding loose feeding.

Advanced intelligent nozzle cleaning and moisturizing device provides safe and convenient nozzle cleaning and maintenance functions, making operation and maintenance more convenient.

(Epson i3200-A1*8/12)

Machine features

Product model		HJD- DP11			
Printhead configuration		i3200-A1*81.9m Japan Epson i3200-A1*8pcs 1.9m	i3200-A1*83.2m Japan Epson i3200-A1*8pcs 3.2m	i3200-A1*12 1.9m Japan Epson i3200-A1*12pcs 1.9m	i3200-A1*12 3.2m Japan Epson i3200-A1*12pcs 3.2m
Ink		(CMYK)Four color high concentration (CMYK) sublimation ink			
		(CMYKLcLmLkLlk或CMYKOBFmFy)Eight color high concentration (CMYKLcmLkLlk or CMYKOBFmFy) sublimation ink			
Max print width		≤1.9m		≤3.2m	
Printhead to medium height		1.5mm~3mm/Adjustable			
Optimum injection height		2mm		1.8mm	
Suitable paper		≥40g		≥31g	
Support image format		JPG/TIF/PDF/etc.			
Ink supply system		Siphon ink supply system			
(4) Capacity (4-color Mode)	Production mode (recommended)	360X1200 Dpi / 1Pass / 310 ㎡/h	360X1200 Dpi / 1Pass /435 ㎡/h	360X1200 Dpi / 1Pass / 450 ㎡/h	360X1200 Dpi / 1Pass /620 ㎡/h
	Fine mode	360X2400 Dpi / 2Pass / 195 ㎡/h	360X2400 Dpi / 2Pass / 275 ㎡/h	360X2400 Dpi / 2Pass / 280 ㎡/h	360X2400 Dpi / 2Pass / 310 ㎡/h
(8) Capacity (8-color Mode)	Production mode (recommended)	360X2400 Dpi / 4Pass / 195 ㎡/h	360X2400 Dpi / 4Pass / 275 ㎡/h	360X2400 Dpi / 4Pass / 280 ㎡/h	360X2400 Dpi / 4Pass / 310 ㎡/h
	Fine mode	720X1800 Dpi/ 6pass / 130 ㎡/h	720X1800 Dpi/ 6pass / 180 ㎡/h	720X1800 Dpi/ 6pass / 195 ㎡/h	720X1800 Dpi/ 6pass / 210 ㎡/h
Max roll diameter for paper rewind & unwind		Paper feeding system1500m ; Paper take-up system1000m（29gsm）			
Working environment		：20~28℃（45%~70%） Temperature: 20~28℃ (low); Humidity: 45%~70% (high)			
Transmission system	X X-axis	Xinjie servo motor/THK linear guide rail from Japan			
	Y Y-axis	Imported fluororubber press paper wheel/Renesas stepper integrated motor			
	Paper retracting system	Constant tension retractable paper system (km)	Constant tension retractable paper system	Constant tension retractable paper system (km)	Constant tension retractable paper system
Manipulation of the interface		Drainage-type air suction channel, multi-support-point platform calibration structure	Multi pivot platform calibration structure	Drainage-type air suction channel, multi-support-point platform calibration structure	Multi pivot platform calibration structure
The operating system		Intelligent air-heat integrated dryer			
Control Board		汉森/Hosonsoft；BYHX			
RIP software		7.0（RIP X）、Neostampa（Delta） Standard configuration includes Montel 7.0 Professional Edition (compatible with RIP X Color Correction System) and Neostampa (optional Delta Color Correction System)			
Alarm system		Low Ink Alarm;Carriage Anti-collision;/Stroke Protection;/Paper-out Stop			
The power supply		220V 50HZ			
Power consumption		2.3KW / 12KW Printer -2.3KW/Dryer -12KW	3KW / 13KW Printer -3KW/Dryer -13KW	2.8KW / 12KW Printer -2.8KW/Dryer -12KW	2.5KW / 11KW Printer -2.5KW/Dryer -11KW
Main engine size		3725(L)*1385(W)*1810(H)mm	5020(L)*1600(W)*1850(H)mm	3725(L)*1385(W)*1810(H)mm	5020(L)*1600(W)*1850(H)mm
Packing dimensions		3800(L)*1145(W)*2040(H)mm	5200(L)*1680(W)*2040(H)mm	3800(L)*1145(W)*2040(H)mm	5200(L)*1680(W)*2040(H)mm
Weigh		1380KG	2100KG	1150KG	2100KG
Spray nozzle maintenance		Maintenance free integrated lifting ink stack			
Spray nozzle cleaning		Fully automatic cleaning, fully automatic ink scraping, fully automatic moisturizing			
Consumable Dosage		12ml/m²			
Computer configuration	Operating system	windows7、8、10 64bit/Professional Edition			
	Hardware requirements	240GB or above solid-state drive(recommended 500GB), 8GB/2400Hz memory module (recommended 16GB), 2GB or above independent video memory, Core i7 processor(recommended 2.8GHz or above frequency)	500GB or above solid-state drive (recommended 1T), 16GB 2400Hz memory module (recommended 32GB), 2GB or above independent video memory, Core i7 processor (recommended 2.8GHz or above frequency)	240GB or above solid-state drive (recommended 500GB), 8GB/2400Hz memory module (recommended 16GB), 2GB or above independent video memory, Core i7 processor (recommended 2.8GHz or above frequency)	500GB or above solid-state drive (recommended 1T), 16GB 2400Hz memory module (recommended 32GB), 2GB or above independent video memory, Core i7 processor (recommended 2.8GHz or above frequency)
	Transmission interface	USB 3.0 High-Speed Interface			
Roll size / Roll weight		Integrated (included within the host)			
Drying system		Intelligent wind and heat integrated dryer	/	Intelligent wind and heat integrated dryer	/

(Epson i3200-A1*15/16)



Machine advantages



The 10000 meter constant tension paper retraction system saves time and effort in high-speed production, eliminating the need for frequent paper changes



Biomimetic air duct honeycomb flat panel helps smooth paper movement, solves paper wrinkling problems, and provides more precise paper movement



Dual nozzle protection system, protecting the most critical parts of the equipment, providing more reliable use



The X-axis is driven by a magnetic evitation linear motor, and the equipment smooth operation, high positioning accuracy, maintenance free

Machine features

High magnetic levitation motor with imported silent linear guide to achieve high-speed printing more accurate and stable.

Finishing sprinkler protection with anti-collision spray car to achieve double protection of sprinkler head, extend the service life of sprinkler head.

All aluminum ink stack, automatic cleaning and moisturizing, make printing cleaner and simpler.

Biomimetic air duct honeycomb flat panel helps smooth paper movement, solves paper wrinkling problems, and provides more precise paper movement.

Multi point suction platform support structure, combined with THK linear guide rail, ensures X-direction printing accuracy.


(Epson i3200-A1*15/16)

■ Machine features

Product model		HJD- DP11			
Print head configuration		i3200-A1*15/1.9m Japan Epson i3200-A1*15/pcs 1.9m	i3200-A1*15 3.2m Japan Epson i3200-A1*15/pcs 3.2m	i3200-A1*16/1.9m Japan Epson i3200-A1*16/pcs 1.9m	i3200-A1*16/3.2m Japan Epson i3200-A1*16/pcs 3.2m
Ink		(CMYK) 4 color high concentration (CMYK) sublimation ink		(CMYK) 4-color high-density (CMYK) sublimation ink 8-color high concentration(CMYKLcLmLkLlk (or)CMYKOBFmFy)Sublimation ink	
Max print width		≤1.9m		≤3.2m	
Printhead to medium height		1.5mm~3mm/Adjustable			
Optimum injection height		1.8mm			
Suitable paper		≥31g			
Support image format		JPG/TIF/PDF/etc.			
Ink supply system		Siphon-type mixed ink supply system		Industrial Negative Pressure Ink Supply System	
(4) Capacity (4-color Mode)	Production mode (recommended)	240X1800 Dpi / 1pass / 540㎡/h	240X1800 Dpi / 1pass /775㎡/h	360X1200 Dpi / 1Pass / 620㎡/h	360X1200 Dpi / 1Pass / 880㎡/h
	Fine mode	360X1800Dpi / 1pass / 360㎡/h	360X1800Dpi / 1pass / 510㎡/h	360X2400 Dpi / 2Pass / 310㎡/h	360X2400 Dpi / 2Pass / 440㎡/h
(8) Capacity (8-color Mode)	Production mode (recommended)	/	/	360X2400 Dpi / 4Pass / 310㎡/h	360X2400 Dpi / 4Pass / 440㎡/h
	Fine mode	/	/	720X1800 Dpi / 6Pass / 210㎡/h	720X1800 Dpi / 6Pass / 295㎡/h
Maximum winding diameter of paper		Paper feeding system15000m、Paper take-up system3500m（29gsm）			
Working environment		Temperature：20~28℃（low）；Humidity：45%~70%（high）			
Transmission system	X X-axis	Magnetic levitation linear motor / Panasonic servo drive (Japan) / THK linear guide rail (Japan) / SIKO magnetic scale head (Germany)			
	Y Y-axis	Fully servo rubber roller feeding/high-precision reducer imported from Japan/paper wrinkle removal rod			
	Paper retracting system	Fully servo dual air expansion axis paper feeding and unloading/ German Beckhoff ultrasonic sensor /Chuck type drive shaft upper and lower paper			
Manipulation of the interface		Biomimetic air duct honeycomb flat plate, multi pivot platform calibration structure			
The operating system		Intelligent air-heat integrated dryer			
Control Board		BYHX			
RIP software		7.0（Neostampa）/Standard configuration includes Montel 7.0 Professional Edition (compatible with RIP X Color Correction System) and Neostampa (optional Delta Color Correction System)			
Alarm system		Low Ink Alarm;Carriage Anti-collision;/Stroke Protection;/Paper-out Stop			
The power supply		380V±5%，50Hz/60Hz / 3-phase 380V±5%, 50Hz/60Hz			
Power consumption		4KW / 12KW / Printer -4KW/Dryer -12KW		4.5KW / 18KW / Printer -4.5KW/Dryer -18KW	
Main engine size		3900(L)*1260(W)*1900(H)mm		5450(L)*1600(W)*1850(H)mm	
Weigh		1380KG		2100KG	
Spray nozzle maintenance		Maintenance free integrated lifting ink stack			
Spray nozzle cleaning		Fully automatic cleaning, fully automatic ink scraping, fully automatic moisturizing			
Roll size		2500(L)*1050(W)*1050(H)mm		3900(L)*1050(W)*1050(H)mm	
Roll weight		470kg		790kg	
Consumable dosage		12ml/m²			
Computer configuration	Operating system	windows7、8、10 64bit / Windows 7/8/10 64-bit Professional Edition			
	Hardware requirements	240GB or above solid-state drive (recommended 500GB), 8GB 2400Hz memory module (recommended 16GB), 2GB or above independent video memory, Core i7 processor (recommended 2.8GHz or above frequency)		500GB or above solid-state drive (recommended 1T), 16GB 2400Hz memory module (recommended 32GB), 2GB or above independent video memory, Core i7 processor (recommended 2.8GHz or above frequency)	
	Transmission interface	USB 3.0 High-speed Interface			

(Epson i3200-A1*8/16)

Printing section

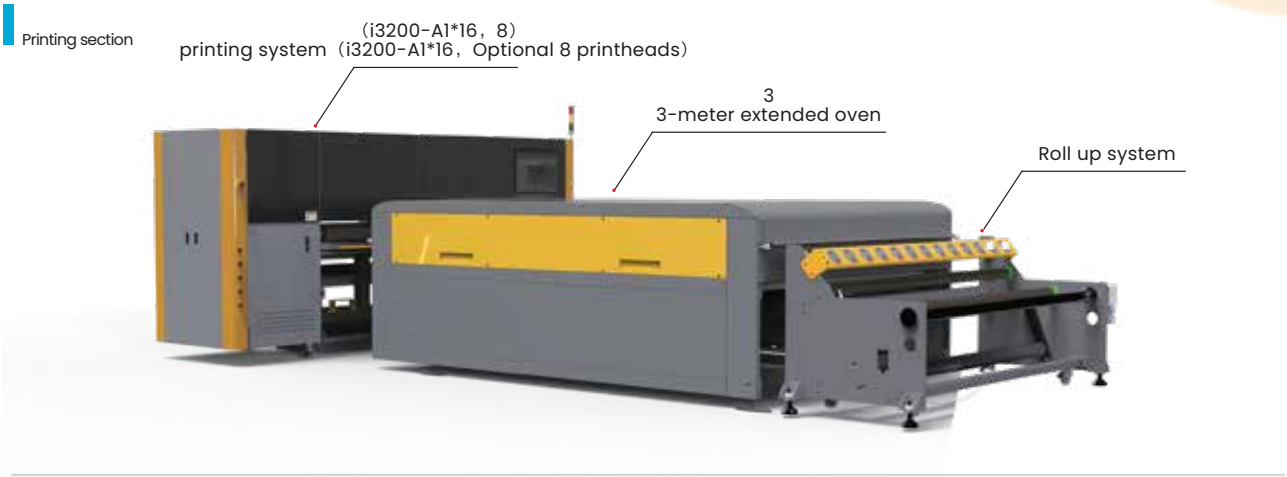

Transfer section



i3200-A1*16） / Machine advantages (i3200-A1*16)



The 10000 meter constant tension paper retraction system saves time and effort in high-speed production, eliminating the need for frequent paper changes



Y-axis transmission rubber roller paper feeding system, compatible with 30g thin paper, more accurate paper feeding



Dual nozzle protection system, protecting the most critical parts of the equipment, providing more reliable use



The X-axis is driven by a magnetic evitation linear motor, and the equipment smooth operation, high positioning accuracy, maintenance free

Machine features

One machine dual-use, on the basis of printing sublimation paper on ordinary paper printers, adhesive (Co) printing is added to achieve high-quality heat transfer printing and hot stamping effects, greatly improving the texture of the finished product.

(Epson i3200-A1*8/16)

■ Machine features

Product model		HJD-DP12	
Print head configuration		i3200-A1*8 Japan Epson i3200-A1*8pcs	i3200-A1*16 Japan Epson i3200-A1*16pcs
ink		（CMYK）+（Co） Four color (CMYK) hot stamping film, sublimation transfer ink+sublimation hot stamping adhesive (Co)	
Suitable paper		Heat sublimation coating hot stamping film	
Suitable fabric		Polyester fiber (polyester)	
(1.5) Capacity (1.5 meters width)	Production mode (recommended)	360X1200 Dpi / 2pass / 80㎡/h	240X1200 Dpi / 2pass / 240㎡/h
	fine mode	720X1200 Dpi / 4pass / 40㎡/h	360X1200 Dpi / 2pass / 160㎡/h
From nozzle to medium height		1mm~4mm（） / adjustable (mechanical)	1mm-20mm/ adjustable (knob type)
Control board		Hosonsoft /BYHX	
Rip Software		7.0UV Standard configuration of Montai 7.0 UV version (can be matched with RIP X color tracing system)	
Printing film width support		300~1900mm	
Optimal spray height		1.8mm	
Consumables usage		color ink：12ml/㎡；/OP：20ml/㎡	
computer configuration	operating system	windows7、8、10 64bitWindows 7/8/10 64-bit Professional Edition	
	hardware requirements	Solid state drive above 240GB (recommended 500GB), 8GB dual channel 2400Hz memory module, 2GB or more independent video memory, Core i5 processor (frequency above 2.5GHz)	Solid state drive above 240GB (recommended 500GB), 8GB dual channel 3200Hz memory module, 2GB or more independent video memory, Core i5 processor (frequency above 2.8GHz)
	Interface	Gigabit network port/USB 3.0 high-speed interface	USB 3.0 high-speed interface
Spray nozzle maintenance		Elevating integrated ink stack	Lift type integrated moisturizing tray (with integrated ink scraping unit)
Spray nozzle cleaning		Fully automatic cleaning, fully automatic ink scraping, fully automatic moisturizing	Fully automatic cleaning, fully automatic ink scraping, fully automatic moisturizing
ink supply system		Siphonic positive and negative pressure mixed ink supply system	Industrial grade negative pressure ink supply system
Transmission system	X X-axis	Xinjie servo motor/Japanese THK linear guide/ Avago grating reading head	Magnetic levitation linear motor/ Israeli high-tech servo drive/ Japanese THK linear guide/German SIKO magnetic grid head
	Y Y-axis	Paper roller for paper feeding/Leisai stepper motor/ equipped with printing film wrinkle roller	Servo rubber roller film/anti slip pressure roller/ high-precision reducer imported from Japan/ equipped with printing film wrinkle removal rod
	Moisturizing plate	No, use an ink pad to moisturize	Renesas stepper motor/Omron positioning sensor from Japan/ Yadeke stroke cylinder
	Paper feeding system	Inflatable shaft film placement/ hand-held fixed gear transmission shaft upper and lower films	Servo inflation shaft film release/ German imported Beckhoff ultrasonic sensor/Chuck type transmission shaft upper and lower film
Suction platform		Ultra flat suction integrated printing platform, multi pivot platform calibration structure	
drying system		After printing, it will be heated and dried in a loop through the tunnel	
work environment		Temperature: 20-28 ℃ (preferably low); Humidity: 45%~70% (preferably high)	
alarm system		Ink shortage alarm, spray collision prevention, travel protection, film shortage shutdown	
Power requirements		AC/Three-phase380V±5%，50Hz/60Hz	AC/Single-phase220V±5%，50Hz
Whole machine power		4.5KW / 20KW Printer -4.5KW/Tunnel dryer -20KW	6KW / 30KW Printer -6KW/Tunnel dryer -30KW
Maximum roll diameter for retractable paper		Paper feeding system:3000m;Paper take-up system:2000m	
Tunnel oven parameters	Power requirements	AC/380V±5%，50Hz/60Hz / AC 3-Phase 380V±5%, 50Hz/60Hz	
	Tunnel oven size	3060(L)*2260(W)*1775(H) mm	
	Weight of tunnel oven	900 Kg	
	Effective drying width of tunnel	1900 mm	
	Roll size	2400(L)*1000(W)*1060(H) mm	
	Roll weight	500kg	
Host Parameters	Host size	3620(L)*1120(W)*1820 (H)mm	4050(L)*1600(W)*1750 (H)mm
	Weight	1180 Kg	1480 Kg

2-printhead high-end printer with standard powder spreader



Machine parameters

(HJD-S01)2 Epson i3200-A1*2 Printer parameters

Device type	New 2 Printhead Printer	Printhead Model	Epson i3200-A1*2/pcs
Max print width	65cm	Working environment	Temperature: 20℃-28℃ Humidity: 65-75%
Print accuracy	720dpi*1800dpi 6 pass 720dpi*2400dpi 8pass	Working power supply	220V 50HZ/60HZ 3.5A
Control Board	Hosonsoft	Outside dimensions	1800*780*1700mm L*W*H
RIP software	MainTop	Packing size	1950*920*960mm L*W*H
Sprinkler maintenance	Automatic cleaning, automatic moisturizing	The weight of	170kg Packing weight: 210kg
Print speed	6pass 8-15㎡/h 8pass 5-12㎡/h	Power	750w
Ink type and configuration	Pigment ink C、M、Y、K、W	Optional configuration	cadlink/photoprint /printfactory(XBYX)
Consumables usage	White ink: 25ml/㎡ /Color ink: 12ml/㎡ /Hot melt powder: 30g/㎡		

Standard Powder Drying Machine Parameters

Device type	Standard Powder Drying Machine	Match the model	2 Printhead printer
Number of lamps	5/pcs	Working power supply	AC220V/50Hz 20A
Power	4200W	Packed in wooden case size	1830(L)*1080(W)*1250(H)mm
Outside dimensions	2480*1050*1090mm	weight	220kg Net weight 220kg 280kg Package weight 280kg

Machine advantages

Advantages of printers



1. X-axis aluminum alloy precision machined crossbeam+
Yadeke high-precision silent guide rail, controlled by a Lei Sai integrated stepper motor, and the white color matching
is precise to within 2 threads



2. The high-strength die opening thickened aluminum alloy base is firmly combined with the machine head, with a precision machining flatness of ≤ 0.03. It is matched with an all aluminum alloy suction platform group to provide long-lasting high-speed and high-precision printing



3. The nozzle moisturizing adopts a maintenance free integrated lifting ink stack, which is durable and protects the nozzle safety



4. Configure film shortage alarm shutdown. When the film is exhausted, the electronic sensor detects a paper shortage status, the software alarms and stops printing to prevent empty printing and nozzle rubbing. The printer can achieve unmanned operatione rubbing, printer can achieve unmanned operation



5. Ink cartridge level alarm system, when the main ink cartridge is low on ink, the buzzer will sound and the corresponding indicator light will light up, prompting the user to add ink



6. White ink circulation and stirring system, Hengjinding's unique independent shaking function of white ink pot, fully shaking without dead corners, preventing white ink sedimentation and ensuring smooth production



7. The spray car is equipped with collision protection systems on both sides of the nozzle, which can quickly stop in case of accidental impact or scratching of the printing film; Manually pressing the ink suction device makes it easier to maintain the ink pad



8. Dual power automatic unwinding with constant expansion force film feeding structure, stable high-speed printing and film feeding, ensuring the accuracy of step-by-step paper feeding; Support 300 meter large roll printing film, batch production does not require frequent roll changes, making it more convenient to use



9. The Y-axis drive uses imported fluororubber large paper pressing wheel, which does not generate static electricity. It does not need to adjust the step again to change the film at will, so as to ensure that the single facial mask moves stably without slipping and does not damage the printing surface of the hot stamping film

Advantages of Standard Powder Drying Machine



1. The standard intelligent temperature control is precise, with mesh belt speed regulation and adjustable powder feeding amount



2. Mesh belt suction film for easy sampling



3. Increase the powder box without frequent powder addition



4. Automatic winding+front cold air

4-printhead high-end printer with advanced powder shaker (Extended length version)



Machine parameters

(HJD-S01)Epson i3200-A1*4 Printer parameters

Device type	New 4 Printhead Printer	Printhead Model	Epson i3200-A1*4/pcs
Max print width	65cm	Working environment	Temperature：20℃-28℃ Humidity：65-75%
Print accuracy	720dpi*1800dpi 6pass 720dpi*2400dpi 8pass	Working power supply	220V 50HZ/60HZ 4.5A
Control Board	Hosonsoft	Outside dimensions	1800*780*1700mm L*W*H
RIP software	MainTop	Packing size	1950*920*960mm L*W*H
Sprinkler maintenance	Automatic cleaning, automatic moisturizing	The weight of	175kg Packing weight：220kg
Print speed	6pass 11-18㎡/h 8pass 8-14㎡/h	Power	1000w
Ink type and configuration	Pigment ink C、M、Y、K、W	Optional configuration	1.Breathable 4-color：KCMY+W 2. Ordinary 8-color：KCMY+ORGB+W 3.Fluorescent 8-color：KCMY+FrFmFgFy+W 4.Optional software:cadlink/photoprint /printfactory/SPIDER RIP
Consumables usage	25ml/12ml/30g/ White ink: 25ml/m²； Color ink: 12ml/m²； Hot melt powder: 30g/m²；		

Advanced powder shaker (Extended length version) parameters

Device type	Advanced powder shaker (Extended length version)	Match the model	4 Printhead printer
Number of lamps	9/pcs	Working power supply	AC220V/50Hz 33A
Power	7000W	Packed in wooden case size	2290*1080*1250mm L*W*H
Outside dimensions	2940*1050*1090mm	weight	300kg Net weight 300kg 360kg Package weight 360kg

Machine advantages

Advantages of printers



1. X-axis aluminum alloy precision machined crossbeam+
Yadeke high-precision silent guide rail, controlled by a Lei Sai integrated stepper motor, and the white color matching
is precise to within 2 threads



2. The high-strength die opening thickened aluminum alloy base is firmly combined with the machine head, with a precision machining flatness of ≤ 0.03. It is matched with an all aluminum alloy suction platform group to provide long-lasting high-speed and high-precision printing



3. The nozzle moisturizing adopts a maintenance free integrated lifting ink stack, which is durable and protects the nozzle safety



4. Configure film shortage alarm shutdown. When the film is exhausted, the electronic sensor detects a paper shortage status, the software alarms and stops printing to prevent empty printing and nozzle rubbing. The printer can achieve unmanned operatione rubbing, printer can achieve unmanned operation



5. Ink cartridge level alarm system, when the main ink cartridge is low on ink, the buzzer will sound and the corresponding indicator light will light up, prompting the user to add ink



6. White ink circulation and stirring system, Hengjianding's unique independent shaking function of white ink pot, fully shaking without dead corners, preventing white ink sedimentation and ensuring smooth production



7. The spray car is equipped with collision protection systems on both sides of the hozzle, which can quickly stop in case of accidental impact or scratching of the printing film; Manually pressing the ink suction device makes it easier to maintain the ink pad



8. Dual power automatic unwinding with constant expansion force film feeding structure, stable high-speed printing and film feeding, ensuring the accuracy of step-by-step paper feeding; Support 300 meter large roll printing film, batch production does not require frequent roll changes, making it more convenient to use



9. The Y-axis drive uses imported fluororubber large paper pressing wheel, which does not generate static electricity. It does not need to adjust the step again to change the film at will, so as to ensure that the single facial mask moves stably without slipping and does not damage the printing surface of the hot stamping film

Advantages of Advanced powder shaker (Extended length version)



1. Extended drying area of high-end powder spreader to meet the needs of fast printing and drying



2.The oven features a dual suction design, with external suction for film entry, which does not affect internal drying. After printing, there is suction for film exit, reducing material waste



3. Front guide plate heating+pre drying, slow and humid environment usage requirements



4. Powder automatic circulation, labor-saving and labor-saving（Optinal）

5/6 printhead printer with independent three temperature zone powder spreader



Machine parameters

(HJD-S01)5/6 Epson i3200-A1*5/6 Printer parameters

Nozzle configuration		i3200-A1*5/pcs	i3200-A1*6/pcs
ink		(CMYK) / (CMYKORGB) / (CMYKORGBFmFyFrFg) + DTF/White DTF Pigment Ink	(CMYK) / (CMYKORGB) + DTF/White DTF Pigment Ink
Suitable fabric		Polyester, nylon, cotton, silk, knitted fabric, textile, non-woven fabric, oxford cloth and various other fabrics	
Capacity (4 color mode)	production mode	720X1800 Dpi/ 6pass - 30m²/h	720X1800 Dpi/ 6pass - 28m²/h
	Precision Mode	360X5400 Dpi / 9pass -15m²/h	360X5400 Dpi / 9pass -15m²/h
Capacity (8 color mode)	production mode	720X900 Dpi/ 6pass - 30m²/h	720X900 Dpi/ 6pass - 28m²/h
	Precision Mode	720X1800 Dpi / 12pass -15m²/h	720X1800 Dpi / 12pass -15m²/h
Capacity (12 color mode)	production mode	720X1800 Dpi/ 6pass - 10m²/h	5，6 Optional 5 printheads are sufficient, 6 printheads do not increase speed
	Precision Mode	720X2400 Dpi / 8pass -6m²/h	
The optimal spraying height of the nozzle		1.8mm	
Control Board		Hosonsoft	
Rip Software		Flexi 22/ PrintFactory/ Cadlink Maintop/Ruiyin/Flexi 22 (optional)/PrintFactory (optional)/Xiaobai Impression (optional)/Cadlink (optional)	
Spray nozzle maintenance		Maintenance free integrated lifting ink stack	
Spray nozzle cleaning		Fully automatic cleaning, fully automatic ink scraping	
ink supply system		Siphonic positive and negative pressure ink supply system	
drive system	x-axis	Airtac Rexay (Jiemeikang) stepper integrated motor/Airtac linear guide, silent slider	
	y-axis	Rexay (Jiemeikang) stepper integrated motor/Imported fluororubber paper roller	
	Ink stack	stepping motor	
Ink bucket capacity		1500ml	
work environment		Temperature: 20-28℃ (/Low Pref) /Humidity: 45%-65% (/High Pref)	
alarm system		Travel protection, carriage anti-collision, ink shortage alarm, film shortage alarm and stop.	
Featured Features		Shake up white ink pot, full-channel white ink circulation, idle automatic cleaning, channel-free white ink printing (optional), full gamut ICC (optional), film printing (optional)	
max print width		65cm / 120cm (Optional)	
Whole machine power		1000W	1200W
Machine power		65cm/Floor space: 2000*840*1650mm /Packing: 2120*1000*950mm	120cm/Floor space: 2600*840*1650mm /Packing: 2120*1000*950mm
Weight		65cm: 185KG /Packing weight: 230kg	120cm:200kg /Packing weight: 250kg
Power requirements		Two-phase 220V±5%, 50Hz/60Hz	
computer configuration	Operating System	windows7、8、10 64bit/Professional	
	Hardware Requirements	Solid state drive over 240G,16G dual-channel memory with main frequency above 2400Hz, Discrete graphics card with video memory over 2G, Intel Core i7 processor (recommended frequency above 2.8GHz).	
	Interface	USB3.0 High-speed Interface / Gigabit Network Interface	
Consumables usage		White ink: 25ml/m² Color ink: 12ml/Hot Melt Powder: 30g/m²	

Parameters of independent three temperature zone powder dryer

Device type	Extra long duster (three temperature zone model)	Match the model	5head/6 Printhead printer
Number of lamps	11/pcs	Working power supply	AC220V/50Hz 33A
Power	8500W	Packed in wooden case size	60cm: 2650*1080*1250mm 120cm: 2650*1750*1250mm
Outside dimensions	60cm: 3400*1050* 1100mm 120cm: 3400*1650*1100mm	weight	60cm: Net weight 340g Package weight 400kg 120cm: Net weight 420g Package weight 500kg

Machine advantages

Advantages of printers



1. X-axis aluminum alloy precision machined crossbeam+ Yadeke high-precision silent guide rail, controlled by a Lei Sai integrated stepper motor, and the white color matching is precise to within 2 threads



2. The high-strength die opening thickened aluminum alloy base is firmly combined with the machine head, with a precision machining flatness of ≤ 0.03. It is matched with an all aluminum alloy suction platform group to provide long-lasting high-speed and high-precision printing



3. The nozzle moisturizing adopts a maintenance free integrated lifting ink stack, which is durable and protects the nozzle safety



4. Configure film shortage alarm shutdown. When the film is exhausted, the electronic sensor detects a paper shortage status, the software alarms and stops printing to prevent empty printing and nozzle rubbing. The printer can achieve unmanned operatione rubbing, printer can achieve unmanned operation



5. Ink cartridge level alarm system, when the main ink cartridge is low on ink, the buzzer will sound and the corresponding indicator light will light up, prompting the user to add ink



6. White ink circulation and stirring system, Hengjinding's unique independent shaking function of white ink pot, fully shaking without dead corners, preventing white ink sedimentation and ensuring smooth production



7. The spray car is equipped with collision protection systems on both sides of the nozzle, which can quickly stop in case of accidental impact or scratching of the printing film; Manually pressing the ink suction device makes it easier to maintain the ink pad



8. Dual power automatic unwinding with constant expansion force film feeding structure, stable high-speed printing and film feeding, ensuring the accuracy of step-by-step paper feeding; Support 300 meter large roll printing film, batch production does not require frequent roll changes, making it more convenient to use



9. The Y-axis drive uses imported fluororubber large paper pressing wheel, which does not generate static electricity. It does not need to adjust the step again to change the film at will, so as to ensure that the single facial mask moves stably without slipping and does not damage the printing surface of the hot stamping film

Advantages of independent three temperature zone powder spreader



1. Double drying of the front guide plate and independent temperature control of the three-layer partition of the rear oven, with precise control; Ultra long drying, more uniform powder melting, preventing oil and water return



2. Three temperature smoke collection, collecting oil fumes, preventing cooling oil fumes from flowing back



3.Drying outlet dual row cold air cooling, rapid cooling before winding



4. Use a dual power paper feeder to meet the needs of larger paper rolls; At the same time, adding a tension adjustment rod before winding can avoid deviation while making the large roll more compact

8 printhead printer with 1.2m parameters of independent three temperature zone powder dryer



Machine parameters

(HJD-S01)/ Printer parameters

Nozzle configuration		Epson i3200-A1*8/pcs
ink		Four color（CMYK）/eight color（CMYKORGB） + DTFwhite DTF paint ink
Suitable fabric		Various fabrics including polyester, nylon, cotton, silk, knitted, woven, non-woven, Oxford cloth, etc
(120cm) Capacity (4-color Mode/120cm)	production mode	360X2400 Dpi/ 4pass - 80m²/h
	Precision Mode	720X1800 Dpi/ 6pass - 37m²/h
(/120cm) Capacity (8-color mode/120cm)	production mode	360X1200 Dpi/ 4pass - 80m²/h
	Precision Mode	360X1800 Dpi/ 8pass - 37m²/h
(/120cm) Capacity (12-color mode/120cm)	production mode	720X1800 Dpi/ 6pass - 21m²/h
	Precision Mode	720X2400 Dpi / 8pass -13m²/h
The optimal spraying height of the nozzle		1.8mm
Control Board		BetterPrinter
Rip Software		Flexi 22/ PrintFactory / Cadlink Maintop/Ruiyin/Flexi 22 (optional)/PrintFactory (optional)/Xiaobai Impression (optional)/Cadlink (optional)
Spray nozzle maintenance		Maintenance free integrated lifting ink stack
Spray nozzle cleaning		Fully automatic cleaning, fully automatic ink scraping
ink supply system		Siphonic positive and negative pressure ink supply system
drive system	x-axis	Airtac Rexay (Jiemeikang) stepper integrated motor/Airtac linear guide, silent slider
	y-axis	Airtac Rexay (Jiemeikang) stepper integrated motor/Airtac linear guide, silent slider
	Ink stack	stepping motor
Ink bucket capacity		1500ml
work environment		Temperature：20-28℃（/Pref. Low）/Humidity：45%-65%（/Pref. High）
alarm system		Travel protection, spray collision prevention, ink shortage alarm, film shortage alarm and shutdown
Featured Features		White ink pot shaking, full channel circulation of white ink, automatic cleaning during idle time, no channel white ink printing (optional), full-color ICC (optional), film printing (optional)
max print width		120cm
Whole machine power		1500W
Size		/Floor dimension：2620*760*1650mm /Packing dimension：2720*850*1800mm
Weight		Net weight：440KG /Gross weight：500KG
/Power requirements		Two-phase 220V±5%，50Hz/60Hz
computer configuration	operating system	windows7、8、10 64bit/Professional Edition
	hardware requirements	3200Hz Upgrade the operating memory frequency to 3200Hz
	Interface	USB 3.0 high-speed interface/Gigabit network interface
Consumable dosage		White ink：25ml/m² /Color ink：12ml/m²;/Hot Melt Powder：30g/m²

Parameters of 1.2m Parameters of independent three temperature zone powder dryer

Device type	1.2m Parameters of independent three temperature zone powder dryer	Match the model	12 head printer
Number of lamps	28/pcs	Working power supply	Three-phase220V
Power	13KW	Packed in wooden case size	3900(L)*1750(W)*1150mm(H)
Outside dimensions	3900(L)*1750(W)*1000mm(H)	weight	Net Weight:820kg Package weight:920kg

Machine advantages

Advantages of printers



1. X-axis aluminum alloy precision machined crossbeam+Yadeke high-precision silent guide rail



2. The entire machine is controlled by a Lei Sai integrated stepper motor, and the white color matching is precise to within 2 threads



3. The nozzle moisturizing adopts a maintenance free integrated lifting ink stack, which is durable and protects the nozzle



4. Configure film shortage alarm shutdown. When the film is exhausted, the electronic sensor detects a paper shortage status, the software alarms and stops printing to prevent empty printing and nozzle rubbing. The printer can achieve unmanned operatione rubbing, printer can achieve unmanned operation



5. Ink cartridge level alarm system, when the main ink cartridge is low on ink, the buzzer will sound and the corresponding indicator light will light up, prompting the user to add ink



6. Built-in white ink stirring device regularly agitates white ink to prevent sedimentation, ensuring convenient operation.



7. The spray car is equipped with anti-collision protection systems on both sides of the nozzle, which can quickly stop in case of accidental impact or scratching of the printing film. The film outlet extends outward, and it will not affect the digital printing when the powder dispenser is



8. The film roller with rubber strips is equipped with tension bar structure. It supports 300-meter large rolls, enables film loading and unloading without air supply, featuring simple operation and stable film feeding.



9. The Y-axis drive uses imported fluororubber large paper pressing wheel, which does not generate static electricity. It does not need to adjust the step again to change the film at will, so as to ensure that the single facial mask moves stably without slipping and does not damage the printing surface of the hot stamping

Advantages of 1.3m Parameters of independent three temperature zone powder dryer



Dual heat source heating from top and bottom, intelligent temperature control
Better drying effect, high efficiency and energy saving



External front and rear dual air suction design for smoother film feeding
No interference with oven internal temperature, ensuring more stable drying



3-layer thickened oven for better heat preservation and energy efficiency



Integrated smoke exhaust box to prevent oil smoke backflow

Large roll film take-up with tension control structure for neat film winding

12 printhead printer with 1.2m parameters of independent three temperature zone powder dryer



Machine parameters

(HJD-S01)Printer parameters

Nozzle configuration		Epson i3200-A1*12/pcs
ink		4/color（CMYK）/8/color（CMYKORGB）/12/color（CMYKORGB+/fluorescent/4/color）+ DTF/White DTF Pigment Ink
Suitable fabric		Polyester, Nylon, Cotton, Silk, Knitted Fabric, Textile, Non-woven Fabric, Oxford Fabric and other various fabrics
(120cm) Capacity (4-color Mode/120cm)	production mode	360X2400 Dpi/ 4pass - 100m²/h
	Precision Mode	720X1800 Dpi/ 6pass - 70m²/h
(120cm) Capacity (8-color mode/120cm)	production mode	360X2400 Dpi/ 8pass - 50m²/h
	Precision Mode	720X1800 Dpi/ 12pass - 35m²/h
(/120cm) Capacity (12-color mode/120cm)	production mode	720X1800 Dpi/ 6pass - 28m²/h
	Precision Mode	360X5400 Dpi / 9pass -16m²/h
The optimal spraying height of the nozzle		1.8mm
Control Board		BYHX
Rip Software		Flexi 22/ PrintFactory / Cadlink Maintop/Ruiyin/Flexi 22 (optional)/PrintFactory (optional)/Xiaobai Impression (optional)/Cadlink (optional)
Spray nozzle maintenance		Maintenance free integrated lifting ink stack
Spray nozzle cleaning		Fully automatic cleaning, fully automatic ink scraping
ink supply system		Siphonic positive and negative pressure ink supply system
drive system	x-axis	SERVOTRONIX、THK/SERVOTRONIX linear motors、 THK linear guides
	y-axis	XINJIE/XINJE servo motors
	Ink stack	/Stepping motors
Ink bucket capacity		5000ml
work environment		/Temperature：20-28℃（/preferably low）/Humidity：45%-65%（/preferably high）
alarm system		Travel protection, spray collision prevention, ink shortage alarm, film shortage alarm and shutdown
Featured Features		White ink tank shaking, full-channel white ink circulation, 300 large roll paper unwinding with air expansion shaft, automatic idle cleaning,channel-free white ink printing (optional), full-gamut ICC (8-color and 12-color optional), ultra-thin film printing (mesh belt feeding, optional)
max print width		120cm
Whole machine power		3000W
Dimensions		Floor Space Dimensions：2800*1350*1770mm； /Package Dimensions：2880*1450*2000mm
Weight		700kg
Power requirements		220V±5%，50Hz/60Hz Single-phase two-wire 220V±5%, 50Hz/60Hz
computer configuration	operating system	windows7、8、10 64bit/Professional Edition
	hardware requirements	500G/Solid state drive over 500GB、 32G2400hz/32GB dual-channel memory with main frequency above 2400Hz、 2G/Discrete graphics card with dedicated video memory over 2GB、 i7/7（2.8GHz） Intel Core i7 / AMD Ryzen 7 series processor (recommended frequency above 2.8GHz)
	Interface	USB3.0/USB 3.0 high-speed interface/Gigabit network interface
Consumable dosage		White ink：25ml/m² Color ink：12ml/m²; /Hot Melt Powder：30g/m²

Parameters of 1.2m Parameters of independent three temperature zone powder dryer

Device type	1.2m Parameters of independent three temperature zone powder dryer	Match the model	12 head printer
Number of lamps	28/pcs	Working power supply	/Three-phase220V
Power	13KW	Packed in wooden case size	3900(L)*1750(W)*1150mm(H)
Outside dimensions	3900(L)*1750(W)*1000mm(H)	weight	Net Weight:820kg Package weight:920kg


Machine advantages

Advantages of printers


Max speed up to 120 m/h, supports 300m large roll film unwinding with roll changing and film splicing functions for continuous production; one unit equals four 4-head printers.



1.Equipped with high-precision perforated guide belt film conveying and high-suction fan,compatible with 38μm ultra-thin film, greatly reducing costs.



2.The carriage is driven by a magnetic levitation linear motor with dual THK double-row linear guides, ensuring quiet and stable high-speed printing, high precision, smooth braking and accurate positioning.



3.High-strength aluminum alloy CNC one-piece forming for the main carriage module, with a precision of 0.05mm to ensure durable and stable high-speed operation.



4.Standard film splicing function is included as standard, which is convenient and efficient, reducing film waste caused by initial printing.



5.Damped winding, inflation-free winding, easy to operate, real-time print effect monitoring, and timely abnormality handling.



6.The print head maintenance system adopts a maintenance-free integrated lifting capping station, which is durable and protects the print head safely.



7.Acoustic-optical ink shortage alarm system reminds users to refill ink in time when ink level is low.



8.Film shortage alarm and stop function: when the film runs out, the printing stops automatically in time, the carriage returns to the capping station for maintenance, and the software pops up a notification to inform the user to replace the roll. It supports unattended operation.

Advantages of 1.3m Parameters of independent three temperature zone powder dryer



Dual heat source heating from top and bottom, intelligent temperature control
Better drying effect, high efficiency and energy saving



External front and rear dual air suction design for smoother film feeding
No interference with oven internal temperature, ensuring more stable drying



3-layer thickened oven for better heat preservation and energy efficiency



Integrated smoke exhaust box to prevent oil smoke backflow



Large roll film take-up with tension control structure for neat film winding

A3 laminating machine with A3 powder spreader



Machine parameters

(HJD-S01-1)A3 Film Making Machine Parameters

Device type	A3 printer	Printhead Model	Epson7610/2、XP600*2
Max print width	33cm	Working environment	Temperature: 20℃-28℃ Humidity: 65-75%
Print accuracy	XP600: 360dpi*1080dpi 6 pass XP600: 360dpi*1440dpi 8 pass 7610: 720dpi*1800dpi 5 pass 7610: 720dpi*2400dpi 8 pass	Working power supply	220V 50HZ/60HZ 3A
Control board	Hosonsoft	Outside dimensions	1200*650*1150mm L*W*H
RIP software	MainTop	Packing size	1324*674*1388mm L*W*H
Sprinkler maintenance	Automatic cleaning, automatic moisturizing	The weight of	134kg:184kg
Print speed	6pass 3-4㎡/h 8pass 2-3㎡/h	Power	500w
Ink type and configuration	Pigment ink C、M、Y、K、、Lc、Lm、W	Consumables usage	: 25ml/ : 12ml/ : 30g/ White ink: 25ml/square meter Color ink: 12ml/square meter Hot melt powder: 30g/square meter
Device features	Small footprint, low use and maintenance costs, affordable nozzle price		

A3 Powder Drying Machine Parameters

Device type	A3 powder dryer	Match the model	A3 printer
Number of lamps	3pcs	Working power supply	AC220V/50Hz 5A
Power	1000W	Packed in wooden case size	1120*740*780mm
Outside dimensions	1020*625*625mm	weight	53kg Net weight 53kg 88kg Package weight 88kg
Device features	1. Small footprint, flexible handling 2. Easy to learn and save labor 3. Precise temperature control		

Machine advantages

Advantages of printers



1. X-axis aluminum alloy precision machined crossbeam+Yadeke high-precision silent guide rail




2. The entire machine is controlled by a Lei Sai integrated stepper motor, and the white color matching is precise to within 2 threads



3. The nozzle moisturizing adopts a maintenance free integrated lifting ink stack, which is durable and protects the nozzle safety



4. Configure film shortage alarm shutdown. When the film is exhausted, the electronic sensor detects a paper shortage status, the software alarms and stops printing to prevent empty printing and nozzle rubbing. The printer can achieve unmanned operatione rubbing, printer can achieve unmanned operation



5. Equipped with a white ink circulation and stirring system; Ink cartridge level alarm system, when the main ink cartridge is low on ink, the buzzer sounds and the corresponding indicator light lights up, prompting the user to add inkand ensuring smooth production



6. The spray car is equipped with anti-collision protection systems on both sides of the nozzle, which can quickly stop in case of accidental impact or scratching of the printing film. The film outlet extends outward, and it will not affect the digital printing when the powder dispenser is



7. The Y-axis drive uses imported fluororubber large paper pressing wheel, which does not generate static electricity. It does not need to adjust the step again to change the film at will, so as to ensure that the single facial mask moves stably without slipping and does not damage the printing surface of the hot stamping film

Advantages of A3 Powder Drying Machine



1. Intelligent temperature control is precise, and the amount of powder can be adjusted arbitrarily



2. Increase the powder box without frequent powder addition



4. Dual power paper feeder for tighter windingwithout deviation

Vertical powder spreading and drying integrated machine



Machine parameters

Width of the storage and retrieval medium	0-600MM	Applicable Medium	Fabric, nylon, synthetic fabric, leather, swim fabric, PVC, EVA, etc
Functional projects	Intelligent control panel (shaking powder control, micro powder control, front heating plate heating control) independent tunnel heating control mechanical structure powder removal device	Heating function	Infrared carbon fiber heating tube
Drying tunnel length	900MM	Roll up function	White motion induction winding
Voltage	110V/220V	Electrical reference	Rated current 16A rated power 4kW
Machine size	820*900*990MM	Package size	850*930*1120MM
Net weight	70KG	Gross weight	85KG

High end vertical powder spreader (With 5 or 6 printheads)



Machine parameters

Control method	Manual control panel	Processing area	0-600MM
Print media	PET hot stamping film	Powder control	Automatically dispense and shake followers
Heating and drying	Front guide heating, front heating, rear upper/lower heating, drying length 1800	Transmission	Mesh belt intelligent speed regulation
Roll up function	Automatic winding, dual power paper feeder winding	Power supply	220V 50HZ
Power	10KW	Net weight	360KG
Floor space	1820L*1100W*1850H	Packaging size	1250L*1350W*1930h

Ordinary vertical powder spreader (With 2 or 4 printheads)



Machine parameters

Control method	Control panel	Processing area	0-600MM
Print media	PET hot stamping film	Powder control	Automatic powder feeding and shaking
Heating and drying	Front guide plate heating, rear heating, drying length 1100	Transmission	Mesh belt intelligent speed regulation
Roll up function	Automatic winding, dual power paper feeder winding	Power supply	220V 50HZ
Power	6KW	Net weight	300KG
Floor space	1450L*990W*1600H	Packaging size	1330L*1100W*1770H

Purifying powder scattering all-in-one machine



Machine parameters

Device type	(60cm) Purifying powder scattering all-in-one machine	Match the model	4/6 4/6 Printhead printer
Number of lamps	10/pcs	Working power supply	AC220V/50Hz 33A
Power	5KW	Packed in wooden case size	2100*1150*1100mm
Outside dimensions	2100*1000*1000mm	weight	/Net weight: 350kg /Gross weight: 380kg

DTF printing machine supporting equipment and tools

(HJD-S01-2) Air purifier (large)



Large（5/6
Suitable for 5/6 printhead DTF printer)
Power：0.9KW
Maximum air volume：1200m³/h
Net weight：180kg
Gross weight：225kg
Equipment size：725x700x1630mm
Wooden crate size：800x800x1800mm
Voltage/current：220V/4.1A
Energy consumption：0.7kw~0.9kw
Noise：70db

Small（2/4
Suitable for 2/4 printhead DTF printer)
Power：0.44KW
Maximum air volume：660m³/h
Net weight：95kg
Gross weight：122kg
Equipment size：530x571x1366mm
Wooden crate size：690x630x1540mm
Voltage/current：220V/2A
Energy consumption：0.15kw~0.44kw
Noise：<65dBA

Oil fume capture: Oil fume first flows through the connected pipeline of the powder scattering machine into the oil filter tank to remove large grease particles, reducing the load of subsequent treatment.
Particle separation: Mechanical filtration. Filter screens and filter elements intercept particulate matter with particle sizes ≥0.5um and ≥0.3um.
Purification treatment: Activated carbon adsorption removes harmful gases and odors. This equipment effectively eliminates odorous substances in oil fume and improves air quality, and fully isolates particles. The service life of the sound insulation filter is 6-12 months.

(Computer stand / Computer desk)



15-34 （≤10kg）
15°
1700mm
700mm
75×75mm / 100×100mm

Load range: 15-34 inch monitors (single screen weight ≤10kg)
Adjustable angle: +15° / -15° (tilt up / tilt down)
Stand height: 1700mm
Adjustable lifting range: 700mm
Compatible monitor vesa hole pitch: 75×75mm / 100×100mm

(HJD-S01-5) Engraving machine



Cutting speed：1mm/s-800mm/s
utting thickness：≤1.2mm
Cutting accuracy：±0.15mm
Cutting size：
Footprint size：1525*1180*1050mm
Package size：1700*1270*1210mm
Cutting area：700*900mm
Working method
(Basiccut,Contour Cut,Sheet Cut)
Power requirements：220V/50Hz/1.5A
Weight：Net weight:220kg , Gross weight:340kg
Cuting material：
Textile DTF,UV DTE,Carton box,Labelstick
(Pen/Blade Type)： Double blade structure

Automatic DTF Film Cutting Machine



（DTF）PET

600mm

PET、PVC、
220V/50Hz，1.1-2.2kW

Process: White ink DTF PET film slitting and cutting, supports cross cutting, vertical cutting and color mark positioning cutting
Operation mode: Touch screen control, one-touch parameter setting
Max cutting width: 600mm
Cutting method: Rotary knife slitting plus flat knife cutting, smooth burr-free incision, full cut and half cut modes available
Applicable materials: Flexible materials including PET heat transfer film, PVC film, fabric, paper and reflective film
Power supply: 220V/50Hz, power: 1.1-2.2kW

(HJD-S01-4) White ink shaker



620*300*123mm
708*385*190mm
7kg 9kg
45/
220v20w，50hz

Equipment size: 620*300*123mm
Net weight: 7kg Gross weight: 9kg
Speed: 45/ min
Power supply parameters: 220v20w, 50hz

DTF ink





1kg/；48*39*27cm/
20(20/)

Specification: 1kg/ bottle Packing size: 48*39*27cm/ box;
Weight: 20 kg (20 bottles/case)
Category: Blue/Red/Yellow/Black/White
Advantages: It has universality to different fibers and is suitable forvarious fibers things, do not pick fabrics, especially suitable for polyester cotton fabric; bright color, high reduction, non-blocking nozzle, green environmental protection;solid color, printing lastingwithout discoloration, high temperature resistance;

Heat transfer film



30cm/33cm/60cm/63cm/70cm/90cm/120cm
60cm：60cm*100m/
61*28*15cm/(2)
15/2)

Size:Width of 30 cm/33cm/60cm/63cm/70cm/90cm/120cm
60cm size：60cm x 100m/ volume
Packing size: 61*28*15cm/ box (2 rolls)
Weight: 15 kg/box (2 rolls)
Category: Single side/Double side
Single mask thickness: 80um Double mask thickness: 90um
Advantages: Single side: back coating bright surface; Double-sided: the back is coated with matte surface; The printing color is bright, the shake powder is clean, the second tear is no pressure, and the amount of ink absorptionis large and theink matching degree is wide. Anti-stick, anti-static, more smooth on the machine does not go

Hot melt powder




25kg/80*50*15cm
26(25)
100-200，

Specification: 25kg/ bag Packing size: 80*50*15cm
Weight: 26 kg (25 kg/bag)
Hot melt powder mesh: 100-200, medium fine universal powder
Advantages: Good elasticity, high fastness, better hand feel than coarse powder, cleaner shaking than fine powder



Weak solvent printer

Laser engraving machine

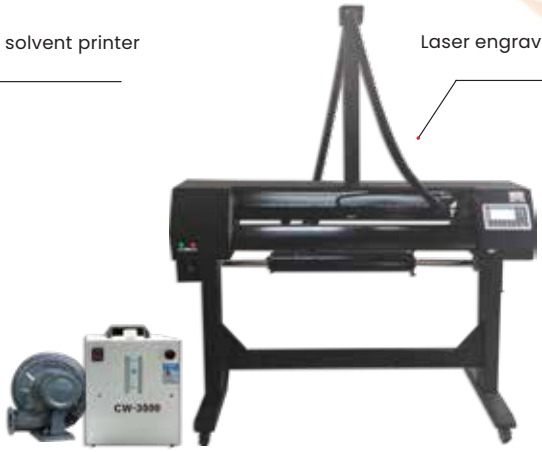

Machine parameters

Product model : HJD-S08

Sprinkler configuration		i3200-E1 X 2 （4） Epson i3200-E1 nozzle X 2 (optional 4 heads)	Working Condition		20~28℃45%~65% Temperature: 20-28 ℃ (preferably low); Humidity: 45%~65% (preferably high)
ink		(CMYK+LcLmLkLlk) Eco-solvent Heat Transfer Vinyl (HTV) Ink	Alarm system		Travel protection, spray collision prevention, ink shortage alarm, film shortage alarm and shutdown
Suitable for media		Spray printing film	Maximum print width		70 cm
(60cm) Capacity	roduction mode (recommended)	720X1800 Dpi/ 6pass - 10m²/h	Featured Features		ICC、RIPX Automatic cleaning during leisure time, full color gamut ultra-fine dot ICC, RIPX color tracking system
	Fine mode	720X2400 Dpi / 8pass -6m²/h			
Optimal spray height		2.0mm	Whole machine power		950W
RIP software		7.0 / Flexi 22/ PrintFactory / Cadlink Montessori 7.0/Flexi 22 (optional)/PrintFactory (optional)/ Little White Impression (optional)/Cadlink (optional)	Host size		1850*750*1750 mm
Sprinkler maintenance		Maintenance free integrated lifting ink stack	Weight		250KG
Sprinkler cleaning		Automatic cleaning, automatic scraping	Power requirements		Single-phase 220V±5%，50Hz/60Hz
Ink supply system		Siphonic positive and negative pressure ink supply system	PC configuration	operating system	windows7、8、10 64bit Windows 7, 8, 10 64bit Professional Edition
Drivetrain	X-axis	Airtac Rexay (Jiemeikang) stepper integrated motor/ Airtac linear guide, silent slider		hardware requirements	240GB or above solid-state drive, 8GB dual channel memory module with a clock speed of 2400Hz or above, 2GB or above independent video memory, Core i5 processor (recommended frequency of 2.3GHz or above)
	Y-axis	Airtac Rexay (Jiemeikang) stepper integrated motor/ Airtac linear guide, silent slider			
	Ink stack	stepping motor		Interface	USB 2.0 interface/Gigabit network interface
Ink barrel volume		500ml			

Product model: HJD-S09

Models	800PRO/	1200PRO/	Drive method	Stepper motor / Servo motor (RFT)
Features	laser Co2 laser+ccd		Carving speed	10-800mm/s
Paper feed width	980mm	1390mm	Laser current	0-30mA/0-30A (RFT)
Carving width	800mm	1200mm	Working voltage	AC110V/220V±10% 50/60Hz
Carving length	（Infinite Length）		Machine Power	400-450W/RFT1000W
Engraving thickness	≤1mm		Laser Power	50W/80W(Optional)、RFT(40W/50W)
Paper feeding system	Segmented Knurled Aluminum Shaft/Integrated Steel Spike Shaft		Interface Types	USB 、U USB port,、USB drive,、WIFI
Paper pressing	Double spring adjustable pressure bar set		Output Software	AutoLaser、CorelDRAW、signmaster、CAD、AI
Packing size	1530*500*530mm	1940*500*530mm	Working Environment	：+1℃±35℃：（10%-50%） Temperature Range: +1℃ to +35℃ Humidity Range: 10% to 50% RH (Non-condensing)
Weight	91kg	50W：95kg 80W：105kg		

/ Machine advantages







The variable droplet technology freely controls the size of ink droplets ejected, reducing the granularity of the image, ensuring smooth color transitions, and delivering high saturation.





Adopting a silent guide rail, it has strong durability without noise. The design of the suction platform ensures smooth printing of the roll material, guaranteeing the continuity and stability of the printing process.

Machine parameters

Product model: HJD-S03

Sprinkler configuration		Epson i3200-U1*3/pcs	Epson i3200-U1*4/pcs	Ink barrel volume	1.5L
Capacity	Production mode (recommended)	720X1800 Dpi / 6pass -7㎡/H	720X1800 Dpi / 6pass -4㎡/H	Consumables usage	Common crystal label: White ink & varnish: 25ml/㎡; /Color ink: 12ml/㎡; Waste-removable hot stamping crystal label: White ink: 25ml/㎡; /Color ink: 12ml/㎡; Anti-stick varnish & hot stamping varnish: 15ml/㎡
	Fine mode	720X2400 Dpi / 8pass -5㎡/H	720X2400 Dpi / 8pass -2.5㎡/H		
ink	LED-UV Soft LED-UV ink	C/M/Y/K/W/V	/	Featured features	Rubber roller coating; Ink shortage alarm system; Integrated roll up and roll up; Automatic delamination; Spray car collision prevention; Configurable real-time cutting and trimming;
	LED-UV Neutral LED-UV ink		C/M/Y/K/W/V/GV		
	LED-UV Hard LED-UV ink				
Printing mode		White ink + color ink + gloss	White ink+colored ink+gloss oil (non gold) /hot stamping golden oil (waste removal hot stamping)	Alarm system	Lack of ink alarm, stroke protection, instant protection in printing
Optimal spray height of the nozzle		1.8mm / 3mm（3D） 1.8mm (hard ink crystal logo)/ 3mm (soft ink thick version/3D imitation embroidery, etc.)		Size	3M.D.:2000x1013x1570mm ;/P.D.:2050x1100x960mm; 4/M.D.:2000x1013x1570mm; /P.D.:2050x1100x1020mm; Small Carton:1200x400x400mm;
Suitable materials		Crystal logo A film, silicone thick film (soft ink), 3D imitation embroidery A film (soft ink)		Weight	3Printhead: Net Weight:270kg; Gross Weight320kg 4Printhead: Net Weight:294kg ; Gross Weight364kg
Printhead maintenance and cleaning		Integrated lifting ink stack/Automatic cleaning, automatic scraping, automatic moisturizing		Working Condition	20~28℃（45%~65% Temperature: 20~28 ℃ (should be low); Humidity: 45%~65% (Yigao)
Curing Method		UV-LED curing lamp (water-cooled high-energy, needs to be used with coolant)		RIP software	RIP:/Maintop(/standard) / PhotoPrint（/optional）/ PrintFactory（/optional）/ /SPIDER RIP（/optional）
Overall machine power		Printer-1.2KW /Laminating Heating-0.75KW		Control Board	Hosonsoft
Ink supply system		Siphon ink supply system		Maximum print width	700mm
Transport interface		USB3.0 high-speed port/Gigabit network cable		Power requirements	AC220V±5%，50Hz~60Hz
Drivetrain	X X-axis	Reisai stepper integrated motor		PC configuration	windows7, 8, 10 64bit professional edition, more than 256G SSD, 8G main frequency of 2400hz or more dual-channel memory bar, more than 2G independent video memory, Core i5 processor (recommended frequency above 2.8Ghz)
	Y Y-axis	Lift rubber roller (with film covered heating), Raysai integrated stepper motor			

Related consumables



AB membrane

Specification:
60cm: A film 66*16.5*17cm/box (1 roll), B film 66*15*15cm/box (1 roll)
30cm: A film 34*16.5*16.5cm/box (1 roll), B film33*30*15cm/box (2 roll)
Weight: 60cm: A film 11.2kg/box, B film 6.9kg/box
30cm: A film 5.4kg/box, B film7.3kg/box



UV ink

Specification: 1kg/box;
Packaging size: 38.5 * 29.5 * 26.2cm/box
Weight: 14.1kg (12 bottles/box)
Category: Blue/Red/Yellow/Black/White



UV cleaning solution

Specification: 1kg/box;
Packaging size: 38.5 * 29.5 * 26.2cm/box
Weight: 14.1kg (12 bottles/box)



UV light oil

Specification: 1kg/box;
Packaging size: 38.5 * 29.5 * 26.2cm/box
Weight: 14.1kg (12 bottles/box)



UV Moisturizing Liquid

Specification: 1kg/box;
Packaging size: 38.5 * 29.5 * 26.2cm/box
Weight: 14.1kg (12 bottles/box)



Machine features

Compatible with roll/cylinder printing function, one machine for three uses;
CIS visual positioning printing function, automatic scanning and positioning (optional);
High drop printing function, capable of printing objects with a maximum height difference of 20mm between concave and convex surfaces (optional);
Touchscreen human-computer interaction, special function operation machine is more intuitive;
Mixing and circulating white ink to reduce clogging of the print head and poor printing results caused by standby white ink sedimentation;
High precision alumina suction platform, double row 8 fans with super large suction power, printing crystal labels, PVC cards, certificates, labels, etc. without the need to stick edges, can be placed and printed immediately, easy to use; The bottom is designed with folding handles for easy machine handling and movement, allowing for work to be done anytime, anywhere.

Machine parameters

Product model: HJD-S06


Sprinkler configuration		Epson i3200-U1HD	Drivetrain	X-axis	Leadshine Integrated Stepper Motor, Japan Omron Positioning Sensor
ink	Soft LED-UV ink	C/M/Y/K/W/V Coating Liquid, Hot Stamping Varnish (Optional)		Y-axis	Integrated Air-absorbing Platform With Lead Screw Stepper (Standard Configuration), Lifting Rubber Roller Stepper(With Film Lamination & Heating), Cylindrical Jig Rotation
	Hard LED-UV ink				
Suitable materials		Flat substrates (including uneven base within 2cm), crystal sticker AB film, thick mold sticker, epoxy resin film, cylinders, etc.		Z-axis	Four-axis Stepper Motor Lifting
Capacity	production mode (recommended)	720X900 Dpi / 6pass -3㎡/H	Alarm system		Low ink alarm, carriage anti-collision, travel protection, real-time protection during printing
	Fine mode	720X1200 Dpi / 8pass -2㎡/H			
Optimal spray height		1.8mm，20mm 1.8mm, max 20mm height difference printing available (requires high-drop ink)	Working Condition		20~28℃ 45%~65% Temperature: 20-28 ℃ (preferably low); Humidity: 45%~65% (preferably high)
Printing method		white ink+colored ink+glossy oil	Packing size		1000mm（L）*900mm（W）*800mm（H）
Maximum print width		300*400mm，300mm，30-120mm Flat 300*400mm, roll 300mm, cylinder Φ30-120mm	Host size		1330mm（L）*880mm（W）*700mm（H）
Sprinkler maintenance		Integrated lifting ink stack	Whole machine power		Printer -1.2KW/Film covered heating -0.5KW
Sprinkler cleaning		Automatic cleaning, automatic scraping, automatic moisturizing	Weight		127kg ; 147kg Net weight: 127kg; Gross weight: 147kg
Ink supply system		Siphon ink supply system	Ink barrel volume		500ml
Curing Method		UV-LED curing lamp (air-cooled)	Power requirements		AC220V±5%，50Hz~60Hz
RIP software		Maintop / PhotoPrint（optional）/ Riin（/optional） （optional）	PC configuration	operating system	windows7、8、10 64bit/ Professional Edition
Consumables usage		Common crystal label: White ink & varnish: 25ml/㎡; Color ink: 12ml/㎡; Waste-removable hot stamping crystal label: White ink: 25ml/㎡; Color ink: 12ml/㎡; Anti-stick varnish & hot stamping varnish: 15ml/㎡		hardware requirements	256GB or above solid-state drive, 8GB dual channel memory module with a clock frequency of 2400Hz or above, 2GB or above independent video memory, Core i5 processor (recommended frequency of 2.5GHz or above)
Control Board		BetterPrinter		Interface	USB 3.0 interface/Gigabit Ethernet cable



Machine advantages



Lift ink stack design, precise control of head position, all-round protection of print head. UV printing is environmentally friendly and has bright colors.



High-precision crossbeam with silent guide rails for more perfect printing results.

Machine features


Infrared medium ultra high alarm; Heating of sprinkler bottom plate; Ink shortage alarm system;
Multi-shape material compatible printing; Honeycomb integrated air suction plate;
Support Epson i3200 high injection technology (suitable for ladder material);
Flat and 30-120mm diameter cylinders compatible for printing;
Color white oil synchronous output; Gloss oil/matte oil/scrub/hot stamping echnology advanced.

Machine parameters

Product model: HJD-S05

Sprinkler configuration		Epson i3200-U1*3/pcs	Epson i3200-U1*4/pcs	Epson F1080-A1*2/pcs	Ink barrel volume	1.5L
Capacity	Production mode	720*1800 Dpi / 6pass -7㎡/H	720*1800 Dpi / 6pass -7㎡/H	720*1800 Dpi / 6pass -3㎡/H	Working Condition	20~28℃ 45%~65% Temperature: 20~28 ℃ (should be low); Humidity: 45%~65% (Yigao)
	Precision mode	720*2400 Dpi / 8pass -5㎡/H	720*2400 Dpi / 8pass -5㎡/H	720*A400 Dpi / 8pass -2㎡/H		
ink	LED-UV Neutral LED-UV ink LED-UV Hard LED-UV ink	C/M/Y/K/W /Co	C/M/Y/K/W/Co	C/M/Y/K/W/Co	Consumables usage	Common crystal label: White ink & varnish: 25ml/㎡; /Color ink: 12ml/㎡; Waste-removable hot stamping crystal label: White ink: 25ml/㎡; Color ink: 12ml/㎡; /Anti-stick varnish & hot stamping varnish: 15ml/㎡
Suitable materials		Glass, plate, various signs, crystal, PVC, acrylic, leather plastic, cylindrical (objectsoptional cylinder printing device printing), etc			Alarm system	Lack of ink alarm, stroke protection, instant protection in printing
Printing method		white ink+color ink+gloss oil			Maximum print width	600* 900mm
Optimal spray height of the nozzle		1.8mm~3mm（support 12mm high injection technology)			The maximum thickness of the object can be printed	10cm Platform failure to adjust
RIP software		Maintop，Flexi 22(Optional)			Curing Method	UV-LED UV-LED curing lamp(air-cooled type)
Control Board		Hosonsoft；BYHX			Cylinder fixture (optional)	30-120mm Suitable cylinder size: Φ 30-120mm (does not support gloss oil)
Sprinkler maintenance		Integrated lifting ink stack			Size	Host size：1700*1900*1000mm Package dimensions：2000*1760*1060mm
Sprinkler cleaning		Automatic cleaning, automatic scraping, automatic moisturizing			Weight	Net weight：400kg; Packaged Weight ： 450kg
Ink supply system		Siphon ink supply system			Power requirements	AC 220V±5%，50Hz~60Hz 900W
Transport interface		USB3.0 high-speed port/Gigabit network cable			PC configuration	windows7, 8, 10 64bit professional edition, more than 256G SSD, 8G main frequency more than 2400hz dual-channel memory bar, independentvideo memory above 2G, Core i5 processor (recommended frequency above 2.8Ghz)
Drivetrain	X-axis	Reisai stepper integrated motor				
	Y-axis	Integrated suction platform/Rayse stepping motor				
	Z-axis	1.8~180mm				

Supporting equipment



Print cylinder device



Coil device



Base



Print cylinder device


9060UV



Machine advantages



Lift ink stack design, precise control of head position, all-round protection of print head. UV printing is environmentally friendly and has bright colors.



High-precision crossbeam with silent guide rails for more perfect printing results.

Machine features

Infrared medium height alarm; Print head base heating; Ink shortage alarm system

Multi-shape & multi-material compatible printing; Honeycomb integrated vacuum table

Supports Epson i3200 high position jet technology (suitable for uneven & stepped materials)

Machine parameters

Product model: HJD-S05-1

Sprinkler configuration		Epson i3200-U1*3/pcs	Ink barrel volume	Color ink0.5L,white ink1.5L
Capacity	Production mode	720*1800 Dpi / 6pass -7㎡/H	Working Condition	Temperature: 20~28 °C (should be low); Humidity: 45%~65% (Yigao)
	Precision mode	720*2400 Dpi / 8pass -5㎡/H		
ink	LED-UV Neutral LED-UV ink	C/M/Y/K/W /Co	Consumables usage	Common crystal label: White ink & varnish: 25ml/Color ink: 12ml/㎡; Waste-removable hot stamping crystal label: White ink: 25ml/㎡; Color ink: 12ml/㎡; Anti-stick varnish & hot stamping varnish: 15ml/㎡
	LED-UV Hard LED-UV ink			
Suitable materials		Glass, plate, various signs, crystal, PVC, acrylic, leather plastic, cylindrical (objectsoptional cylinder printing device printing), etc	Alarm system	Lack of ink alarm, stroke protection, instant protection in printing
Printing method		white ink+color ink+gloss oil	Maximum print width	900* 600mm
Optimal spray height of the nozzle		1.8mm~3mm（12mm/support 12mm high injection technology, /Optional)	The maximum thickness of the object can be printed	10cm；Platform failure to adjust
RIP software		Maintop，Flexi 22(Optional)	Curing Method	UV-LED Water-cooled high-power UV-LED curing lamp
Control Board		Hosonsoft	Cylinder fixture (optional)	ϕ30-100mm Suitable for cylinder size: ϕ30-100mm (Supports white and color printing for special jobs, varnish not available)
Sprinkler maintenance		Integrated lifting ink stack	Size	Host size：1700*1900*1000mm Package dimensions：2000*1760*1060mm
Sprinkler cleaning		Automatic cleaning, automatic scraping, automatic moisturizing	Weight	Net weight：400kg; Packaged Weight ：450kg
Ink supply system		Siphon ink supply system	Power requirements	AC 220V±5%，50Hz~60Hz
Transport interface		USB3.0 high-speed port/Gigabit network cable	PC configuration	windows7, 8, 10 64bit professional edition, more than 256G SSD, 8G main frequency more than 2400hz dual-channel memory bar, independentvideo memory above 2G, Core i5 processor (recommended frequency above 2.8Ghz)，Gigabit Ethernet cable
Drivetrain	X-axis	Leadshine Integrated Stepper Motor		
	Y-axis	High suction fan vacuum platform, Leadshine Integrated Stepper Motor		
	Z-axis	1.8~120mm		

Product Applications



Print cylinder device









Cylindrical



HEAD OFFICE

B-66/A, S.I.T.E., Area,
Karachi-75700,Pakistan.
+92 (21) 32550093-98
info@vawda.com

LAHORE OFFICE

307/E, Nadir street, Ferry Meadowlane,
West canal Bank, Lahore-54590,Pakistan.
+92 (42) 36113239
lhr@vawda.com

FAISALABAD OFFICE

P-68, Vawda House, Vawda Street 4,
Zia Town Faisalabad-38000, Pakistan.
+92 (41) 8524576
fsd@vawda.com

MULTAN OFFICE

Plot # 62/A, Phase-1
Industrial Estate Multan.
+92 (61) 6538131
mul@vawda.com

FAV GROUP OF COMPANIES WWW.VAWDA.COM