FAV Group of Companies

Rise together!



Accredit

PROXY AUTHORIZATION

We hereby authorize **Faird Ahmed Vawda & Co.** as the **exclusive agent** of our company, Gaomi Jiacheng Machinery Technology Co., Ltd., in Pakistan, and appoint it to conduct **market promotion, sales and after-sales services** of our relevant products in the aforesaid region. areas, maintenance work.

Authorization period:

January 3rd, 2026 to January 3rd, 2028

Gaomi Jiacheng Machinery Technology Co., Ltd.

January 3rd, 2026


SIZING
MACHINERY

JC739-SF9 型伺服控制系统九单元
传动高速、高效、智能型双浆槽浆纱机

JC739-SF9 Servo control system
Nine-units drive high-speed high efficiency intelligent double sizing-boxs machine

1 产品的主要技术参数
Main technical parameters of the product

项目 project	单位 Units	JC739-SF9
车头有效幅宽 The front is effective and wide	mm	2000/2400/2800/3600/4200
适应品种范围 Adapt to variety range		6S-200S 短纤维经纱 Short fiber through yarn
车速 speed	m/min	1-200
蜗牛速度 Snail speed	m/min	0.5
织轴卷径 Max weaer’ beam diameter	mm	800/1000/1250
最大卷绕张力 Max. around tension	KN	7.5
最大压力 max. pressure	KN	55
经轴幅宽 Warper’sbeam diameter	mm	1800/2000/2400/2800
烘筒数量 The number of drying cylinder		14/20
容纳经轴数量 Number of warper’s beams		24（可据要求）
经轴最大直径 Max. diameter through warper’s beams	mm	800/1000/1250
重量（约） Weight (approx)	T	35





2 各组合单元技术配置
Technical configuration of each combined unit

(I) Beam creel:

1. Double layer combination, wheeled structure, each four axis for a group, each group between the pedestrian pedal, easy to operate;

2. Use the warp unwinding strength motion control system to realize automatic tension control.

3. the use of the mandrel guide roller, roller surface beating is small, small resistance, smooth operation.

4. using high strength nylon and double bearing support, stable operation, low failure rate.




pressure type high-pressure slurry groove

Characteristics of the sizing mechanism:

(1) The side pressure high pressure grouting system can make the yarn achieve satisfactory penetration and coating effect. Due to the large choice for the number of dip pressure, the process adaptability for different yarn varieties is improved.

(2) Good slurry fluidity measures and high-precision slurry temperature control provide slurry conditions for the improvement of slurry quality

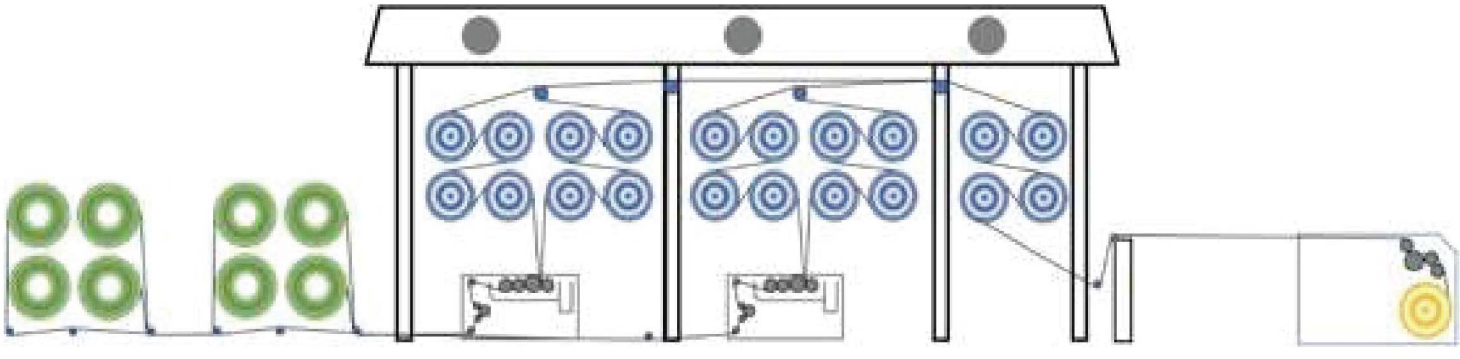



(II) Sizing box:

1. Structure of the size:

(1) four roll type slurry groove, slurry groove frame for steel plate structure, cover stainless steel shell;

(2) The main slurry tank volume is 220L, and the auxiliary slurry tank volume is 200L;

(3) The main slurry groove is integrated with the preheated slurry tank. The groove body of the slurry groove is a stainless steel double-layer structure, and the auxiliary slurry groove is placed on the side of the oven;

(4) the front of the bottom of the groove slurry, waterfall overflow outlet grouting, slurry circulation using stainless steel gear slurry pump, slurry pump flow 20-50 L/min, counterflow cycle, uniform viscosity, stable temperature.

(5) Direct steam heating, equipped with automatic temperature control system;

(6) Using the three-roll lead device, the surface of the lead roll is coated with synthetic rubber, and the pressure roller is pneumatic pressurized;

(7) Equipped with two wet partiings, the speed changes and changes with the speed;

(8) Auxiliary slurry tank with slurry filtration.



(III) Drying room:

Roof structure: elevated column structure, using stainless steel drying cylinder with a diameter of 800mm, a total of 20 drying cylinders, 16 drying surface spray polytetrafluoroethylene thin anti-adhesive layer;

Broom drive: pre-dr ying cylinder and combined drying cylinder are respectively driven by three independent servo motors;

Through yarn route: wet yarn can be divided into 2 layers or 4 layers into the oven pre-drying;

Temperature control: the pre-drying room and the combined drying room are equipped with 5 sets of automatic temperature control system;

Room exhaust humidity: the exhaust hood of the oven and the slurry tank is a right Angle trapezoidal anti-drip stainless steel hood, the side with 3 axial flow fan forced exhaust wet;

The baked door sheet is made of stainless steel.

(Ⅳ) Headstock:

1, transmission: spindle winding transmission adopts synchronous servo motor independent unit constant tension winding system, which can realize conical tension control;

2, weaving axis pressure, measuring roller pressure, closing, falling shaft and other actions are controlled by pneumatic.

3, the length measuring roll measurement;

4, electronic meter long inkjet printing;

5. Equipped with yarn single-side wax and pre-melting device;

6. The towing roller is a rubber roller, driven by an independent synchronous servo motor;

7, using double roller type side yarn pressing device, the maximum pressure of 3 KN;

8, equipped with a new fully sealed electric telescopic reed, easy to operate, anti-flying flower;


9. A batch of dividing rod, according to the number of the axis;

10. The ft box adopts gear transmission (company invention patent);

11. Tension auxiliary control system (company invention patent) is used in the dry yarn separation area.

12, with automatic tide return control and one-key speed increase function.



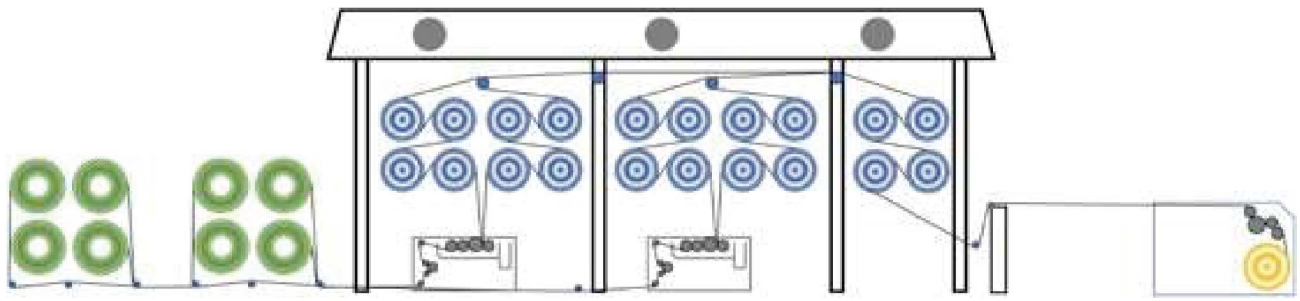

JC739-SF9 型伺服控制系统九单元双浆槽 20 烘筒工艺流程图

JC739-SF9 Process flow chart of double sizing-boxs 20 cylinders sizing machine of servo control system

JC739SF-D6 伺服控制系统六单元
传动高速、高效、智能型单浆槽浆纱机


JC739SF-D6 Servo control system six-unit drive
high-speed high efficiency intelligent one sizing-box machine

产品的主要技术参数
Main technical parameters of the product

项目 project	单位 Units	HJF739SF-D6
车头有效幅宽 The front is effective and wide	mm	2000/2400/ 2800/3600/4200
适应品种范围 Adapt to variety range		6S-200S 短纤维经纱 Short fiber through yarn
车速 speed	m/min	1 — 200
蜗牛速度 Snail speed	m/min	0.5
织轴卷径 Max weaer’ beam diameter	mm	800/1000/1250
最大卷绕张力 Max. around tension	KN	7.5
最大压力 max. pressure	KN	55
经轴幅宽 Warper’sbeam diameter	mm	1800/2000/2400/2800
烘筒数量 The number of drying cylinder		12/14
容纳经轴数量 Number of warper’s beams		16
经轴最大直径 Max. diameter through warper’s beams	mm	800/1000/1250
重量（约） Weight (approx)	T	25





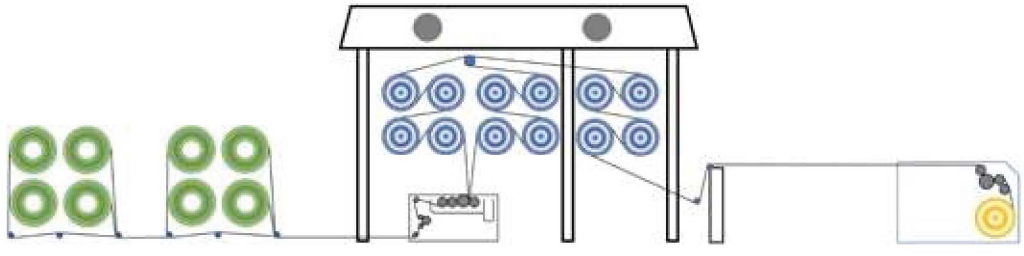

JC739SF-D6

伺服控制系统六单元单浆槽浆纱机 12 烘筒工艺流程图

Process flow chart of six unit one sizing-box 12 cylinder of servo control system

JC739-S9


型变频控制系统
九单元机电仪一体化双浆槽浆纱机

JC739-S9 Inverter control system nine-unit electromechanical integrated double sizing-boxs sizing machine


产品的主要技术参数
Main technical parameters of the product

项目 project	单位 Units	JC739-SF9
车头有效幅宽 The front is effective and wide	mm	2000/2400 2800/3600/4200
适应品种范围 Adapt to variety range		6S-120S 短纤维经纱 Short fiber through yarn
车速 speed	m/min	1 — 130
蜗牛速度 Snail speed	m/min	1
织轴卷径 Max weaer’ beam diameter	mm	800/1000/1250
最大卷绕张力 Max. around tension	KN	7
最大压力 max. pressure	KN	55
经轴幅宽 Warper’sbeam diameter	mm	1800/2000/2400/2800
烘筒数量 The number of drying cylinder		14
容纳经轴数量 Number of warper’ s beams		24
经轴最大直径 Max. diameter through warper's beams	mm	800/1000/1250
重量（约） Weight (approx)	T	35



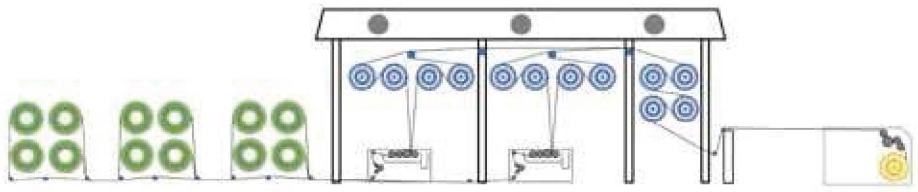

JC739-S9 型双浆槽 12 烘筒高架烘房浆纱机工艺流程图
Process flow chart of the elevated drying room sizing machine of double sinzing-boxs 12 cylinder

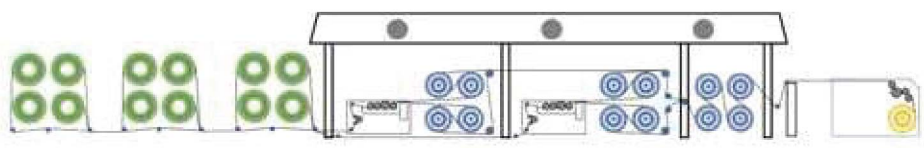

JC739-S9 型双浆槽 12 烘筒平行烘房浆纱机工艺流程图
Process flow chart of parallel drying room sizing machine of double sizing-boxs 12 cylinder

JC739-D6

型变频控制系统
六单元单浆槽浆纱机产品技术配置


JC739-D6 Six-units of the frequency conversion control system technical configuration of ones sizing-box size machine

产品的主要技术参数
Main technical parameters of the product

项目 project	单位 Units	HJF739-D6
车头有效幅宽 The front is effective and wide	mm	2000/2400 2800/3600
适应品种范围 Adapt to variety range		6S-120S 短纤维经纱 Short fiber through yarn
车速 speed	m/min	1 — 130
蜗牛速度 Snail speed	m/min	1
织轴卷径 Max weaer' beam diameter	mm	800/1000/1250
最大卷绕张力 Max. around tension	KN	7
最大压力 max. pressure	KN	55
经轴幅宽 Warper'sbeam diameter	mm	1800/2000/2400
烘筒数量 The number of drying cylinder		10
容纳经轴数量 Number of warper' s beams		16
经轴最大直径 Max. diameter through warper' s beams	mm	800/1000/1250
重量（约） Weight (approx)	T	25






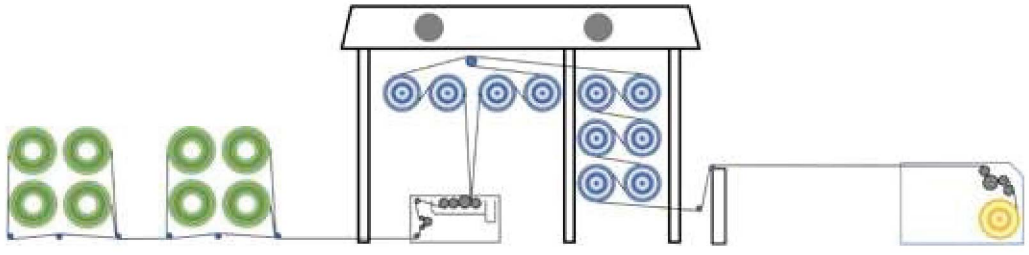


JC739-D6

高架烘房 10 烘筒单浆槽浆纱机工艺流程图

Process flow chart of one sizing-box 10 cylinder sizing machine

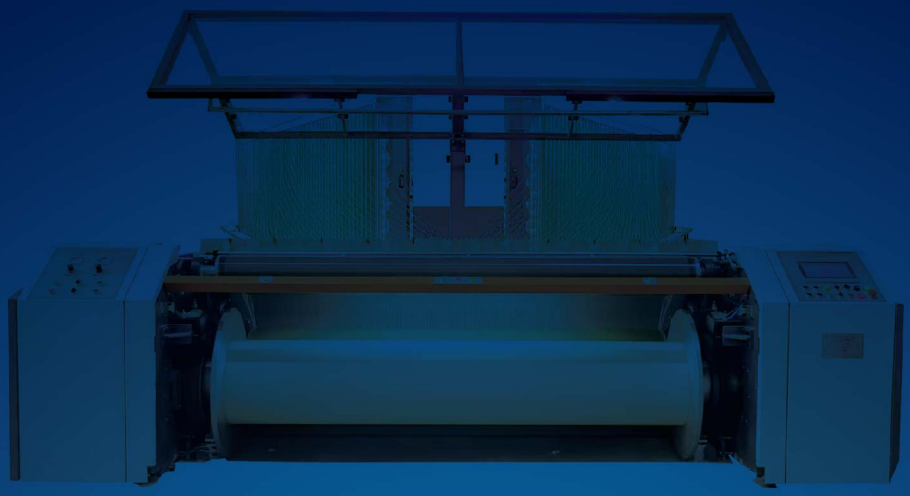

DIRECT WARPING

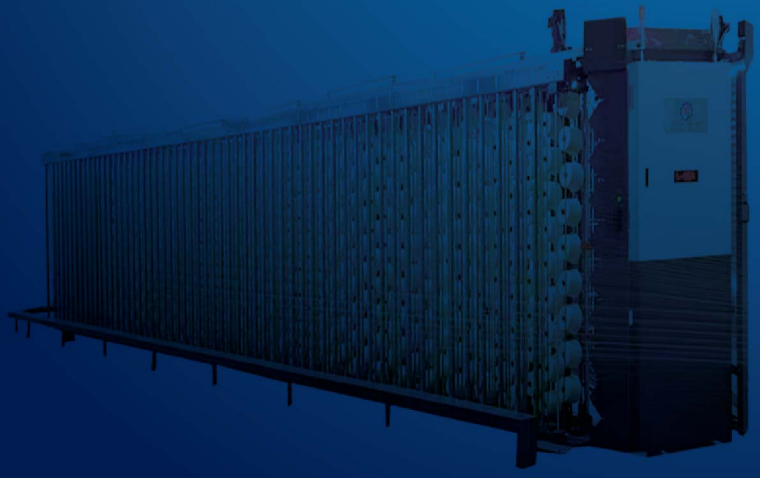



JY128C型
分批整经机
JY128C Batch warping machine



适用范围 Range of application

该机能精确控制经纱长度和经纱的排列，适用于各种短纤维纱线的分批整经，是各类无梭织机的织前准备设备。

This machine can accurately control length and arrangement of warp yarn.It is suitable for directly warping ofvarious kinds of chopped yarns and is the prespinningpreparation equipment for various kinds of pirnless looms.

主要技术参数 Main technical parameters


1. 整经幅宽 (Fabric width of warping beam)	1400mm-3000mm
2. 经轴盘片直径 (Diameter of warp beam)	Φ800mm、Φ1000mm、Φ1250mm
3. 整经速度 (Speed of beam warping)	300-1200m/min
4. 制动距离 (Braking length)	≤3m(800m/min)
5. 经纱长度误差 (Error in the length of warped yarn)	≤0.2%
6. 筘左右调节范围 (Left and right adjustable range of reed)	0-40mm
7. 主电机功率 (Power of main motor)	15KW-22KW
8. 操作显示器 (Operation displayer)	10.4寸触摸屏 (10.4 inch touch panel)
9. 主机重量 (Weight of main body)	3500KG
10. 筒子架 (Bobbin creel)	V型循环式、翻转式 (V-shaped recirculated、Turnover V-cree)



经轴夹头 Warp beam chucks

40° 内锥啮合，自行对中。保证高速运行，安全制动。

40 ° inner cone engagementandself centeringensure high-speed running and security brak.

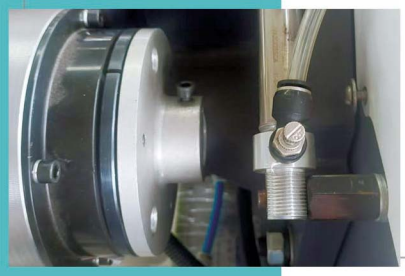

吹风装置 Blowing device

清洁伸缩筘齿

The blowing device makes the expansion reed clean.



压辊装置 Pressure roller device

压纱辊电动-液压控制，在200-6000牛顿范围可调。


The pressing force is electro-hydraulic controlled and adjustablebetween 200-6000N.



制动装置 Braking device

两侧电动-液压控制碟式刹车，可对高速运行的经轴迅速制动。导纱辊及压纱辊上同样附有制动器，保证同时制动。

The electro-hydraulic controlleddisc brakes on both sides,ensurebrake for the high-speed runningbeam rapidly.Brakes on guideroller and pressing Roller ensurethe synchronized braking.

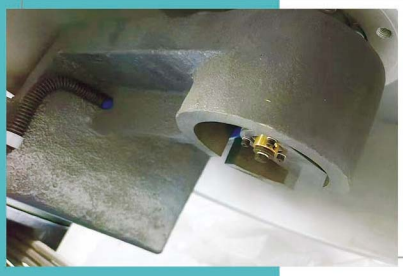

电子精确计长 Electronnic length counting

通过安装在压纱辊的编码器可精确计算 纱线长度，保证各批次轴经纱长度相等。

Through the encoder fixed on thepressure roller the yarn length canbe calculated precisely and Ensurethe same length of different batches.



筘摆动装置 Reed swing device

伸缩箱可通过电机实现上下及左右各方向的移动，防止纱线切断及延长箱片的使用寿命。

Expansion reeds move along X andY axis by motor control.Prevent theyarn being cut off and increasing theservice life of expansion reed.



恒阻尼装置 Constant damping device

由两个通过液压控制的碟刹以恒定的阻尼作用于压纱辊，保持恒定的压纱张力。

Two hydraulic controlled disc brakesact the constant damping on thepressing roller and ensure the con-stant pressing force.



主机触摸屏工作站
Host computer touch screen workstation


可视化输入输出方案，工艺信息简便，自动计算过程参数，并显示当前工艺参数信息。

Visualized program input andoutput,further simplified processinformation.Automatic calculate procedure parameters,display live pro-cess parameters.



大V型循环式筒子架

高质量的保证、完美的张力设计
保持经纱片全长和宽度上张力恒定



V–shaped recirculated bobbin creel
Ensurance of highquality,perfect design for tension.Constant thread tension over the entire length and width of the warp.

高质量
High quality

对经纱质量要求低
Low requirements onwarp yarn

经纱张力较低
Low thread tension

经纱张力前后保持一致
Uniform thread tension fromback ro front

不会产生松纱
No snarling

应用范围广
Universal application

从粗支到细支的短纤维纱
Coarse to the finest staple fibre yarns

单纱和倍捻纱
Single and doubled yarns

可使用任意规格的筒子
Optional package formats usable

高产能
High Production Capability

实际速度可达 1200m/min
Speed in practice of up to 1200m/min

纱线自由运动
Free yam route

换筒或换批时无需结头
No notting when changing package or lot

清理和维护费用较低
Reduced cleaning and maintenance outlay

筒子易于插装
Automatic rotation of package frames

经纱容易放到经纱刹车片中
Simple placing of the threads in the stoptensioner

纱线张力得以平衡
Equalized thread tension

预张力器可自动平衡从最后端到最前端纱线不同长度产生的张力差别。调整预张力器的包围角得以补偿。

The pretensioner automatically-compensate the thread tensiondifferences occuring due to thevariation in thread length from therearmost to foremostpackage.The automatic pretensioner is set to that a correspond-ing warp compensates the differences in tension betweenthe front and rear threads.

不会产生松纱
No snarling


自动预张力器可防止会产生机器停机的松纱现象。预张力器可根据整经过程中的不同阶段自动调整到正确位置。

An automatic pretensionerprevents snarling which canoccur on stopping the machine .The pretensioner auto-matically takes up the correctposition depending on thephase in the warping process.

用于高产能低张力整经筒子架的纱线张力器

Thread tensioner for warping creels with high productivity and low thread tension





高质量
Highest quality

停机时不会松纱或飞纱
按下按钮可激活纱线监测器
多次断纱警告显示
不断显示纱线数目
断经时不会丢纱

No loose ends shooting forwardwhen stopping
Stop motions are self-activated by-pushbutton
Warning display after repeatedbreaks on thesame end
Continuous display of number ofrunning ends
No threads lost at the end break

高产能
High Production Capability

应用范围广
高速运行时纱线张力较低
快速识别断经位置

Wide application
Low thread tensions for high speeds
End breaks are rapidly located

整经轴没有缺纱
No missing yarn on thewarping beam

在张力器中内置监测器。当纱线停止时，该装置在几毫秒内做出反应，因此不会丢纱。

Monitors in the tensioner willrespond in Milliseconds oncethe threadstop,-so that No endsare lost.

高速度，低拉伸力
High speed with low thread tensioner force


启动瞬间,张力器即打开压纱盘。
高速运行时,负载很小。

High speed with low thread tensioner force . The jaws open automatically shortly after the start. The tensile load on the thread is low,even at high Beaming speed.

内置独立吹气装置
Integrated individual blow-off

在每个张力器中均有细小的喷嘴，以一定的时间间隔喷出压缩空气，使张力器周围环境保持清洁。

Each tensioner contains fine air jets which keep the tensioner zone clean .

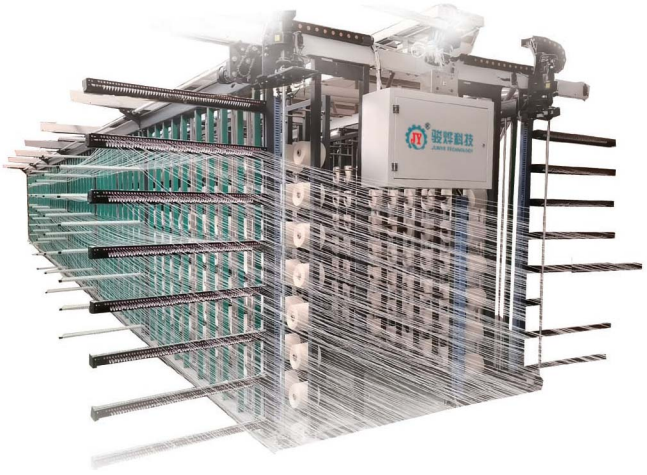

小V型翻转式筒子架
Turnover V creel

适用范围
Scope of application

用于短纤纱
For staple yam

选配项
Oplional parts

吊扇、巡回吹吸风
Ceiling fan、travelling cleaner

张力器
Tensioner



吊环式张力器
Ring type tensioner

适用范田：适用于化纤长丝和短纤维
For filament and staple yarn

工作原理:通过改变纱线的包角或瓷环的个数，改变纱线的张力
Adjust yarn tension by changing yarn angle or ceramic ring number

张力范围: 3-20CN　Tension range:3-20CN



压片两柱式张力器
2-pillar tensioner

适用范围：适用于短纤维
For staple yarn

工作原理：通过改变纱线的包角，改变纱线的张力
Adjust yarn tension by changing yarn angle

张力范围：10-25CN　Tension range:10-25CN



三柱式磁悬浮张力器
3-pillar magnetic suspension tensioner

适用范围：适用于短纤维
For staple yarn

工作原理：通过调节磁柱的高低，改变纱线的张力
Adjust yarn tension by lifting up and down of the column

张力范围：10-70CN　Tension range:10-70CN



三柱式张力器
3-pllar tensioner

适用范围：适用于短纤维
For staple yarn

工作原理：工作原理:通过改变纱线的包角，改变纱线的张力
Adjust yarn tension by changing yarn angle

张力范围：5-70CN　Tension range: 5-70CN


SECTIONAL
WARPER

Specifications of Model
YBGA688-3600-1250 sectional warping machine

Warping machine		
1	Frame	welded steel bar
	Machine movement	1.5KW servo motor (Taiwan TECO) drives the roller directly
2	Drum	**Steel**
	Drum Diameter	1026mm
	Drum length	3700mm (working width 3600mm)
	Cone angle	9°(1:6.3)
	Cone length	2110mm(full warping φ1250mmbeam)
	Drum balance	≤0.10mm
3	Drum drive	
	Motor	22kw three-phase synchronous motor
	Inverter	37kw **Delta VFD-B** Shared with beaming machine
	Speed	0~600m/min
	Speed error	Less than 0.5%
	Speed fluctuation	±0.2%
	Main bearing	**SKF**
4	Warping operation table Traversing	
	Drive	Fixed by the ball screw and servo motor drives nut(SBC)
	Guide rails	Ball linear guide rails(double rails SBC)

	Servo motor	1.5kw AC servo motor (Taiwan TECO)
	Servo drive	1.5kw AC servo motor (Taiwan TECO)
	Strip traversing speed	0.001~9.999mm/r
	Strip traversing response	Responded upon 1/1024 rotation of the drum
	Strip traversing precision	0.02%
	Strip location	Automatic
5	Backwards & forwards of warping operation table	Servo motor, ball screw driven(SBC)
	Driven Motor	1.5kw AC servo motor (Taiwan TECO)
	Driver	1.5kw AC servo motor (Taiwan TECO)
	Guide rails	Ball linear guide rails (double rails SBC)

	Work way	Equal distance winding
	Space reed movement	Forwards and backwards movement byrod less air cylinder with linear guide rail(Germany FESTO)
6	Brake of drum	Clamping brake 4pcs
	Brake medium	Special braking liquid
	Brake control way	Automatic control according to the speed
	Braking distance	≤3m(with a speed of 500m/min)

	Beaming tension close-loop Control	Precision proportional valve
	Value setting way	Set the inner and outer circle air pressure values of the beam
	Setting range	Air pressure range 0~6.00 bar

	Control way	Linear change from the inner circle(beginning of the winding) to the outer circle(end of the winding) or constant tension optional
7	Machine safety protection	Infrared protection
8	Main controller	**SIEMENS S7— 200 1PC**
9	Operational display	10.4inch **Eview**colorful touch screen
	Display technical data	Warp length, piece length, strips, speed, low speed, displacement, strip width, count of displacement etc
	Function setting	Shift, whether piece length stop, yarn broken memory, clear motor switch, blowing switch etc
	Information function	Manual instruction, maintenance instruction, alarm information, production information etc
	Adjusting and maintenance function	Switch inspection, brake air pressure inspection, brake function inspection, left and right movement inspection etc
10	Pneumatic element	air valve (FESTO for beaming tension, Others use JELPE)
11	Button	Schneider
12	Encoder	axle hole and drum mounted(Koyo)
13	AC contactor	Schneider

Beaming machine		
1	Type	Whole machine fixed (special for 1250mm beam diameter)
2	Frame	Welded steel bar

3	Beam drive	Belt wheel decelerating drive
	Winding direction	C.W or CCW, can be set when it install
	Motor	37kw three-phase asynchronous motor
	Inverter	37kw **Delta VFD-B** shared with warping Machine
	Beaming speed	0~120m/min
	Beaming tension	0~15000N
	Speed deviation	≤0.5%
4	Beam brake	Steel tape brake
5	Load/drop beam	**Hydraulic load/drop beam device**
6	Operational display	10.4inch **Eview** colorful touch screen
7	Safety device	Safety bar and infrared guard device
8	Waxing device	three-roller step-less speed control
	Heater	Temperature Controller
	Temperature Controller range	0~200℃
	Guide Roller	80mm, length 1300mm
	Speed control	Motor
9	Pneumatic element	Relief valve and pressure gauge (FESTO Germany)
Pneumatic reed		
1	Frame	Welded steel bar
2	Reed	Special stainless steel reed
3	Up & down lease reed control	Sleeve cylinder

4	Clamp yarn controller	Revolving cylinder
5	Warp yarn layer	Shield layer(steel)
6	Location	Automatic, moving up & down during warping
Creel		
1	Type	Similar with Benninger type
2	Pitch	250mm*250mm
3	Layer	8
4	automatic stop device	Infrared automatic stop
5	Spindles	800
6	Tension device	Spring type

YBGA688 Intelligent Sectional Warping machine







FAV Group of Companies

+92 305 3097543 | +92 300 2246155

Head Office
B-66/A, S.I.T.E., Area,
Karachi-75700, Pakistan.
+92 (21) 32550093-98
info@vawda.com

Lahore Office
307/E, Nadir street, Ferry Meadowlane,
West canal Bank, Lahore-54590, Pakistan.
+92 (42) 36113239
lhr@vawda.com

Faisalabad Office
P-68, Vawda House, Vawda Street 4,
Zia Town Faisalabad-38000, Pakistan.
+92 (41) 8524576
fsd@vawda.com

Multan Office
Plot # 62/A, Phase-1 Industrial
Estate Multan-60000, Pakistan.
+92 (61) 6538131
mul@vawda.com