Munshad Ahmed Ansari
Country Manager PL-Sizing
munshad@vawda.com
03053097543 | 03002246155

Head Office
B-66/A, S.I.T.E., Area,
Karachi-75700, Pakistan.
+92 (21) 32550093-98
info@vawda.com

Lahore Office
307/E, Nadir street, Ferry Meadowlane,
West canal Bank, Lahore-54590, Pakistan.
+92 (42) 36113239
lhr@vawda.com

Faisalabad Office
P-68, Vawda House, Vawda Street 4,
Zia Town Faisalabad-38000, Pakistan.
+92 (41) 8524576
fsd@vawda.com

Multan Office
Plot # 62/A, Phase-1 Industrial
Estate Multan-60000, Pakistan.
+92 (61) 6538131
mul@vawda.com

Group of Companies

华尊 · 日佳
HuaZun · RiJia

RJW系列
RJW SERIES

喷水织机
WATER JET LOOM

公司简介 Company Profile

风雨共舟　携手共赢

青岛华尊机械股份有限公司成立于2000年，是一家专业从事喷水织机、喷气织机研发设计、生产销售的国家高新技术企业。

公司建立了完善的质量管理体系，先后获得了ISO9001、ISO14001、OHSAS18001等质量体系认证；拥有先进的加工中心、三座标测量仪、轴承加热装配设备、喷涂设备、总装流水线等，技术实力雄厚加工能力强；研发力量强，研发投入高，已累计取得了数十项专利技术，使公司拥有了核心技术；优秀的销售服务团队，为用户提供技术支持，为用户解除后顾之忧。

公司成立伊始，就将“做一件产品，树一座丰碑”作为经营理念，秉承“诚信、和谐、创新”的企业精神，坚守品质，追求卓越，在激烈的竞争中取得了年产销数千台织机的成绩，不但在国内拥有大量的客户，而且远销印尼、印度、越南、朝鲜、土耳其、埃塞俄比亚、巴勒斯坦等国家，深受用户的喜爱。

不诋毁对手，不贬低同行，不辜负客户，专注于提高技术质量水平，用优质的产品全面的服务让客户满意，让同行认可，让对手敬佩。

华尊日佳，永握合作伙伴的双手，让诚信为先，共同发展共结双赢联盟。

Qingdao Huazun Machine Co., LTD was founded in 2000,one national high-tech enterprise which devotes to researching, producing and selling water and air jet loom.

The company has established a perfect quality management system, successively obtained ISO9001, ISO14001, OHSAS18001 and other quality system certification; it has advanced processing center equipment, three coordinate measuring instrument, bearing heating assembly equipment,painting equipment, general assembly line, etc., with strong technical strength and strong processing capacity; it has strong R & D force, high R & D investment, and has accumulated dozens of patent technologies. The company has core technology and excellent sales service team, which provides technical support for users.

Since its establishment, the company has taken "making a product and building a monument" as its business philosophy, adhering to the enterprise spirit of "integrity, harmony and innovation", upholding quality and pursuing excellence. It has achieved the annual production and sales of thousands of looms in the fierce competition. It not only has the largest and most customers in China, but also sells to Indonesia, India, Vietnam, Palestine , korea, turkey, Ethiopia and other countries, deeply customer's favorite.

Don't denigrate the competitors, don't belittle the peers, live up to the customers, focus on improving the technical quality level, use high-quality products and comprehensive services to satisfy the customers, let the peers recognize and let the competitors admire.

Huazun(Rijia), always hold the hands of partners, let integrity first, pursue common development and win-win alliance.

历程 Course

2000年1月，第一批RJW851型重磅喷水织机下线;
2000年4月，第一台双泵双喷重磅喷水织布机面市;
2000年6月，双泵三喷重磅水织机成功推向市场;
2000年10月，自主研发的FA201B、FA219A、FA239A系列梳棉机顺利通过鉴定，并投放市场;
2002年4月，3.6米超宽幅喷水织布机诞生;
2006年6月，喷水提花机远销南亚;
2008年5月，408系列喷水织机研制成功;
2008年8月，超宽双经轴系列水织机投放市场热销;
2009年2月，双泵四喷嘴系列喷水织机投放市场热销;
2012年4月，大卷装系列喷水织机诞生;
2015年3月，喷水织机大提花系列投放市场;
2015年9月，411系列喷水织机热销;
2015年12月，8100系列试制成功;
2016年11月，508机型震撼上市，好评如潮;
2017年2月，8100机型360筘幅充绒布机器调试成功;
2018年11月，5.6米超宽幅织机隆重推出;
2019年3月，智能化喷水织机隆重推出;
2019年2月，节能永磁直驱喷水织机批量上市;
2020年5月，玻纤专用喷水织机试验成功;
2021年7月，RJW8122机型推向市场，针对高密超细织造优势独特;
2022年4月，HZ860新型六连杆高速宽幅喷气织机推向市场;
2023年5月，第一代智能调节电动水泵织机推向市场... ...

In January 2000, the first batch of RJW851 heavy weight water-jet looms came out of the assembly line;
In April 2000, the first double-pump double-nozzle water jet loom was on the market;
In June 2000, the double-pump three-nozzle heavy water-jet looms were successfully brought into market;
In October 2000, the independent research and development of FA201B,FA219A andFA239A series of carding machine successfully passed the indentification and put on the market;
In April 2002, 3.6 meters ultra-wide looms water jet looms were born;
In June 2006, water jet jacquard looms were exported to South Asia;
In May 2008, the 408 series water jet looms were successfully developed;
In August 2008, super-wide double beam series water jet looms got hot selling in the market;
In February 2009, double-pump,four-nozzle series water jet looms got hot selling in the market;
In April 2012, the batching-motion series water jet loom were born;
In March 2015, water jet loom jacquard series were put on the market;
In September 2015, the 411 series water jet looms got hot selling;
In December 2015, the 8100 series water jet looms trial production success;
In November 2016, the 508 model shocked the market and received high praise;
In February 2017, 8100-360 width double-layer lint fabric machine was successfully debugged;
In November 2018, the 5.6-meter ultra wide machine was launched;
In March 2019, intellertual water jet loom was launched;
In February 2019, energy-saving permanent magnet direct drive water jet looms were launched in bulk;
In May 2020, the test of fiberglass specialized water jet loom was successful;
In July 2021, the RJW8122 model was launched on the market, with unique advantages in high-density and ultra-fine weaving;
In April 2022, the HZ860 new six link high-speed wide width air jet loom was launched on the market;
In May 2023, the first generation intelligent regulation electric water pump loom was launched on the market...

为客户制造独特价值
是我们一成不变的追求

QINGDAO HUAZUN MACHINERY CO.,LTD.

Honor

青岛华尊机械股份有限公司

创新

专注于一个产品，不断创新，不断超越。创新已成为青岛华尊机械股份有限公司的信仰，已成为青岛华尊机械股份有限公司的追求。

青岛华尊机械股份有限公司成立以来，将技术创新作为公司最重要的一项工作，经过技术人员多年的努力，公司已获得25项国家专利；4项计算机软件著作权登记

INNOVATION

Focus on one product, keep innovating and surpassing. Innovation has become the belief and pursuit of Qingdao Huazun Machine Co., Ltd. .

Since the establishment of Qingdao Huazun Machine Co., Ltd., technical innovation has been regarded as the most important work of the company. Through the efforts of technicians for many years, the company has obtained 25 national patents and 4 computer software copyright registration.

三坐标测量仪
Coordinate measuring instrument

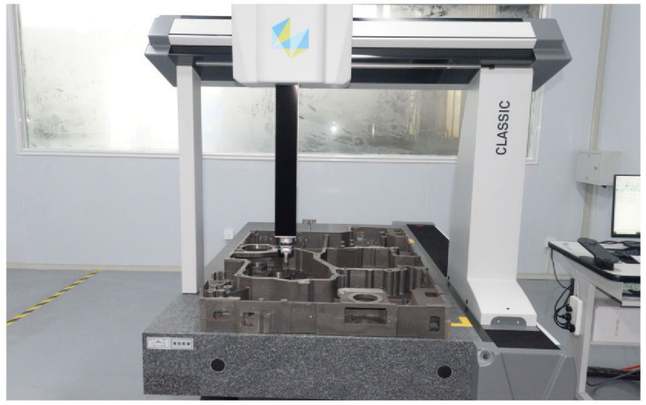

公司采用先进的检验检测设备，确保工序生产产品合格率，严格控制质量，从而保证整机的产品质量，通过检验改进产品生产工艺，提高质量，提升产品综合竞争力。

The company adopts advanced inspection and testing equipment to ensure the pass rate of products produced in the process and strictly control the quality, so as to ensure the product quality of the whole machine, improve the production process through inspection, improve the quality and enhance the comprehensive competitiveness of products.

CNC加工中心
CNC machining center

采用CNC加工中心成套加工关键零部件，使产品一次精加工完成，高精度的进口加工中心，成套加工左右墙扳，确保设备两侧齿轮同轴旋转，降低产品运转时产生的震动和噪音，提高织机稳定性及开机率。

CNC Machining Center is used to process key parts in a complete set, so that the product can be finished in one finishing process, high precision import processing center, complete processing of left and right wall wrenches, ensuring coaxial rotation of gear on both sides of the equipment, reducing vibration and noise generated during product operation, and improving loom stability and start-up rate.

涂装车间
Painting shop

涂装车间采用国内先进的除油、去锈，20分钟内进入先进的喷涂线，涂料用环氧树脂，采用国际先进的静电喷漆设备，利用静电吸附原理，杜绝漏喷现象，全面无缝覆盖工件表面、所有底漆、面漆全部烘干处理，提高油漆在工件上的表面附着力。所有涂装防锈处理按汽车的表面处理方案批次做72小时5%盐雾试验。

In the painting work shop, the company applies leading process of degreasing and rust free,then enters advanced painting line within 20 minutes.The coating is epoxy resin.We adopt internationally advanced electrostatic painting device and electrostatic adsorption principle, to ban missed painting phenomenon and comprehensively seamless cover surface of workpieces.All primer, finish coat do drying treatment in order to raise adhesive force of painting. All painting rust free treating of all painting make test of 5% salt spray with 72 hours according to cars surface treatment project.

流水线组装
Assembly line

公司采用织机整机装配流水线，通过严格的质量管理、精细分化组装工序流程。用专用工具定扭矩紧固联结件，通过整条流水线上的技术来优化产品的质置控制，对生产设施的可靠性、成本效益和质量具有严格的要求，确保了整机组装的质量100%合格。

The company uses the Whole machine assembly line. through the strict quality managemant. fine dilferentiation assembly process flow. The factory people use the special tool to tighten the connecting parts with constant torgue.optimizing product's quality control through whole assembly line's technic. we have the strict requirements about production facility's stabiliy, cost efficiency and quality to ensure whole machine's assembly qualified by100%.

RJW8122系列喷水织机
RJW8122WATER JET LOOM

主要特点
Main features

RJW8122系列喷水织机，是针对超高密及重磅织物的织造而设计生产的一款织机，对整机的刚性进行优化升级，抑制织造过程中的振动，提升高速织造的稳定性。采用新型独立废边纱开口机构（已获国家发明专利），适应高速运行，并提升可靠性。采用高强度的耐磨不锈钢打纬轴，降低维护成本，并保证高强度打纬工况的超长使用寿命。

The RJW8122 series water jet loom is designed and produced for weaving ultra-high density and heavy-duty fabrics. It optimizes and upgrades the rigidity of the entire machine, suppresses vibration during the weaving process, and enhances the stability of high-speed weaving. Adopting a new independent waste edge yarn opening mechanism (obtain a national invention patent), adapting to high-speed operation and improving reliability. The use of high-strength wear-resistant stainless steel weft knitting shaft reduces maintenance costs and ensures an ultra long service life under high-strength weft knitting conditions.

◆短动程六连杆打纬机构
◆Short stroke six link beat-up mechanism
◆可选双泵多色选纬
◆Optional dual pump multi-color weft selection
◆整机刚性优化升级设计，应对高密重磅织造
◆Rigid optimization and upgrading design of the entire machine to cope with high-density and heavy-duty weaving
◆采用新型独立废边纱开口机构，提高捕纬稳定性
◆Adopting a new independent waste edge yarn opening mechanism to improve the stability of weft picking
◆可选积极松经机构，适应特殊品种织造
◆Optional active warp release mechanism, suitable for special variety weaving

RJW8100系列喷水织机
RJW8100 WATER JET LOOM

1. 采用短动程打纬，适应高速织造的同时减少钢筘对织物的损伤;
2. 缩短织物从织口到卷取刺皮辊的布的长度，减少回弹，有利于提高织口的稳定性;
3. 一体式墙板，机架增加纵向撑挡，提高机架稳定性;
4. 采用偏心摇轴结构，减小打纬振动
5. 1-4色曲柄开口或曲柄6连杆配置;
6. 稳定的后梁涨力结构消极松经;
7. 经位置线高度降低40mm，既降低了织机重心，提高了稳定性，又便于挡车操作;

1. use short stroke to beat the weft, adapt to high-speed weaving, and reduce the damage of reed to fabric
2. from the mouth to shorten the fabric take-up roller thorn cloth length, reduce the springback, improve the stability of the textile export;
3. Integrated wall panel,rack increase longitudinal support, improve rack stability;
4. eccentric shaft structure, reducing vibration beating
5. 1-4 color crank opening or crank 6 linkage configuration;
6. stable beam tension structure of negative slack;
7. line of position to reduce the height of 40mm, which not only reduces the loom focus, improve the stability and easy operation;

高生产性

始终视高速性能为喷水织机的基本使命。“RJW8100”通过强韧的机架构造、一体式墙板设计，更加稳定的引纬性能、合理的开口和打纬机构等，发挥出超越原有织机高速性能。

高品位

通过强韧的机架构造、强化的送经、缩短织前布经路，大幅提升了打纬的性能，实现了高密制造。

良好的操作性

“RJW8100”是以操作简便为目标开发的。降低经线高度，使操作更简便。

提升通用性

通过缩短织前布经路，使更高密度的稳定织造成为了可能。从细支纱到粗支纱，从窄幅到宽幅，以至不平衡组织的织物，用以期待能对应更广泛的织造产品。

通过缩短喷嘴间距，第一喷嘴和第二喷嘴的引纬状态差异也是很小的，即使织机高速运转，也能实现均一化的引纬。

HIGH PRODUCTIVE

Always regard high speed performance as the basic mission of water jet looms. The "RJW8100" takes advantage of the strong frame structure, Integrated wall panel design,the more stable weft insertion performance, the reasonable opening and beating up mechanism, and so on.

HIGH GRADE

Through the strong frame structure, the strengthening of the let-off and shorten the weaving cloth road before the weaving, greatly enhance the beating up performance, High density manufacturing.

GOOD OPERABILITY

"RJW8100" is developed with the goal of simple operation. It reduces the position line and improves the operation simplicity.

ENHANCE VERSATILITY

It is possible to stabilize weaving by shortening the weaving path. Fabrics from thin to coarse yarn, from narrow to wide, and even unbalanced fabric, are expected to correspond to a wider range of woven products.

By shortening the nozzle spacing, the difference of the weft insertion state between the first nozzle and the second nozzle is also very small. Even if the loom runs at high speed, uniform weft insertion can be achieved.

高效 创新 卓越
Efficiency Innovation Excellece

幅宽最高可达5.6米，用作灯箱布等广告布制作。
THE WIDTH CAN REACH UP TO 5.6 METERS, AND IS USED FOR MAKING ADVERTISING CLOTH SUCH AS LIGHT BOX CLOTH.

RJW718系列喷水织机
RJW718 WATER JET LOOM

RJW718系列喷水织机，是为提高织造产品适应性，减少投资成本而研发的一款优质喷水织机，其织造范围可从一般面料到厚重高附加值织物，一台机器可满足多种需求。

RJW718 series is high quality water jet loom developed for adaptability of fabric and reducing producing cost, which ranges from common fabric to heavy high value-added one.

高速化
High-speed

我公司专项研发的强韧机架结构，使机器运转稳定，可以减轻高速运转时的机器震动，从而实现更加稳定的机器运转，提高织物品质。

Our research of strong frame structure, makes stable running machine and reduces vibration when high speed.

專業　品質　超越

Specialty　Quality　Transcend

华尊公司 日佳机械
TEL:0512-63520135 RIJIA MACHINERY

适应性
Adaptability

偏心打纬，可以极大的提高打纬力。不同幅宽，可适当调整偏心数量，保证打纬的可靠性。较高的打纬力，能够更好的织造较高纬密织物。

Eccentric beating, greatly improves beating force. Different width, we can adjust eccentric number. High beating force, focuses on high weft-density fabric.

经济型
Economic

标配电主轴电机，可实现较普通电机省电至少8%-25%。更快的速度，更高的效率，可以稳定的提高产量；更好的适应性，高张力，高纬密都能轻松驾驭；更稳定的机架，极大减小零件的磨损。

Standard specification is Motor X, saving 8%-25% power than common one. Higher speed, higher efficiency, stably improves producing output;Better adaptability that is high tension,high weft density all can do. More stable frame, reduces abrasion of small parts.

RJW508系列喷水织机
RJW508 WATER JET LOOM

◆可选择:机械送经、机械卷取,电子送经、电子卷取
◆可选择:1-6喷电子自由选纬
◆可配置:曲柄开口、凸轮开口、多臂开口和提花装置。
◆可选择幅宽:135,150,170,190,210,230,260,280,300,320,340,360CM
◆纬密范围:4-100根/cm(根据实际经纬纱规格和织物组织确定)
◆设计最高转速:1100转/分钟(根据实际经纬纱规格和织物组织确定)
◆综框片数:曲柄开口2-8片,凸轮开口2-14片,多臂开口16片。
◆装机功率:1.5kw-5.4kw

◆ Optional: mechanical let-off, mechanical take up, electronic let-off, electronic take up
◆ Optional: 1-6 nozzle electric weft selecting freely.
◆ Configurable shedding devices: crank shedding; cam shedding;dobby shedding;jacquard
◆ Optional reed width:135,150,179.190,210,230,260,280,300,320,340,360CM
◆ The weft density range: 4-100 pick/cm (identified according to actual weft yarn specifications and fabric weave)
◆ Maximum speed: 1100RPM (identified according to actual weft yarn specifications and fabric weave)
◆ Heald frame number: crank shedding 2-8 pieces; cam shedding 2-14 pieces; dobby shedding 16 pieces
◆ Install power: 1. 5kw-5. 4kw

高緯密　高速度　高效率
High density　High velocity　High efficiency

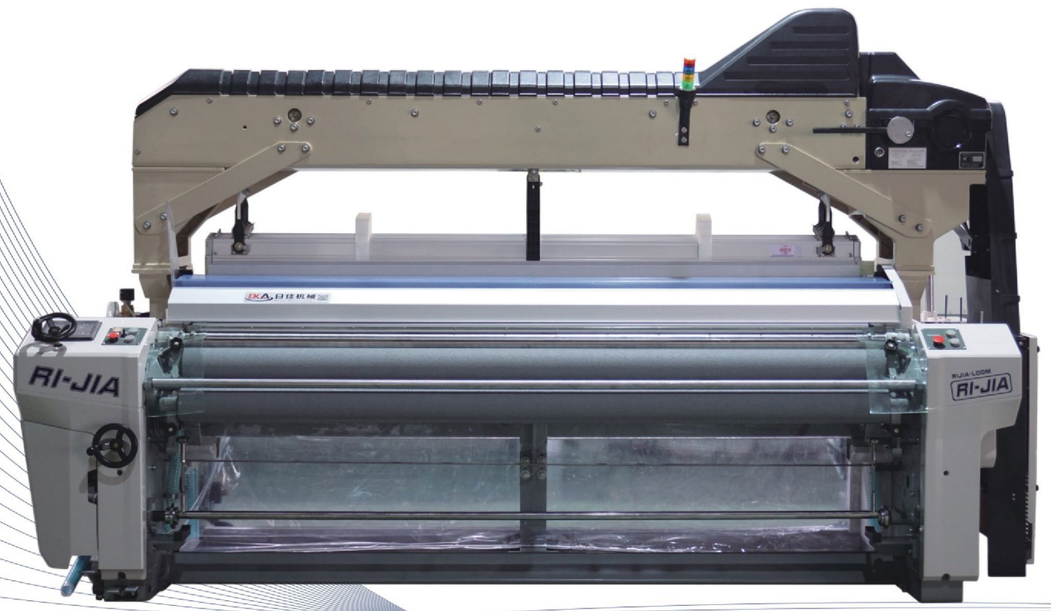

强韧的机架结构:高刚性两侧箱型机架,可以减轻高速运转时的振动,可以实现进一步稳定的引纬和打纬,从而保证织物的高品位。主要的驱动部分安排在油浴的环境中,所以实现了进一步稳定的高速运转。

高速中从容引纬;通过打纬曲线的改进,加大了纬丝飞行角度,使引纬更加稳定,可以织造出高品质的差别化织物。

稳定的运转:强韧的机架结构和高刚性的送经、卷取机构,使织机运行更加稳定,织造范围从轻薄到中厚织物,从低密度到高密度织物,即使织造复杂组织的织物和开口不平衡织物时,振动也很轻微,能够稳定的织造。

设计了最优化的四连杆打纬结构，运动流畅振动极小，适合织布要求，可使结构经久耐用。

采用了更合理的柱塞、泵簧、喷嘴、柱式单向阀，使引纬更加柔和、更加稳定。改进了引纬结构，使水泵的使用寿命更长。

设计了更高追随性的张力系统，减少了客户对织物隐档的担忧。减少了脆弱

经纱的断经，使开口更清、布面质量更高。经轴稳定器使高张力、高纬密织物的织造更稳定。

设计了更坚固的织口支撑结构和更抗拉、更抗布打滑的卷取罗拉结构。稳定的织口既减少了各种布面档子的产生又使高张力高纬密织物更容易织造。

Robust frame structure;Detached sturdy double-sided box frame which reduces vibration at high-speed operation. Because of this reduces vibration, the weft insertion and beating motion are much more stabilized which keeps fabric quatity higlh.Its main drive is contained in an oil bath to achieve stable high-speed operation
Weft insertion methodically at high speed: the weft insertion angle is enlarged by improvement in the beating curve that ensure weft insertion stably for all kinds of chemical fiber materials, as well as the great improvement of unstable situation of shedding and warp yarn tension, ensure weaving the differentiation fabric with high quality
Stable running: the robust frame structure, rigid let off and take up stabilize the loom running and the weaving range is increased from thin to middle-thick fabric, and from low to high density fabric. Even weave fabrics of complicated or unbalanced construction, vibration is low
The optimized Four-bar Beating-up structure on the frame of 408 wallboard machine is designed. The beating-up structure not only moves smoothly, but also vibrates minimally. It is most suitable for weaving and can make the structure durable.
RJW408 uses a more reasonable plunger, pump spring, nozzle, valve sheet,so that weft more soft, more stable.improved weft structure, so that the pump life longer, no wear.
RJW408 designed a higher follow-up tension system, Reduced customer concerns about marks.Reduce the breakage of fragile warp yarns、The openings are clearer、The fabric is of higher quality.The warp beam stabilizer makes the weaving of high tension, high latitude weave fabric more stable.
RJW408 designed a more robust fabric support structure and a take-up roller structure that is more tensile and more resistant to fabric slippage.The stable warp opening not only reduces the marks of various fabric and makes high-tension high-weft fabric easier to weave.

RJW881系列喷水织机
RJW881WATER JET LOOM

◆可选择:机械送经、机械卷取,电子送经、电子卷取
◆可选择:RDP机械测长,1-6喷电子自由选纬
◆可配置:曲柄开口、凸轮开口、多臂开口和提花装置
◆可选择幅宽:135.150.170,190,210,230,260,280,300,320,340,360CM
◆纬密范围:4-100根/cm(根据实际经纬纱规格和织物组织确定)
◆设计最高转速:900转/分钟(根据实际经纬纱规格和织物组织确定)
◆综框片数:曲柄开口2-8片,凸轮开口2-14片,多臂开口16片
◆装机功率:1.5kw-5.4kw

◆ Optional:mechanical let-off, mechanical take up, electronic let-off, electronic take up
◆ Optional:RDP mechanical measuring & storage device, 1-6 nozzle electronic weft selecting freely
◆ Configurable shedding devices:crank shedding; cam shedding; dobby shedding; jacquard
◆ Optional reed width:135,150,170,190,210,230,260,280,300,320,340,360CM
◆ The weft density range:4-100 pick/cm(identified according to actual weft yarn specifications and fabric weave)
◆ Maximum speed:900RPM (Identified according to actual weft yarn specifications and fabric weave)
◆ Heald frame number:crank shedding 2-8 pieces; cam shedding 2-14 pieces;dobby shedding 16 pieces
◆ Instal power:1.5kw-5.4kw

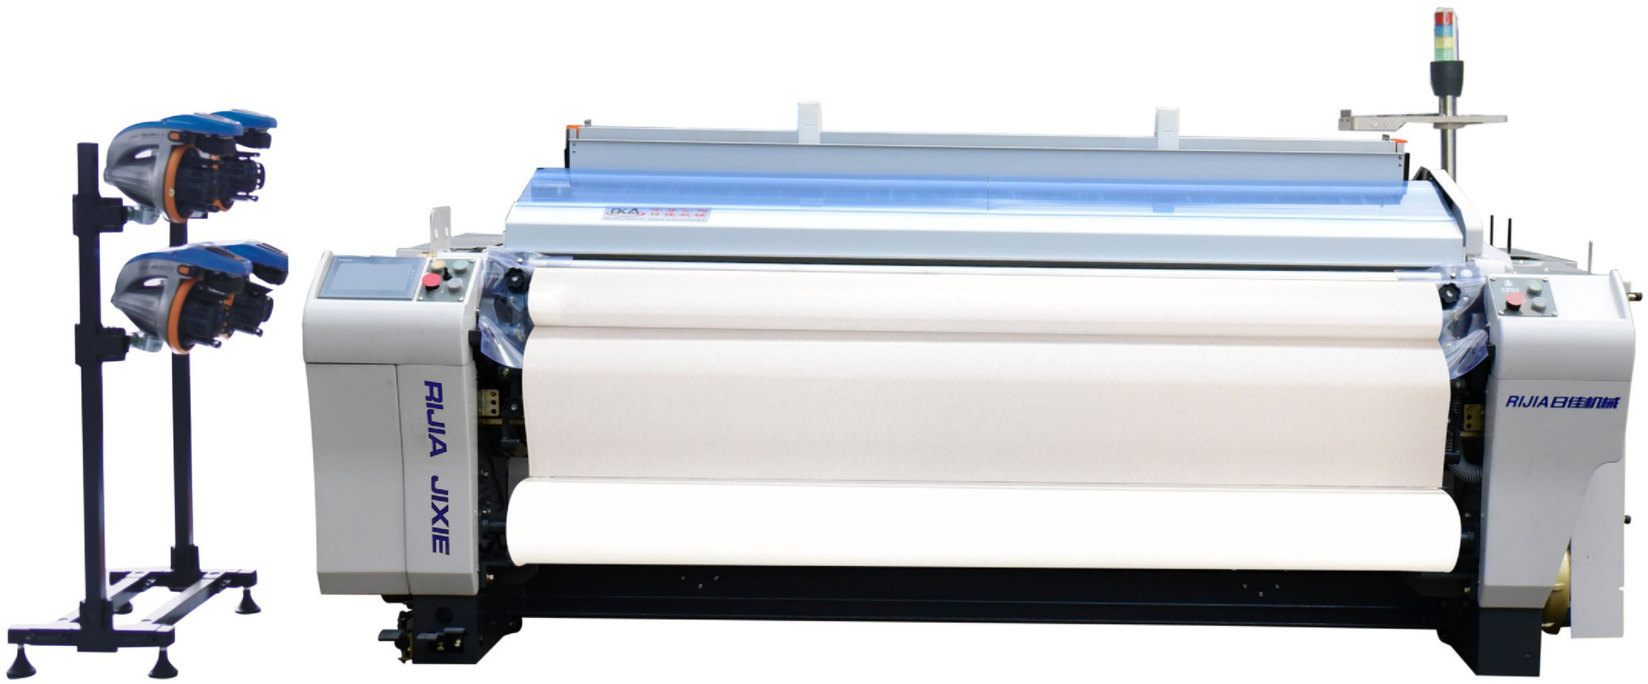

华尊公司 日佳机械
TEL:0512-63520135 RIJIA MACHINERY

主要特点
Main features

RJW881系列重磅型喷水织机是在RJW851系列标准型喷水织机的基础上,对主要运动部件及机架机构进行了重新优化设计,对打纬和送经机构、卷取机构进行了改进,增加了送经辅助装置,使整机运行更加平稳,降低了织机运行中出现的振动和噪音，提高了织机的运转效率，扩大了织造产品的范围。

RJW881 design based on RJW851 series water-jet loom, which is optimizing the main component and frame structure, improving the beating-up, let-off mechanism and take up mechanism, installing assistant device on let-off mechanism,all of this ensure the running stably and reduce vibration and noise, increase effciency and enlarge the weaving range.

RJW881设计了更坚固的织口支撑结构和更抗拉、更抗布打滑的卷取罗拉结构。稳定的织口既减少了各种布面档子的产生又使高张力高纬密织物更容易织造。

RJW881 designed a more robust fabric support structure and a take-up roller structure that is more tensile and more resistant to fabric slippage. The stable warp opening not only reduces the marks of various fabric and makes high-tension high-weft fabric easier to weave.

加宽中板，加大机器受力面积，使机器运转更稳定。加强的横梁支撑，机架更稳固，震动更小。

Widen the middle plate, increase the stress area of the machine, and make the machine run more stably. Strengthened beam support, more stable frame, less vibration.

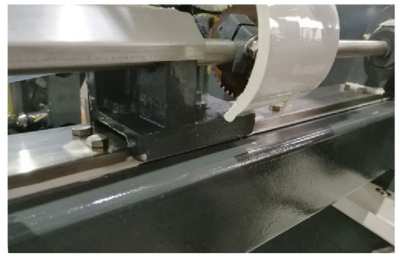

电气制造“芯”系统解决方案

Solution of "core" system in electrical manufacturing

搭载“芯”直驱电主轴系统，为织造行业进入装备智能化应运而生。
配置包括，喷水织造"导航仪"主控系统+送经卷取系统+直驱电主轴系统。
外配可以支持储纬器控制、多臂提花控制，满足客户定制化需求。
支持双泵四喷，变车速变纬密织造。
上下经轴、左右经轴，机外卷控制。
选配GPRS物联网云服务端，为后续纺织行业进入5G时代预留云计算功能。

With "core" direct drive motorized spindle system, intelligent weaving industry into equipment emerged as the times require.
Configuration includes Water-jet Weaving "navigator" main control system + let-off and take-up system + direct drive motorized spindle system
External distribution can support weft storage control and dobby jacquard control to meet customer customization requirements.
Supporting double pumps, four jets, variable speed and weft density weaving
Upper and lower warp shafts, left and right warp shafts, winding control
Choose GPRS Internet of Things cloud server to reserve cloud computing function for subsequent textile industry entering 5G Era

直驱电主轴MD-motor应运而生，承载着工匠精神

较比传统的异步主轴电机，MD-motor系统具备以下优势

★直驱电主轴系统采用交流永磁同步电机，系统效率高达95%，运转的高效区间在额定负载的20%-125%。去掉了无功损耗，更节省电能。
★电主轴直驱传动，取消了刹车盘、皮带盘，进一步降低了传动损耗。使得直驱电主轴系统节能率高达20%-30%。
★电主轴系统可以无级调节织机转速，在保证织机效率的同时可以提高10r/min以上车速，以500r/min车速为例，1000台织机相当于多了20-60台织机在运转，不可小觑!
★寸动、慢速寻纬，定角度开车起停功能，既避免挡车工高速打手问题，又完善织机启停。

★Direct drive motorized spindle system uses AC permanent magnet synchronous motor, the system efficiency is up to 95%, the operation efficiency range is 20% - 125% of the rated load. Remove reactive power loss, save more electricity
★Direct drive of motorized spindle eliminates brake disc and belt disc, which further reduces transmission loss. The energy saving rate of the direct drive motorized spindle system is as high as 20%-30%.
★The motorized spindle system can steplessly adjust the loom speed, while ensuring the efficiency of the loom, it can increase the speed of more than 10 r/min. Taking 500 r/min as an example, 1000 looms are equivalent to 20-60 looms in operation, which should not be underestimated.
★Incremental motion, slow weft searching and fixed angle start-stop function can not only avoid the problem of high-speed hitters of locomotives, but also improve the start-stop of looms.

直驱电主轴价值体现 Value Embodiment of Direct Drive Electric Spindle

★平均每台织机节电约3000元/年，再加上节省的保全工、换皮带盘刹车片的损耗，企业每年净利润多出350万以上。
★使用电主轴驱动器，可以无级调节车织机车速，在不降低织机效率的同时提高10r/min以上车速。
★直驱电主轴较比老式异步电机系统，节约了皮带盘，刹车盘和传动结构。不仅节电，而且减少磨损，降低故障点。

★The average power saving of each loom is about 3000 yuan per year, and the net profit of the enterprise is more than 3.5 million yuan per year, combined with the loss of the saved preservers and the replacement of belt disc brake pads.
★With motorized spindle driver, the speed of the loom can be steplessly adjusted, and the speed of the loom can be increased by more than 10 r/min without reducing the efficiency of the loom.
★Compared with the old asynchronous motor system, the direct drive motorized spindle saves belt disc, brake disc and transmission structure. It not only saves electricity, but also reduces wear and tear and points of failure.

TWJ200-A6 喷水织机一体化电控系统

Integrated electronic control system of TWJ200-A6 water jet loom

系统拓扑 System topology

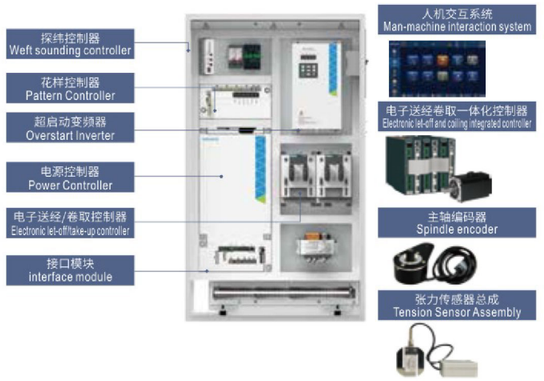

● 电送电卷 ● 7寸触摸屏 ● 光电探纬 ● 花样控制器，4喷 ● 超启动变频器
◎ 双送单卷 ◎ 电子多臂 ◎ 电子提花 ◎ 10寸触摸屏 ◎ 光纤探纬

● Electric transmission coil ● 7 Inch Touch Screen
● Photoelectric weft detection ● Pattern Controller, 4 Spray
● Overstart Inverter ◎ Double delivery single volume
◎ Electronic Dobby ◎ Electronic jacquard
◎ 10 Inch Touch Screen ◎ Optical fiber weft detection

系统配置 system configuration

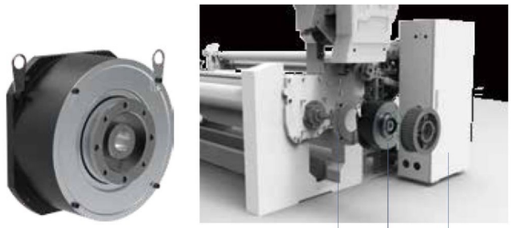

产品配置 Product configuration

TAJ200-Q5 大喷气织机一体化电控系统+MX织机电主轴
TWJ200-A6喷水织机一体化电控系统+MX织机电主轴
TWJ200-A3喷水织机一体化电控系统+MX织机电主轴
ITD500超启动变频器+MX织机电主轴

TAJ200-Q5 large air-jet loom integrated electronic control system + MX loom spindle
TWJ200-A6 Water-jet Loom Integrated Electronic Control System+MX Loom Spindle
TWJ200-A3 Water-jet Loom Integrated Electronic Control System+MX Loom Spindle
ITD500 Super Start Inverter+MX Loom Spindle

系统特点 System characteristics

■ 高品质 Superior quality

系统采用多核控制，可支持最高车速超过1500 rpm；标配变频超启动功能，内置节能算法，可支持变车速，变纬密、空纬、停撬等特殊功能满足复杂织物需求；
内置电子送经工艺，采用张力快速收敛算法，可有效保证布匹质量；提供织口平移功能及多种随动补偿方式，可有效消除织物档疵；

The system adopts multi-core control, which can support the maximum speed of more than 1500rpm; standard frequency conversion over-start function, built-in energy-saving algorithm, which can support variable speed, variable weft density, space weft, prying and other special functions to meet the needs of complex fabrics;Built-in electronic let-off process, using fast tension convergence algorithm, can effectively ensure the fabric quality, provide the function of fabric translation and a variety of follow-up compensation methods, can effectively eliminate fabric defects;

■ 一体化设计 Integrated Design

高度集成喷水电控工艺，电子送经、卷取工艺，花样控制工艺；
支持光电及光纤探纬，采用智能探纬算法，有效提高探纬成功率。

Highly integrated sprinkler control technology, electronic let-off and coiling technology, pattern control technology;Supporting photoelectric and optical fiber weft detection, using intelligent weft detection algorithm, effectively improve the success rate of weft detection.

■ 物联网 Internet of things

提供物联网解决方案，可对织机进行远程控制、远程故障提醒与排查，实时喷水织机的生产效率，产量等相关数据。

Provides Internet of Things solutions, remote control of looms, remote fault warning and troubleshooting, real-time production efficiency of water-jet looms, output and other related data.

系统特点 System characteristics

■ 高效节能 High efficiency and energy saving

国际IE5标准，节能效率可达20%~30%；
International IE5 standard, energy saving efficiency can reach 20%~30%.

■ 灵活变速 Flexible speed change

自由更换车速，具备慢点动，超启动功能；
Free change speed, with slow jog, super start function;

■ 绝缘防水 Insulation waterproofing

采用一体化灌胶工艺，电机完全防水，适应高温高湿环境；
The motor is completely waterproof and adapts to high temperature and humidity environment by using integrated glue filling process.

■ 超长寿命 long life

第三代稀土永磁体的汽车级IPM电机方案结合闭环矢量控制技术，永不退磁；
The third generation of vehicle-grade IPM motor with rare earth permanent magnets combines closed-loop vector control technology and never demagnetizes.

■ 极简维护 Minimalist maintenance

主轴直连，无需传动皮带，驱动器内置刹车工艺，无需刹车盘，实现主轴传动机构极简维护。
The main shaft is directly connected without transmission belt, the driver has built-in braking technology, and no brake disc, thus realizing the minimal maintenance of the main shaft transmission mechanism.

技术参数 Specifications

型号 Type		RJW8100	RJW718	RJW508	RJW881	RJW851
筘幅（cm)reed Space		150,170,190,210,230,260,280,320,340,360, (cm)				
有效幅宽 (cm) Useful reed space		最大穿筘门幅=筘幅，最小幅宽穿筘门幅=筘幅–60cm Maximum reed width = reed width, minimum width reed, door width = reed -60cm				
构造 Frame		两侧箱体式（主要传动部分采用油浴润滑）+中间横梁式构造 Both sides of the box (the main transmission part of oil bath lubrication) + intermediate beam structure				
传动部分 Driving	刹车 brake	机电一体，电磁离合器控制机械式刹车 Direct stop mechanism by an electromagnetic brake				
	控制 control	按钮式和触摸式，（开关键，准备键，正转键，逆转键，停止键） Push and touch button(Arrange,run,stop,forward inching				
	主电机 motor	带超启动功能可连续运转电机 Rush start motor				
	电机功率 Motor capacity	1.5kw 1.8kw 2.2kw 2.7kw 3.2kw 3.7kw 4.5kw 5.2kw 7.2kw 7.5kw				
打纬机构 beating		曲柄摇杆机构 Crank rocker mechanism				
送经机构 Let–off	构造 system	全自动机械式连续送经或电子式连续送经。单经轴或垂直式双经轴 Automatic mechanical and continuous let-off, or electronic let-off. One or vertical two roll				
	经轴直径 warp beam	Φ800mm法兰盘 Φ 914mm法兰盘 Φ1000mm法兰盘 Φ800mmFlange Φ 914mmFlange Φ1000mmFlange				
卷取机构 Take–up	构造 system	机械式连续卷取或电子式连续卷取。 Mechanical or electronic continuous take-up				
	适用纬密 pick density	常规：5–60纬/cm，特定：3–96纬/cm. Normal:5-60picks/cm, special:3-70picks/cm				
	布匹卷取直径 cloth width updiameter	Φ 520mm， 机外卷600mm 大卷装(选配) 最大达800mm Φ 520mm， Outer coil 600mm package (optional) Maximum 800mm				
开口机构 Shedding	平织 Plain shedding	曲柄开口（2–8片),平纹组织。 Crank shedding(heald frame number: 2 to 8) 1/1 fabric				
	凸轮 cam shedding	凸轮开口（2–14片），平纹、斜纹，缎纹组织。 Cam shedding (heald frame number:2-10),plain, twill, satin fabric				
	多臂 dobby shedding	消、积极式（最多综框数：16片），电子或机械式读取机构 Positive/negative heald frame number:16(max), electronic and mechanical reading system, plain, twill, satin or complex deaign				
	提花 jacquard	1408针、2688针、5120针电子提花装置 1408 2688 5120 lifting hooks,electronic jacquard device				

技术参数 Specifications (续)

引纬机构 weft insertion	测长机构 Measuring &storage	300型RDP风机式机械测长（单喷）或电子储纬式测长（1–6喷） 300RDP type mechanical measuring turbo blower (single nozzle) or electronic weft feeder (1–6 nozzles)
	泵体 Pump	MS型,MH型，单泵或双泵结构 Type MS, MH, single pump or double pump structure
	水泵柱塞 Plunger Of Pump	Φ32/Φ17，Φ32/Φ18，Φ36/Φ20，Φ36/Φ22，Φ36/Φ24，Φ36/Φ26 Φ39/Φ28，Φ39/Φ30，Φ42/Φ32， 陶瓷柱塞。ceramic plunger
	喷针 Nozzle Needle	T20/10,T30/10,T45/20,TL50–00,TL65–20,TL75–40,T75–40, TL90–40
	纬入选择 Weft Filling	1个喷嘴，2个喷嘴，3个喷嘴，4个喷嘴，6个喷嘴 One, two, three, four nozzle, six nozzle
	探纬 Filling Feeler	光电式探纬器，光纤式 Photoelectric weft feeler,Fiber type
耳丝部分 selvage		行星齿轮式绞边装量 Planetary gear hemming
电气部分 electrical part	国产或进口 Domestic or imported	主控板，交流接触器，变压器，变频器，数控接口，耳丝断自停装置，废丝断自停装置，过载过热保护 Main control board, AC contactor, transformer, Frequency converter, NC interface, selvage break system, waste yarn break system, overheating and overload protection
	电子码表 Electronic meter	织机转速，总产量，分班产量，总效率，分班效率，定布长度自动控制，停机原因汇总并显示。 Count and display:rotational speed,total yield,team yield, total efficiency,team efficiency,cloth length auto control,stopping.
随机配件 Other devices		卷布辊一根，纬密齿轮一个，废丝桶一个，喷针喷体一套 A cloth roller, a weft density gear,a trashcan, a set of nozzle needle

RJW718、RJW508、RJW881、RJW851系列喷水织机机械尺寸图

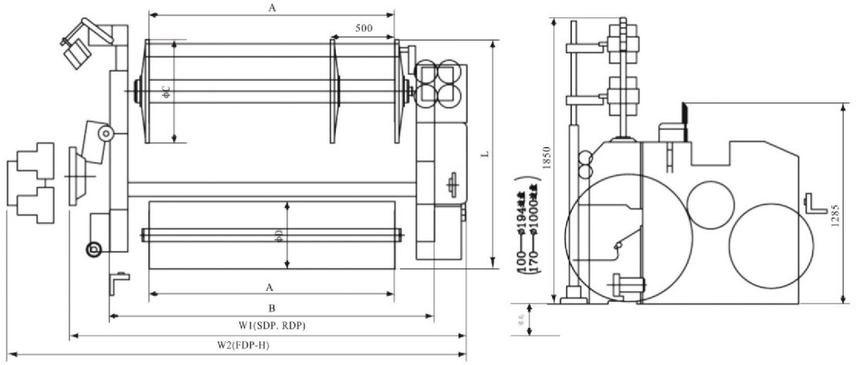

筘幅	A	B	W1		W2	
			1C(SDP.RDP)		2C(FDP-H)	
			曲柄	多臂	曲柄	多臂
150cm	150	2070	2750	2775	3250	3275
170cm	170	2270	2950	2975	3450	3475
190cm	190	2470	3150	3175	3650	3675
210cm	210	2670	3350	3375	3850	3875
230cm	230	2870	3550	3575	4050	4075
280cm	280	3370	4050	4075	4550	4575
320cm	320	3770	4450	4475	4950	4975
340cm	340	3970	4650	4675	5150	5175
360cm	360	4170	4850	4875	5350	5375

边盘￠C		800	914	1000
布卷直径￠D		520	520	520
L	RJW718	1740	1903	1979
	RJW508	1740	1903	1979
	RJW881	1765	1903	1979
	RJW851	1735	1903	1979

RJW8100系列喷水织机机械尺寸图

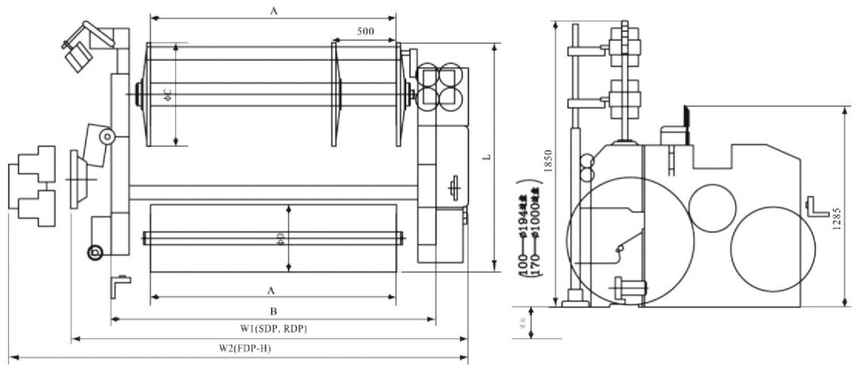

筘幅	A	B	W1		W2	
			1C(SDP.RDP)		2C(FDP-H)	
			曲柄	多臂	曲柄	多臂
150cm	150	2070	2750	2775	3250	3275
170cm	170	2270	2950	2975	3450	3475
190cm	190	2470	3150	3175	3650	3675
210cm	210	2670	3350	3375	3850	3875
230cm	230	2870	3550	3575	4050	4075
280cm	280	3370	4050	4075	4550	4575
320cm	320	3770	4450	4475	4950	4975
340cm	340	3970	4650	4675	5150	5175
360cm	360	4170	4850	4875	5350	5375

边盘￠C		800	914	1000
布卷直径￠D		520	520	520
L	RJW8100	1860	1974	2060