
Thermostat Rev C - TOP side (through-hole parts only)

RL1-RL3: Hongfa HF115F/005-1ZS3 (COM = middle contact column). J20, J1, F2, C1 (+ marked), J3, J5 (JST XH).

U1: 2 x 1x15 female headers (NodeMCU Amica, rows 22.86 mm apart).

230 VAC above the dashed line: keep solder mask and clearances as designed. No SMT on this side.

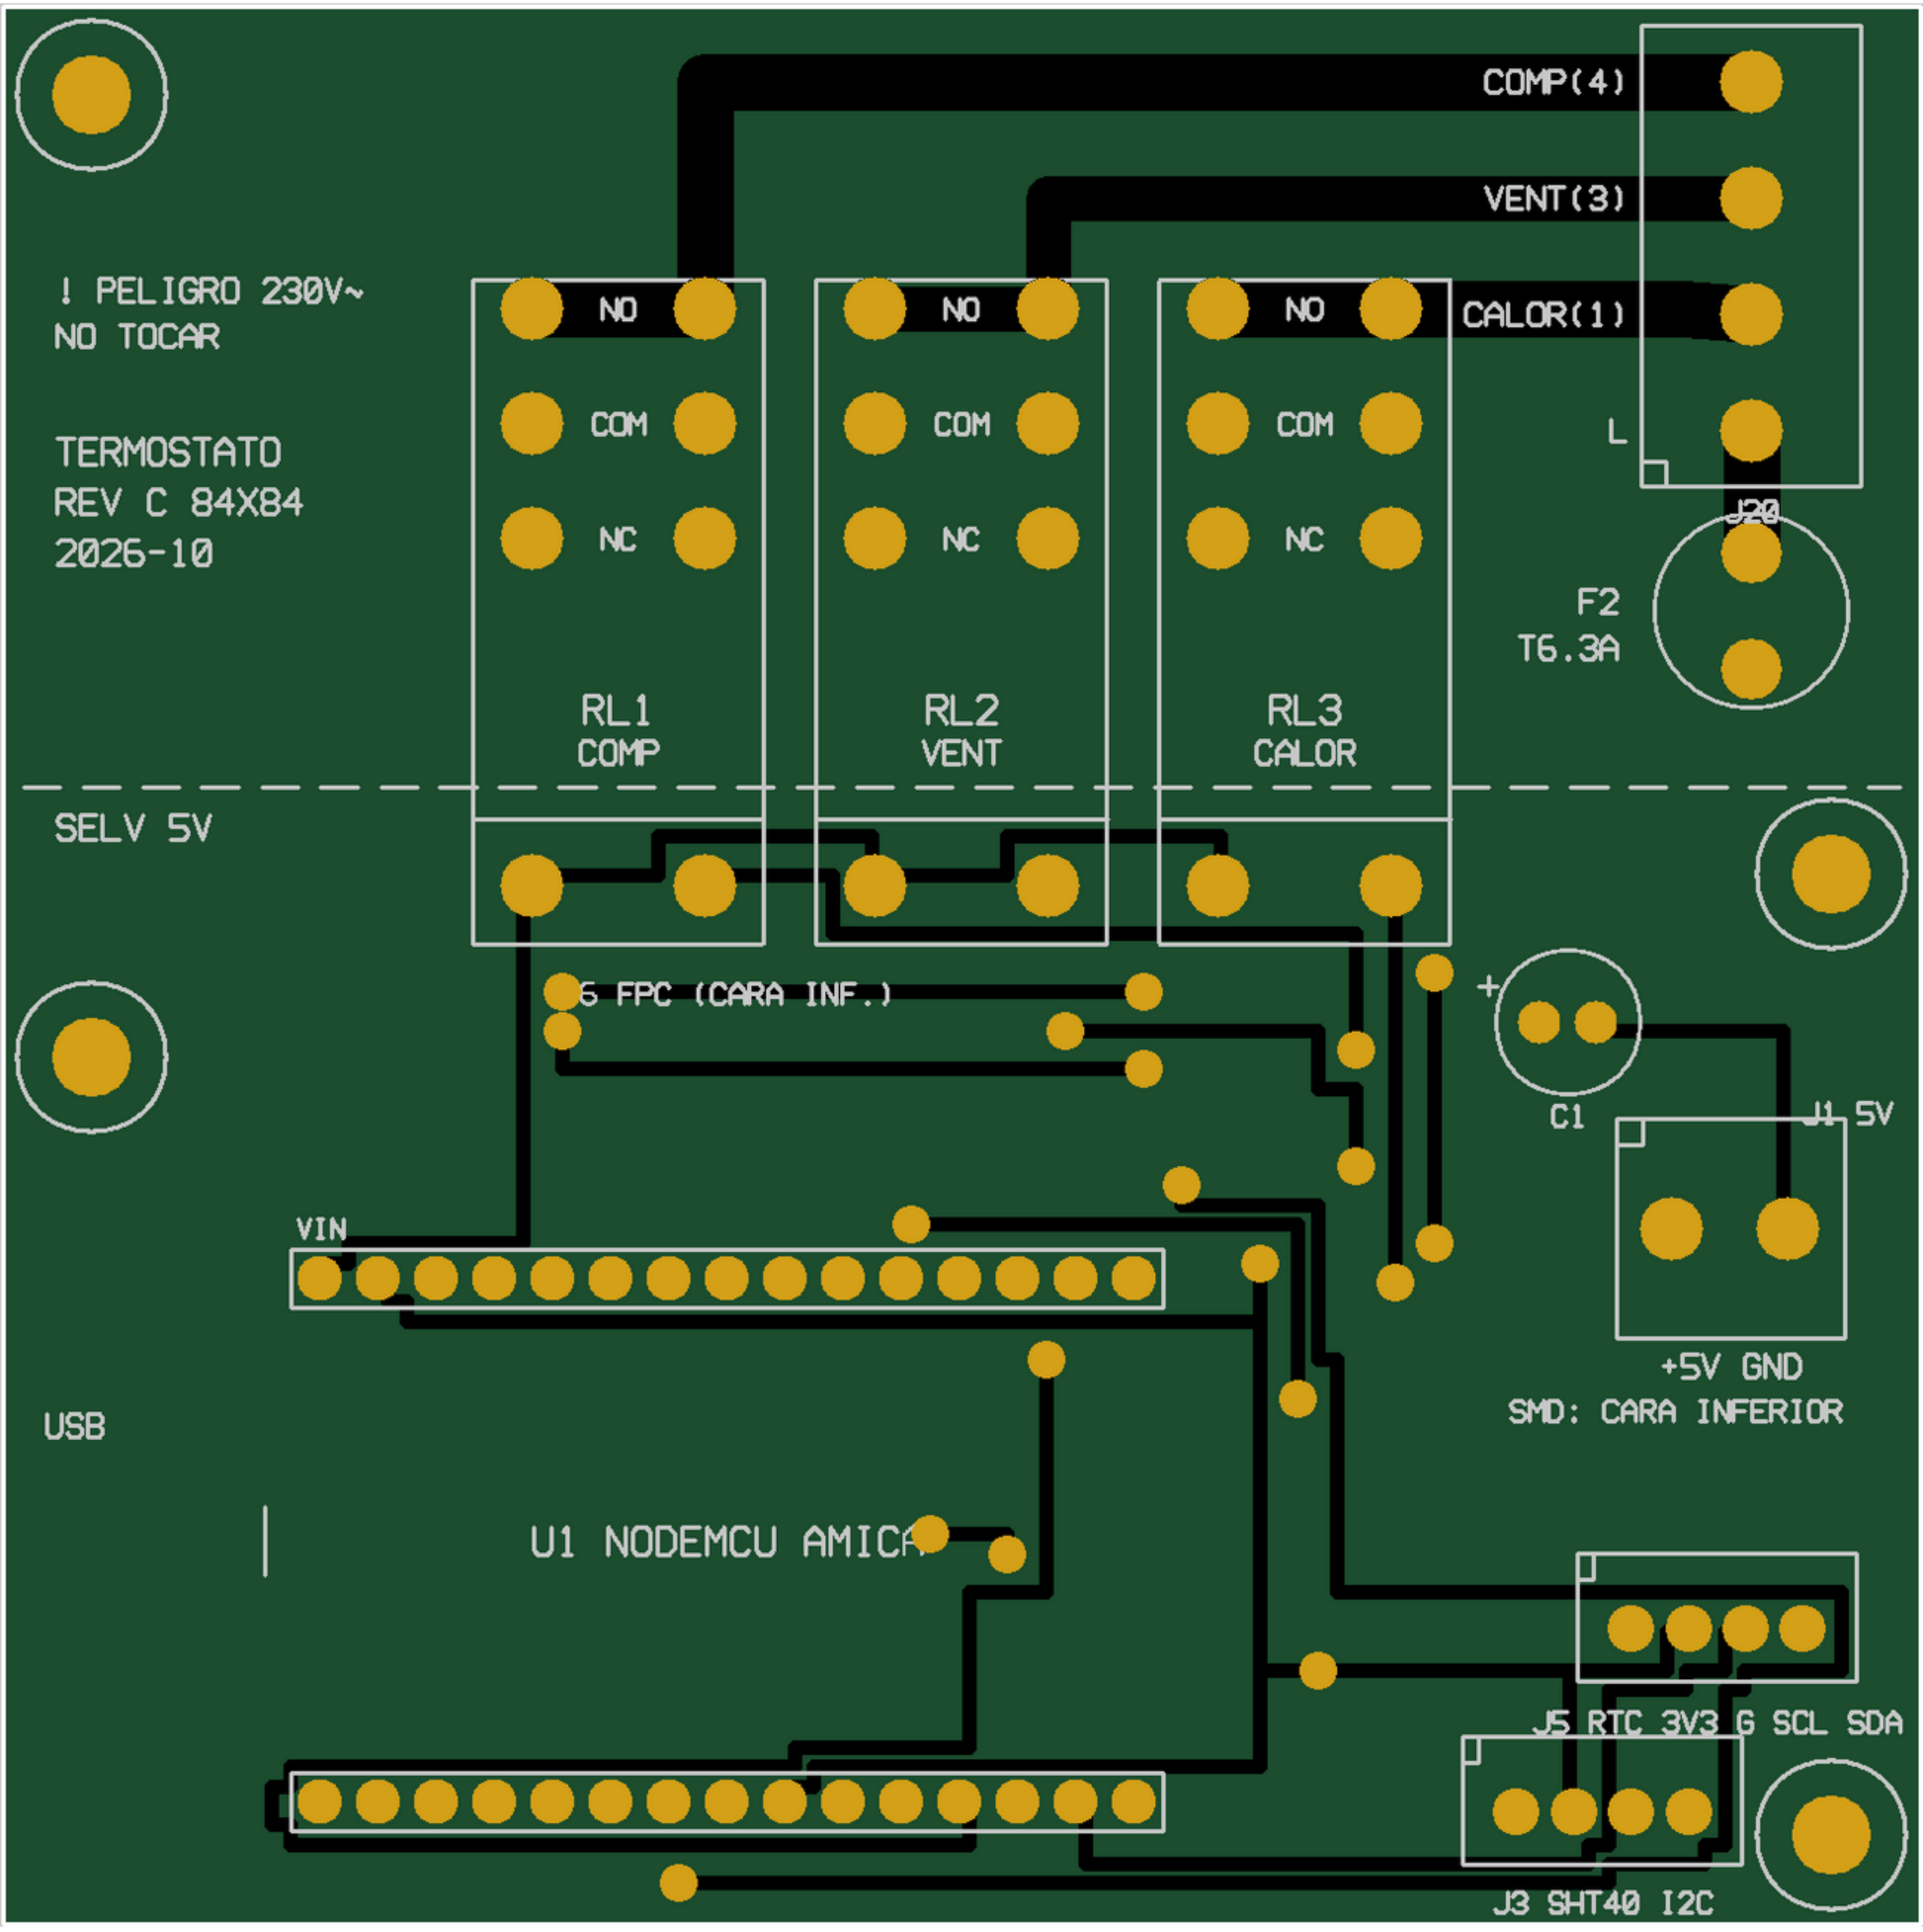


84 x 84 mm - viewed from the top

Thermostat Rev C - BOTTOM side, viewed from the bottom (ALL SMT)

J6: JUSHUO AFC07-S50ECA-00 FPC connector, opening towards the 230 V edge of the board.

Q1-Q3 BC817-40, D1-D3 1N4148W, R1-R6 + R16-R19 + C2, C3 (0805), F1 PTC 1812.

Silkscreen on this side reads correctly from the bottom.

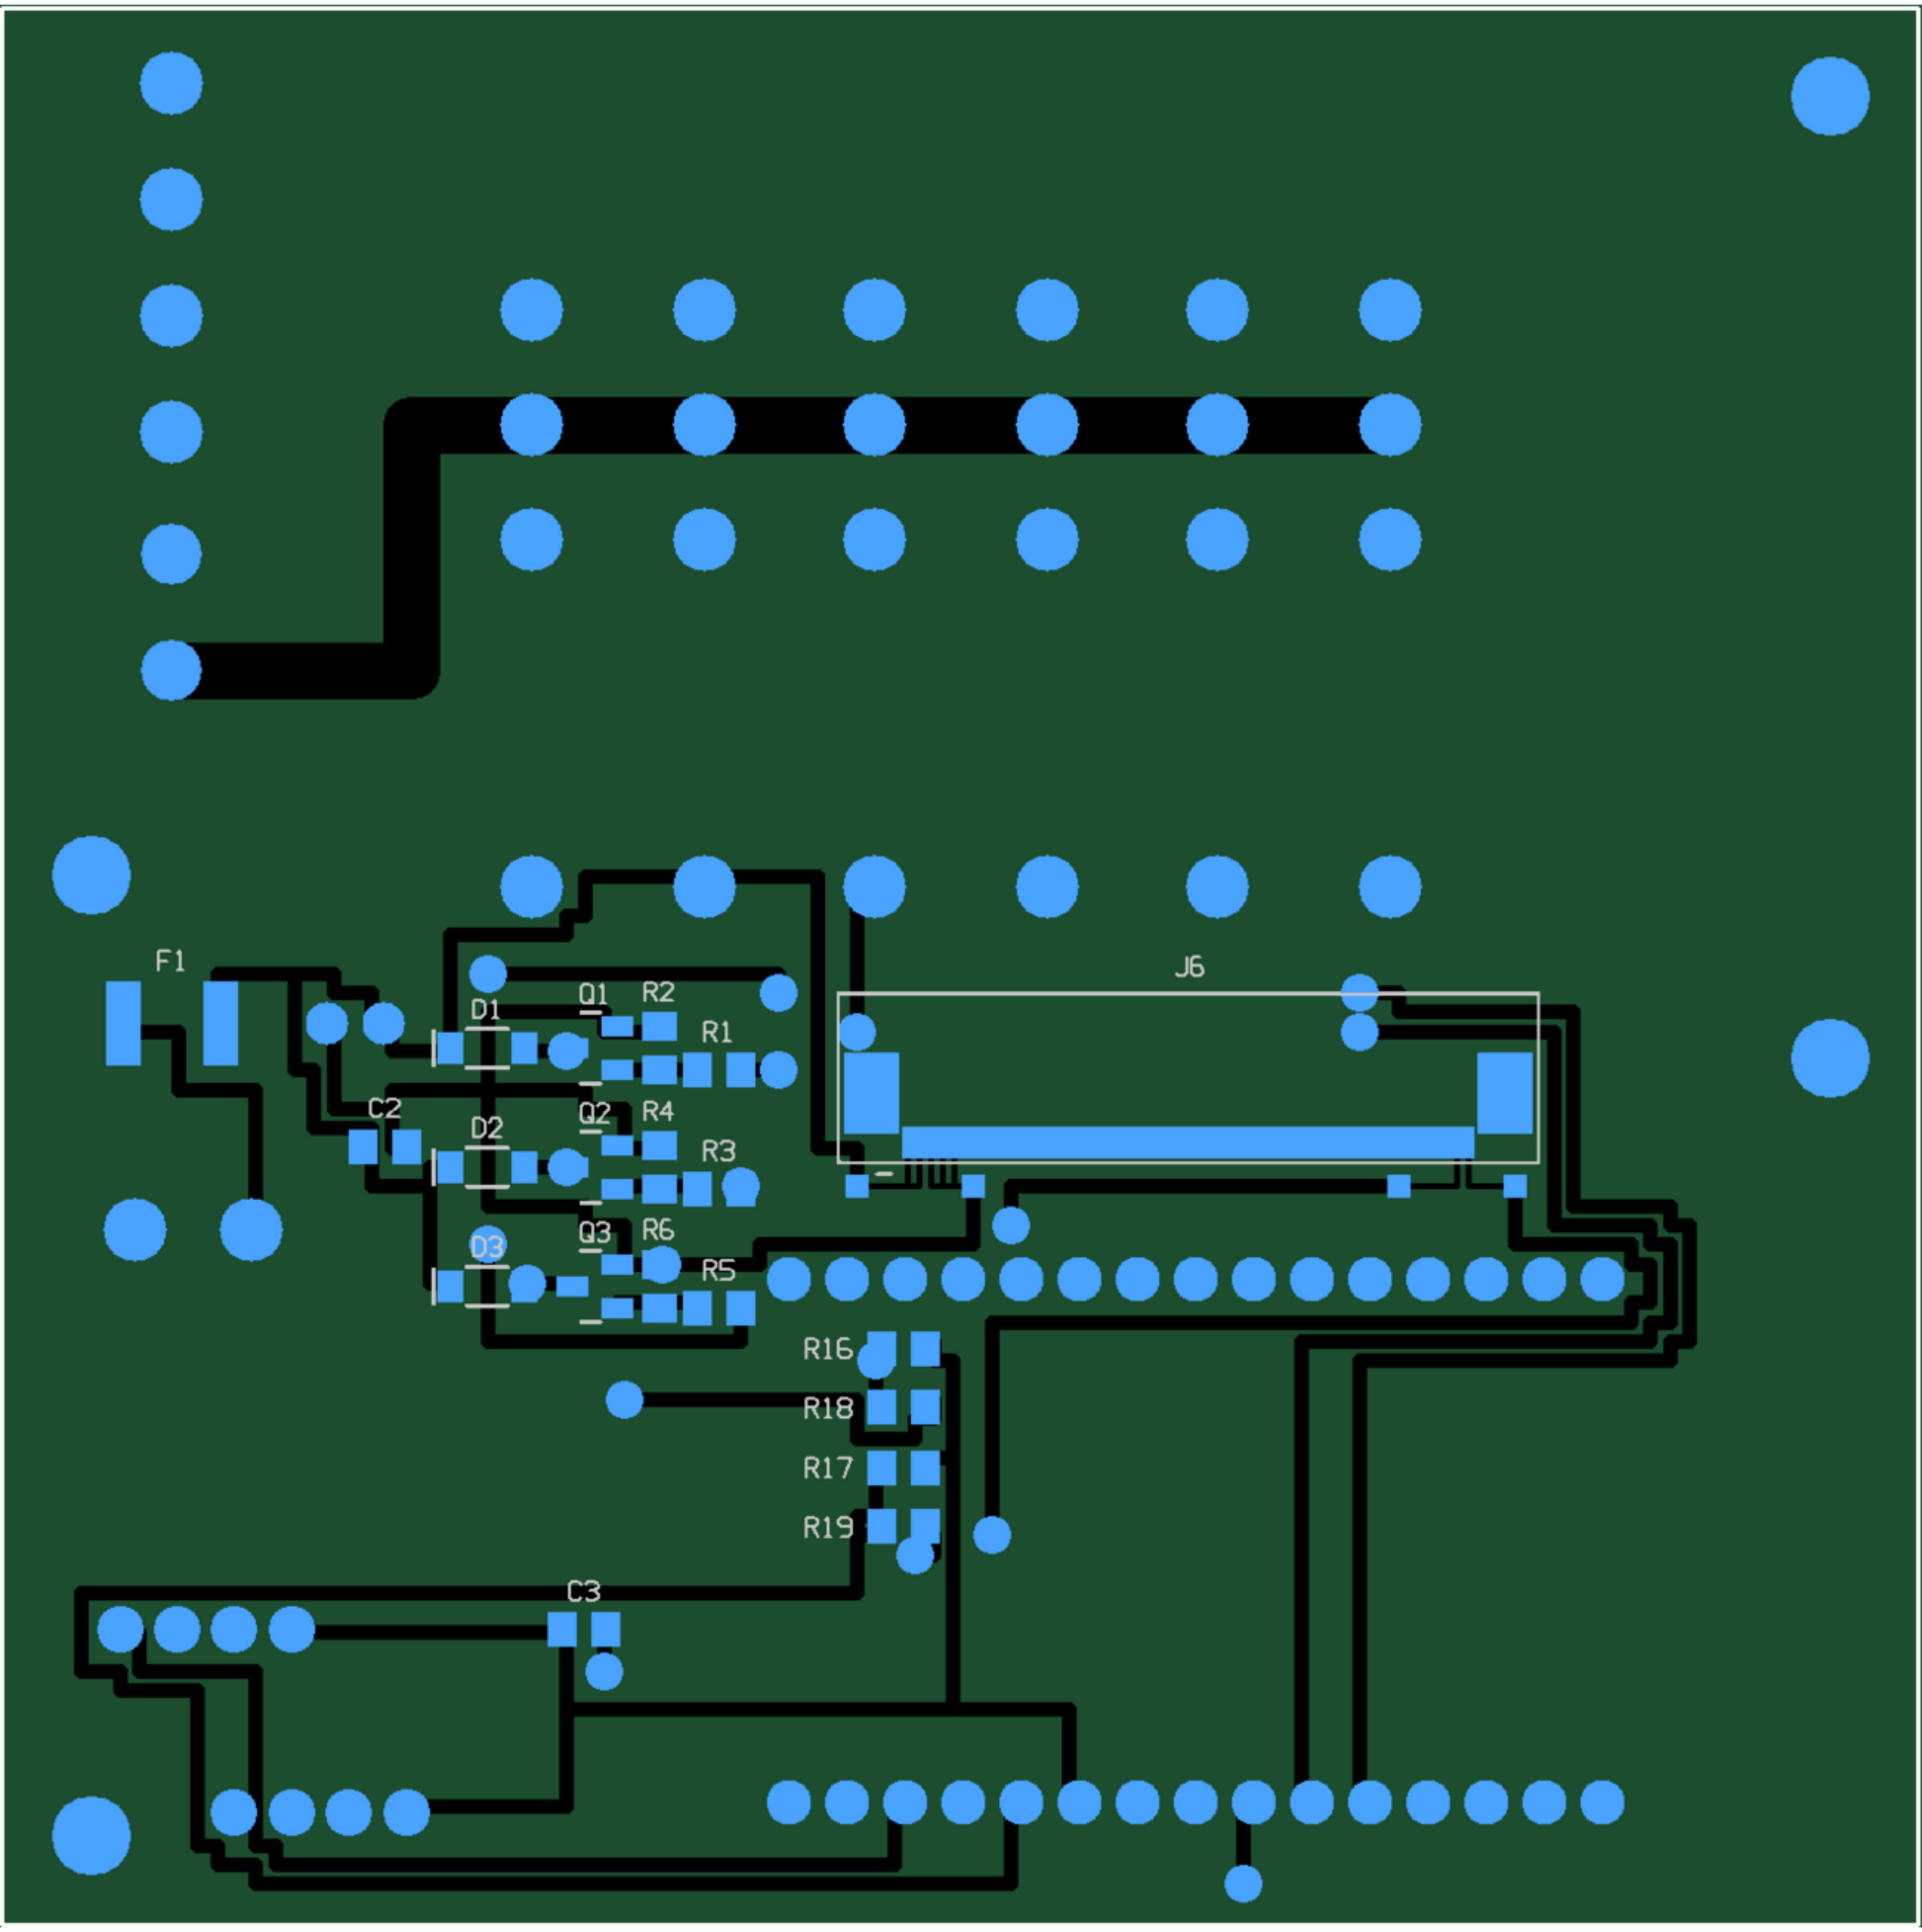

Mirrored image of the bottom layers (as seen when the board is flipped)