1A Positive Voltage Regulator

D-PACK (TO-252)



TO-220

General Description

- The TCI LM78xx family is monolithic fixed voltage regulator integrated circuit. They are suitable for applications that required supply current up to 1A.
- The LM78M is available in D-PACK (TO-252) and TO-220 packages.

.

Features

- Output Current up to 1A
- Fixed output voltage of 5V, 6V, 8V, 9V, 10V, 12V,15V, 18V and 24V available
- Thermal overload shutdown protection
- Short circuit current limiting
- Output transistor SOA protection
- RoHS Compliance

Applications

- High Efficiency Linear Regulator
- Post Regulation for Switching Supply
- Microprocessor Power Supply
- Mother Board

Ordering Information

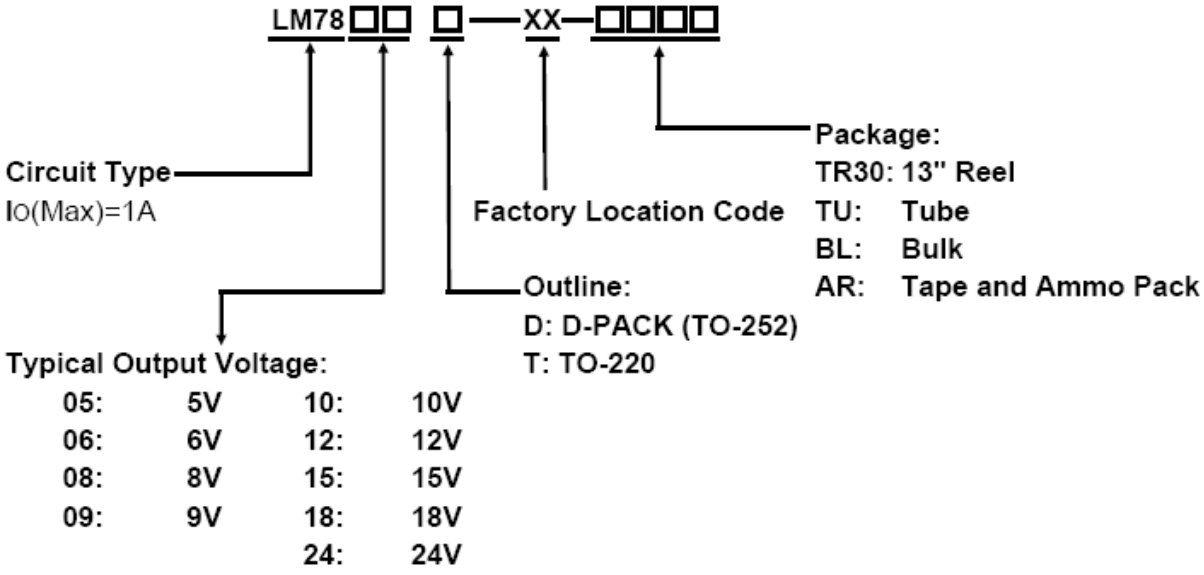

Tel: (800)-TAITRON (800)-824-8766 (661)-257-6060
Fax: (800)-TAITFAX (800)-824-8329 (661)-257-6415

Pin Configuration

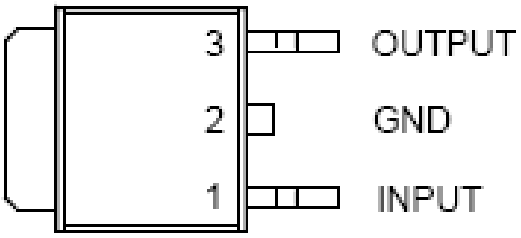

Outline: D
D-PACK
(TO-252)

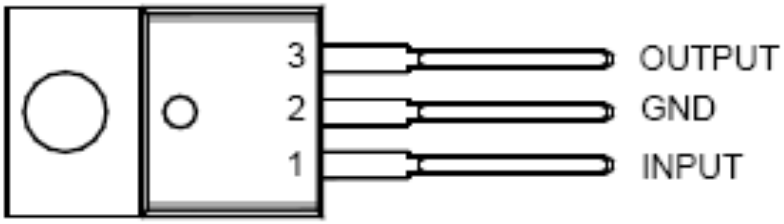

Outline: T
TO-220

Block Diagram

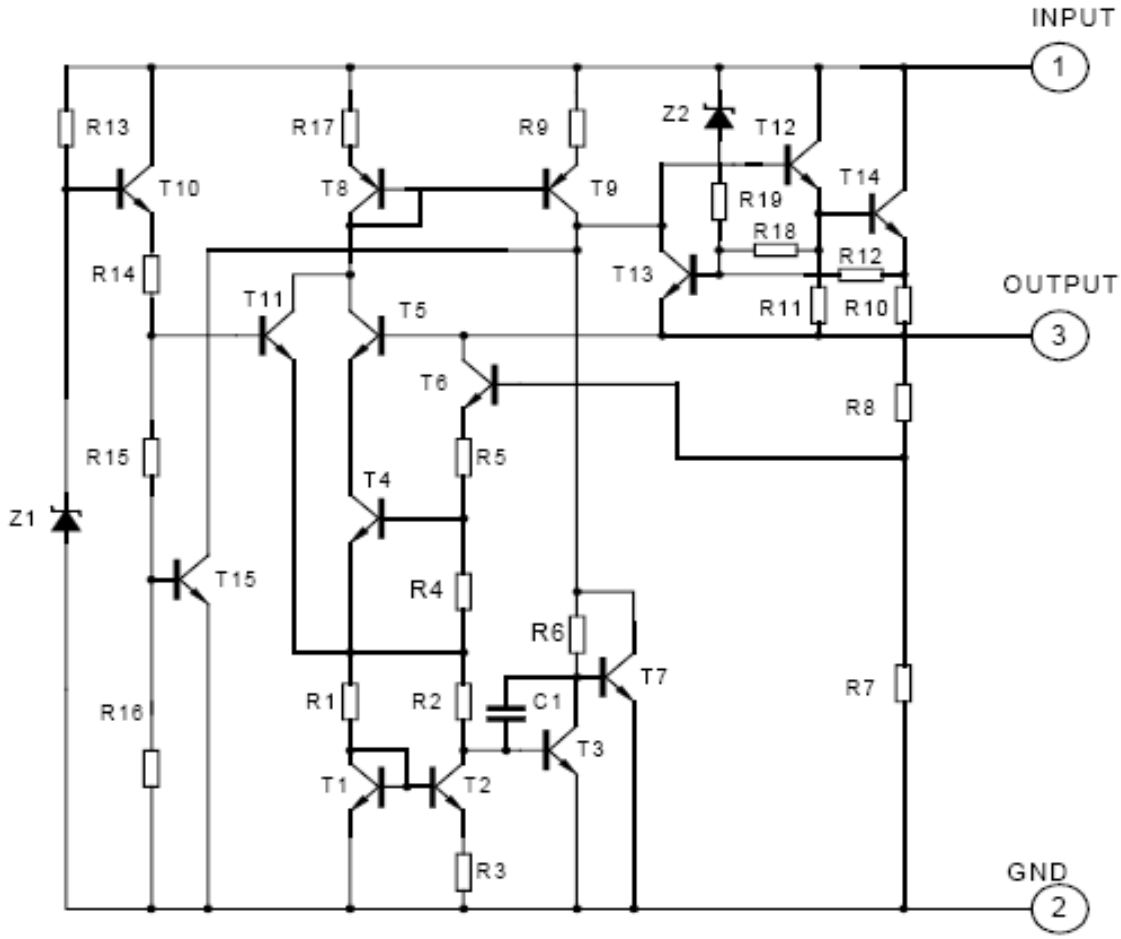

Absolute Maximum Ratings

Symbol	Description		Ratings	Unit
V_{IN}	Input Voltage	V_{OUT}=3.3~18V	35	V
		V_{OUT}=20~24V	40	
I_{OUT}	Output Current		1	A
P_D	Power Dissipation	D-PACK (TO-252)	Internally Limited	mW
		TO-220		
T_J	Junction Temperature		150	
T_{OPR}	Operating Temperature Range		-20 ~ 150	° C
T_{STG}	Storage Temperature Range		-55 ~ 150	° C

Note: 1. Absolute maximum ratings are stress ratings only and functional device operation is not implied. The device could be damaged beyond Absolute maximum ratings.

2. The maximum steady state usable output current are dependent on input voltage, heat sinking, lead length of the package and copper pattern of PCB. The data are showed as electrical characteristics table represents pulse test conditions with junction temperatures specified at the initiation of test.

Electrical Characteristics (T_J=25° C, $P_D \leqq$15W, unless otherwise specified)

For LM7805 (V_{IN}=10V, I_{OUT}=0.5A, C1=0.33μF, C_O =0.1μF)

Symbol	Description	LM7805			Unit	Test Conditions
		Min.	Typ.	Max.		
V_{OUT}	Output Voltage	4.80	5.0	5.20	V	I_{OUT}=5mA-1.0A
		4.75	-	5.25	V	7.5V≤V_{IN}≤20V, I_{OUT}=5mA-1.0A
ΔV_{OUT}	Load Regulation	-	-	50	mV	I_{OUT}=5mA-1.0A
		-	-	25	mV	I_{OUT}=0.25A-0.75A
ΔV_{OUT}	Line Regulation	-	-	50	mV	7V≤V_{IN}≤25V
		-	-	50	mV	7.5V≤V_{IN}≤20V, I_{OUT}=1.0A
I_Q	Quiescent Current	-	-	8.0	mA	$I_{OUT} \leqq$1.0A
ΔI_Q	Quiescent Current Change	-	-	1.0	mA	7.5V≤V_{IN}≤20V
		-	-	0.5	mA	I_{OUT}=5mA-1.0A
eN	Output Noise Voltage	-	40	-	μV	10Hz≤f≤100KHz
$\Delta V_O/\Delta T$	Temperature coefficient of V_{OUT}	-	-0.6	-	mV/℃	I_{OUT}=5mA
RR	Ripple Rejection	62	80	-	dB	8V≤V_{IN}≤18V, f=120Hz
I_{PEAK}	Peak Output Current	-	1.8	-	A	-
I_{SC}	Short-Circuit Current	-	250	-	mA	V_{IN}=35V
V_D	Dropout Voltage	-	2.0	-	V	-

For LM7806 (V_{IN}=11V, I_{OUT}=0.5A, C1=0.33μF, C_O =0.1μF)

Symbol	Description	LM7806			Unit	Test Conditions
		Min.	Typ.	Max.		
V_{OUT}	Output Voltage	5.76	6.0	6.24	V	I_{OUT}=5mA-1.0A
		5.70	-	6.30	V	8.5V≤V_{IN}≤21V, I_{OUT}=5mA-1.0A
ΔV_{OUT}	Load Regulation	-	-	60	mV	I_{OUT}=5mA-1.0A
		-	-	30	mV	I_{OUT}=0.25A-0.75A
ΔV_{OUT}	Line Regulation	-	-	60	mV	8V≤V_{IN}≤25V
		-	-	60	mV	8.5V≤V_{IN}≤21V, I_{OUT}=1.0A
I_Q	Quiescent Current	-	-	8.0	mA	I_{OUT}≦1.0A
ΔI_Q	Quiescent Current Change	-	-	1.0	mA	8.5V≤V_{IN}≤21V
		-	-	0.5	mA	I_{OUT}=5mA-1.0A
eN	Output Noise Voltage	-	45	-	μV	10Hz≤f≤100KHz
$\Delta V_O/\Delta T$	Temperature coefficient of V_{OUT}	-	-0.7	-	mV/℃	I_{OUT}=5mA
RR	Ripple Rejection	59	75	-	dB	9V≤V_{IN}≤19V, f=120Hz
I_{PEAK}	Peak Output Current	-	1.8	-	A	-
I_{SC}	Short-Circuit Current	-	250	-	mA	V_{IN}=35V
V_D	Dropout Voltage	-	2.0	-	V	-

For LM7808 (V_{IN}=14V, I_{OUT}=0.5A, C1=0.33μF, C_O =0.1μF)

Symbol	Description	LM7808			Unit	Test Conditions
		Min.	Typ.	Max.		
V_{OUT}	Output Voltage	7.68	8.0	8.32	V	I_{OUT}=5mA-1.0A
		7.60	-	8.40	V	10.5V≤V_{IN}≤23V, I_{OUT}=5mA-1.0A
ΔV_{OUT}	Load Regulation	-	-	80	mV	I_{OUT}=5mA-1.0A
		-	-	40	mV	I_{OUT}=0.25A-0.75A
ΔV_{OUT}	Line Regulation	-	-	80	mV	10.5V≤V_{IN}≤25V
		-	-	80	mV	10.5V≤V_{IN}≤23V, I_{OUT}=1.0A
I_Q	Quiescent Current	-	-	8.0	mA	I_{OUT}≦1.0A
ΔI_Q	Quiescent Current Change	-	-	1.0	mA	10.5V≤V_{IN}≤23V
		-	-	0.5	mA	I_{OUT}=5mA-1.0A
eN	Output Noise Voltage	-	58	-	μV	10Hz≤f≤100KHz
$\Delta V_O/\Delta T$	Temperature coefficient of V_{OUT}	-	-0.9	-	mV/℃	I_{OUT}=5mA
RR	Ripple Rejection	56	72	-	dB	11.5V≤V_{IN}≤21.5V, f=120Hz
I_{PEAK}	Peak Output Current	-	1.8	-	A	-
I_{SC}	Short-Circuit Current	-	250	-	mA	V_{IN}=35V
V_D	Dropout Voltage	-	2.0	-	V	-

For LM7809 (V_{IN}=15V, I_{OUT}=0.5A, C1=0.33μF, C_O =0.1μF)

Symbol	Description	LM7809			Unit	Test Conditions
		Min.	Typ.	Max.		
V_{OUT}	Output Voltage	8.64	9.0	9.36	V	I_{OUT}=5mA-1.0A
		8.55	-	9.45	V	11.5V≤V_{IN}≤24V, I_{OUT}=5mA-1.0A
ΔV_{OUT}	Load Regulation	-	-	90	mV	I_{OUT}=5mA-1.0A
		-	-	45	mV	I_{OUT}=0.25A-0.75A
ΔV_{OUT}	Line Regulation	-	-	90	mV	11.5V≤V_{IN}≤25V
		-	-	90	mV	11.5V≤V_{IN}≤24V, I_{OUT}=1.0A
I_Q	Quiescent Current	-	-	8.0	mA	I_{OUT}≦1.0A
ΔI_Q	Quiescent Current Change	-	-	1.0	mA	11.5V≤V_{IN}≤24V
		-	-	0.5	mA	I_{OUT}=5mA-1.0A
eN	Output Noise Voltage	-	58	-	μV	10Hz≤f≤100KHz
$\Delta V_O/\Delta T$	Temperature coefficient of V_{OUT}	-	-1.1	-	mV/℃	I_{OUT}=5mA
RR	Ripple Rejection	56	72	-	dB	12.5V≤V_{IN}≤22.5V, f=120Hz
I_{PEAK}	Peak Output Current	-	1.8	-	A	-
I_{SC}	Short-Circuit Current	-	250	-	mA	V_{IN}=35V
V_D	Dropout Voltage	-	2.0	-	V	-

For LM7810 (V_{IN}=16V, I_{OUT}=0.5A, C1=0.33μF, C_O =0.1μF)

Symbol	Description	LM7810			Unit	Test Conditions
		Min.	Typ.	Max.		
V_{OUT}	Output Voltage	9.60	10.0	10.40	V	I_{OUT}=5mA-1.0A
		9.50	-	10.50	V	12.5V≤V_{IN}≤25V, I_{OUT}=5mA-1.0A
ΔV_{OUT}	Load Regulation	-	-	100	mV	I_{OUT}=5mA-1.0A
		-	-	50	mV	I_{OUT}=0.25A-0.75A
ΔV_{OUT}	Line Regulation	-	-	100	mV	13V≤V_{IN}≤25V
		-	-	100	mV	13V≤V_{IN}≤25V, I_{OUT}=1.0A
I_Q	Quiescent Current	-	-	8.0	mA	I_{OUT}≦1.0A
ΔI_Q	Quiescent Current Change	-	-	1.0	mA	12.6V≤V_{IN}≤25V
		-	-	0.5	mA	I_{OUT}=5mA-1.0A
eN	Output Noise Voltage	-	58	-	μV	10Hz≤f≤100KHz
$\Delta V_O/\Delta T$	Temperature coefficient of V_{OUT}	-	-1.1	-	mV/℃	I_{OUT}=5mA
RR	Ripple Rejection	56	72	-	dB	13V≤V_{IN}≤23V, f=120Hz
I_{PEAK}	Peak Output Current	-	1.8	-	A	-
I_{SC}	Short-Circuit Current	-	250	-	mA	V_{IN}=35V
V_D	Dropout Voltage	-	2.0	-	V	-

For LM7812 (V_{IN}=19V, I_{OUT}=0.5A, C1=0.33μF, C_O =0.1μF)

Symbol	Description	LM7812			Unit	Test Conditions
		Min.	Typ.	Max.		
V_{OUT}	Output Voltage	11.52	12.0	12.48	V	I_{OUT}=5mA-1.0A
		11.40	-	12.60	V	14.5V≤V_{IN}≤27V, I_{OUT}=5mA-1.0A
ΔV_{OUT}	Load Regulation	-	-	120	mV	I_{OUT}=5mA-1.0A
		-	-	60	mV	I_{OUT}=0.25A-0.75A
ΔV_{OUT}	Line Regulation	-	-	120	mV	14.5V≤V_{IN}≤30V
		-	-	120	mV	14.6V≤V_{IN}≤27V, I_{OUT}=1.0A
I_Q	Quiescent Current	-	-	8.0	mA	I_{OUT}≦1.0A
ΔI_Q	Quiescent Current Change	-	-	1.0	mA	14.5V≤V_{IN}≤30V
		-	-	0.5	mA	I_{OUT}=5mA-1.0A
eN	Output Noise Voltage	-	75	-	μV	10Hz≤f≤100KHz
$\Delta V_O/\Delta T$	Temperature coefficient of V_{OUT}	-	-1.5	-	mV/℃	I_{OUT}=5mA
RR	Ripple Rejection	55	72	-	dB	15V≤V_{IN}≤25V, f=120Hz
I_{PEAK}	Peak Output Current	-	1.8	-	A	-
I_{SC}	Short-Circuit Current	-	250	-	mA	V_{IN}=35V
V_D	Dropout Voltage	-	2.0	-	V	-

For LM7815 (V_{IN}=23V, I_{OUT}=0.5A, C1=0.33μF, C_O =0.1μF)

Symbol	Description	LM7815			Unit	Test Conditions
		Min.	Typ.	Max.		
V_{OUT}	Output Voltage	14.40	15.0	15.60	V	I_{OUT}=5mA-1.0A
		14.25	-	15.75	V	17.5V≤V_{IN}≤30V, I_{OUT}=5mA-1.0A
ΔV_{OUT}	Load Regulation	-	-	150	mV	I_{OUT}=5mA-1.0A
		-	-	75	mV	I_{OUT}=0.25A-0.75A
ΔV_{OUT}	Line Regulation	-	-	150	mV	18.5V≤V_{IN}≤30V
		-	-	150	mV	17.7V≤V_{IN}≤30V, I_{OUT}=1.0A
I_Q	Quiescent Current	-	-	8.0	mA	I_{OUT}≦1.0A
ΔI_Q	Quiescent Current Change	-	-	1.0	mA	17.5V≤V_{IN}≤30V
		-	-	0.5	mA	I_{OUT}=5mA-1.0A
eN	Output Noise Voltage	-	90	-	μV	10Hz≤f≤100KHz
$\Delta V_O/\Delta T$	Temperature coefficient of V_{OUT}	-	-1.8	-	mV/℃	I_{OUT}=5mA
RR	Ripple Rejection	54	70	-	dB	18.5V≤V_{IN}≤28.5V, f=120Hz
I_{PEAK}	Peak Output Current	-	1.8	-	A	-
I_{SC}	Short-Circuit Current	-	250	-	mA	V_{IN}=35V
V_D	Dropout Voltage	-	2.0	-	V	-

For LM7818 (V_{IN}=27V, I_{OUT}=0.5A, C1=0.33μF, C_O =0.1μF)

Symbol	Description	LM7818			Unit	Test Conditions
		Min.	Typ.	Max.		
V_{OUT}	Output Voltage	17.28	18.0	18.72	V	I_{OUT}=5mA-1.0A
		17.10	-	18.90	V	21V≤V_{IN}≤33V, I_{OUT}=5mA-1.0A
ΔV_{OUT}	Load Regulation	-	-	180	mV	I_{OUT}=5mA-1.0A
		-	-	90	mV	I_{OUT}=0.25A-0.75A
ΔV_{OUT}	Line Regulation	-	-	180	mV	21V≤V_{IN}≤33V
		-	-	180	mV	21V≤V_{IN}≤33V, I_{OUT}=1.0A
I_Q	Quiescent Current	-	-	8.0	mA	I_{OUT}≦1.0A
ΔI_Q	Quiescent Current Change	-	-	1.0	mA	21.5V≤V_{IN}≤33V
		-	-	0.5	mA	I_{OUT}=5mA-1.0A
eN	Output Noise Voltage	-	110	-	μV	10Hz≤f≤100KHz
$\Delta V_O/\Delta T$	Temperature coefficient of V_{OUT}	-	-2.2	-	mV/℃	I_{OUT}=5mA
RR	Ripple Rejection	53	69	-	dB	22V≤V_{IN}≤32V, f=120Hz
I_{PEAK}	Peak Output Current	-	1.8	-	A	-
I_{SC}	Short-Circuit Current	-	250	-	mA	V_{IN}=35V
V_D	Dropout Voltage	-	2.0	-	V	-

For LM7824 (V_{IN}=33V, I_{OUT}=0.5A, C1=0.33μF, C_O =0.1μF)

Symbol	Description	LM7824			Unit	Test Conditions
		Min.	Typ.	Max.		
V_{OUT}	Output Voltage	23.04	24.0	24.96	V	I_{OUT}=5mA-1.0A
		22.80	-	25.20	V	27V≤V_{IN}≤38V, I_{OUT}=5mA-1.0A
ΔV_{OUT}	Load Regulation	-	-	240	mV	I_{OUT}=5mA-1.0A
		-	-	120	mV	I_{OUT}=0.25A-0.75A
ΔV_{OUT}	Line Regulation	-	-	240	mV	27V≤V_{IN}≤38V
		-	-	240	mV	27V≤V_{IN}≤38V, I_{OUT}=1.0A
I_Q	Quiescent Current	-	-	8.0	mA	I_{OUT}≦1.0A
ΔI_Q	Quiescent Current Change	-	-	1.0	mA	28V≤V_{IN}≤38V
		-	-	0.5	mA	I_{OUT}=5mA-1.0A
eN	Output Noise Voltage	-	170	-	μV	10Hz≤f≤100KHz
$\Delta V_O/\Delta T$	Temperature coefficient of V_{OUT}	-	-2.8	-	mV/℃	I_{OUT}=5mA
RR	Ripple Rejection	50	66	-	dB	28V≤V_{IN}≤38V, f=120Hz
I_{PEAK}	Peak Output Current	-	1.8	-	A	-
I_{SC}	Short-Circuit Current	-	250	-	mA	V_{IN}=35V
V_D	Dropout Voltage	-	2.0	-	V	-

Typical Characteristics Curves

Fig.1- Peak Output Current vs. Input/Output Differential Voltage

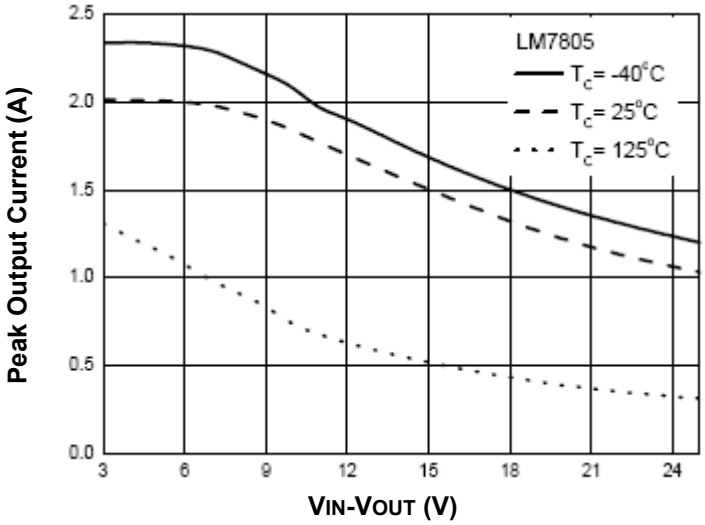

Fig.2- Output Voltage vs. Junction Temperature

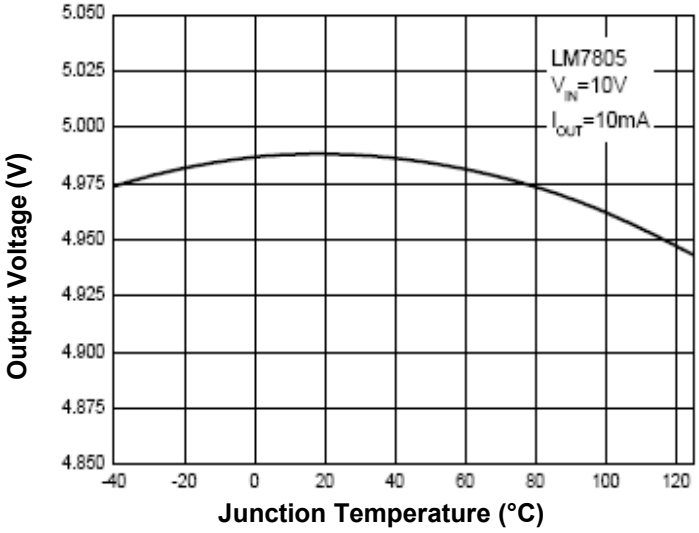

Fig.3- Quiescent Current vs. Junction Temperature

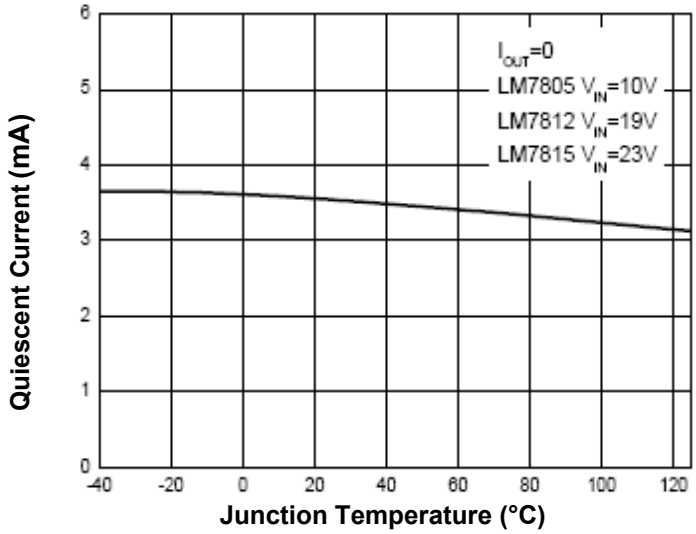

Fig.4- Ripple Rejection vs. Frequency

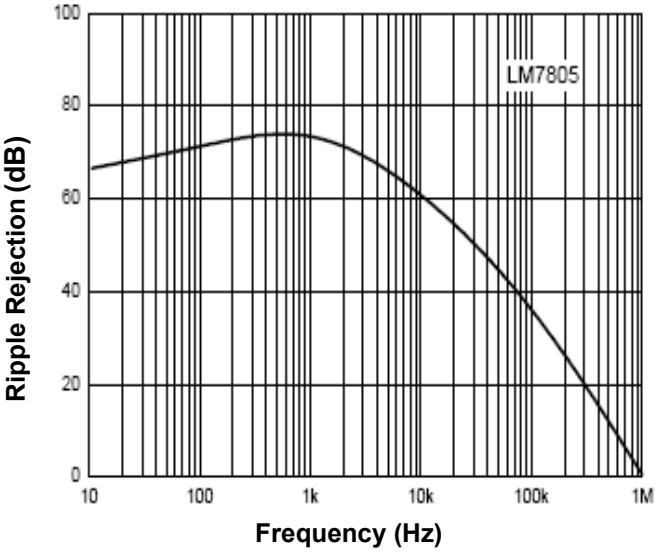

Typical Characteristics Curves (Continued)

Fig.5- Dropout Voltage vs. Junction Temperature

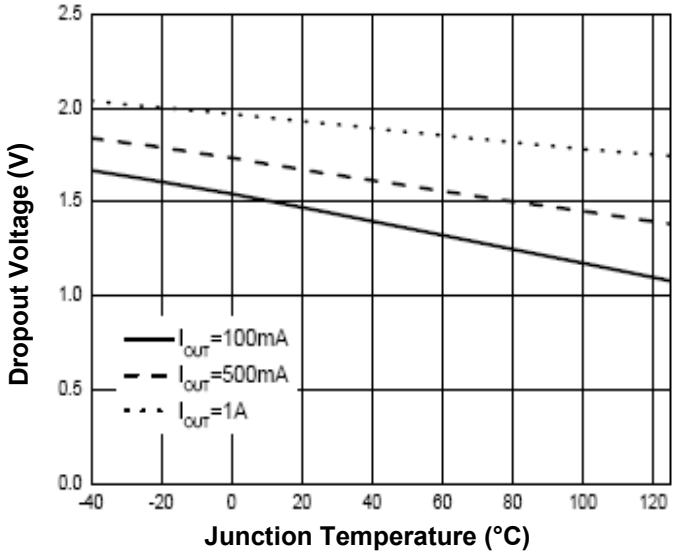

Fig.6- Power Dissipation vs. Case Temperature

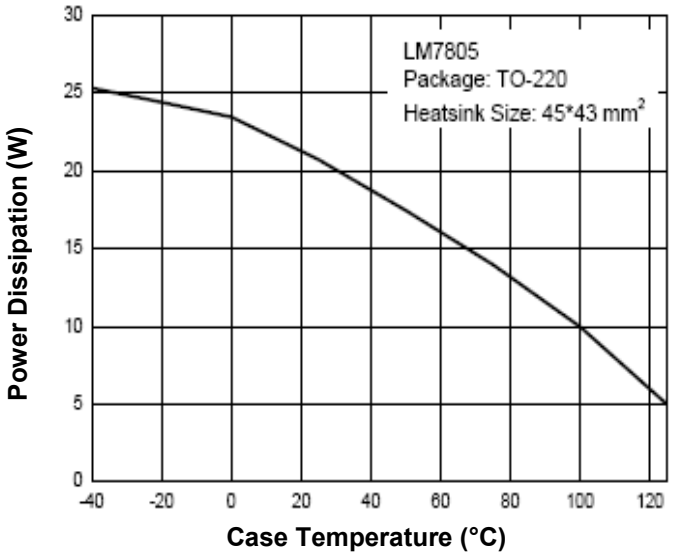

Fig.7- Power Dissipation vs. Case Temperature

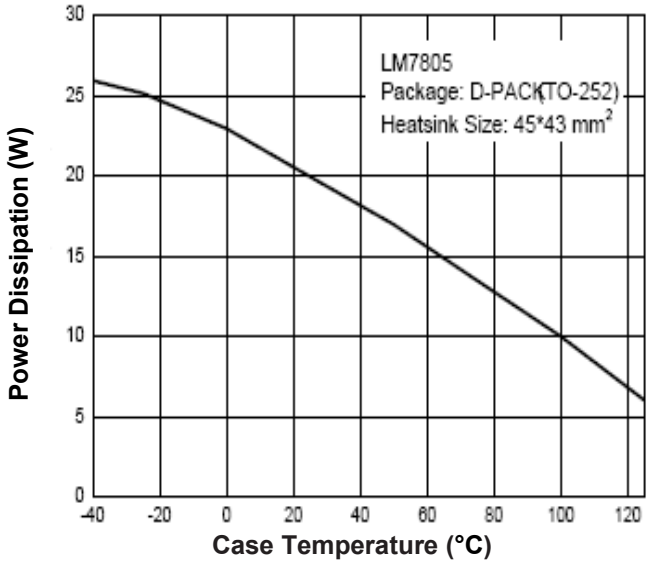

Fig.8- Thermal Shutdown Protection

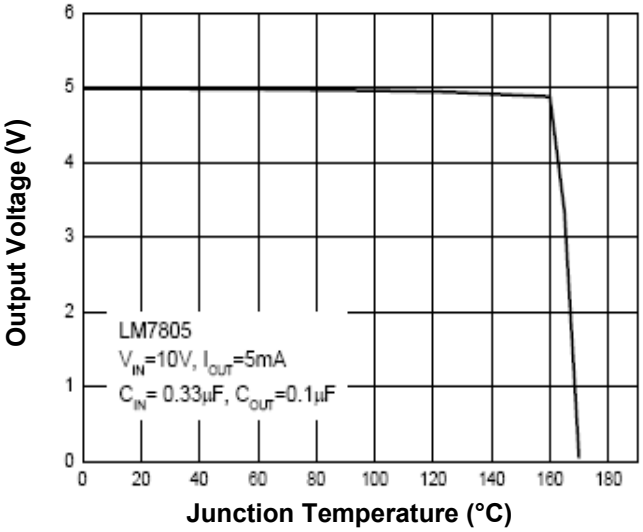

Typical Characteristics Curves (Continued)

Fig.9- Line Transient
(Conditions: I_{OUT}=500mA, C_{OUT}=0.1μF)

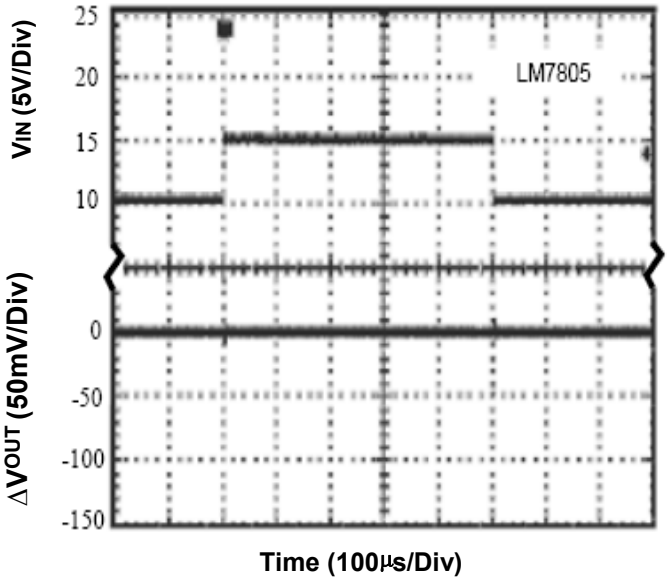

Fig.10- Load Transient
(Conditions: V_{IN}=10V, C_{IN}=0.33μF, C_{OUT}=0.1μF)

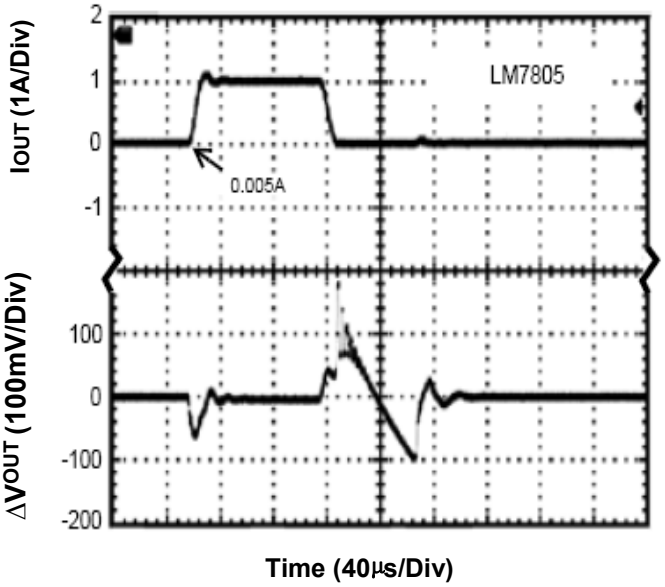

Typical Application

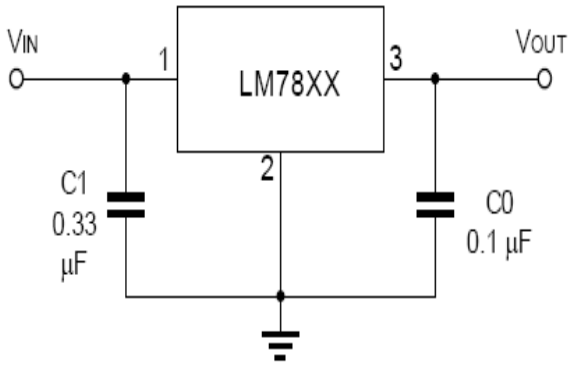

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Dimensions in mm (inches)

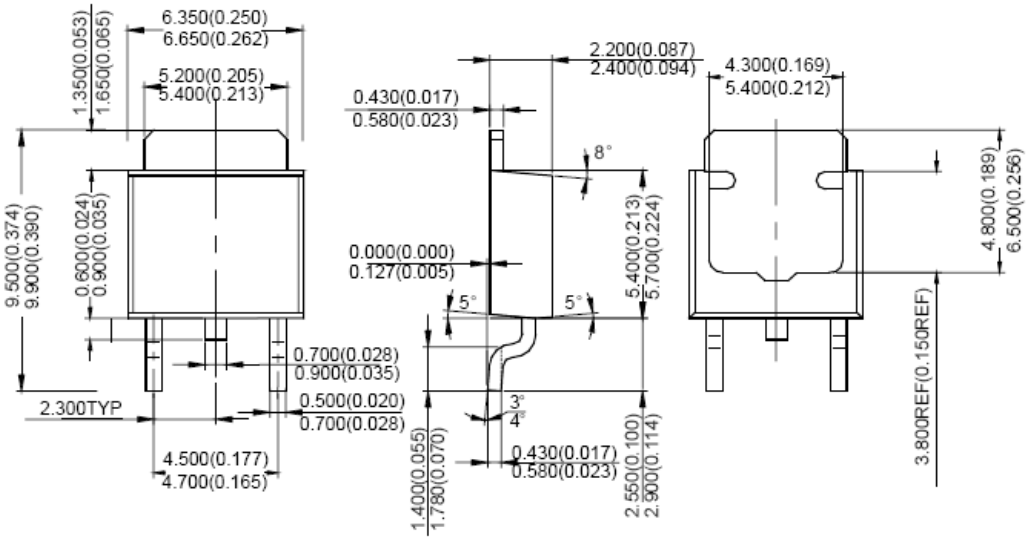

D-PACK
(TO-252)

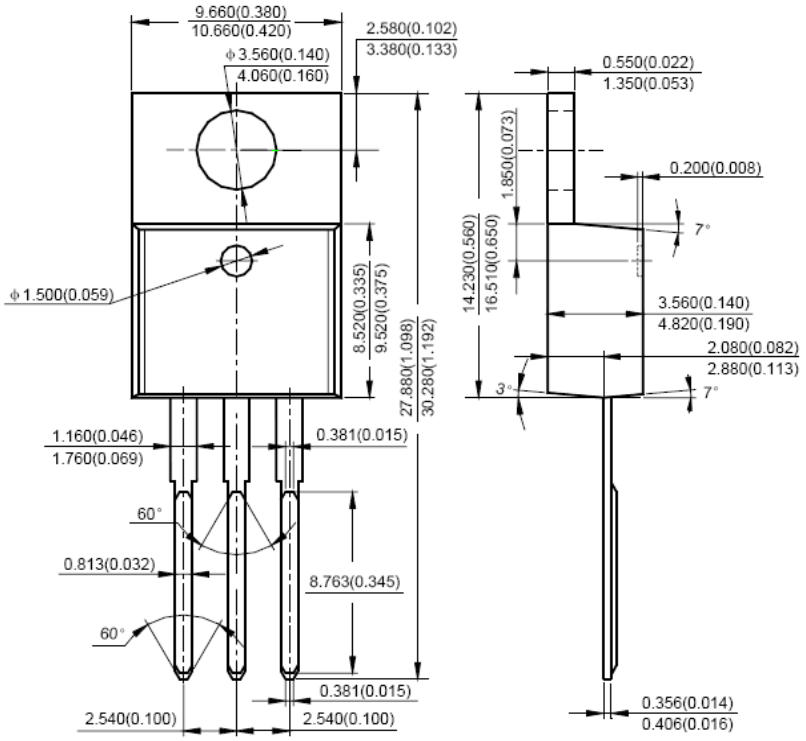

TO-220

How to contact us:

US HEADQUARTERS

28040 WEST HARRISON PARKAWAY, VALENCIA, CA 91355-4162
Tel: (800) TAITRON (800) 824-8766 (661) 257-6060
Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415
Email: taitron@taitroncomponents.com
Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P. 42970 MEXICO
Tel: +52-55-5560-1519
Fax: +52-55-5560-2190

TAITRON COMPONETS INCORPORATED E REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL
Tel: +55-11-5574-7949
Fax: +55-11-5572-0052

TAITRON COMPONETS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

METROBANK PLAZA, 1160 WEST YAN' AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA
Tel: +86-21-5424-9942
Fax: +86-21-5424-9931