## Motional Quantum Ground-State Cooing Outside the Lamb-Dicke Regime

Yichao Yu, Nicholas R. Hutzler, Jessie T. Zhang, Lee R. Liu, and Kang-Kuen Ni\*

Department of Chemistry and Chemical Biology,

Harvard University, Cambridge, Massachusetts, 02138, USA

Department of Physics, Harvard University, Cambridge, Massachusetts, 02138, USA and

Harvard-MIT Center for Ultracold Atoms, Cambridge, Massachusetts, 02138, USA

(Dated: June 21, 2017)

Single neutral atom trapped in optical tweezer is a promising system for various applications in quantum information and simulation. The control of the motional states for such a system is crucial for exploiting its full potential. We report Raman sideband cooling of a single sodium atom to its three-dimensional motional ground state in an optical tweezer. Despite having a very large Lamb-Dicke parameter, high initial temperature and large differential AC Stark shift in the excited state, we achieved a ground state preparation fidelity of 77(4)% after a few hundred ms of cooling by using a few new cooling techniques including addressing high order Raman sideband. We demonstrate that Raman sideband cooling to the 3D motional ground state is applicable to systems where tight confinement or low initial cooling is hard to achieve. The is particularly relevant for systems which are challenging to laser-cool, such as molecules and exotic atoms, and opens up a new approach for further cooling of these systems.

Systems of single neutral atoms trapped in optical tweezers are an exciting platform to study quantum information, quantum chemistry, and quantum simulation of many-body systems . This approach provides full single-site resolution and control, and can feature long-range interactions via Rydberg atoms, polar molecules, or dipolar atoms . Polar molecules in particular offer the additional advantages of long-lived internal states and a high degree of tunability, including the shape, range, and strength of the interaction . Optical tweezers can also be re-arranged in real-time, allowing rapid preparation of atoms in complex geometries with high fidelity .

In order to achieve long coherence times and full quantum control of the system, it is typically necessary to cool the atom to the three dimensional motional ground state in the optical tweezer. This has been demonstrated for neutral Rb[1, 2] and Cs[3] in experiments that had low initial temperature and small Lamb-Dicke parameter. These features may not be easily achievable for other systems, such as directly laser-cooled polar molecules, or atoms with challenging sub-Doppler cooling such as Na, K, and Li. In this letter, we cool single sodium atoms trapped in optical tweezers to the motional ground state with Raman sideband cooling. Despite having a large Lamb-Dicke parameter and high initial temperature, we are able to achieve a ground state probability of 77(4)% by utilizing several new cooling techniques and a carefully optimized cooling sequence. Our approach is quite general, and opens up ground-state cooling for other systems.

The Raman sideband cooling we used to achieve the high ground state preparation fidelity consists of multiple cycles of laser pulses to manipulate the internal and motional states of the atoms. Figure 1A shows the schematic of the energy levels and the cooling sequence in our setup. Each cooling cycle starts with the sodium atom in the  $|F=2,m_F=-2\rangle$  ground electronic state and a certain

vibration state n. In the first step, a Raman pulse drives a transition to the motional state  $n - \Delta n$  to reduce the motional energy while also changing the internal state to  $|F=1, m_F=-1\rangle$ . In the second step, which finishes the cooling cycle, an optical pumping pulse bring the atom back to the  $|F=2, m_F=-2\rangle$  state to take away the entropy. The second step could also change the motional state of the atoms which could cause heating. The possibility for this to happen for an atom in the motional level n is approximately proportional to the effective Lamb-Dicke parameter  $\eta_{eff}^{OP}=\sqrt{2n+1}\eta^{OP}$  where  $\eta^{OP} = k^{OP} \sqrt{\hbar/2m\omega}$  is the Lamb-Dicke parameter for optical pumping. Additional photon scattering on the atom in the  $|F=2, m_F=-2\rangle$  state will also cause heating. In order to reduce this effect, we address the atom in the F = 2 states during optical pumping on the D1 line, so that the  $|F=2, m_F=-2\rangle$  state is a dark state for  $\sigma^-$  polarization and does not scatter any photon. We measured a 130(20) times reduction in photon scattering rate on  $|F=2, m_F=-2\rangle$  state compare to using only the D2 line with the same optical pumping rate. The geometry of the relevant beams and their polarizations is showed in figure 1B. The optical tweezer has one weakly confined axial direction (axis 1) and two more strongly confined radial directions (axis 2 and 3). Multiple pairs of beams are used to drive the Raman transition during cooling in order to isolate and maximize the coupling to different trap axis.

In order to perform Raman sideband cooling efficiently and minimize the heating during the optical pumping, we need to have a low initial temperature and a small Lamb-Dicke parameter. However, since the Lamb-Dicke parameter  $\eta$  is inversely proportional to  $\sqrt[4]{m}\lambda$  where m is the mass of the atom and  $\lambda$  is the wavelength of the atomic transition, it is larger for sodium at a given trap depth due to its low mass and short D

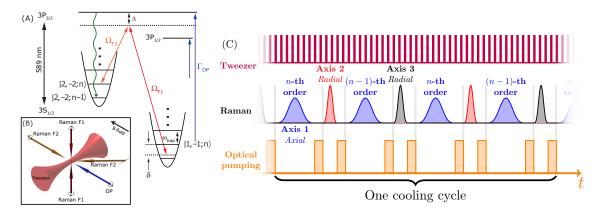


FIG. 1. (A) Energy levels and schematic of Raman sideband cooling. The Raman transitions have a one photon detuning  $\Delta=25$  GHz from the D2 line. We use D1 light with  $\sigma^-$  polarization to repump atoms out of  $|F=2,m_F=-1\rangle$  state to minimize heating on the atom in  $|F=2,m_F=-2\rangle$  state (B) Geometry and polarizations of the Raman and optical pumping beams relative to the optical tweezer and bias magnetic field. (C) Schematic of the cooling sequence. The tweezer switches at 3 MHz to reduce light shifts during optical pumping. Each cooling cycle consists of 8 pulses. The four axial pulses are addressing two neighboring cooling orders. The two pulses in each radial directions are either addressing two neighboring cooling orders or having different length on the first order when most of the population are below n=3 towards then end of the cooling sequence.

line wavelength. With 45 mW of power in the trap, we measure trapping frequencies of  $\{\omega_1, \omega_2, \omega_3\}/2\pi = \{69(1), 430(4), 590(5)\}$  kHz which corresponds to optical pumping Lamb-Dicke parameters of  $\{\eta_1^{OP}, \eta_2^{OP}, \eta_3^{OP}\} = \{0.602(5), 0.241(2), 0.206(1)\}$  Moreover, due to the small hyperfine structure in the  $3^2P_{3/2}$  manifold, the sub-Doppler cooling in sodium is also less efficient and we start the Raman sideband cooling with a initial temperature of 70  $\mu$ K. Combined with the high Lamb-Dicke

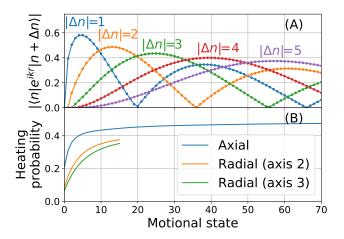


FIG. 2. Matrix elements and heating probabilities as a function of motional state. The range plotted covers 99% of the initial thermal distribution. (A) Matrix elements for Raman transition in the axial direction showing deviation from  $\sqrt{n}$  scaling and multiple minimums for different sideband orders. (B) Heating probability during the optical pumping step for all three axis. Due to the large Lamb-Dicke parameter, there is a high probability of heating especially in the axial direction.

parameters, this gives us a initial effective optical pumping Lamb-Dicke parameters of  $\{\eta_{1eff}^{OP}, \eta_{2eff}^{OP}, \eta_{3eff}^{OP}\} = \{4.0(1), 0.67(2), 0.50(1)\}$  As a result, there is a very high probability of heating during the optical pumping step (figure 2B) causing an estimated 30% average heating probability during optical pumping in the weakly confined axial direction.

Fortunately, the high Lamb-Dicke parameters also provide us with tools to overcome this issue. The Lamb-Dicke parameters for the Raman transitions in our configuration are  $\{\eta_1^R, \eta_2^R, \eta_3^R\} = \{0.40(1), 0.341(2), 0.291(1)\}.$ As shown in figure 2A, the high Raman Lamb-Dicke parameters causes a strong coupling to higher orders of cooling sidebands, especially for high motional states. This enables cooling of atoms in high motional states by driving higher order Raman sidebands, removing more motional energy in a single cooling pulse and offsetting the effect of heating. Since the heating probability is higher for high motional states, cooling on these high order sidebands can greatly suppress the high heating during optical pumping during the initial cooling. Since the coupling strength of different orders do not reach their minimums at the same time, using multiple orders of motional sidebands for cooling also avoids accumulation of population near the coupling minimum of a particular order, which improves the overall efficiency of the cooling process.

The high initial temperature also causes additional complications. First, population in high motional states means that the atoms sample the anharmonicity of the trap away from the harmonic center. This effect broadens the sidebands and reduces their heights, and therefore the efficiency of cooling, when driven with a single frequency. In order to overcome this issue, we power

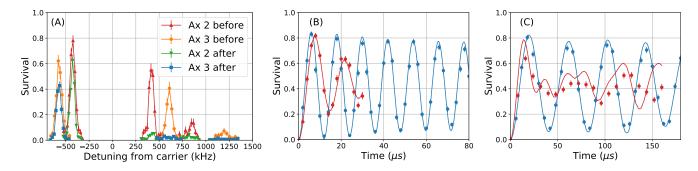


FIG. 3. (A) Radial Raman sideband spectrum of first order heating, first order cooling and second order cooling before and after Raman sideband cooling. (B,C) Rabi flopping on axis 3 (B) carrier and (C) first order heating sideband before (red) and after (blue) cooling. Solid lines in (B) and (C) are theoretical calculation of the Rabi flopping. The blue lines corresponds to a ground state probability of 93% after cooling and the red lines corresponds to a thermal distribution of 70  $\mu$ K before cooling.

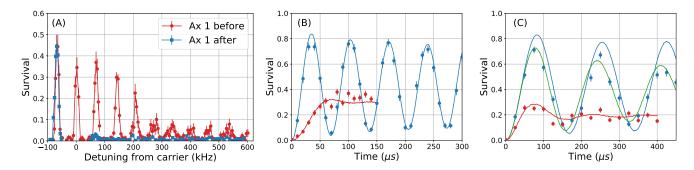


FIG. 4. (A) Axial Raman sideband spectrum from first order heating to eighth order cooling before and after Raman sideband cooling. The data for the second and higher orders of cooling sidebands are taken with 150  $\mu$ s pulse time and the rest are taken with 125  $\mu$ s pulse time. (B,C) Rabi flopping on axial (B) carrier and (C) first order heating sideband before (red) and after (blue) cooling. Solid lines in (B) and (C) are theoretical calculation of the Rabi flopping. The blue and green lines corresponds to a ground state probability of 92% after cooling and the red lines corresponds to a thermal distribution of 70  $\mu$ K before cooling. The blue lines does not take into account the effect of decoherence due to resonance fluctuation. By comparing it to the green line in (C), which includes a 3 kHz fluctuation, we can clearly see that this effect is the strongest for the after cooling data on the axial heating sideband where the Rabi frequency is the lowest.

broaden the sidebands by increasing the Rabi frequency so that it is larger than the expected sideband frequencies distribution which causes all the states to be driven equally. This limits the Rabi frequency of the Raman pulse on the radial sidebands to be no lower than tens of kHz. Second, the deep trap that is needed to trap and image single sodium atom also creates a very large AC Stark shift in the excited state (as large as 300 MHz). This creates large, position-dependent detuning for the optical pumping light and mixes the excited state state hyperfine levels, which affects the branching ratios and increases the number of photons needed for optical pumping. We solve this issue by switching the trapping light at 3MHz during the whole cooling sequence, similar to our loading and imaging process [4], but leave on the OP light with constant intensity. Due to the large light shift, the OP light is effectively off when the trap light is on. Since the atom can only be addressed by the optical pumping light when the trap light is off, the effect of light shift on optical pumping fidelity is suppressed.

Taking all these features of our system into account, we use a Monte-Carlo simulation to verify the validity of our method. In the simulation, we can observe the high heating rate due to the high Lamb-Dicke parameters and confirm that by using high order Raman sideband transition in the cooling sequence we can suppress this effect and reduces the motional energy of the atom faster. The simulation is also used to guide the optimization of the cooling sequence by exploring the large parameter space and finding a robust cooling strategy. As shown in figure 1C, we found that instead of cooling on only one sideband order at a time, it is generally more efficient to alternate the cooling pulse between two neighboring orders (axial) or pulse lengths. A cooling sequence like this minimizes the accumulation of atom in a state not addressed by a particular Raman pulse parameter.

For the more tightly confined radial directions, we begin the cooling with  $\{\bar{n}_2, \bar{n}_3\} = 3.4(2), 2.5(2)$  The radial sideband spectra of the initial distribution is shown in figure 3A as orange and red lines, where we can clearly see

the first order heating, first order cooling and second order cooling sidebands. After applying around 1000 cooling pulses cooling in all three dimensions starting with cooling on the radial second order, the Raman spectrum with the same parameters is shown in figure 3A as blue and green lines, where the first and second order cooling sidebands on both axis are suppressed. Given the absence of the second order cooling sideband, we can estimate the ground state probability in each direction based on the height of the first order cooling and heating sideband to be 90(2)% and 94(3)%.

It is important to note that the large Raman Lamb-Dicke parameters  $\eta^R$  mean that we must use caution when measuring the temperature. Traditional sideband thermometry uses the ratio of the cooling and heating sidebands to measure  $\bar{n}/(\bar{n}+1)$ , which relies on the coupling strength to be proportional to  $\sqrt{n}$ . However, outside the Lamb-Dicke regime, the coupling strength deviates from this simple scaling rule rapidly as shown in figure 2A. When the atom temperature is still high, we measure the heights of multiple sidebands to make sure no population is hidden at the minimum of one sideband order. Once the atom is cooled down, we estimate the temperature and ground state population under the assumption that only a few states are populated. We can verify the result via an independent measurement of Rabi flopping on the carrier and heating sidebands. This data is shown before and after cooling in Figures 3B and 3C and yields 89(2)% and 92(2)% showing good agreement between the two methods.

The axial direction is much less confined and therefore has a much higher initial effective Lamb-Dicke parameter of  $\eta_{eff1}^{OP} \approx 4.0$ , and is therefore more difficult to cool. The red line in figure 4A shows the Raman spectrum in the axial direction before applying Raman sideband cooling; the clearly resolved sidebands up to eighth order indicates population in highly-excited motional levels. Therefore, we begin our cooling sequence by driving Raman transitions on the eighth order axial cooling sideband. After applying the cooling sequence identical to the one we use to cool the radial directions, the spectrum is shown in figure 4A as the blue line. All of the high order ( $\geqslant 2$ ) axial

cooling sidebands disappear, and the first order cooling sideband is strongly suppressed. The ground state probability calculated from this spectrum is 92(3)%. We can again use Rabi flopping on the carrier and heating sideband to verify this result similar to the radial direction. In this case, we see very good agreement on the carrier (figure 4B) but there is additional decoherence on the axial first order heating sideband (figure 4C). We believe this decoherence is caused by technical noise, which is the most pronounced on this transition due to its slow Rabi frequency. The decoherence time scale is consistent with magnetic field fluctuations of 1.5 mG that we have measured in the lab, which produces a Zeeman shift of around 3 kHz.

Combining the axial and radial cooling results, we have achieved a 3D ground state probability of 77(4)%. We believe this is currently limited by off-resonant scattering from the Raman beams and the resonance shift caused by magnetic field fluctuations. We are planing to improve these by increasing the detuning of the Raman beams and implementing better control of the magnetic field. We expect these changes to improve the cooling performance even further. We have shown that despite the difficulty in cooling sodium atoms, it is possible to achieve reliable three dimensional cooling with significant ground state probability using new cooling techniques and a optimized cooling sequence. This opens up the possibility of cooling a large variety of systems to their motional ground state using Raman sideband cooling that is challenging to laser cool including molecules and exotic atoms.

- \* ni@chemistry.harvard.edu
- J. D. Thompson, T. G. Tiecke, A. S. Zibrov, V. Vuletić, and M. D. Lukin, Phys. Rev. Lett. 110, 133001 (2013), arXiv:1209.3028.
- [2] A. M. Kaufman, B. J. Lester, and C. A. Regal, Phys. Rev. X 2, 041014 (2012).
- [3] L. R. Liu, J. T. Zhang, Y. Y. Yu, N. R. Hutzler, Y. Liu, T. Rosenband, and K.-K. Ni, arXiv 1701.03121 (2017), arXiv:1701.03121.
- [4] N. R. Hutzler, L. R. Liu, Y. Yu, and K.-K. Ni, New J. Phys. 19, 023007 (2017).