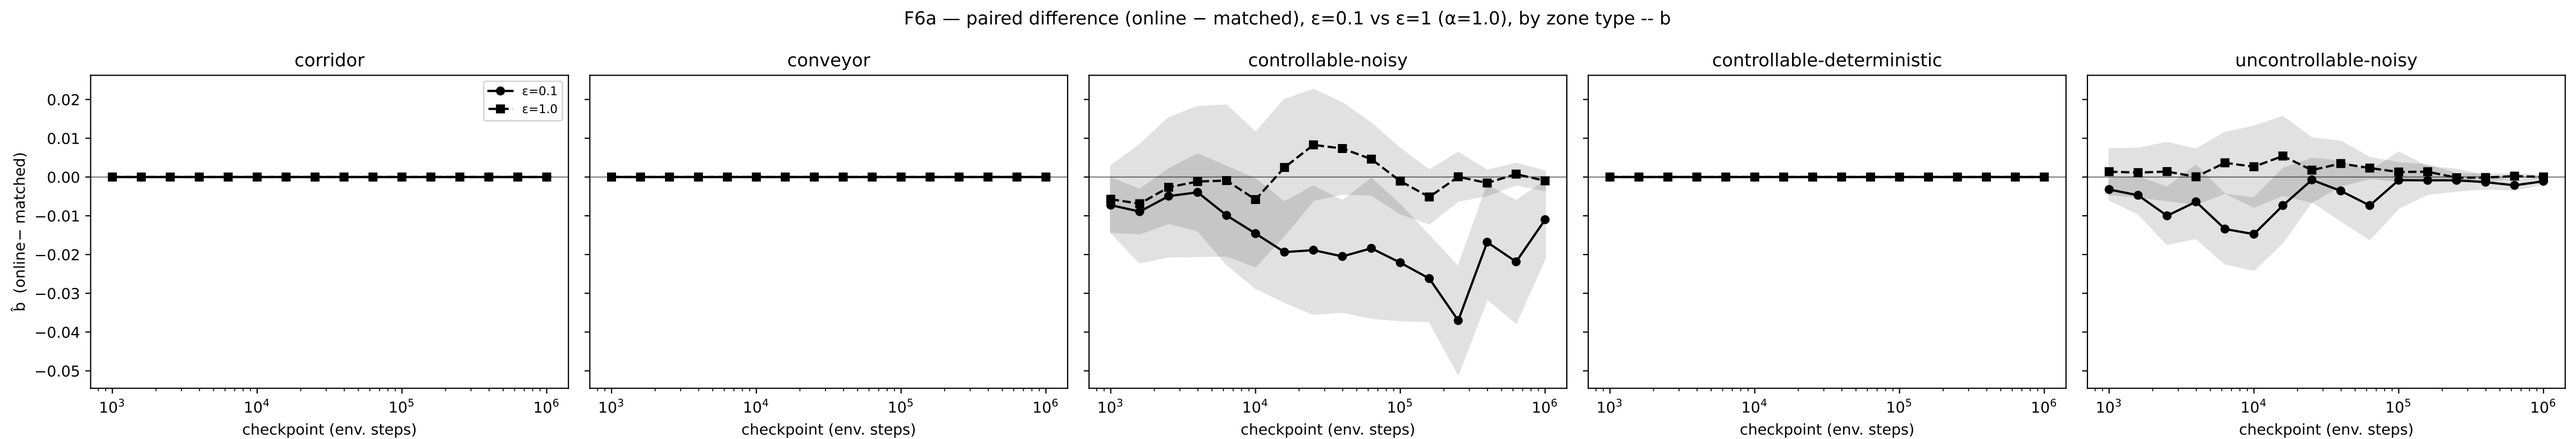
F6a — paired difference (online − matched), ε=0.1 vs ε=1 (α=1.0), by zone type -- b
corridor
conveyor
controllable-noisy
controllable-deterministic
uncontrollable-noisy
ε=0.1
ε=1.0
b̂ (online− matched)
0.02
0.01
0.00
−0.01
−0.02
−0.03
−0.04
−0.05
10^3
10^4
10^5
10^6
checkpoint (env. steps)