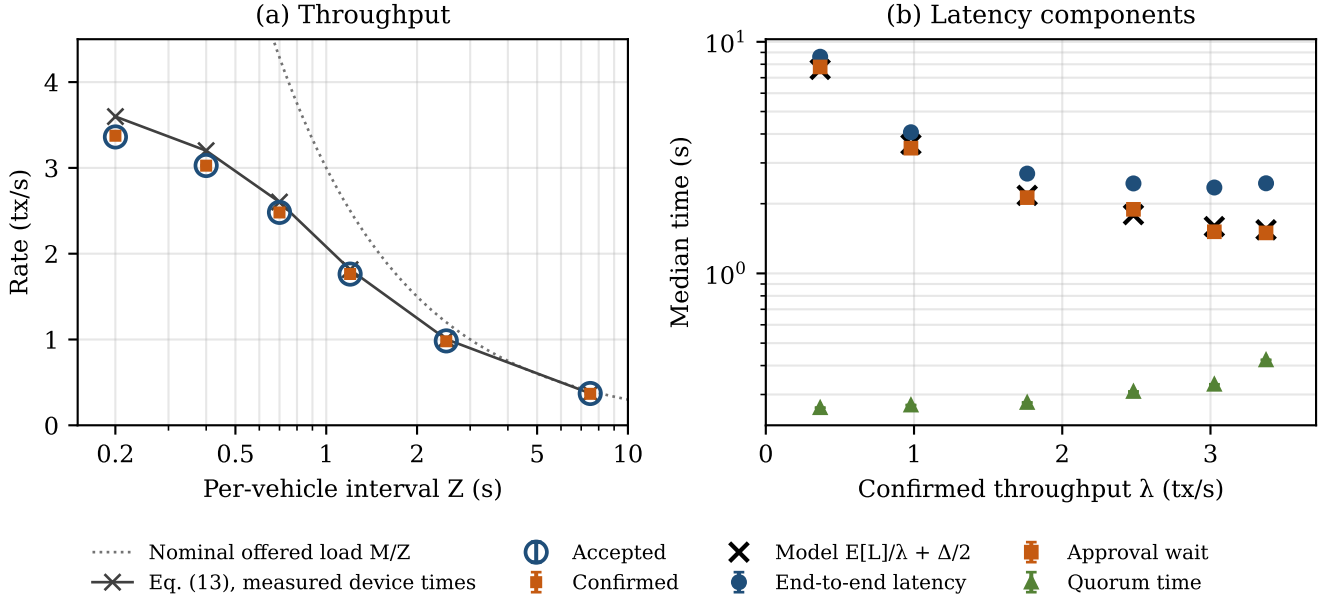
(a) Throughput
Rate (tx/s)
Per-vehicle interval Z (s)
0.2
0.5
1
2
5
10
0
1
2
3
4
(b) Latency components
Median time (s)
10^1
10^0
Confirmed throughput λ (tx/s)
0
1
2
3
Nominal offered load M/Z
Eq. (13), measured device times
Accepted
Confirmed
Model E[L]/λ + Δ/2
End-to-end latency
Approval wait
Quorum time