

The Audio Ease™ Rocket Science™ Bundle 2.0

Manual for version 2.0 CD

© Audio Ease April -2000 - www.audioease.com

system requirements:
MOTU Audio System 2.1 or higher
FreeMidi 1.4 or higher
PowerPC 604 at 150 mHz or better
Digital Performer 2.7 or higher

An older version of the Rocket Science bundle, one that is compatible with older releases of MOTU software, is available at the Audio Ease website.



Page 3 Roger - Multiple Gender Vowel Bank



Page 6 ORBIT - Psycho Acoustic Flight Path Simulator

Page 10 Follo - Energy Driven Band Booster

Page 13 



Macintosh, Performer and Digital Performer, are trademarks or registered trademarks of the respective product's manufacturer.

You can apply human vowel sounds to your audio with Roger. Use the vowel bar at the bottom to click through the vowels and click the portrait to select one of the Roger family members.

Portamento controls the transition speed between vowels, and the 'sharpness' of the vowel is controlled by the bandwidth parameter.

Make the Roger family talk rhythmic random nonsense, locked to Performers tempo, using Auto. Roger is MIDI controllable from your MIDI keyboard or from recorded MIDI data on the sequencer's tracks, and it can receive parameter automation from Performer.

Besides a Mono to Mono Roger there is a Stereo to Stereo Roger that uses identical settings to treat both channels of stereo input.

Roger is fitted with a look ahead limiter to prevent any level accidents that can be the result of resonating filters in general.





Pressing the rocket will bring up Roger's About window.
If you are running a version of Roger that has not been authorized yet, you will see the Demo/Authorize Rocket button. Demos of Roger, Orbit and Follo will unlock into the full versions when you type in a serial number. Check out page 13 of this manual for details.

By clicking on a face, you select the vowel set of one of the Roger Family members. Roger's mouth sits from C2 to B2 on your MIDI keyboard, Patty's vowels are from C3 to B3, and Cindy's from C4 to B4. This sequence is repeated throughout your MIDI keyboard.






b**OO**t l**A**w d**UH** ut**AH** b**U**t b**IR**d b**A**t b**E**t b**I**t b**EE**t

This is the Vowel Bar. Click in any of these vowels to apply it to your input sound, and drag your mouse over the buttons to very quickly trigger them. You can also use a MIDI Keyboard, or paramater autoimation to trigger vowels.

Portamento is the speed at which one vowel transforms into the next. It can be controlled either by the knob, a MIDI keyboard's modulation wheel, the velocity of a MIDI key, or parameter automation. A value of 0 will make a vowel transition so short that it will almost click. Turning the knob all the way to the right results in a transition time of about 6 seconds.



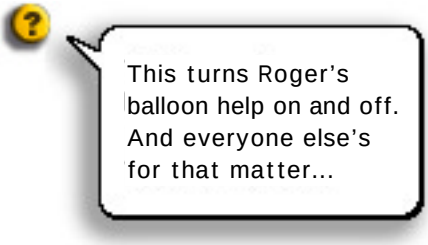




This determines the bandwidth of the formant bandpass filters that make up the vowel filter. It can be controlled either by the knob, a MIDI keyboard's modulation wheel, or the velocity of a MIDI key. A value of 0 will make your filters so narrow that they whistle (they will keep whistling when you turn of the input). Turning the knob all the way to the right will make the filters so wide that the output will in fact not be filtered at all.




Setting 'Auto' to 'on' will make any member of Roger's family babble random nonsense, in a tempo determined by the tempo knob. The babble is synced to Performers tempo, you can select multiples and divisions of your Performer bpm's. During Auto, Roger still reacts to clicks in the vowel bar, MIDI notes and parameter automation.







Much more interesting rhythms are produced by auto, if some beats are randomly skipped. Use the beat skip parameter to select what percentage of the beats should be skipped.

Since Digital Performer 2.7, the Rocket Science Bundle can receive Paramater Automation, as well as MIDI from Performers tracks

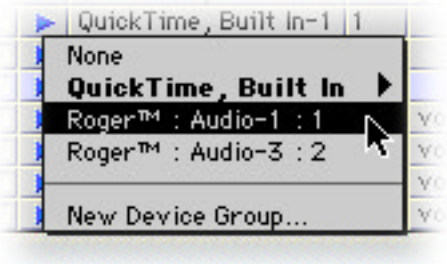

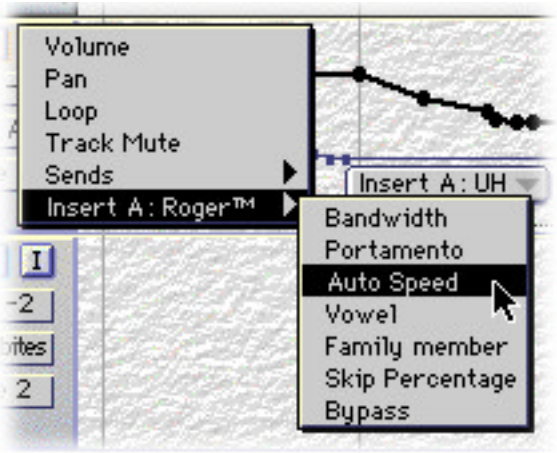

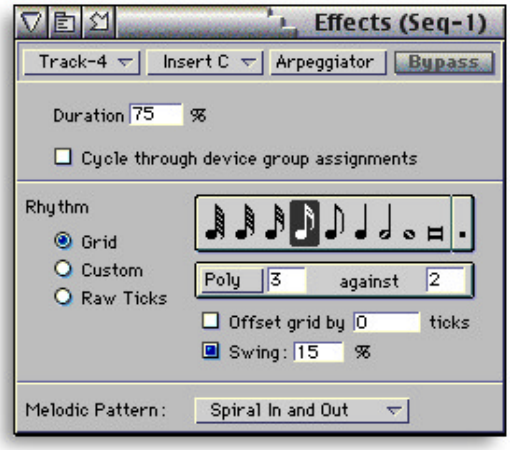

Tips & Hints

- Even more powerful than 'Auto' for getting a groove into Roger's babble is Performer's built-in Arpeggiator MIDI plug-in that can be inserted in any MIDI Track in Performer's mixer window. It is always in sync with your song and highly customisable for weird effects. Pipe your keyboard's MIDI to Arpeggiator and feed the MIDI output of the Arpeggiator to Roger. While you are at it, try Performer's Echo MIDI plug-in as a MIDI source for Roger too.


Orbit lets you control the virtual position of your sound source. It accurately calculates the sound source's reflections of the walls of a virtual 'outer room', using the exact amount of delay and attenuation for the direct sound and all reflections alike. It is a plug-in mainly of the Mono To Stereo kind, although there is a Stereo to Stereo version that mixes left and right inputs before they are sent to Orbit.

You can use Orbit merely as an automatable physically correct panning device, or you can use it as a flight path simulator that offers control over your position, speed and location of the source, the size of the virtual space and the absorption of high frequencies by the walls. For direct sound and all reflections, Orbit will precisely emulate the Doppler effect so that pitch will shift up when a sound (or a reflection) comes at you, and will shift down when it moves away.

The light blue small room is the room you are in. You can drag it up and down in the outer room, its size is determined by the speaker span parameter. The tiled surface is the outer room, that is adjusted with the room size parameter. The red ball is the sound source.

The motion selector lets you choose between a static source or one that follows a path set by clicks in the outer room. The source can also follow an adjustable oval, or it can just fly about like Buck Rogers on LSD.



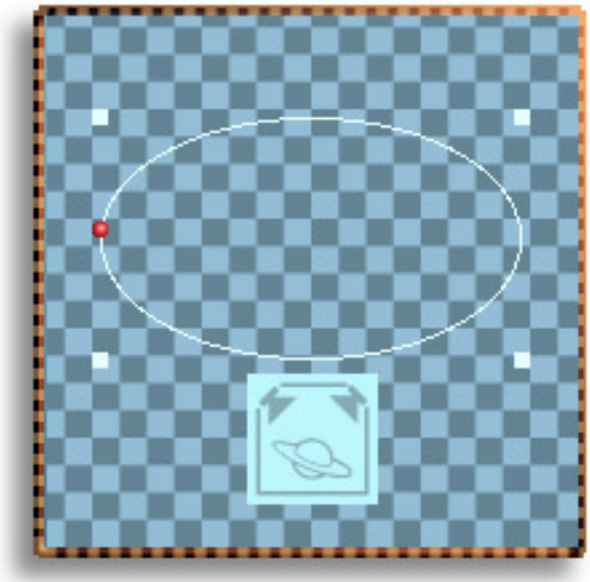

This is the graphic display of the localization parameters. It is a view from above, like a road map.

The light blue small room is the room you are in. You can drag it up and down in the outer room, its size is determined by the speaker span parameter.


The tiled surface is the outer room, that is adjusted with the room size parameter. One tile is a meter, which is about three feet.

The red ball is the sound source. Which may sit still or move, according to the motion selection at the bottom left of Orbit. Read on for more info about the white oval...



With the Motion Selector you select the motion type of the source. When you click in it the popup menu at the right comes up. It offers five choices.





- Here the source will sit still wherever you click the mouse in the outer room. It requires less processing power than the four moving types, and therefore you may be able to select more reflections. Whenever you click in a different location, you may notice an audible click. The speed knob has no effect when you select this one.



- Here the source will move to wherever you click in the outer room. When you quickly click in multiple locations the source will follow your trail, smoothly cutting some corners here and there. The maximum speed the source can reach is set by the speed knob in meters per second (check the speed knob for additional details).





- With these two, the source sound will follow the trail set by an adjustable white oval, in the clockwise or counter clockwise direction, at a cruising speed determined by the speed knob (check the speed knob for additional details).
You can change the horizontal and vertical dimensions of the oval by dragging in its white squares. You can change the location of the circle by clicking inside the circle and dragging it. You can also set the circle so narrow that it becomes a vertical or horizontal line.



- Here the source sound will move randomly about like a drunk, within the confines of the white oval, at a maximum speed determined by the speed knob (check the speed knob for additional details). Like with the above two, the circle's dimensions and location are adjustable. Try setting it small and drag it around a bit.




This is the knob that determines the (maximum) cruising speed of the source. Its unit is meters per second. One dark or light blue tile in the outer room is a meter. Your cruising speed at a stroll in the park would be about 1.5 m/s, while them Duke Boys may rush by at 40 m/s (90 mph). The speed knob is more precise at low values than at high values. You can hold option down while dragging for extra precision, or you can type in a value.



The source localization works optimally if you set the speaker span value to the distance between the speakers that you are listening to. If you set this value too high, you may experience a 'hole in the middle' effect, if you set it too low,the stereo imagery may become too narrow. Click in the Speaker Span field and drag to left and right to adjust the setting. Hold <option> (<alt>) down while dragging for more precision. In the graphic display you will see the light blue inner room size change accordingly. The minimum setting of 0.2 meter (about 8 inches) is meant for use on headphones.





The room size parameter sets the size of the outer room. In the graphics display every tile is a meter (that's approximately three feet). Click in this field and drag to left and right to adjust the setting. Hold down <option> (<alt>) while dragging for more precision.


The high damp knob determines the frequency response of the walls of the outer room. As an example: wooden walls will reflect less high frequencies than concrete ones, so to simulate them, you should apply some High Damping. When High Damp is set to zero, reflections will sound as bright as the direct sound.



Automation



The two motion modes above, the ones that are controlled by clicking anywhere in the outer room, allow automation via parameter automation in Digital Performer 2.7 and up. All your clicks are recorded as x,y coördinate parameters. In addition the speed and high damp knobs are automation enabled.

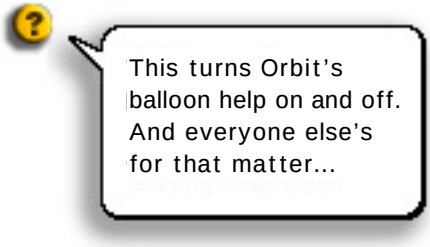




Pressing the rocket will bring up Orbit's About window.
If you are running a version of Orbit that has not been authorized yet, you will see the Demo/Authorize Rocket button. Demos of Roger, Orbit and Follo will unlock into the full versions when you type in a serial number. Check out page 13 of this manual for details.



The localization cues that the listener gets from Orbit are generated by accurately calculating the sound source's reflections of the walls of the outer room.


If you let the sound source reflect of each wall once, then you need four reflections per speaker. If you allow each of those reflections to bounce off of yet another wall, then you'll need 8 more reflections, totalling to 12 reflections. If you set the number of reflections to 60, then the sounds that reach each of the speakers of the inner room have bounced off of five walls or less. The higher the setting, the longer your reflection pattern and the more processor power Orbit will need.

Setting this number to 0 will allow only the direct, unreflected sound to reach both speakers of the inner room, therefore it will not impose the acoustic characteristics of the outer room on your sound at all, while still preserving a lot of the accuracy of the localization.

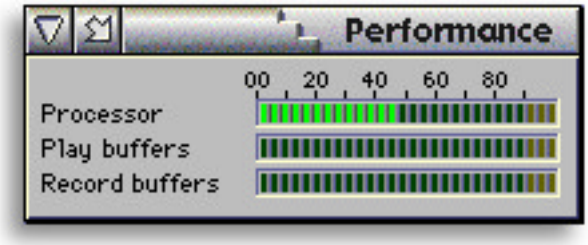

Moving sources require more processing power than static ones. Check out the performance monitor from the MOTU Audio System Options menu in Performer.
When you increase the number of reflections the processor load goes up. Until your computer may not be able to go any further. You will then get the MAS timeout dialog.

When you select the 'static' motion: (see right) the processor load is much lower than in any of the other motions. That is because in that case Orbit does not have to make smooth, click-free interpolations. Also a buffer size of 128 bytes (hardware setup) requires more processing power than a buffer size of 1024 bytes.



Tips & Hints

- Suppose you have four close miked (or MIDI'ed) instruments on separate tracks of Performer. Insert an Orbit in every channel, set the number of reflections to 0 and the motion static (see above). You can now push every instrument to its own location, creating a much more realistic panorama than you could have with plain panning. The sound is still dry, so you can apply high quality (outboard) reverberation. When you let Orbit calculate early reflections, try to get rid of the early reflections your reverberation unit produces.
  To simulate the small movement an instrumentalist would make, you can select the motion to the right and confine the instrumentalist within a small circle.




- Consider that much of the 'panning' effect of Orbit is achieved by the difference in distance from the source to the left speaker and to the right speaker. Often you can locate a source to the far right and still maintain more or less the same volume on both channels. A trick you wouldn't be able to pull off using normal panning.

Follo™ dynamically adjusts the peak of a resonating bandpass filter according to the level of the incoming audio, and according to any incoming MIDI modulation wheel or breath control. The blue slider is the target for high amplitude audio. The moving ball indicates where the resonator's peak is, the bandwidth determines how wide and resonating the band is, and the release determines the rate at which the peak falls back to the yellow slider. The analysis knob offers control over the sensitivity of the ball. Applications of Follo include an autowah on a guitar, and a thumping resonating bass generator when the ball clips at the blue slider when it is set way low.

Besides a Mono to Mono Follo there is a Stereo to Stereo Follo that uses identical settings to treat both channels of stereo input. But you should really try the Mono to Stereo Follo, especially on sounds like (synth) basses. It can do some pretty weird things to your stereo image.

Follo is fitted with look ahead limiter to prevent any level accidents that can be the result of resonating filters in general.

All Follo's parameters are automation enabled.

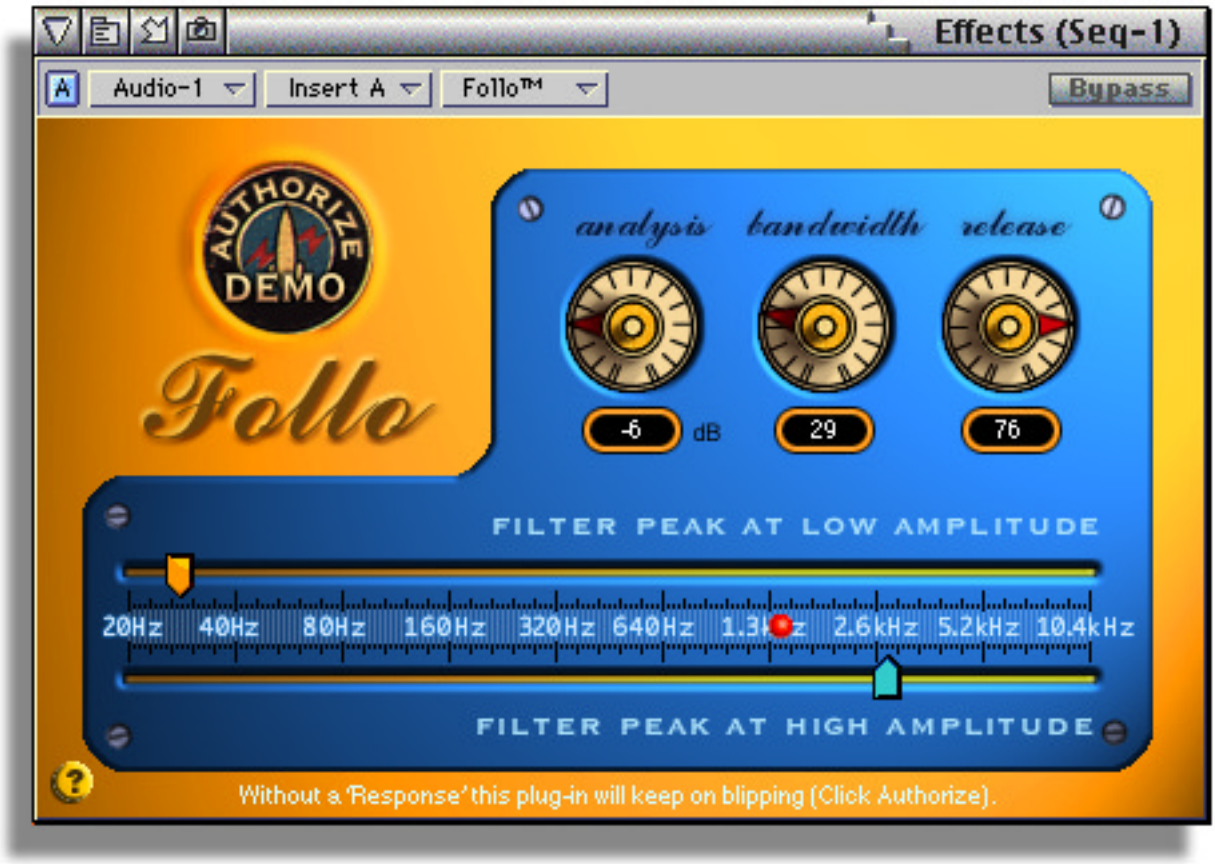



Pressing the rocket will bring up Follo's About window. If you are running a version of Follo that has not been authorized yet, you will see the Demo/Authorize Rocket button. Demos of Roger, Orbit and Follo will unlock into the full versions when you type in a serial number. Check out page 13 of this manual for details.



The red ball indicates at what frequency the filter peak lies. That frequency will never exceed the limit of either yellow or blue slider. The direction the ball moves in is determined by the settings of the sliders relative to one another.



The yellow slider sets the frequency of the filter peak when the input signal is silence. If the yellow slider is to the left of the blue slider, the ball will move up in frequency when the input amplitude rises. If the yellow slider is to the right of the blue slider, the ball will move down in frequency when the input amplitude rises.



The blue slider sets the frequency of the filter peak when the input signal is at its max: 0dB. When the level goes up, the ball shoots towards the blue slider and when the level goes down, it falls back to the yellow one. Hold down <option> (<alt>) for more precision when adjusting the sliders.

You can adjust the level analysis sensitivity with the analysis knob. Setting it high may cause the ball to hit the blue slider often. Analysis doesn't change the output gain of the signal.






The release control adjusts the rate at which the filter will sweep back to the yellow slider frequency after a loud peak has passed.

The bandwidth control adjusts the resonant quality of the filter. A high value gently lifts a broad frequency band around the red ball, a lower value narrows the filter band, and at the lowest extreme lets the filter oscillate.



Tips & Hints

- You should really try the Mono to Stereo Follo, especially on sounds like (synth) basses. It can do some pretty weird things to your stereo image.
- Setting the analysis parameter high causes the peak to hit the blue slider often. If bandwidth is very low, this frequency will become very apparent in the resonating output. Try the effect of tuning the blue slider to the root of your music (hold down <option> (<alt>) while adjusting for more precision).
- Try inserting Performer's Echo plug-in before Follo™ in a channel. When the input sound stops, Echo with feedback makes it fade away in bumps. And Follo will follow.

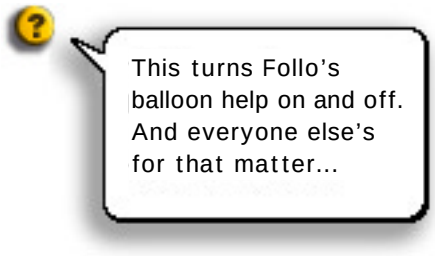

The Rocket Science Bundle beeps every 10 seconds untill you enter a valid serial number. When you buy the Rocket Science Bundle, you get a serial number. The Rocket Science Bundle's suggested retail price is $199.

When You buy on-line, at www.audioease.com, you get your serial number by e-mail immediately.

when you buy the boxed CD-ROM (at www.motu.com or your local pro-audio dealer) the serial number is stickered in the CD case like this:




(That's a fake number by the way)

When you have a serial number you go to either one of the three plug-ins and you press

and then

This will come up:

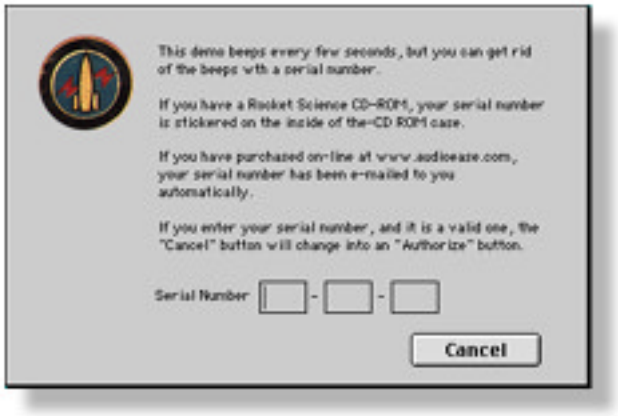

Now you type in your serial number, "Cancel" turns to "Authorize"and you have unlocked the Rocket Science Bundle. No Beeps.