OpenDynKVM — generated schematic (see design.md)

1. PC1 USB-C (upstream to Hub-1)
2. PC2 USB-C (upstream to Hub-2)
3. PWR / SERVICE USB-C
4. Power path (TPS2121 priority, LM66200 PC OR), 3.3 V buck, 1.1 V LDO
5. RP2354B: USB host + switching logic (core 1.1 V from external LDO, VREG disabled)
6. Service switch: RP2354B USB -> SERVICE port (S=0, default) / Hub-0 (S=1)
7. Hub-0 (KVM host side, FS)
8. Hub-1 (PC1)
9. Hub-2 (PC2)
10. AT32F405 #1 (HS device to PC1)
11. AT32F405 #2 (HS device to PC2)
12. Front port: Keyboard
13. Front port: Mouse
14. Front port: Other
15. MX key + under-key LED (hand-assembled), status LEDs, mounting holes

Generated by tools/gen_schematic.py from the netlist in that file — edit the generator, no
Design rationale: ../design.md. Pin numbers of custom symbols: tools/gen_symbols.py.

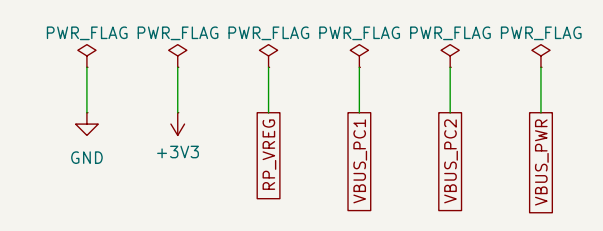
PWR_FLAG
PWR_FLAG
PWR_FLAG
PWR_FLAG
PWR_FLAG
PWR_FLAG
GND
+3V3
RP_VREG
VBUS_PC1
VBUS_PC2
VBUS_PWR

Generated by tools/gen_schematic.py — edit the generator, not this file

Sheet: /
File: kvm.kicad_sch

Title: OpenDynKVM

Size: A0 | Date: 2026-10-22 | **Rev: 5**
KiCad E.D.A. 10.0.6 | Id: 1/1