



Network Fundamentals for Cloud

BITS Pilani
Pilani Campus

Nishit Narang
WILPD-CSIS



BITS Pilani
Pilani Campus

CC ZG503: Network Fundamentals for Cloud

Lecture No. 2



BITS Pilani
Pilani Campus

Fundamentals of Networking: Part 2

Slides Source: Computer Networking: A Top-Down Approach, 8th edition, Jim Kurose, Keith Ross, Pearson, 2020


All material copyright 1996-2020
J.F Kurose and K.W. Ross, All Rights Reserved

RECAP: The Internet: a “nuts and bolts” view



Billions of connected computing *devices*:

- *hosts* = end systems
- running *network apps* at Internet's “edge”



Packet switches: forward packets (chunks of data)

- *routers, switches*




Communication links

- fiber, copper, radio, satellite
- transmission rate: *bandwidth*


Networks

- collection of devices, routers, links: managed by an organization

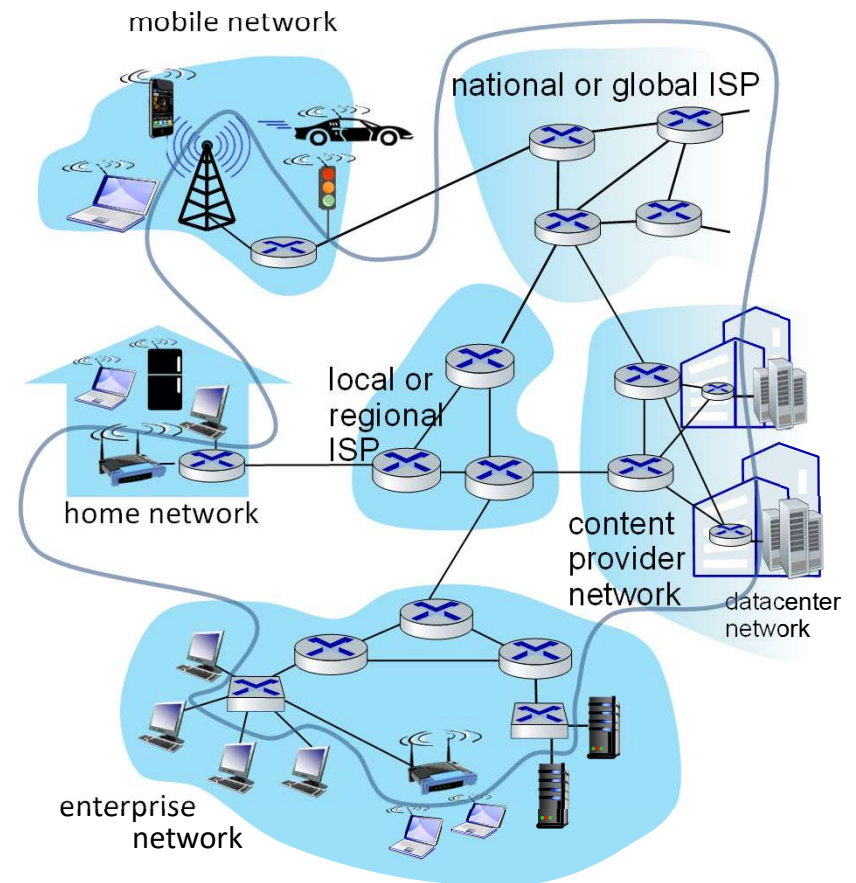

RECAP: The Internet: a “nuts and bolts” view


- *Internet: “network of networks”*
 - Interconnected ISPs
- *protocols are everywhere*
 - control sending, receiving of messages
 - e.g., HTTP (Web), streaming video, Skype, TCP, IP, WiFi, 4G, Ethernet
- *Internet standards*
 - RFC: Request for Comments
 - IETF: Internet Engineering Task Force

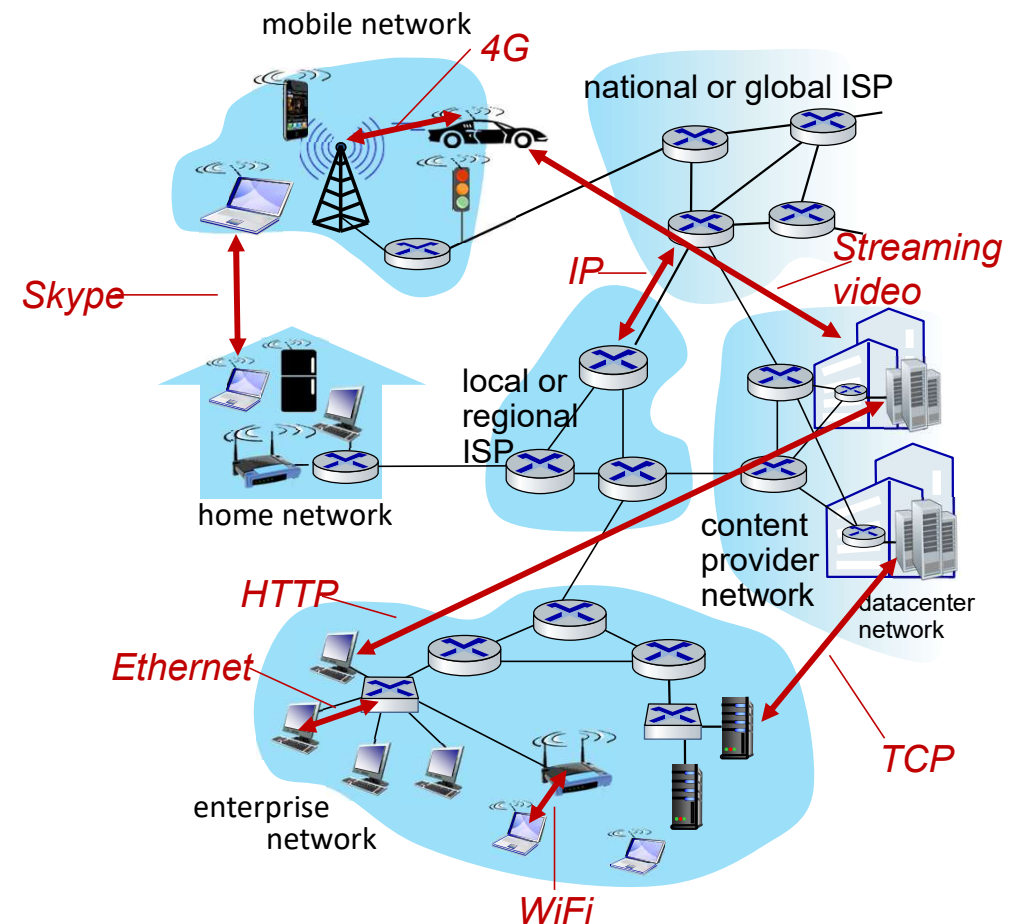

A closer look at Internet structure

Network edge:

- hosts: clients and servers
- servers often in data centers

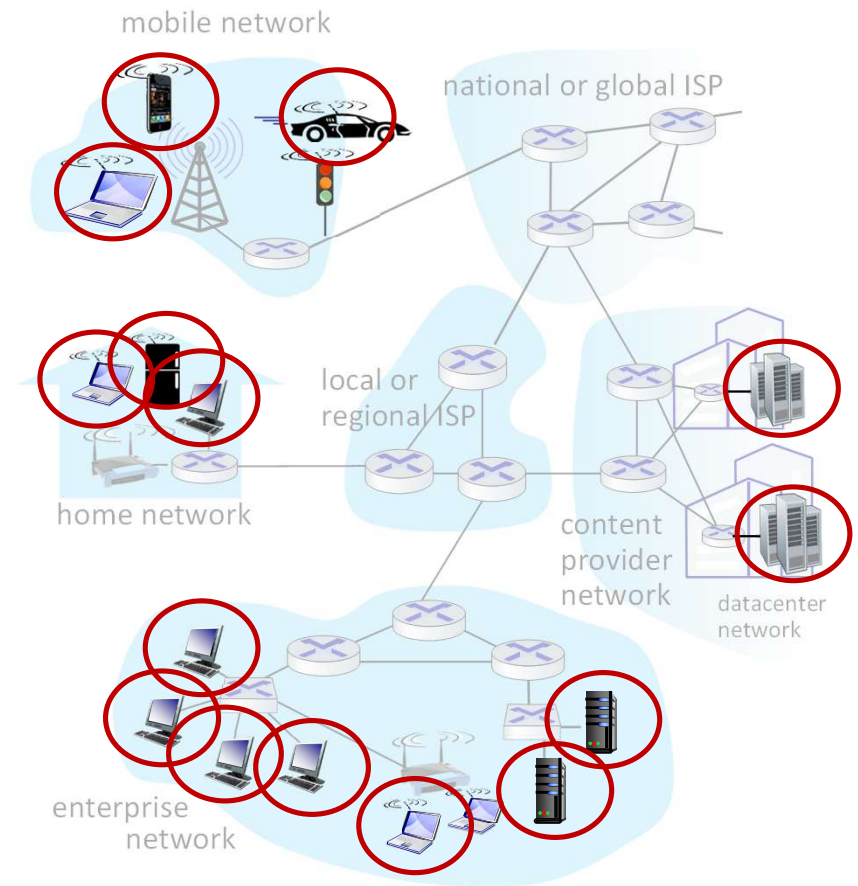


A closer look at Internet structure

Network edge:

- hosts: clients and servers
- servers often in data centers

Access networks, physical media:

- wired, wireless communication links

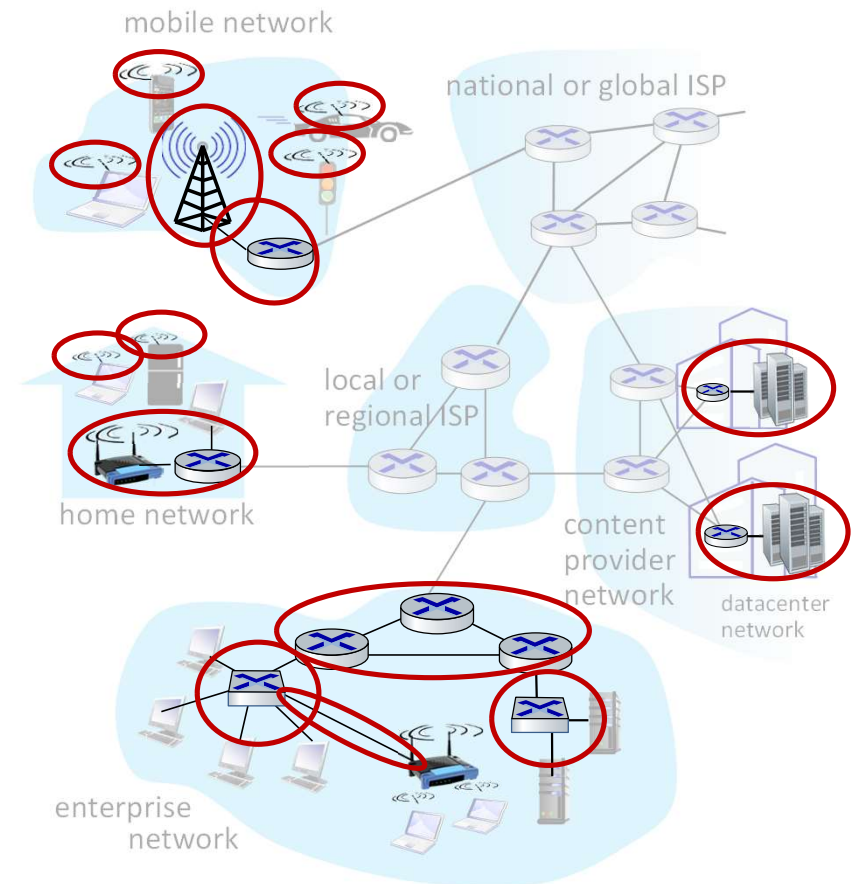

A closer look at Internet structure

Network edge:


- hosts: clients and servers
- servers often in data centers

Access networks, physical media:

- wired, wireless communication links


Network core:

- interconnected routers
- network of networks

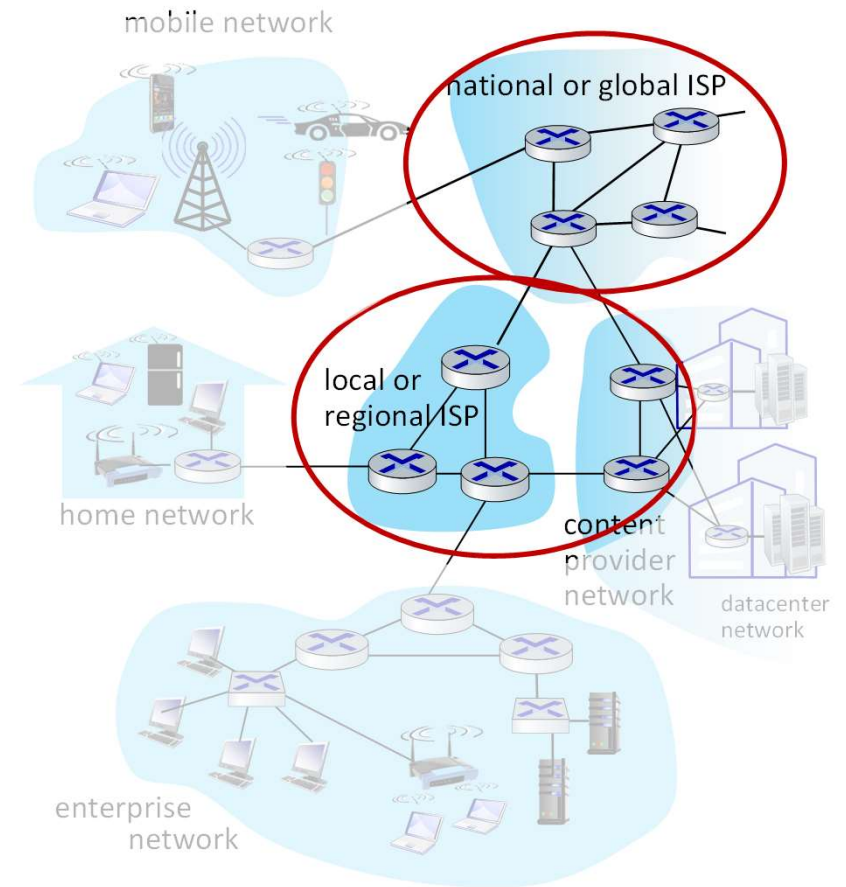

The network core


- mesh of interconnected routers
- **packet-switching**: hosts break application-layer messages into *packets*
 - network **forwards** packets from one router to the next, across links on path from **source to destination**

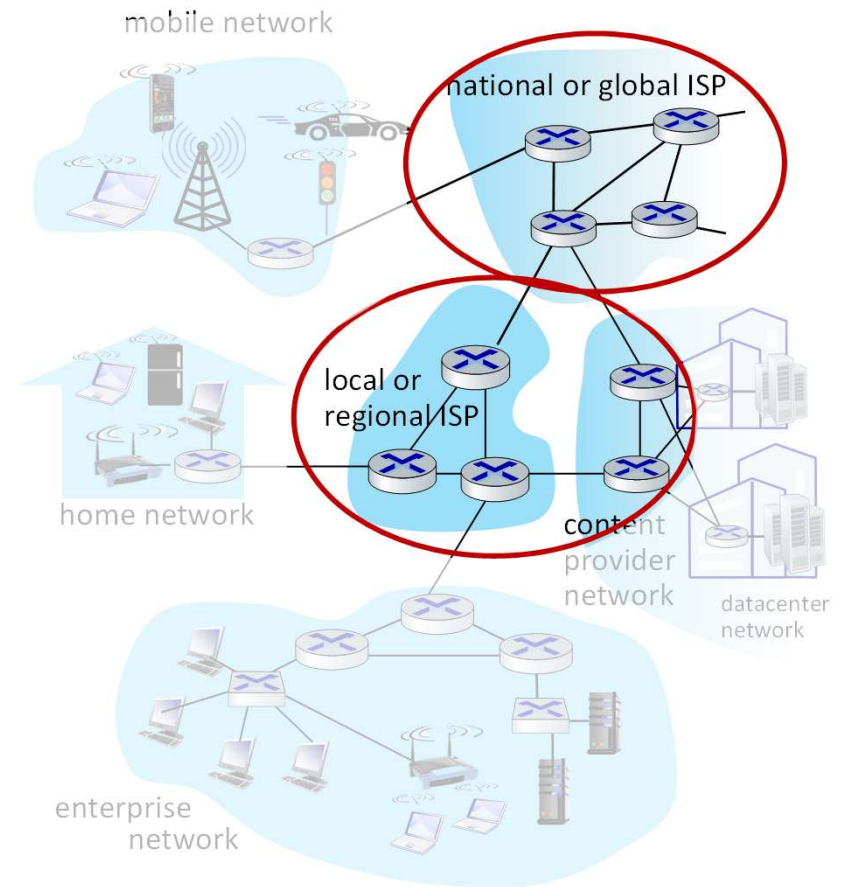

Two key network-core functions

Forwarding:

- aka “switching”
- *local* action: move arriving packets from router’s input link to appropriate router output link

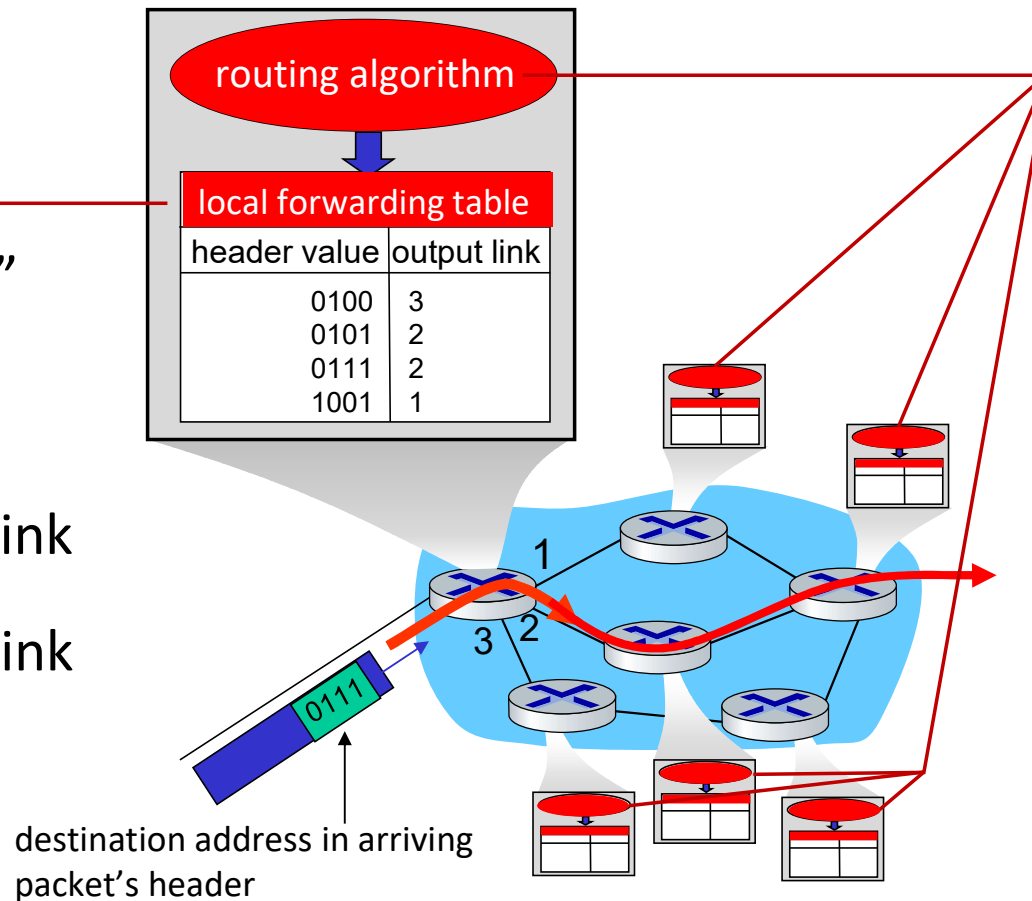

Routing:

- *global* action: determine source-destination paths taken by packets
- routing algorithms






Host: sends *packets* of data


host sending function:

- takes application message
- breaks into smaller chunks, known as *packets*, of length L bits
- transmits packet into access network at *transmission rate R*
 - link transmission rate, aka link *capacity, aka link bandwidth*

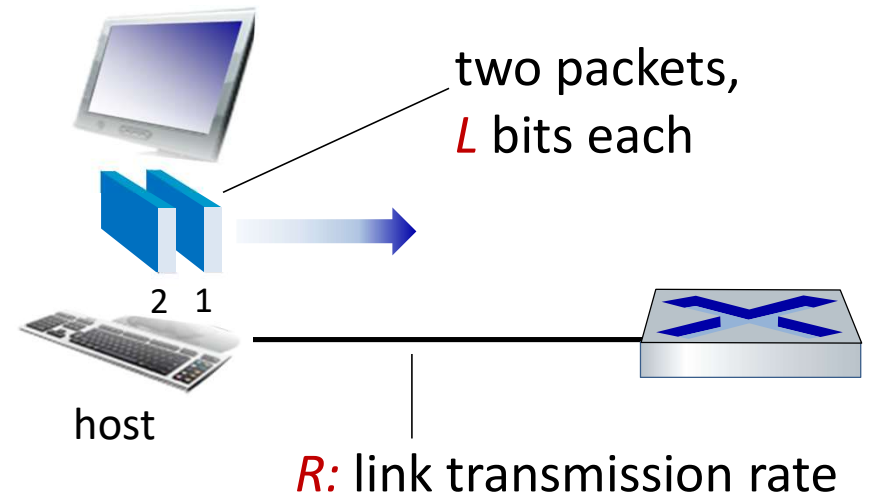

$$\begin{array}{l} \text{packet} \\ \text{transmission} \\ \text{delay} \end{array} = \begin{array}{l} \text{time needed to} \\ \text{transmit } L\text{-bit} \\ \text{packet into link} \end{array} = \frac{L \text{ (bits)}}{R \text{ (bits/sec)}}$$

Packet-switching: store-and-forward

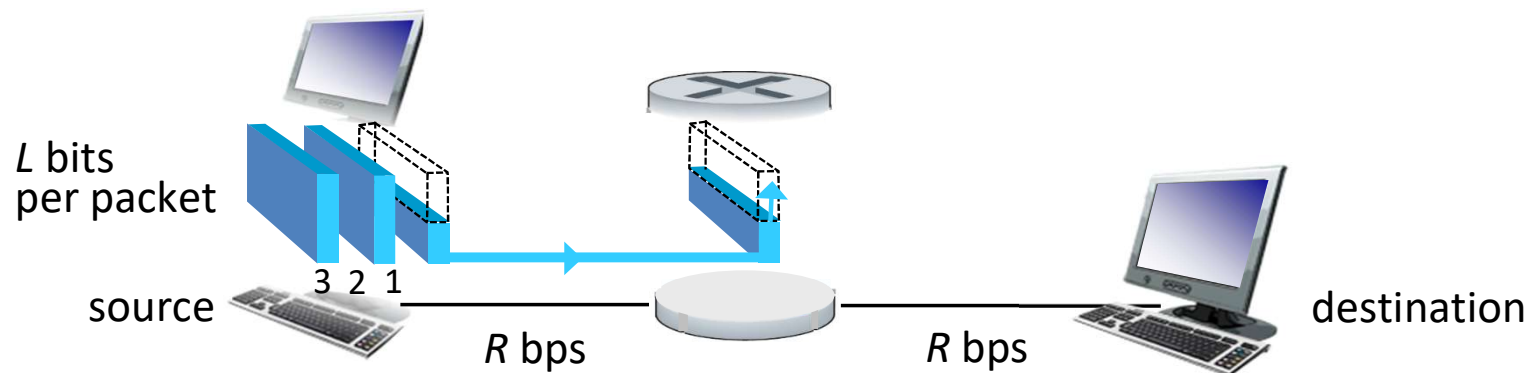


- **packet transmission delay:** takes L/R seconds to transmit (push out) L -bit packet into link at R bps
- **store and forward:** entire packet must arrive at router before it can be transmitted on next link

One-hop numerical example:

- $L = 10$ Kbits
- $R = 100$ Mbps
- one-hop transmission delay = 0.1 msec


Packet-switching: queueing

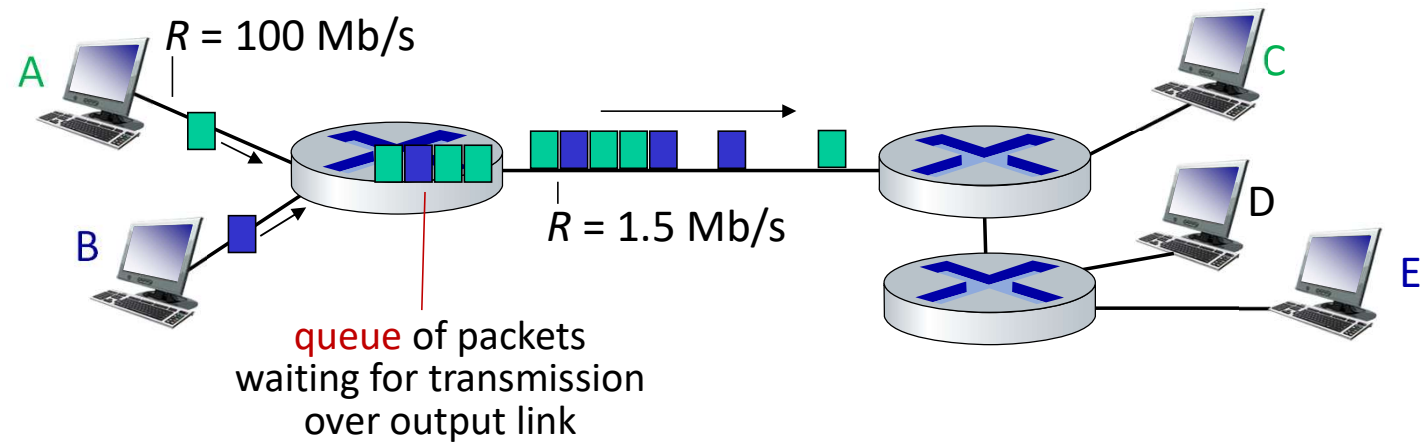

Queueing occurs when work arrives faster than it can be serviced:



Packet-switching: queueing

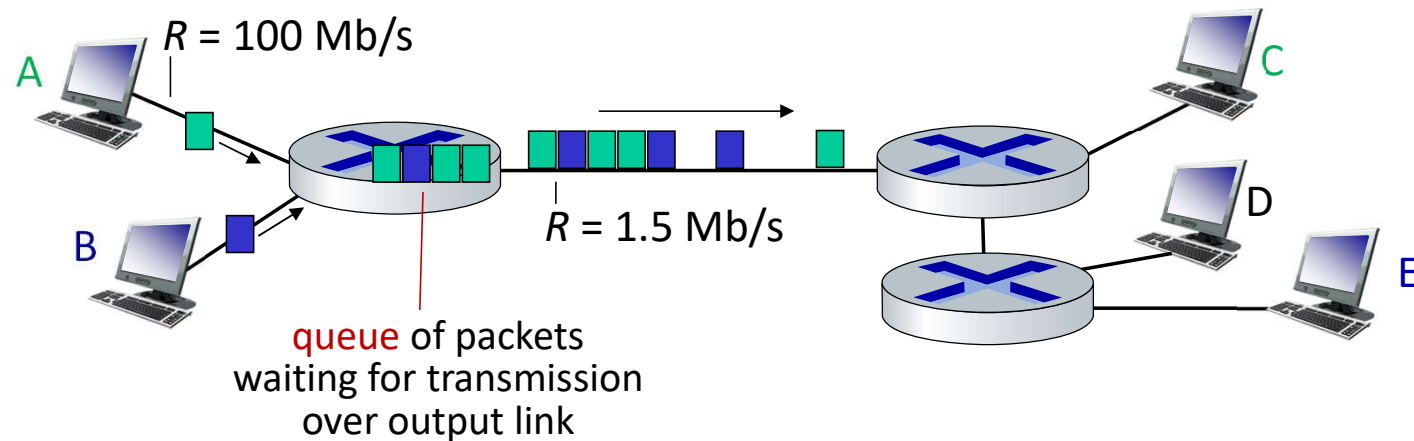


Packet queuing and loss: if arrival rate (in bps) to link exceeds transmission rate (bps) of link for some period of time:

- packets will queue, waiting to be transmitted on output link
- packets can be dropped (lost) if memory (buffer) in router fills up

Alternative to packet switching: circuit switching

end-end resources allocated to,
reserved for “call” between source
and destination


- in diagram, each link has four circuits.
 - call gets 2nd circuit in top link and 1st circuit in right link.
- dedicated resources: no sharing
 - circuit-like (guaranteed) performance
- circuit segment idle if not used by call (no sharing)
- commonly used in traditional telephone networks

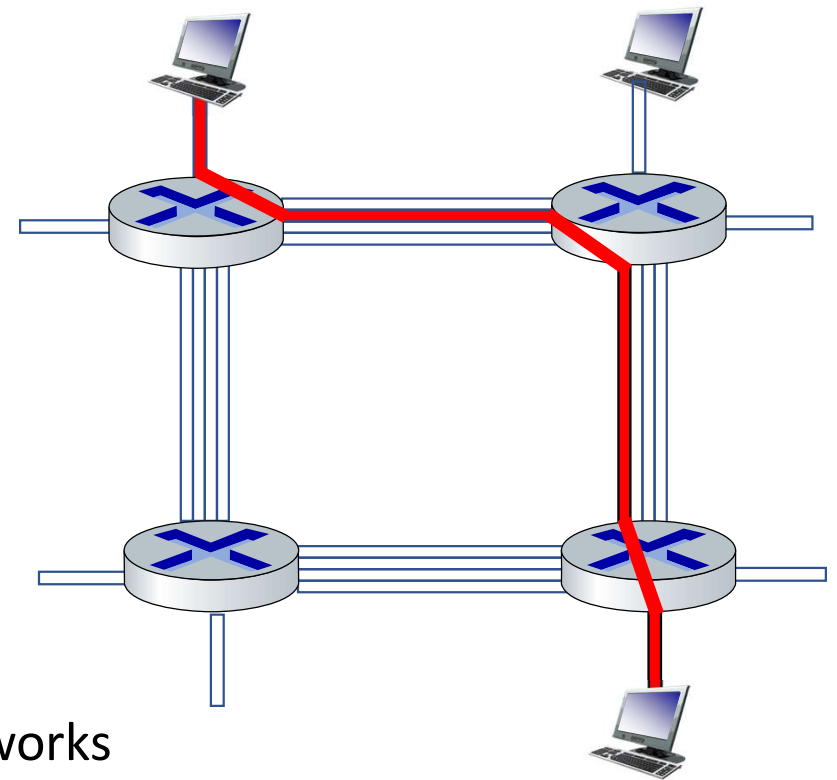

Packet switching versus circuit switching

example:

- 1 Gb/s link
- each user:
 - 100 Mb/s when “active”
 - active 10% of time

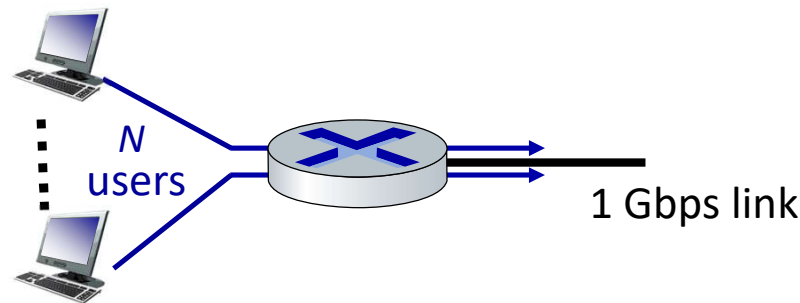

Q: how many users can use this network under circuit-switching and packet switching?

- **circuit-switching:** 10 users
- **packet switching:** with 35 users, probability > 10 active at same time is less than .0004 *

Q: how did we get value 0.0004?

A: HW problem (for those with course in probability only)


Packet switching versus circuit switching

Is packet switching a “slam dunk winner”?

- great for “bursty” data – sometimes has data to send, but at other times not
 - resource sharing
 - simpler, no call setup
- **excessive congestion possible:** packet delay and loss due to buffer overflow
 - protocols needed for reliable data transfer, congestion control
- **Q: How to provide circuit-like behavior with packet-switching?**
 - “It’s complicated.” There are various techniques that try to make packet switching as “circuit-like” as possible.

Internet structure: a “network of networks”


- hosts connect to Internet via **access** Internet Service Providers (ISPs)
- access ISPs in turn must be interconnected
 - so that *any* two hosts (*anywhere!*) can send packets to each other
- resulting network of networks is very complex
 - evolution driven by **economics**, **national policies**

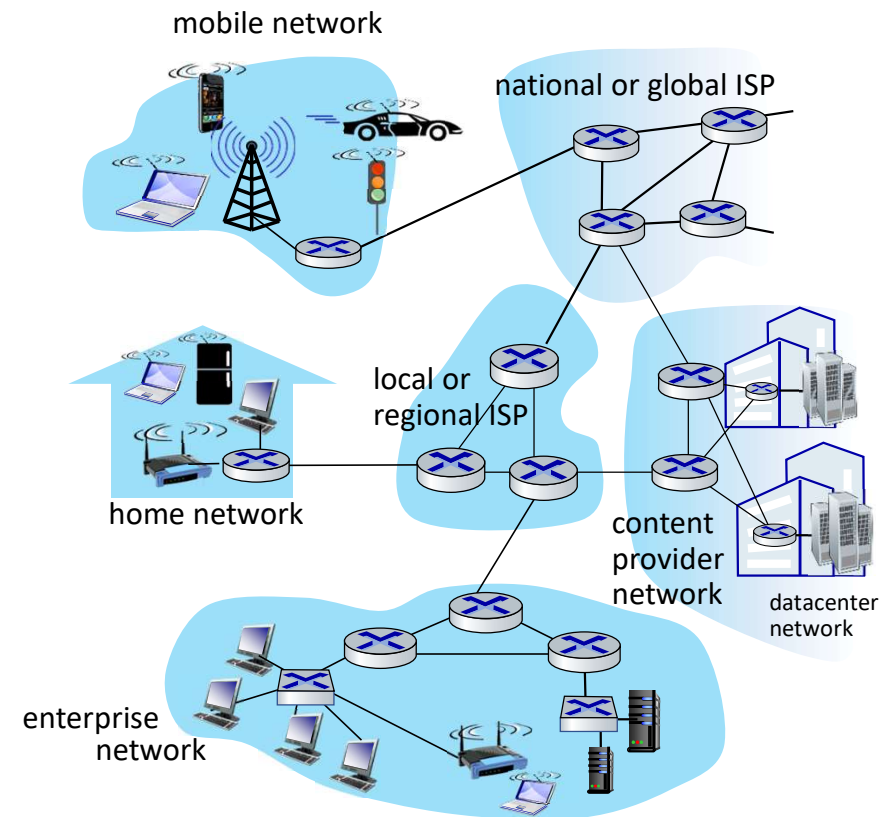

Let's take a stepwise approach to describe current Internet structure


Internet structure: a “network of networks”

Question: given *millions* of access ISPs, how to connect them together?

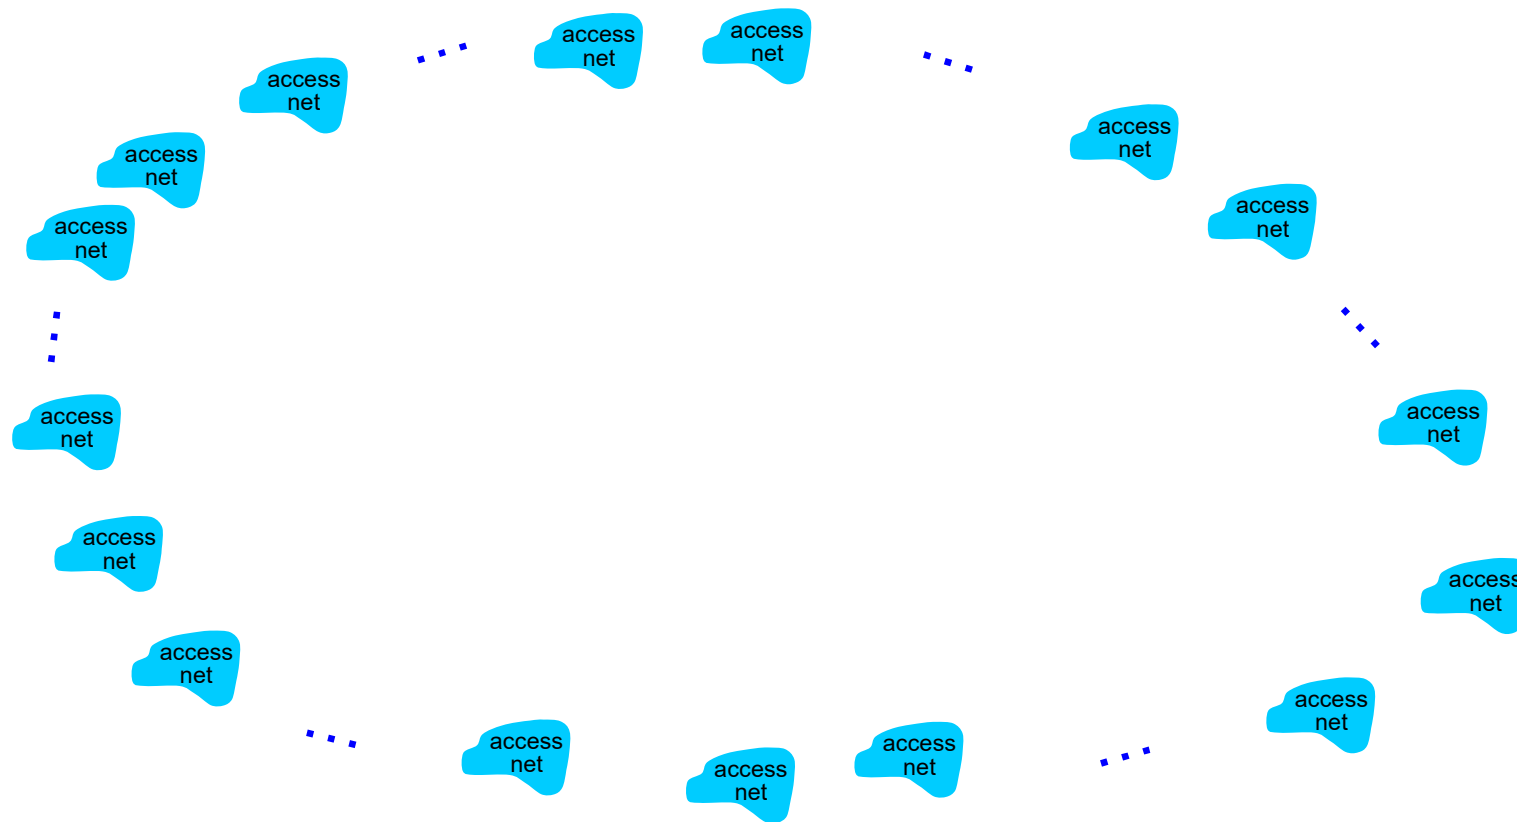

Internet structure: a “network of networks”


Question: given *millions* of access ISPs, how to connect them together?

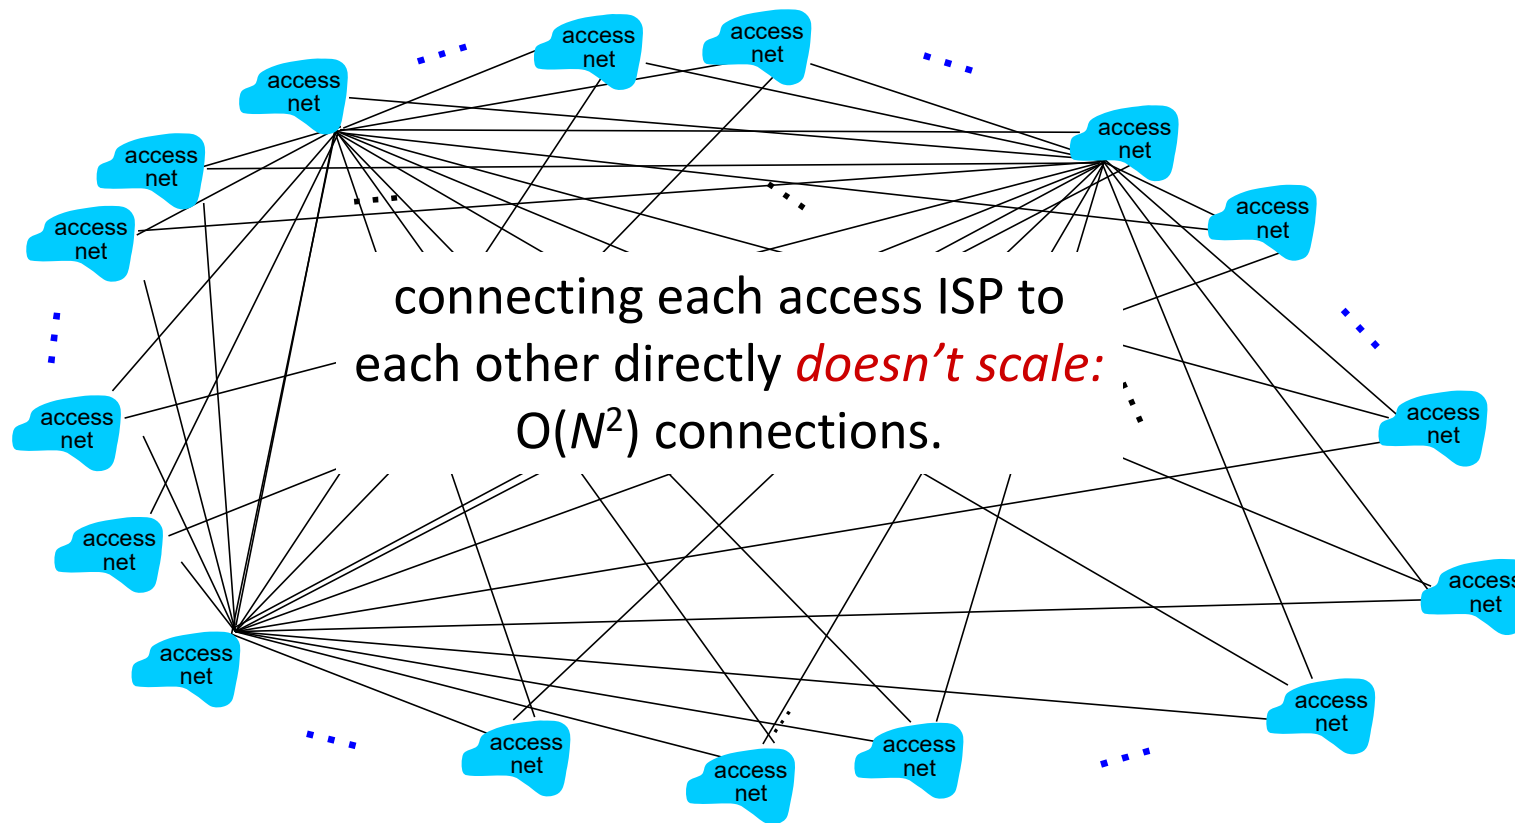

Internet structure: a “network of networks”


Option: connect each access ISP to one global transit ISP?

Customer and provider ISPs have economic agreement.

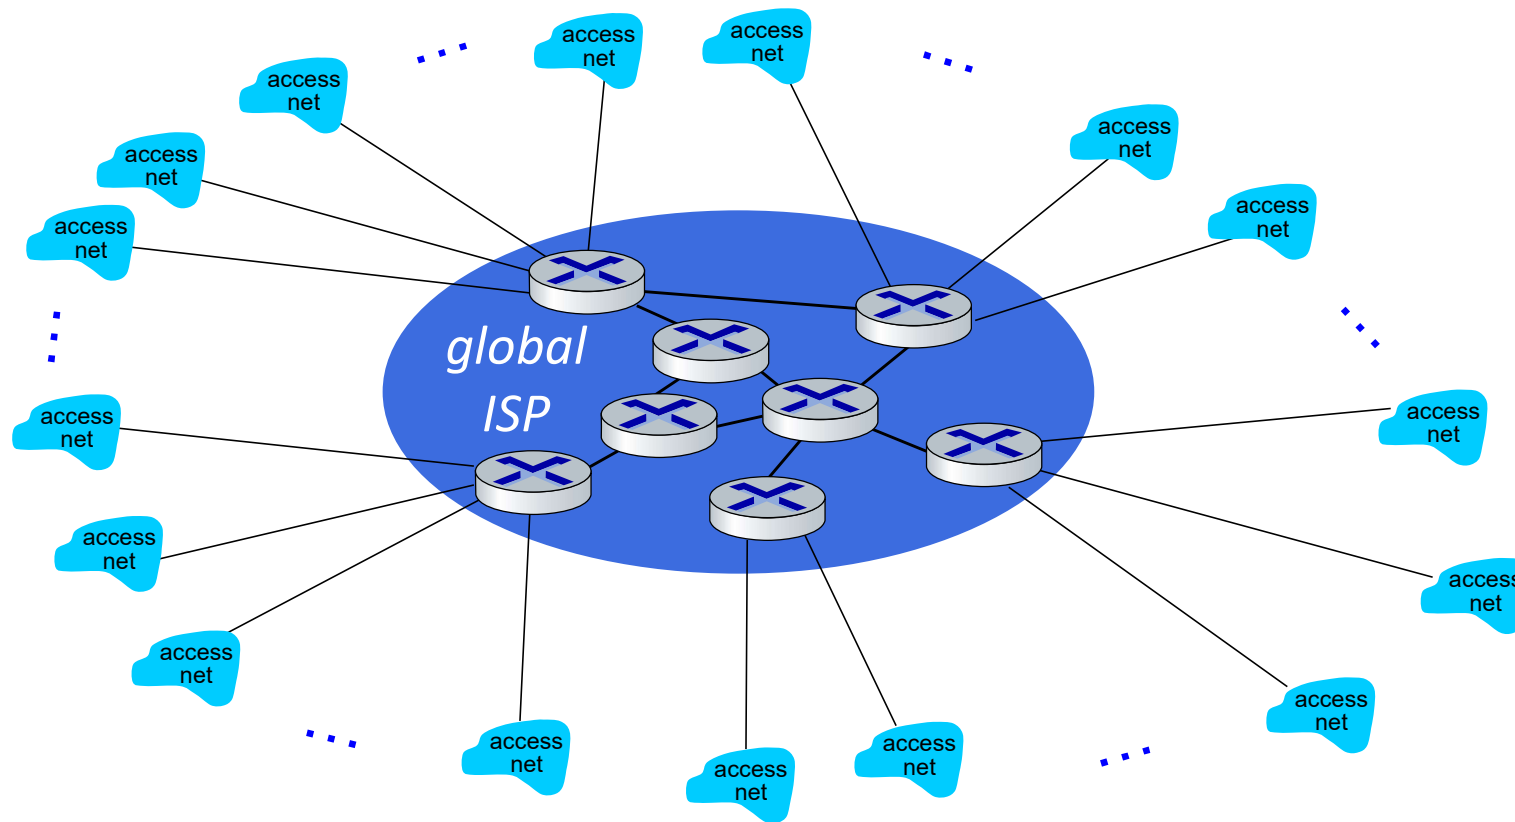


Internet structure: a “network of networks”

But if one global ISP is viable business, there will be competitors

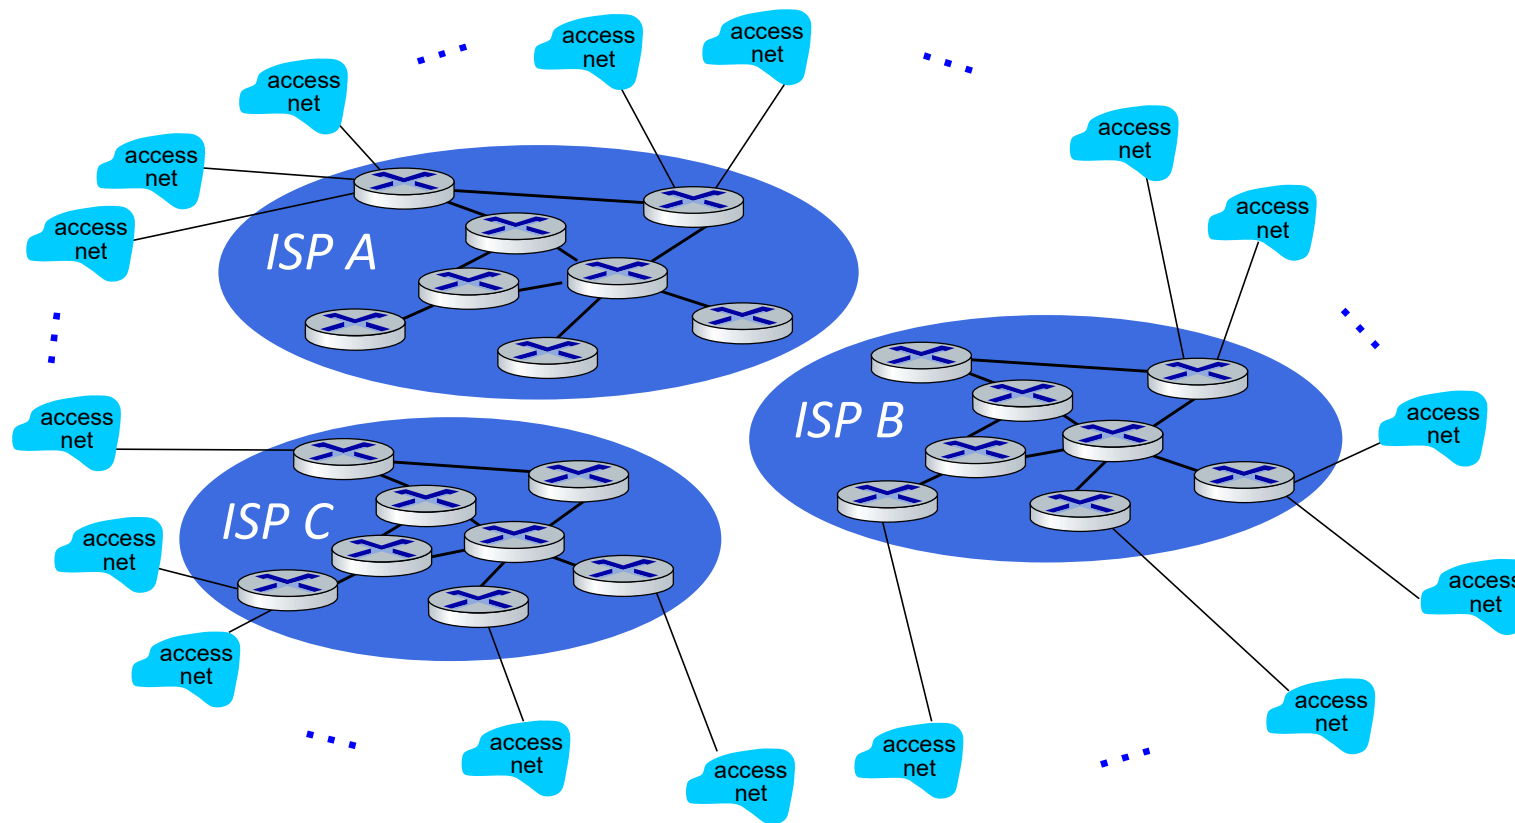


Internet structure: a “network of networks”

But if one global ISP is viable business, there will be competitors who will want to be connected

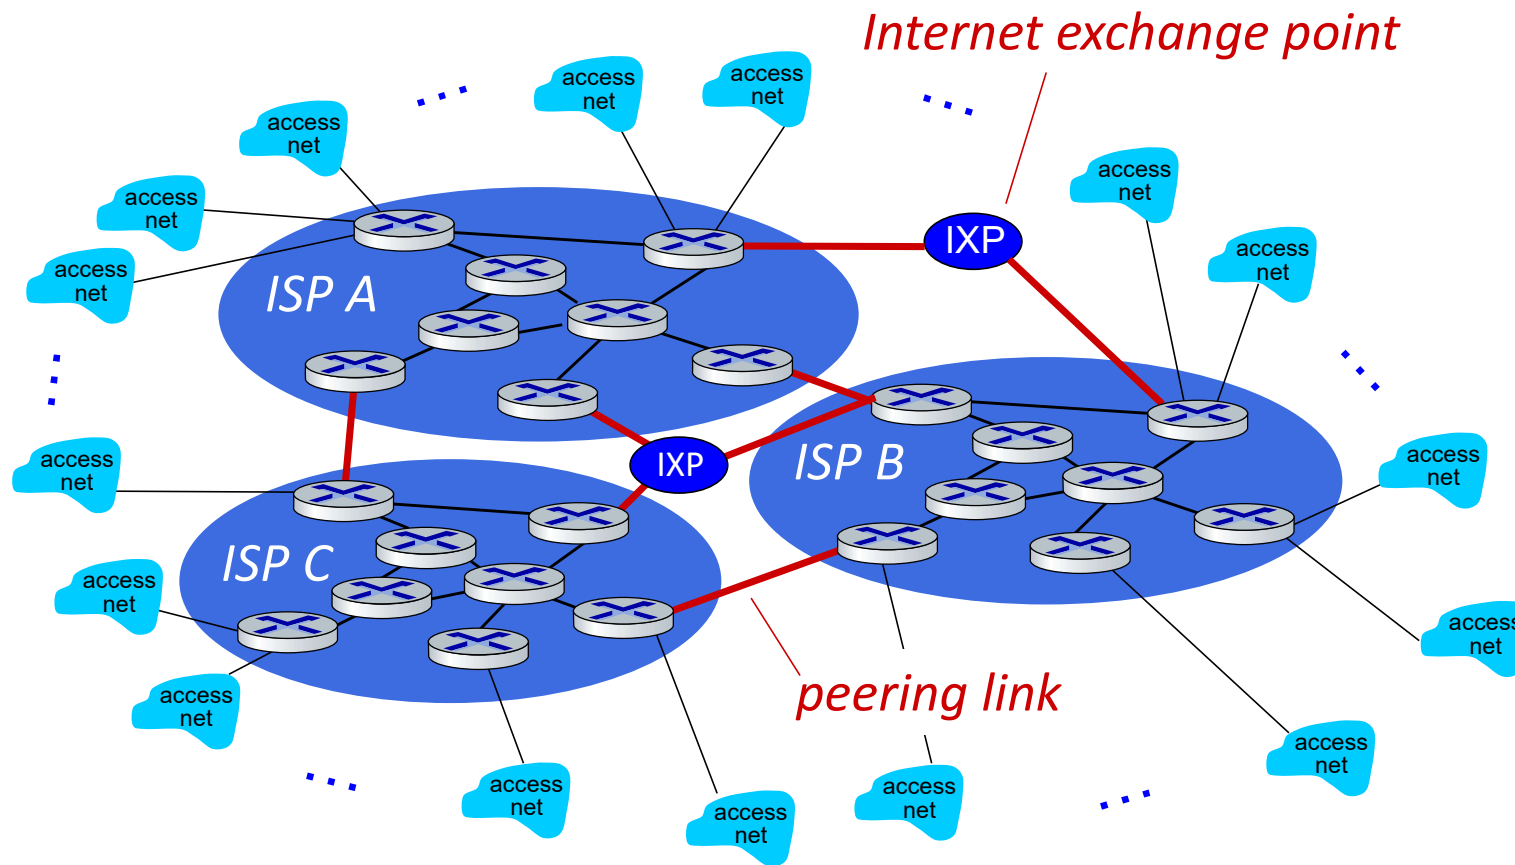


Internet structure: a “network of networks”

... and regional networks may arise to connect access nets to ISPs

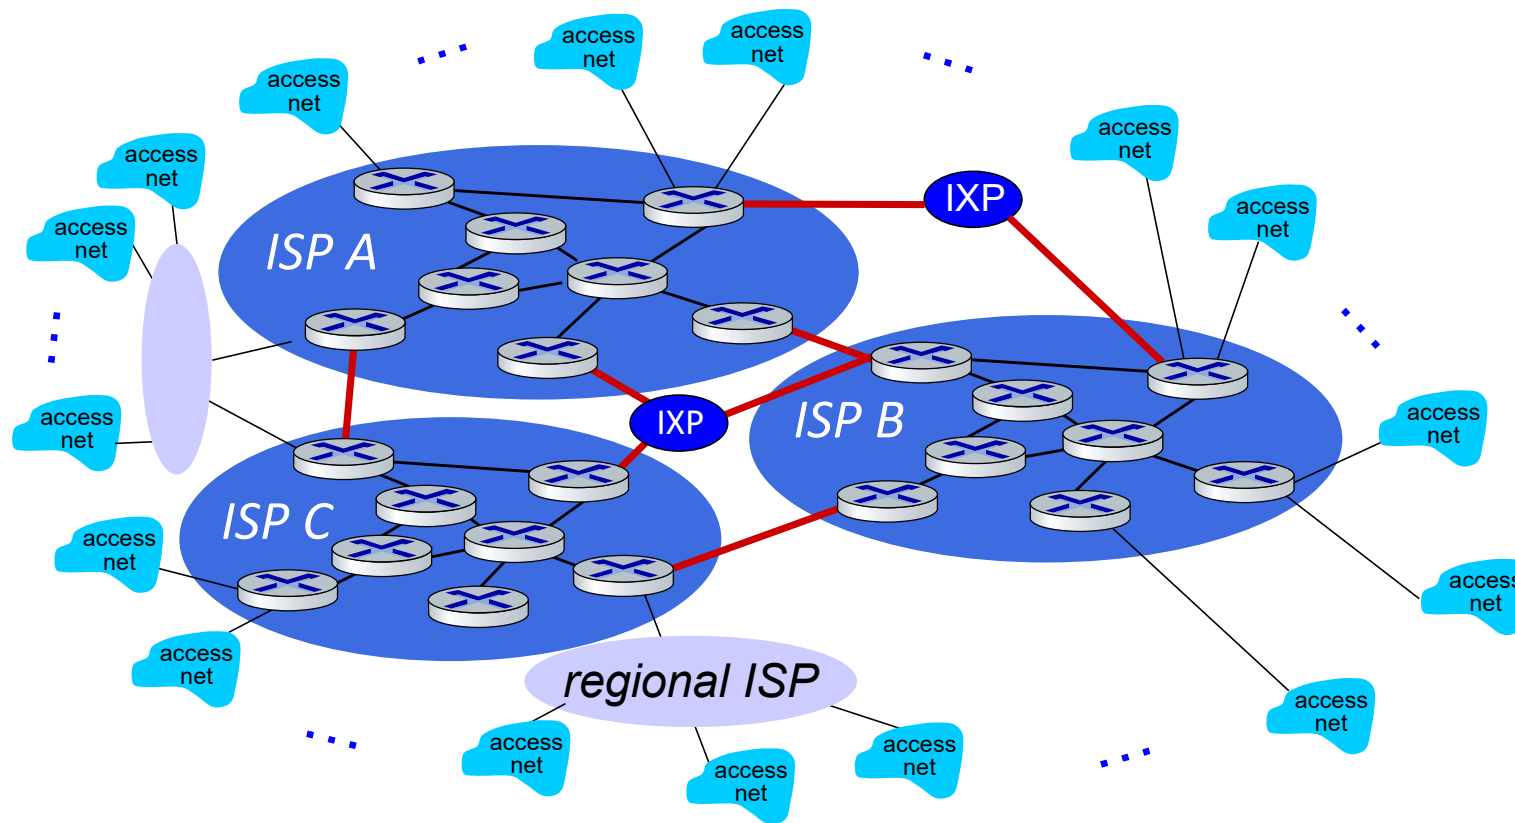


Internet structure: a “network of networks”

... and content provider networks (e.g., Google, Microsoft, Akamai) may run their own network, to bring services, content close to end users

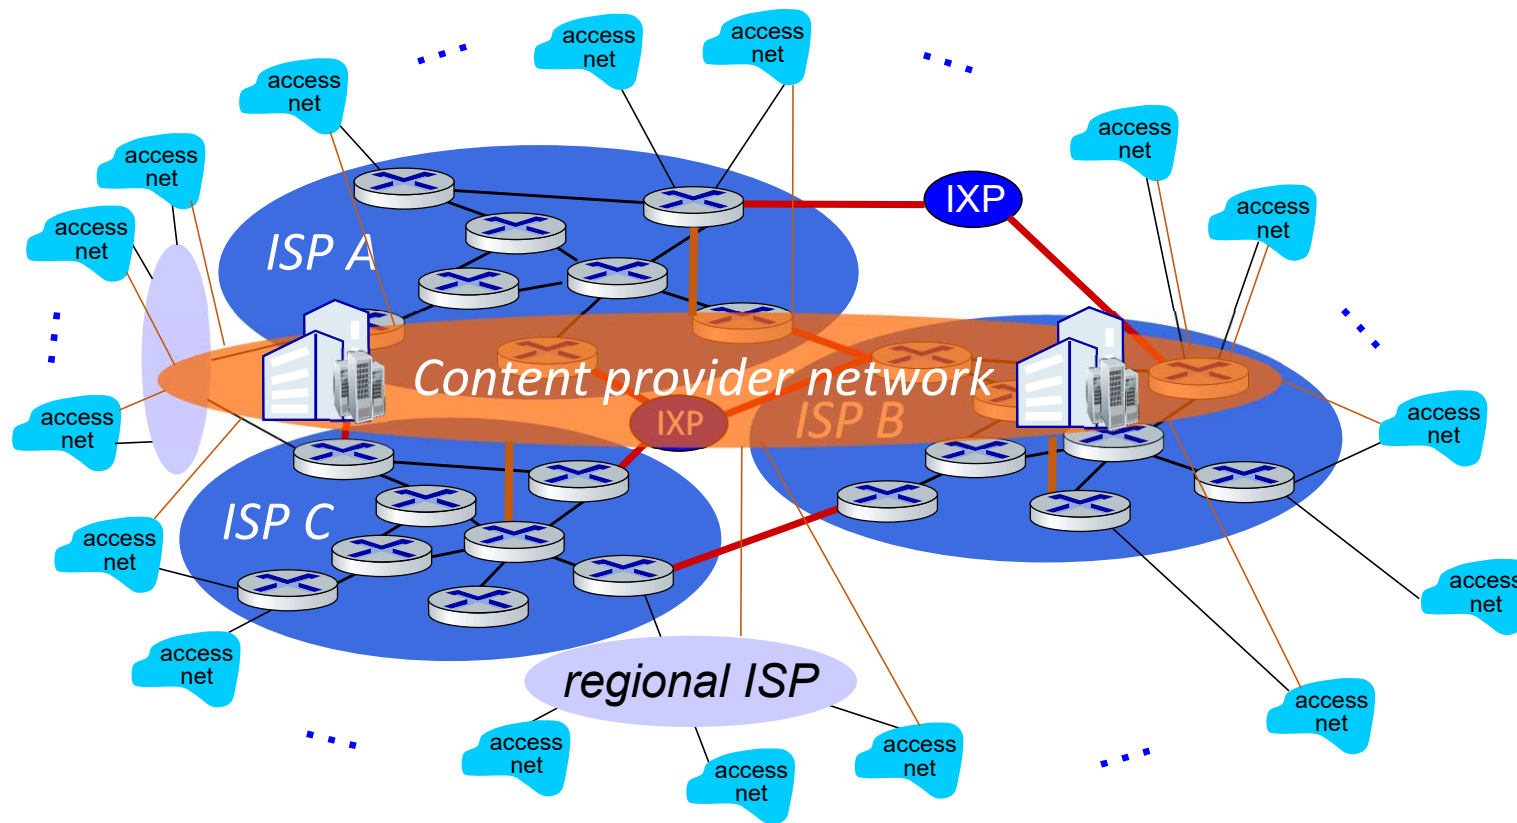

Internet structure: a “network of networks”

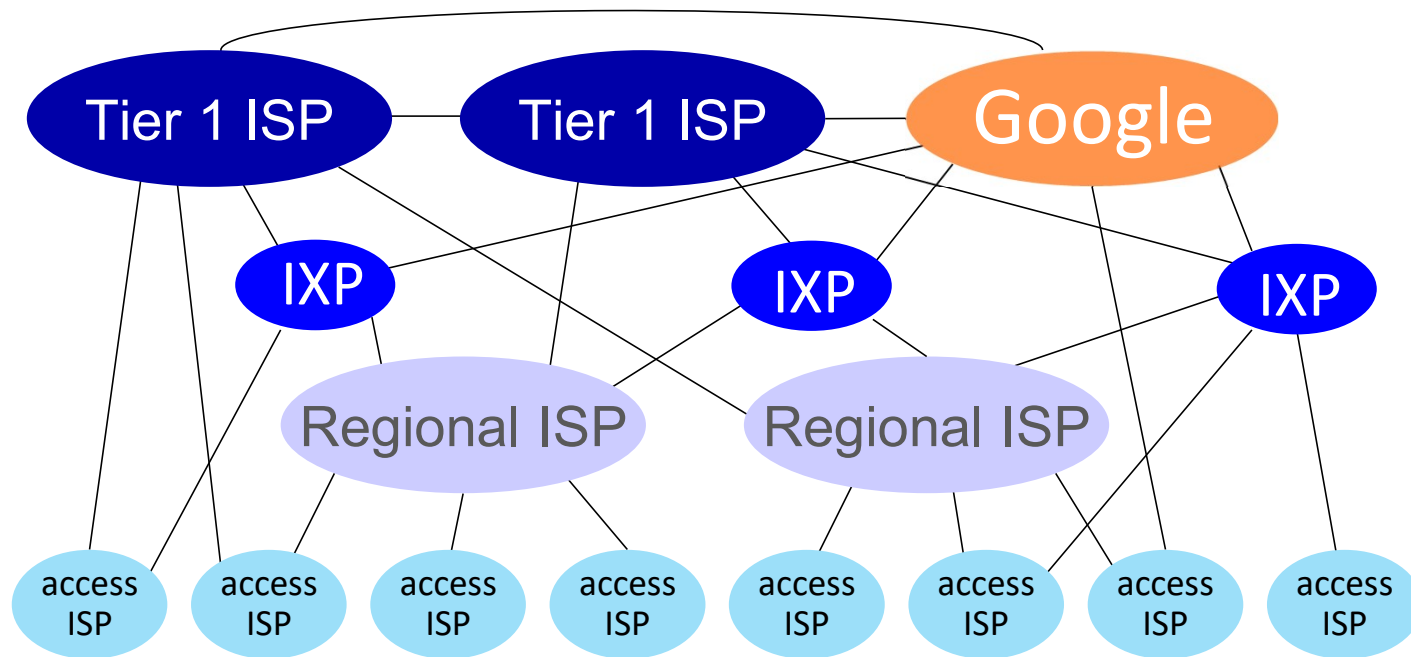


At “center”: small # of well-connected large networks


- “tier-1” commercial ISPs (e.g., Level 3, Sprint, AT&T, NTT), national & international coverage
- content provider networks (e.g., Google, Facebook): private network that connects its data centers to Internet, often bypassing tier-1, regional ISPs

How do packet delay and loss occur?

- packets *queue* in router buffers, waiting for turn for transmission
 - queue length grows when arrival rate to link (temporarily) exceeds output link capacity
- packet *loss* occurs when memory to hold queued packets fills up

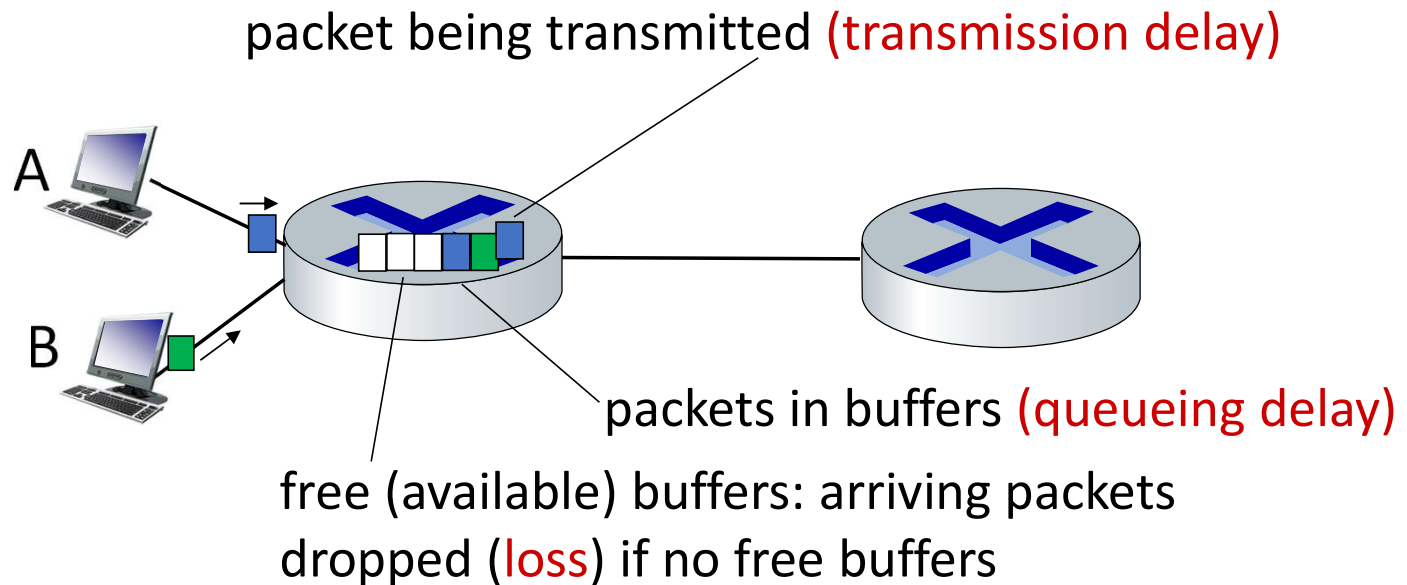

Packet delay: four sources

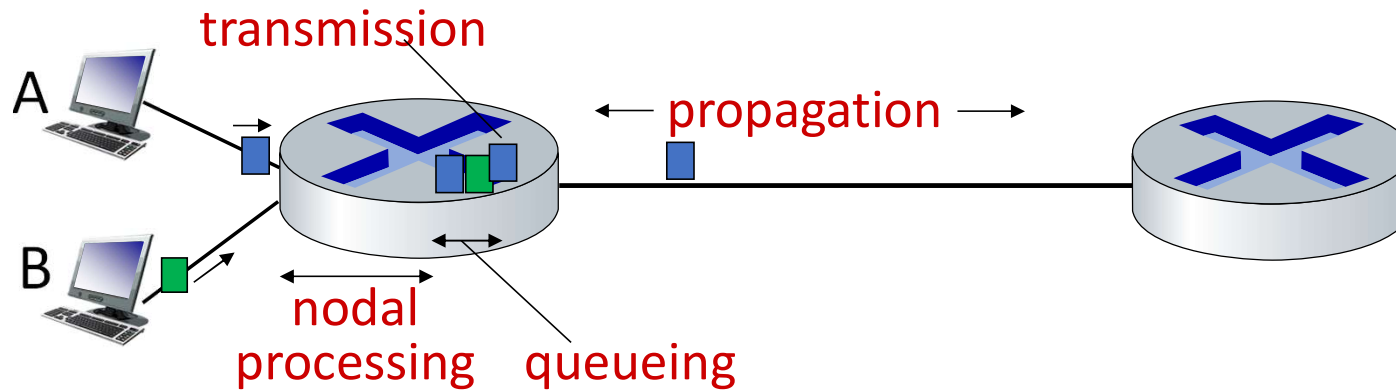

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$


d_{proc} : nodal processing

- check bit errors
- determine output link
- typically < microsecs

d_{queue} : queueing delay

- time waiting at output link for transmission
- depends on congestion level of router

Packet delay: four sources

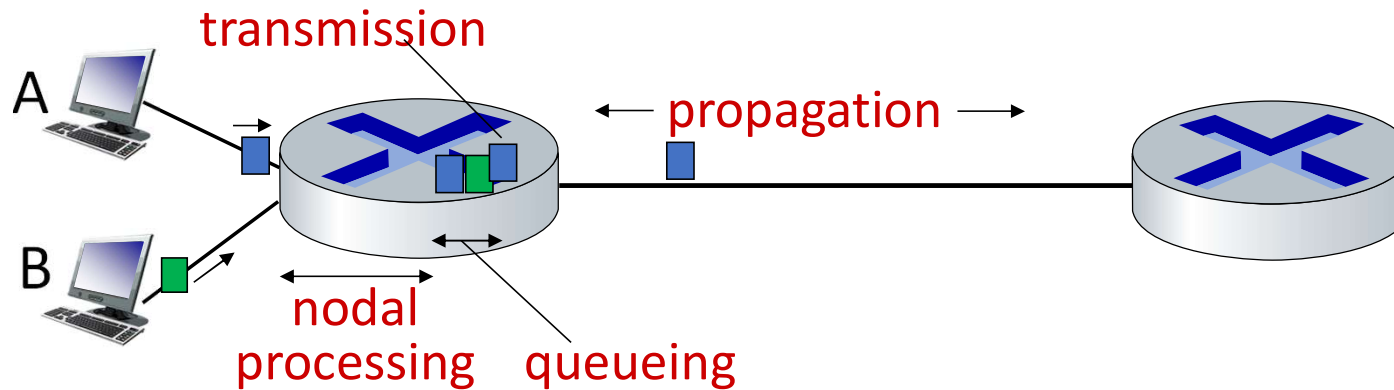

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

d_{trans} : transmission delay:

- L : packet length (bits)
- R : link transmission rate (bps)

■ $d_{\text{trans}} = L/R$


d_{prop} : propagation delay:

- d : length of physical link
- s : propagation speed ($\sim 2 \times 10^8$ m/sec)

■ $d_{\text{prop}} = d/s$


d_{trans} and d_{prop}
very different

Caravan analogy

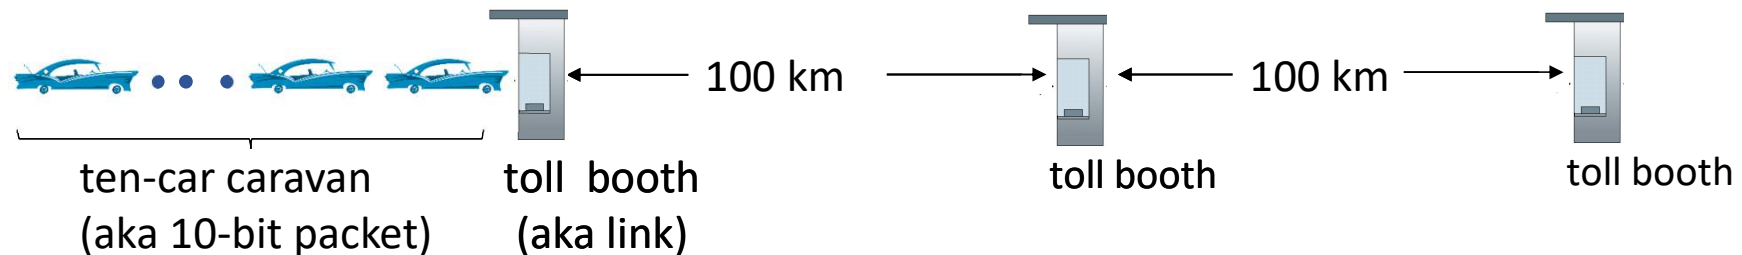

- car \sim bit; caravan \sim packet; toll service \sim link transmission
- toll booth takes 12 sec to service car (bit transmission time)
- “propagate” at 100 km/hr
- **Q: How long until caravan is lined up before 2nd toll booth?**
- time to “push” entire caravan through toll booth onto highway = $12 \times 10 = 120$ sec
- time for last car to propagate from 1st to 2nd toll booth: $100\text{km}/(100\text{km/hr}) = 1$ hr
- **A: 62 minutes**

Caravan analogy

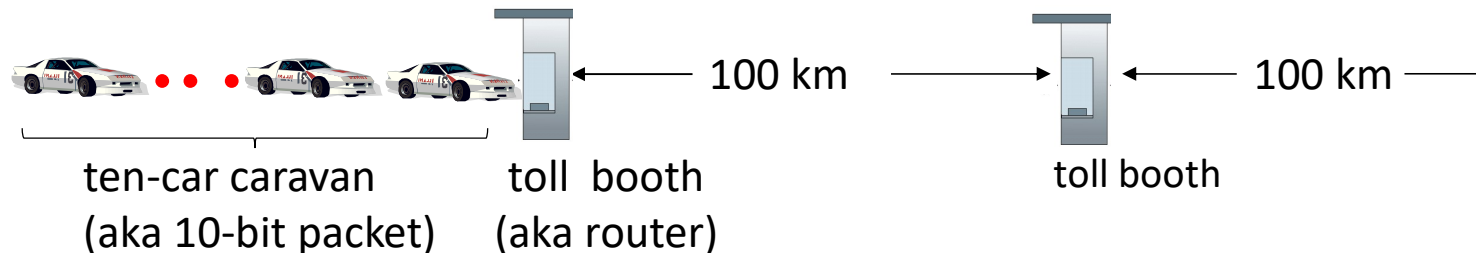

- suppose cars now “propagate” at 1000 km/hr
- and suppose toll booth now takes one min to service a car
- **Q: Will cars arrive to 2nd booth before all cars serviced at first booth?**
A: Yes! after 7 min, first car arrives at second booth; three cars still at first booth

Packet queueing delay (revisited)

- a : average packet arrival rate
- L : packet length (bits)
- R : link bandwidth (bit transmission rate)

$$\frac{L \cdot a}{R} : \frac{\text{arrival rate of bits}}{\text{service rate of bits}} \quad \text{“traffic intensity”}$$

- $La/R \sim 0$: avg. queueing delay small
- $La/R \rightarrow 1$: avg. queueing delay large
- $La/R > 1$: more “work” arriving is more than can be serviced - average delay infinite!

