


DRILL CHART: TOP to BOTTOM				
ALL UNITS ARE IN MILS				
FIGURE	SIZE	TOLERANCE	PLATED	QTY
△	10.0	+3.0/-3.0	PLATED	286
□	18.0	+3.0/-3.0	PLATED	307
○	25.0	+3.0/-3.0	PLATED	16
+	64.0	+3.0/-3.0	PLATED	16
⊠	70.0	+3.0/-3.0	PLATED	8
R	236.0x236.0	+3.0/-3.0	NON-PLATED	4

NOTES: UNLESS OTHERWISE SPECIFIED:
 - CLASS 2, FR408 RECOMMENDED
 - MACHINING FINISH THROUGHOUT
 - BOARD FINISH: NOT RECOMMENDED
 - SOLDER MASK: CORNERS, ALL INSIDE, OR LESS THAN .005" OR LESS
 - LEGEND/SILKSCREEN: 1
 - DRILLING: ALL HOLES TO BE DRILLED TO SIZE AND QUANTITY FROM CAD DATA IN MINIMUM ANULAR RING COPPER PLATING HOLE FINISH COPPER SURF. HOLE CLOSURE: 1.000" ON THE 84 CAVITIES, 2 TO EXPOSE LAYER

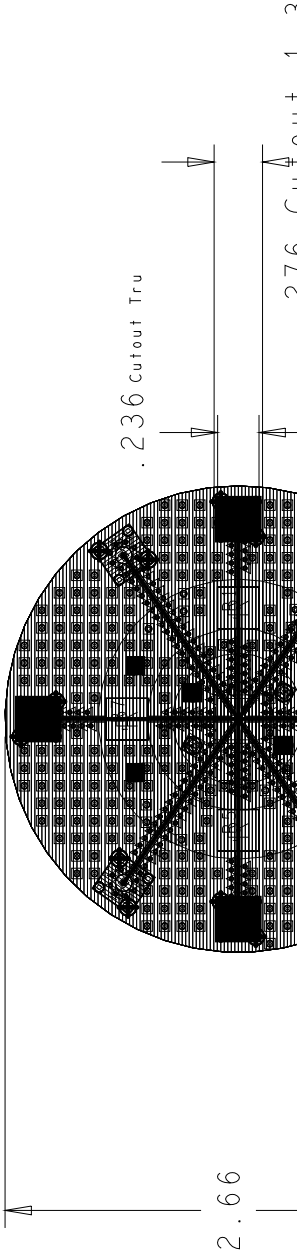

276.0 Cutout Tru

1 2