

# **Multi-Sensor Preprocessing for Traffic Light Detection**

BY

NISHAT ANJUM KHAN

B.S., Bangladesh University of Engineering and Technology, 2014

THESIS

Submitted in partial fulfillment of the requirements  
for the degree of Master of Science in Electrical and Computer Engineering  
in the Graduate College of the  
University of Illinois at Chicago, 2017

Chicago, Illinois

Defense Committee:

Dr. Rashid Ansari, Chair and Advisor

Dr. Ahmet Enis Cetin

Dr. Mojtaba Soltanalian

Copyright by

Nishat Anjum Khan

2017

*To my parents*

## TABLE OF CONTENTS

<u>CHAPTER</u>		<u>PAGE</u>
<b>1</b>	<b>INTRODUCTION . . . . .</b>	1
<b>2</b>	<b>BACKGROUND . . . . .</b>	2
2.1	Accelerometer . . . . .	2
2.2	Gyroscope . . . . .	3
2.3	Geomagnetic field sensor . . . . .	3
2.4	Orientation . . . . .	4
<b>3</b>	<b>SYSTEM . . . . .</b>	5
3.1	System architecture . . . . .	5
3.1.1	Diagram . . . . .	5
<b>4</b>	<b>CONCLUSION . . . . .</b>	16
	<b>CITED LITERATURE . . . . .</b>	17
	<b>VITA . . . . .</b>	18

## LIST OF TABLES

<u>TABLE</u>		<u>PAGE</u>
I	Hue range for red and green pixel. . . . .	7

## LIST OF FIGURES

<b><u>FIGURE</u></b>		<b><u>PAGE</u></b>
1	System Overview . . . . .	6
2	Original videoframes. . . . .	7
3	Red green pixel filtering. . . . .	8
4	Red green traffic bulb detection. . . . .	8
5	Red and green traffic bulb intensity. . . . .	10
6	Output not using black box checking filter. . . . .	11
7	Output using black box checking filter. . . . .	12
8	ROI movement with the change of sensor data. . . . .	13
9	Enlarged ROI to detect traffic light successfully. . . . .	14
10	CDF of frame processing time. . . . .	15

## **SUMMARY**

abstract goes here.

## **CHAPTER 1**

### **INTRODUCTION**

We used hough circle (1) to detect traffic lights.

..

## CHAPTER 2

### BACKGROUND

In this chapter we will discuss the background of our system. The main approach of our system is to improve the traffic light detection using smartphone sensor. In first part of this chapter we will discuss the inertial sensor of Android and Euler angle using sensor fusion. Later we will discuss the traffic bulb detection process.

#### 2.1 Accelerometer

Accelerometer is one of the motion sensor in smartphone. Smartphone now a days have three axis accelerometer, which can measure acceleration along this three axis and return a vector in the reference frame. Accelerometer can not measure free fall acceleration rather it measure the forces that are applied to the sensor itself. For example, when phone is on the table, it will measure acceleration of  $g$ , the acceleration due to gravity, because this is proportional to the accelerometer experienced weight.

??... shows the reference coordination system of accelerometer in Android phone. The device measures acceleration  $ax, ay$  and  $az$  along the three axis of android reference frame. The acceleration  $az$  points towards the outside of screen face, that is perpendicular to the phone plane. The acceleration  $ax$  and  $ay$  are along to phone plane.

## 2.2 Gyroscope

Gyroscope measure the rate of rotation or the angular velocity of rotation along the three axis of smartphone's reference frame. This is also a motion sensor of smartphone like accelerometer. These gyroscope use MEMS (micro-electro-mechanical sensing) technology, contain vibrating elements to measure Coriolis effect. When smartphone rotates, there is a change of direction of vibrating elements because of the Coriolis force. MEMS gyroscope measure these variation along the three axis to estimate the rate of rotation. Gyroscope output is quite smooth, and very responsive to small rotations.

??... shows the reference coordination system of gyroscope in Android phone. The device measures rate of rotaion wx,wy and wz along the three axis of android reference frame. The angular velocity of rotation wz points towards the outside of screen face, that is perpendicular to the phone plane, which is the angular velocity of phone's rotaion in X-Y plane. The rate of rotation wx and wy is along with the phone plane, which is the angular velocity of phone's rotaion in Y-Z plane and Z-X plane respectively.

## 2.3 Geomagnetic field sensor

Geomagnetic field sensor is a position sensor of smartphone. It helps to determine the device's physical position in the world's reference frame. Geomagnetic field sensor mesure the change of magnetioc field and estimates the magnetic field at earth's point to find the declination from the true North. It provides the geomagnetic field strength along the three coordination axis of refernce frame.

## 2.4 Orientation

Each sensor defined in previous section has it's own strength and weakness. Gyroscope is fast, accurate and reliable. It is very responsive to small rotation so it can track the change of rotation at every timestamp. But gyroscope data can not measure gravity. So with accelerometer it can provide a better rotation or motion of the sensor in application's frame reference. But to have the position of the device in world's reference frame, we need to fused this data with geomagnetic field sensor. Another motion sensor in android, rotation vector, use this three sensor data to report the orientation of the device in vector form along the axis of reference frame.

This rotation vector provides the axis of the system and the angle of rotation from these axis. From this angle and axis data, we can get the orientation of the system in terms of pitch, roll and azimuth. Pitch is the degree of rotation about the X axis. This is the angle between the plane parallel to device and parallel to the ground. If device top edge incline to the ground the pitch will be positive and vice versa. The range of pitch value is -180 degrees to 180 degrees. Roll is the degree of rotation about Y axis. This is the angle between the plane perpendicular to device and perpendicular to ground. If device's left edge inclines to the ground roll value is positive. The range of roll value is -90 degrees to 90 degrees. Azimuth is the degree of rotation about Z axis. If the device is faced to the earth's North the azimuth is 0 degree. Azimuth is 90 degree at earth's East, 180 degree to earth's South and 270 degree to earth's West.

..

## CHAPTER 3

### SYSTEM

In this chapter, we discuss about the system overview for traffic light detection. This system detect the color of traffic light in a recorded videoframe. We captured video using a smartphone along with the sensor data.

#### 3.1 System architecture

We use three features of traffic light, color, shape, and traffic bulb in a black box and the sensor feature of a smartphone as a system architecture for traffic light detection. While recording the video we logged in the sensor data. The first step of detection is the color filtering of the recorded videos. Each video frames is consist of different colors. In this step each frame is filtered with only red and green pixel. The traffic bulb shape is mostly circle. To detect this characteristic we use Hough Circle transformation(1). Based on the traffic light detection position in videoframes, we fix region of interest area, which is a subpart of videoframes. After that, on next videoframes the ROI change in respect to the sensor data.

##### 3.1.1 Diagram

Section 3.1 discusses the overall architecture of our system.

Figure 1 shows the overview of the system.

At first we recorded videos along with the sensor data, gyroscope, accelerometer, pitch, roll, and azimuth. These data have synchronization with our recorded videoframes, since we logged

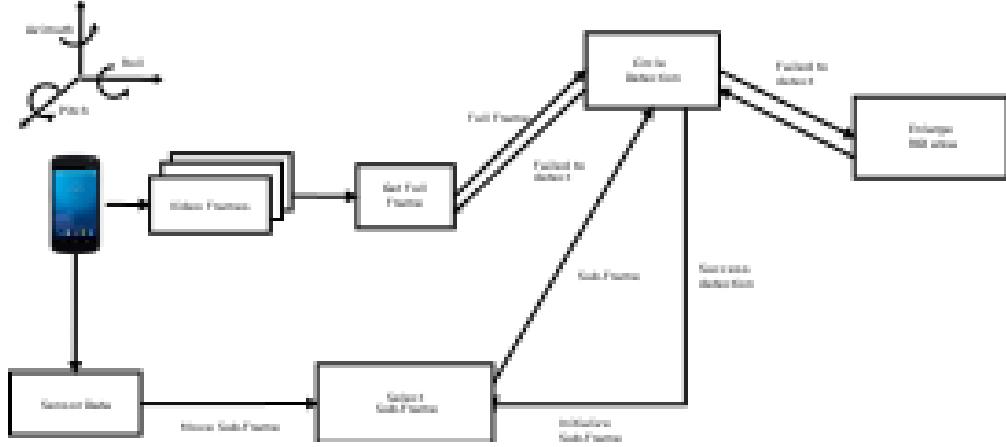


Figure 1: System Overview

in sensor data while recording. Now to detect the traffic light, we use three features of traffic light. Those are the color, shape of traffic light and traffic light location in a black box.

The first step of detection algorithm is color filtering of video frames. The most distinctive feature of traffic bulb is it's bright color. Color filtering step filter out these candidate pixel from the video frames. For this purpose we convert the BGR color space to HSV space first. In BGR space, to detect specific color we need to depend on three different values (B,G,R) HSV space has the property to find out the color based on only single value,hue. The range of hue values of each color are well defined that help us to filter out our desired pixels. In OpenCV the hue range is from 0 to 180. We fix the range for red and green analyzing the color range of traffic bulbs. Table I shows the hue range for red and green pixel.

Figure 2(a) shows the video frame with red traffic signal light and (b) shows the frame with green traffic signal light. Figure 3 shows the image with only red and green pixel. (a) shows

TABLE I: Hue range for red and green pixel.


Hue range for red	Lower 0 to 10 Upper 160 to 179
Hue range for green	65 to 95



Figure 2: Original videoframes.

the filtering output with red traffic light and (b) shows the filtering output with green traffic lights. The color filtering process is computationally lightweighted and it zeros out most of the pixels that reduce computational time to next steps.

The next step of this detection algorithm is to detect the shape of traffic bulb (circle). These filter images has only the desired pixel values. To detect circle on this filtered images, we use gaussian blur filter, in order to avoid false detection. After this, we use the circle Hough Transform (1) to detect the circles. But, noise from the original images can fool the hough

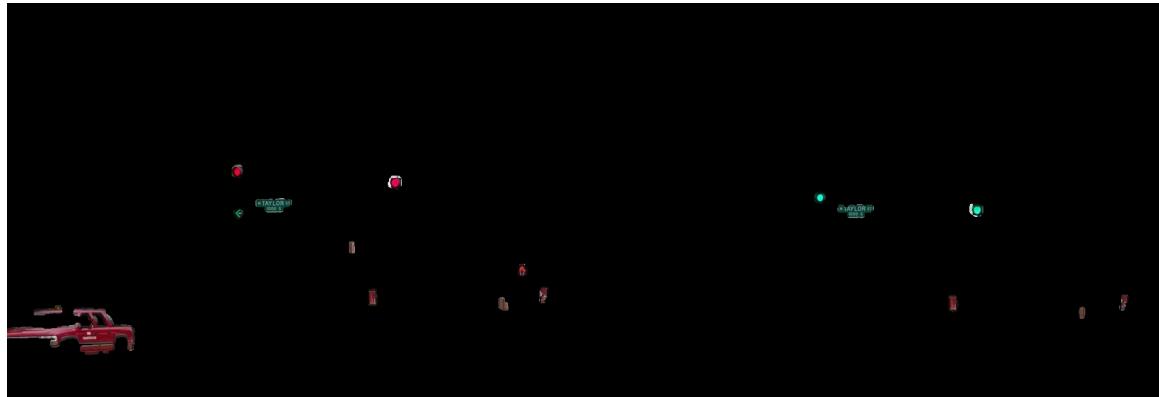


(a) Frame with red lights

(b) Frame with green lights

Figure 3: Red green pixel filtering.

transform to detect false and more circles. As a solution to this problem, before converting our original BGR space frame to HSV space, a median filter is used.

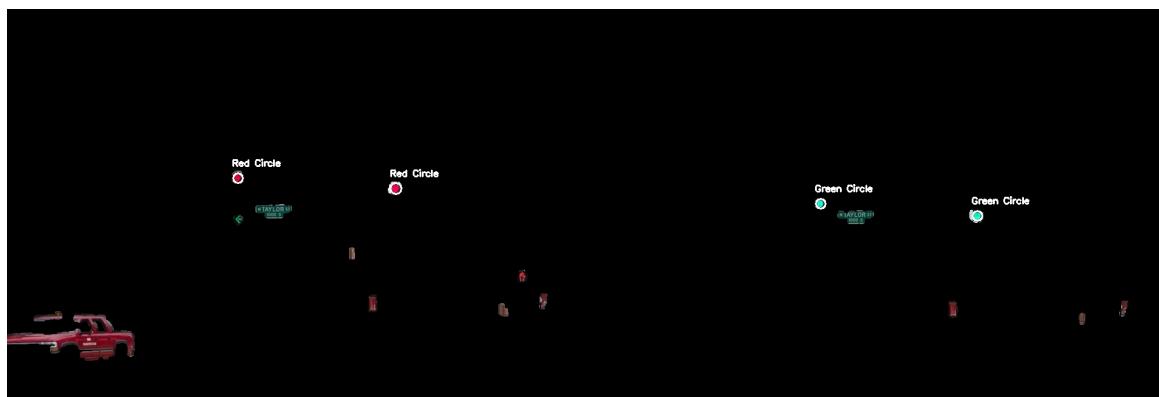

(a) Frame with red lights

(b) Frame with green lights

Figure 4: Red green traffic bulb detection.

Figure 4 shows the circle detection output. (a) shows the red traffic light detection. In this image we have other red pixel values except the traffic signal light. But Hough circle transform can detect the circle precisely. (b) shows the green traffic light detection output with Hough transform method.

At this point we have knowledge about the traffic bulb location and size (radius). Now to detect if traffic bulb is in the black box, the other feature of our detection, we tried two heuristic filters. Our first approach is to check pixels intensity of a circular area around the traffic bulb. We use midpoint circle algorithm to find out the pixels value on a circle perimeter which is larger than our traffic bulb size. Our system give a matrix with the count of pixels which has the intensity of a black color of all those points. The intensity of black color can detect to check the Value of HSV space. For black color, range of Value is very low, less than 40-45. If this count is greater than our threshold we select that circle as our traffic bulb. But we face some false detection problem with this approach. Since the intensity of traffic bulb color is high and it spreads out also. So we can not get successful result with this approach.

Figure 5 shows the red and green traffic bulb intensity. We can see that the color spreads out around the exact circle area. So the black color intensity measurement around the bulb circle area using midpoint circle algorithm is not giving actual result.

Our second approach is to scan a rectangle frame around the traffic light. Traffic bulbs locate in a black box, which can place in horizontally or vertically in street. To make our approach more global we scan all around the traffic light to check the intensity. Our system give a matrix of the no of pixels that has the intensity same as black color. If this pixel no is more

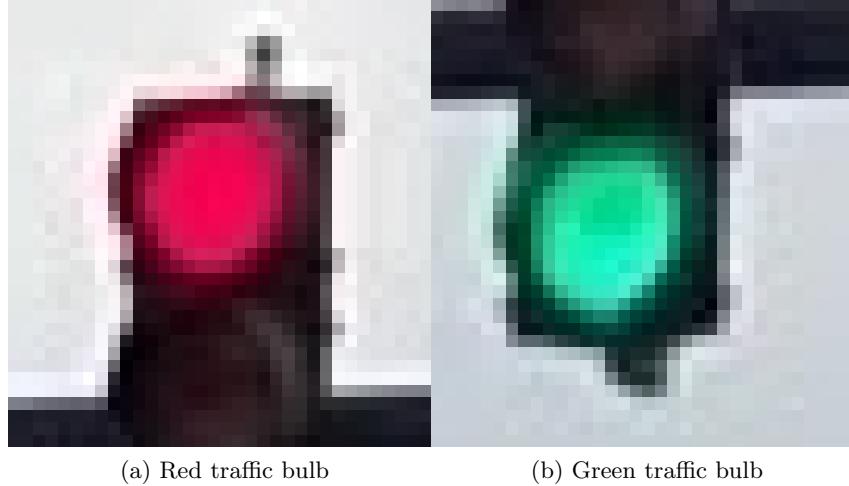


Figure 5: Red and green traffic bulb intensity.

than our threshold value we consider that the detected circle is in the traffic signal black box and we finally detect that circle as our traffic bulb.

Figure 6 shows there is one green false positive between two red traffic light. That false green circle actually a street nameplate and around that there is no black box. So when we use our black box checing filter we can remove this false positive detection. Figure 7 shows the output after using our heuristic black box checking filter.

For improvize our detection we also use the smartphone sensor data. So when we detect a traffic light in our video frame successfully using the color,shape of traffic light and the characteristics of traffic bilb being in a box, we have idea of the position of the traffic light. With this idea we subdevide our videoframe making a region of interest area. When we move to the next frame, we have a prior knowledge of traffic light position and we know the sensor



Figure 6: Output not using black box checking filter.

data, pitch, roll and azimuth of this frame. Using these sensor data of current frame and the previous frame we have the idea of movement of traffic light. With this change of movement the ROI also moves to the direction of change. Figure 8 shows the movement of ROI with the change of pitch and azimuth of our recorded video. Apart from this, when our system can not detect any circle in our specific ROI area, it updates the ROI and try to detect the light.

With the successful detection, our region of interest again change with the light position and pitch and azimuth value. For unsuccessful detection, ROI enlarged until it process the full frame and then go to the next frame to detect traffic light. And this process is continuing to every frame.



Figure 7: Output using black box checking filter.



(a) Initial ROI



(b) Movement with change of sensor data



(c) Movement with change of sensor data

Figure 8: ROI movement with the change of sensor data.



Figure 9: Enlarged ROI to detect traffic light successfully.

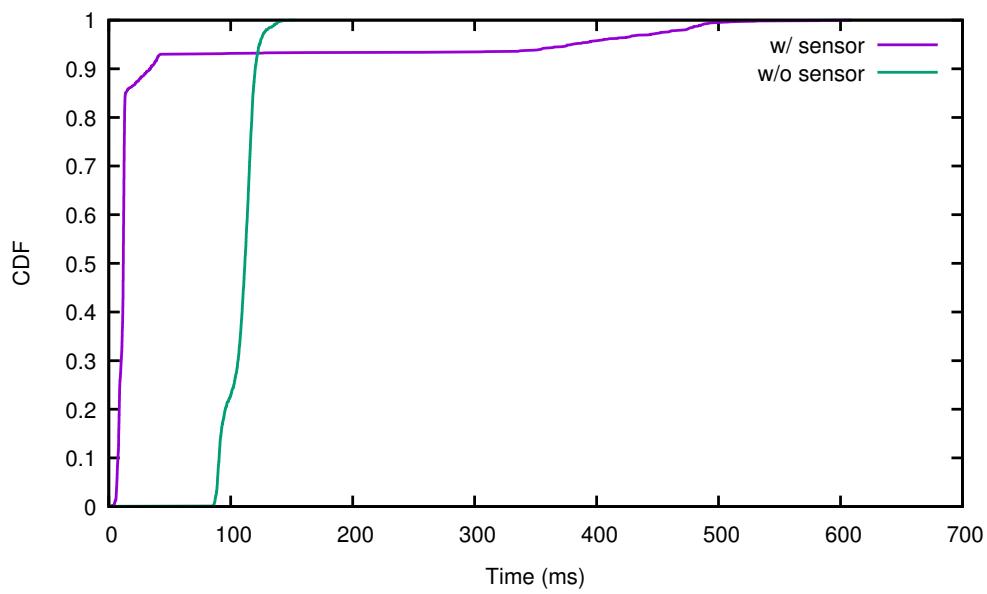


Figure 10: CDF of frame processing time.

## **CHAPTER 4**

### **CONCLUSION**

In conclusion, this is a great work!

## CITED LITERATURE

1. Smereká, M. and Duleba, I.: Circular object detection using a modified hough transform. International Journal of Applied Mathematics and Computer Science, 18(1):85, 2008.

## VITA

Name	ABM Musa
Education	Ph.D., Computer Science, University of Illinois at Chicago, 2017. B.S., Computer Science and Engineering, Bangladesh University of Engineering and Technology, 2008.
Publications	A.B.M. Musa, James Biagioni and Jakob Eriksson, Trading Off Accuracy, Timeliness, and Uplink Usage in Online GPS Tracking, in IEEE Transactions on Mobile Computing (TMC), vol. 15, no. 8, pp. 2124–2136, Aug. 1 2016. James Biagioni, A.B.M. Musa, and Jakob Eriksson, Thrifty Tracking: Online GPS Tracking with Low Data Uplink Usage, In Proceedings of the 21st ACM SIGSPATIAL International Conference on Advances in Geographic Information Systems (SIGSPATIAL13). ACM, New York, NY, USA, 496–499. A.B.M. Musa and Jakob Eriksson. Tracking unmodified smartphones using Wi-Fi monitors, In Proceedings of the 10th ACM Conference on Embedded Network Sensor Systems (SenSys 12). ACM, New York, NY, USA, 281–294. A.B.M. Musa, Jakob Eriksson, Demo: WiFlow: Real-time Travel Time Estimation using Wi-Fi Monitors, In Proceedings of the 9th ACM Conference on Embedded Networked Sensor Systems (SenSys 11). ACM, New York, NY, USA, 429–430. A.B.M. Musa, Jakob Eriksson, On-Demand, Deploy-Anywhere Wi-Fi Diagnostics, Demo In Proceedings of the sixteenth annual international conference on Mobile computing and networking (MobiCom 10), ACM, New York, NY, USA.
Patents	Theodoros Salonidis, A.B.M. Musa, Seraphin B. Calo, Murtaza Jafar, Executing Data Stream Processing Applications in Dynamic Network Environments, International Business Machines Corporation, US20160156514 (2016). Lenin Ravindranath, Victor Bahl, A.B.M. Musa, and David Chu, Application-centric Socialization, Microsoft Corporation, US20140280443 (2014).

Awards	Third place in UIC research forum competition among Engineering and Physical Science (2011) Deans List for excellent academic performance in BUET (2004–2007) University Merit Scholarship at BUET (2003)
Service	Reviewer for IEEE Transactions on Intelligent Transportation Systems (2016–2017) Reviewer for International Journal for Geographical Information Science (2017) Treasurer at UIC Computer Science Graduate Student Association (2012–2013)