
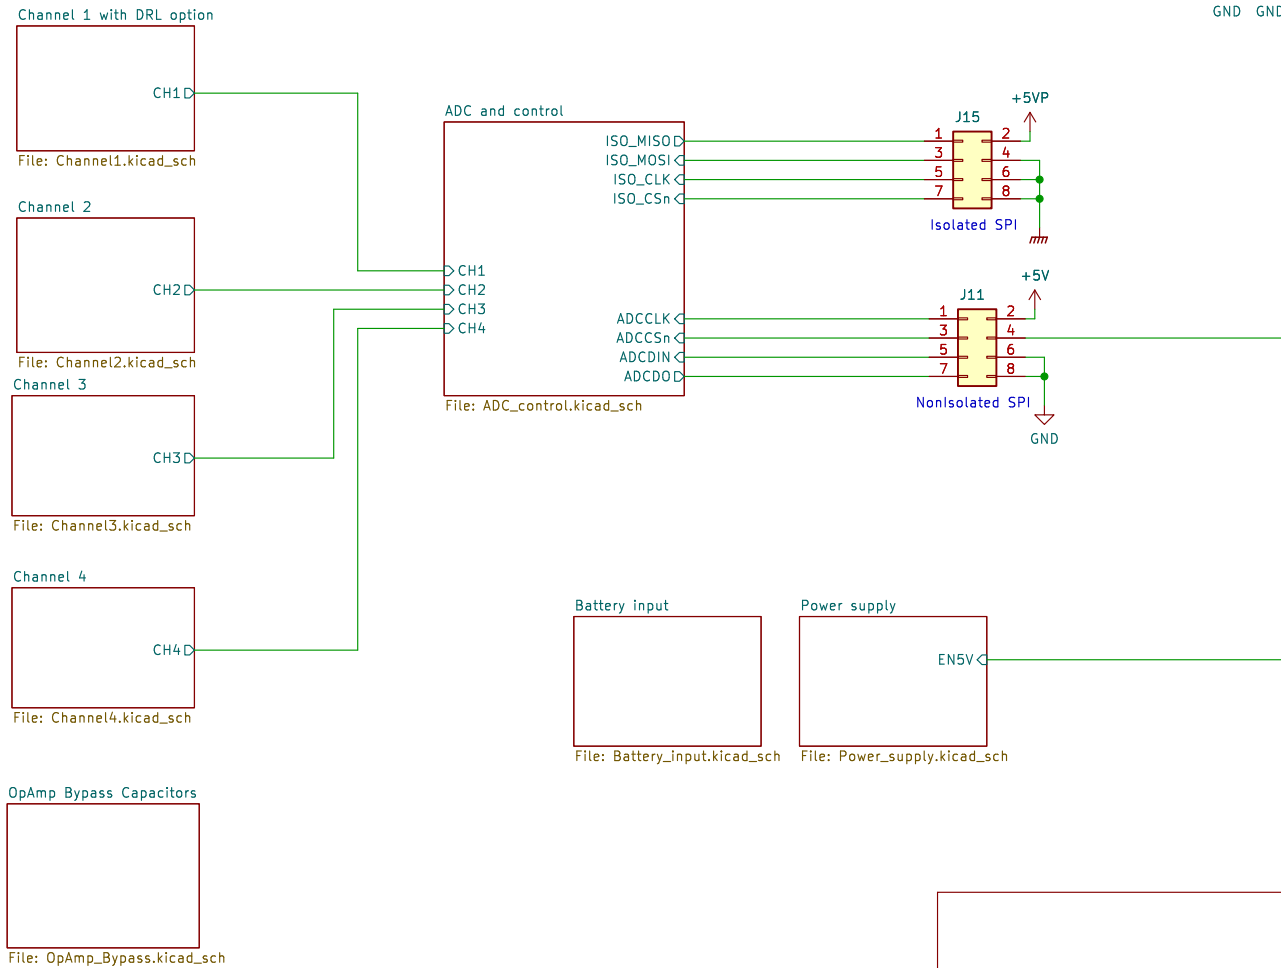


Measurements can be:


- differential between channels
- differential between universal reference channel and channel that is being measured

If using reference measurements then connect the input that will be used as reference to connector J7 or J5 and mount corresponding jumpers
J34 (audio connector) can be used to connect to the 3 electrode cable manufactured with Audio connector at ends

Channel1 has the option to use DRL or virtual ground (reference) to connect to RL electrode
It can be used to compare results with and without DRL



Sheet: /		
File: eeg_ecg.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 8.0.5		Id: 1/9

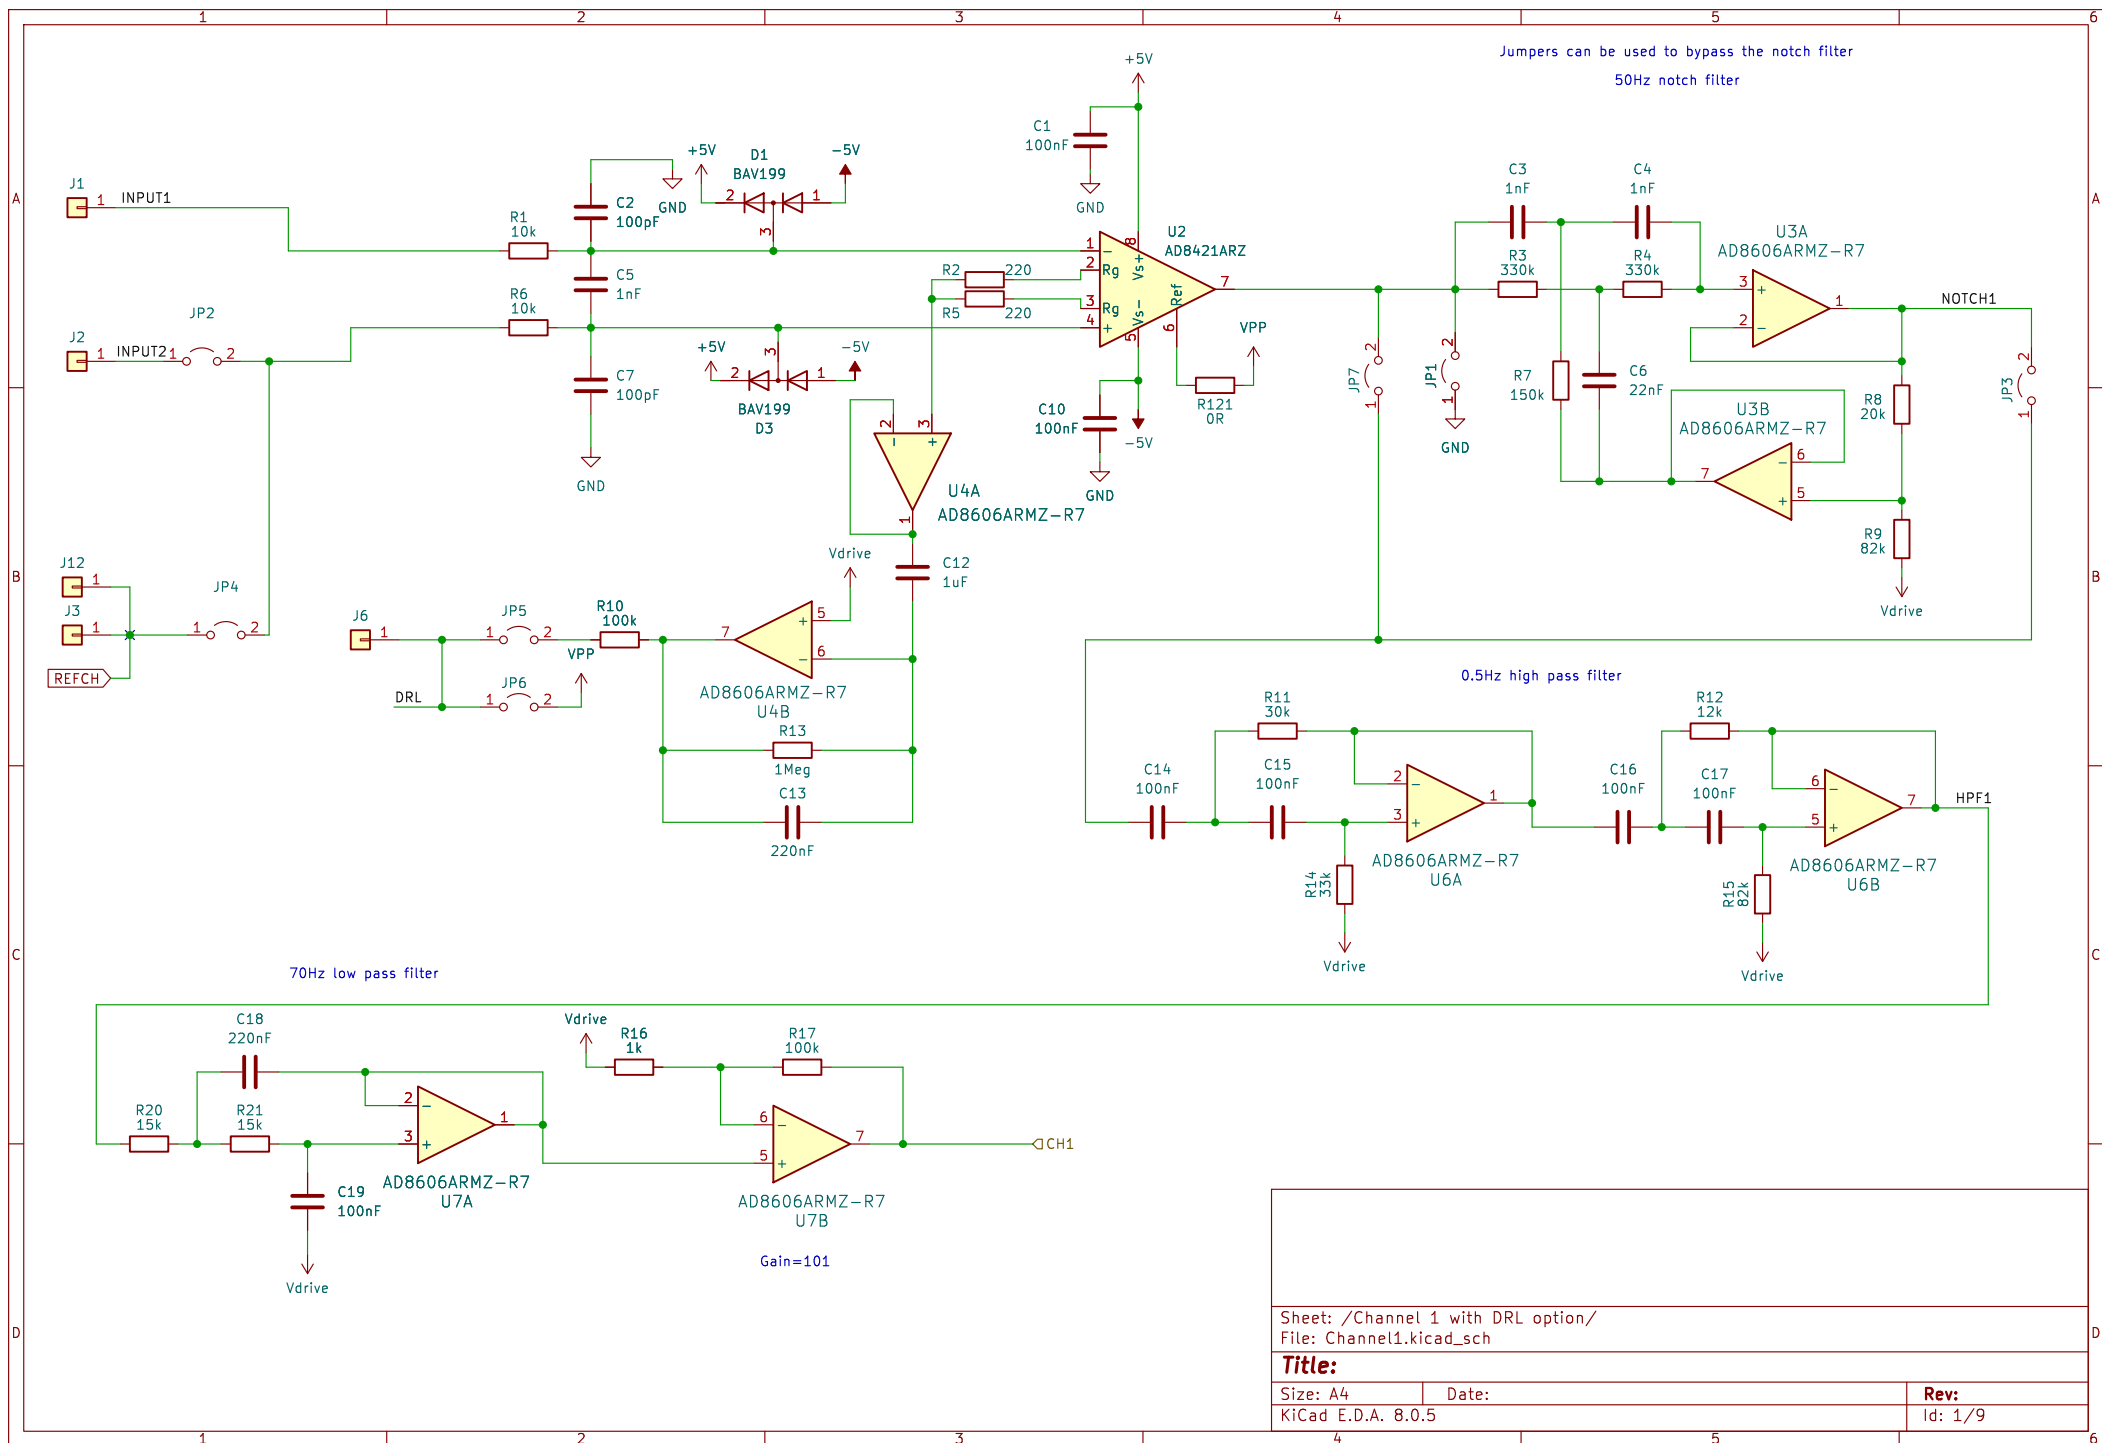


Sheet: /Channel 1 with DRL option/
File: Channel1.kicad_sch


Title:

Size: A4
KiCad E.D.A. 8.0.5

Date:

Rev:
Id: 1/9

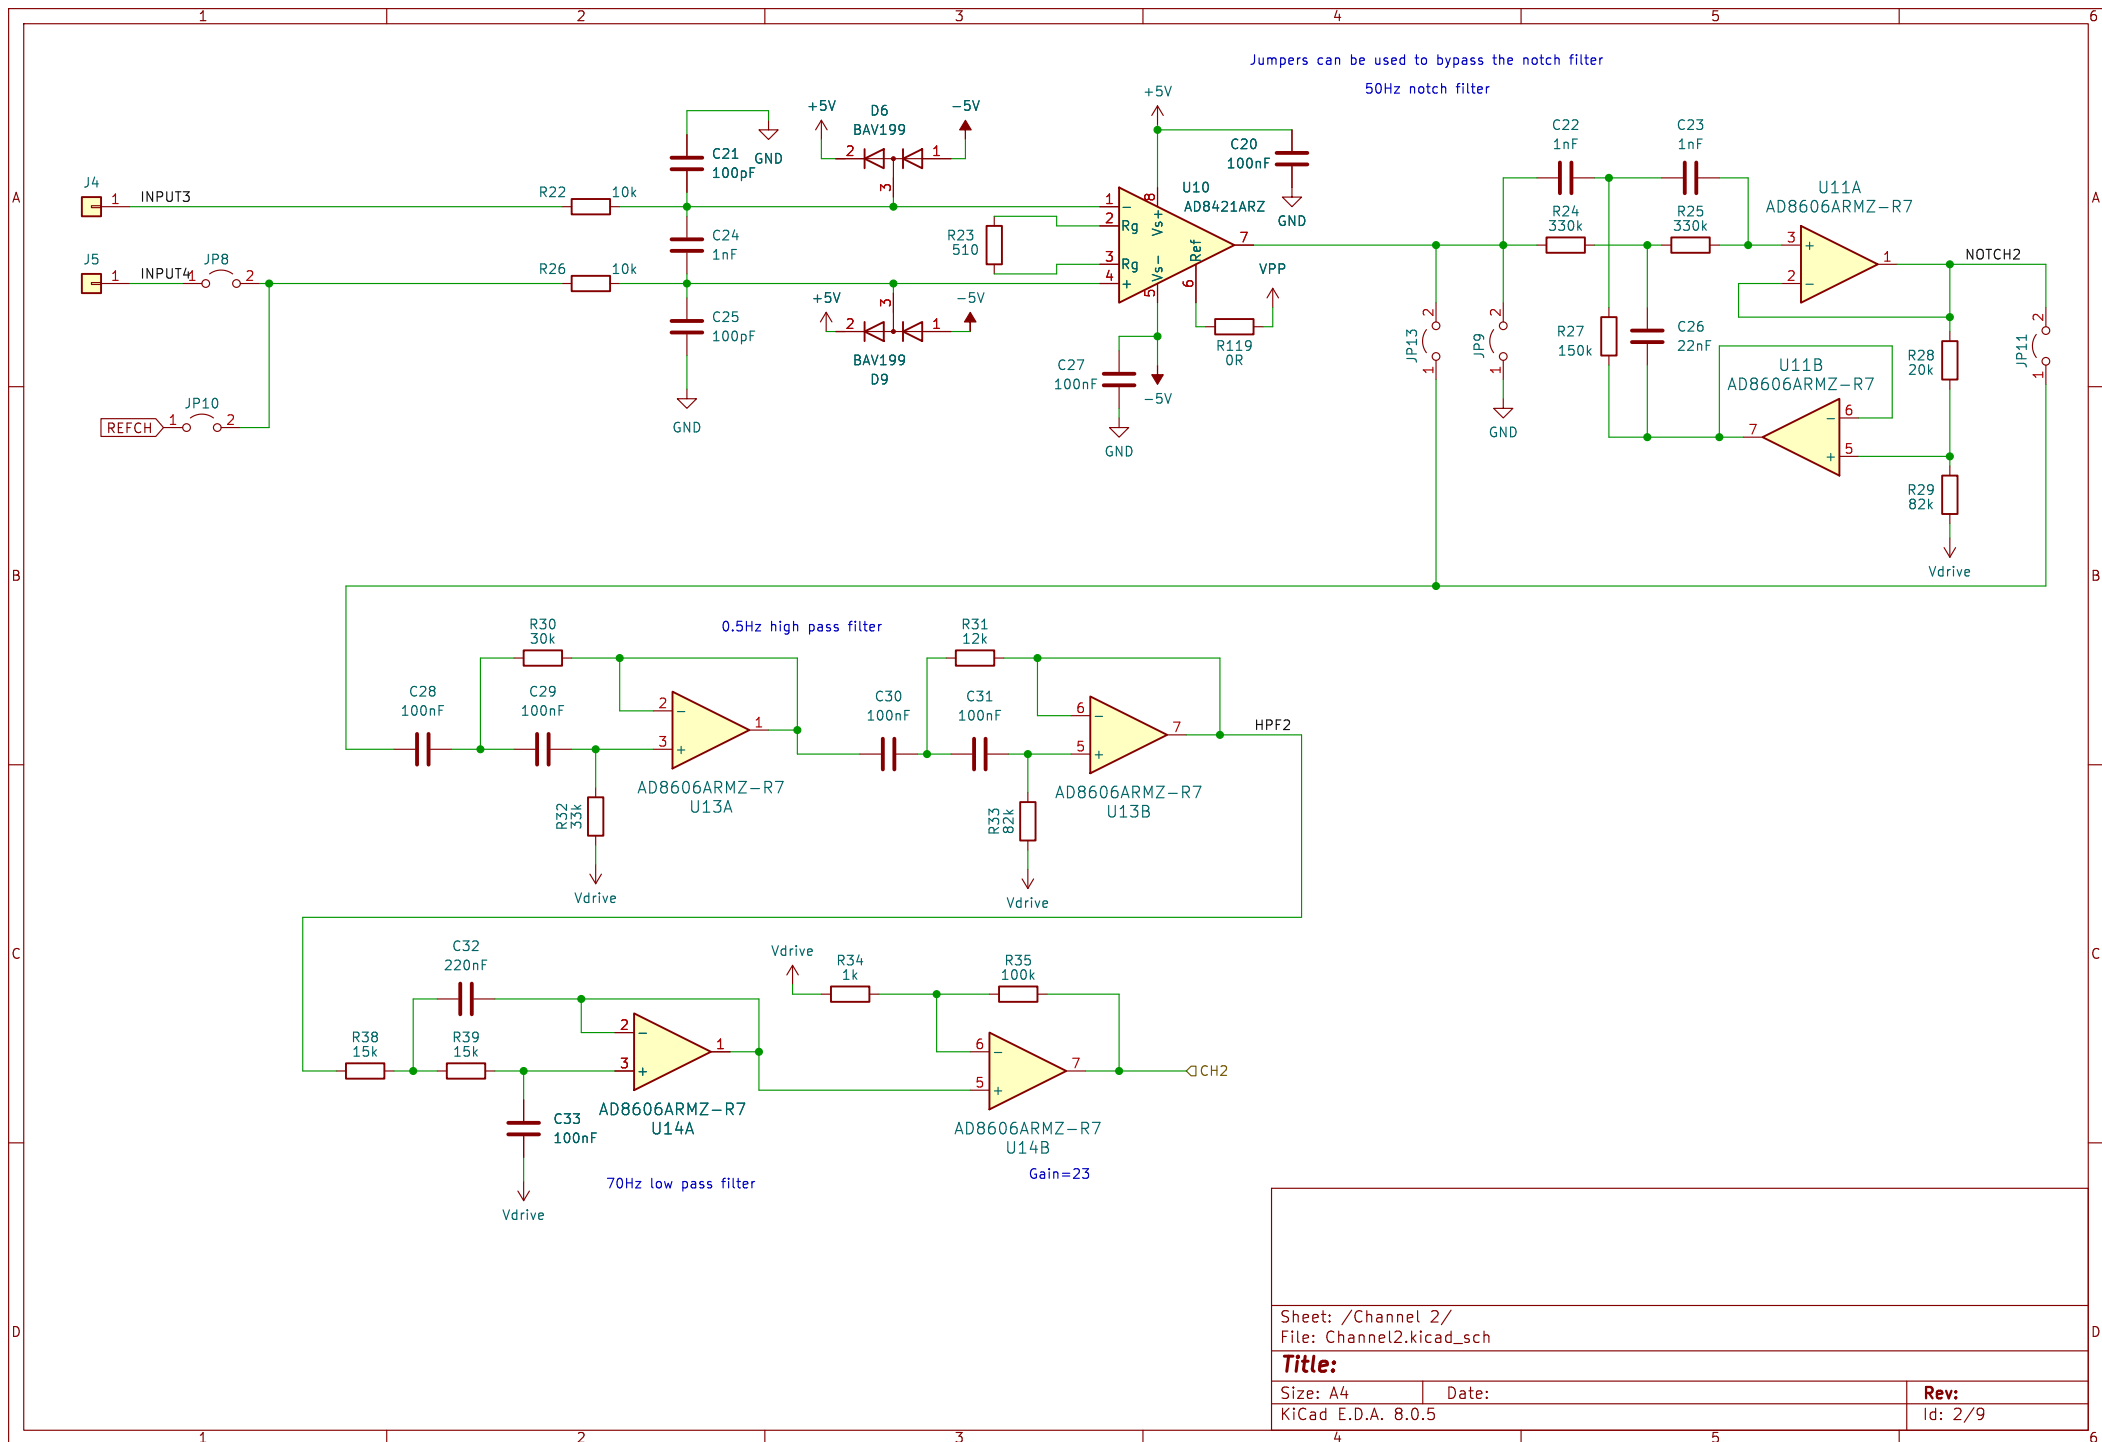

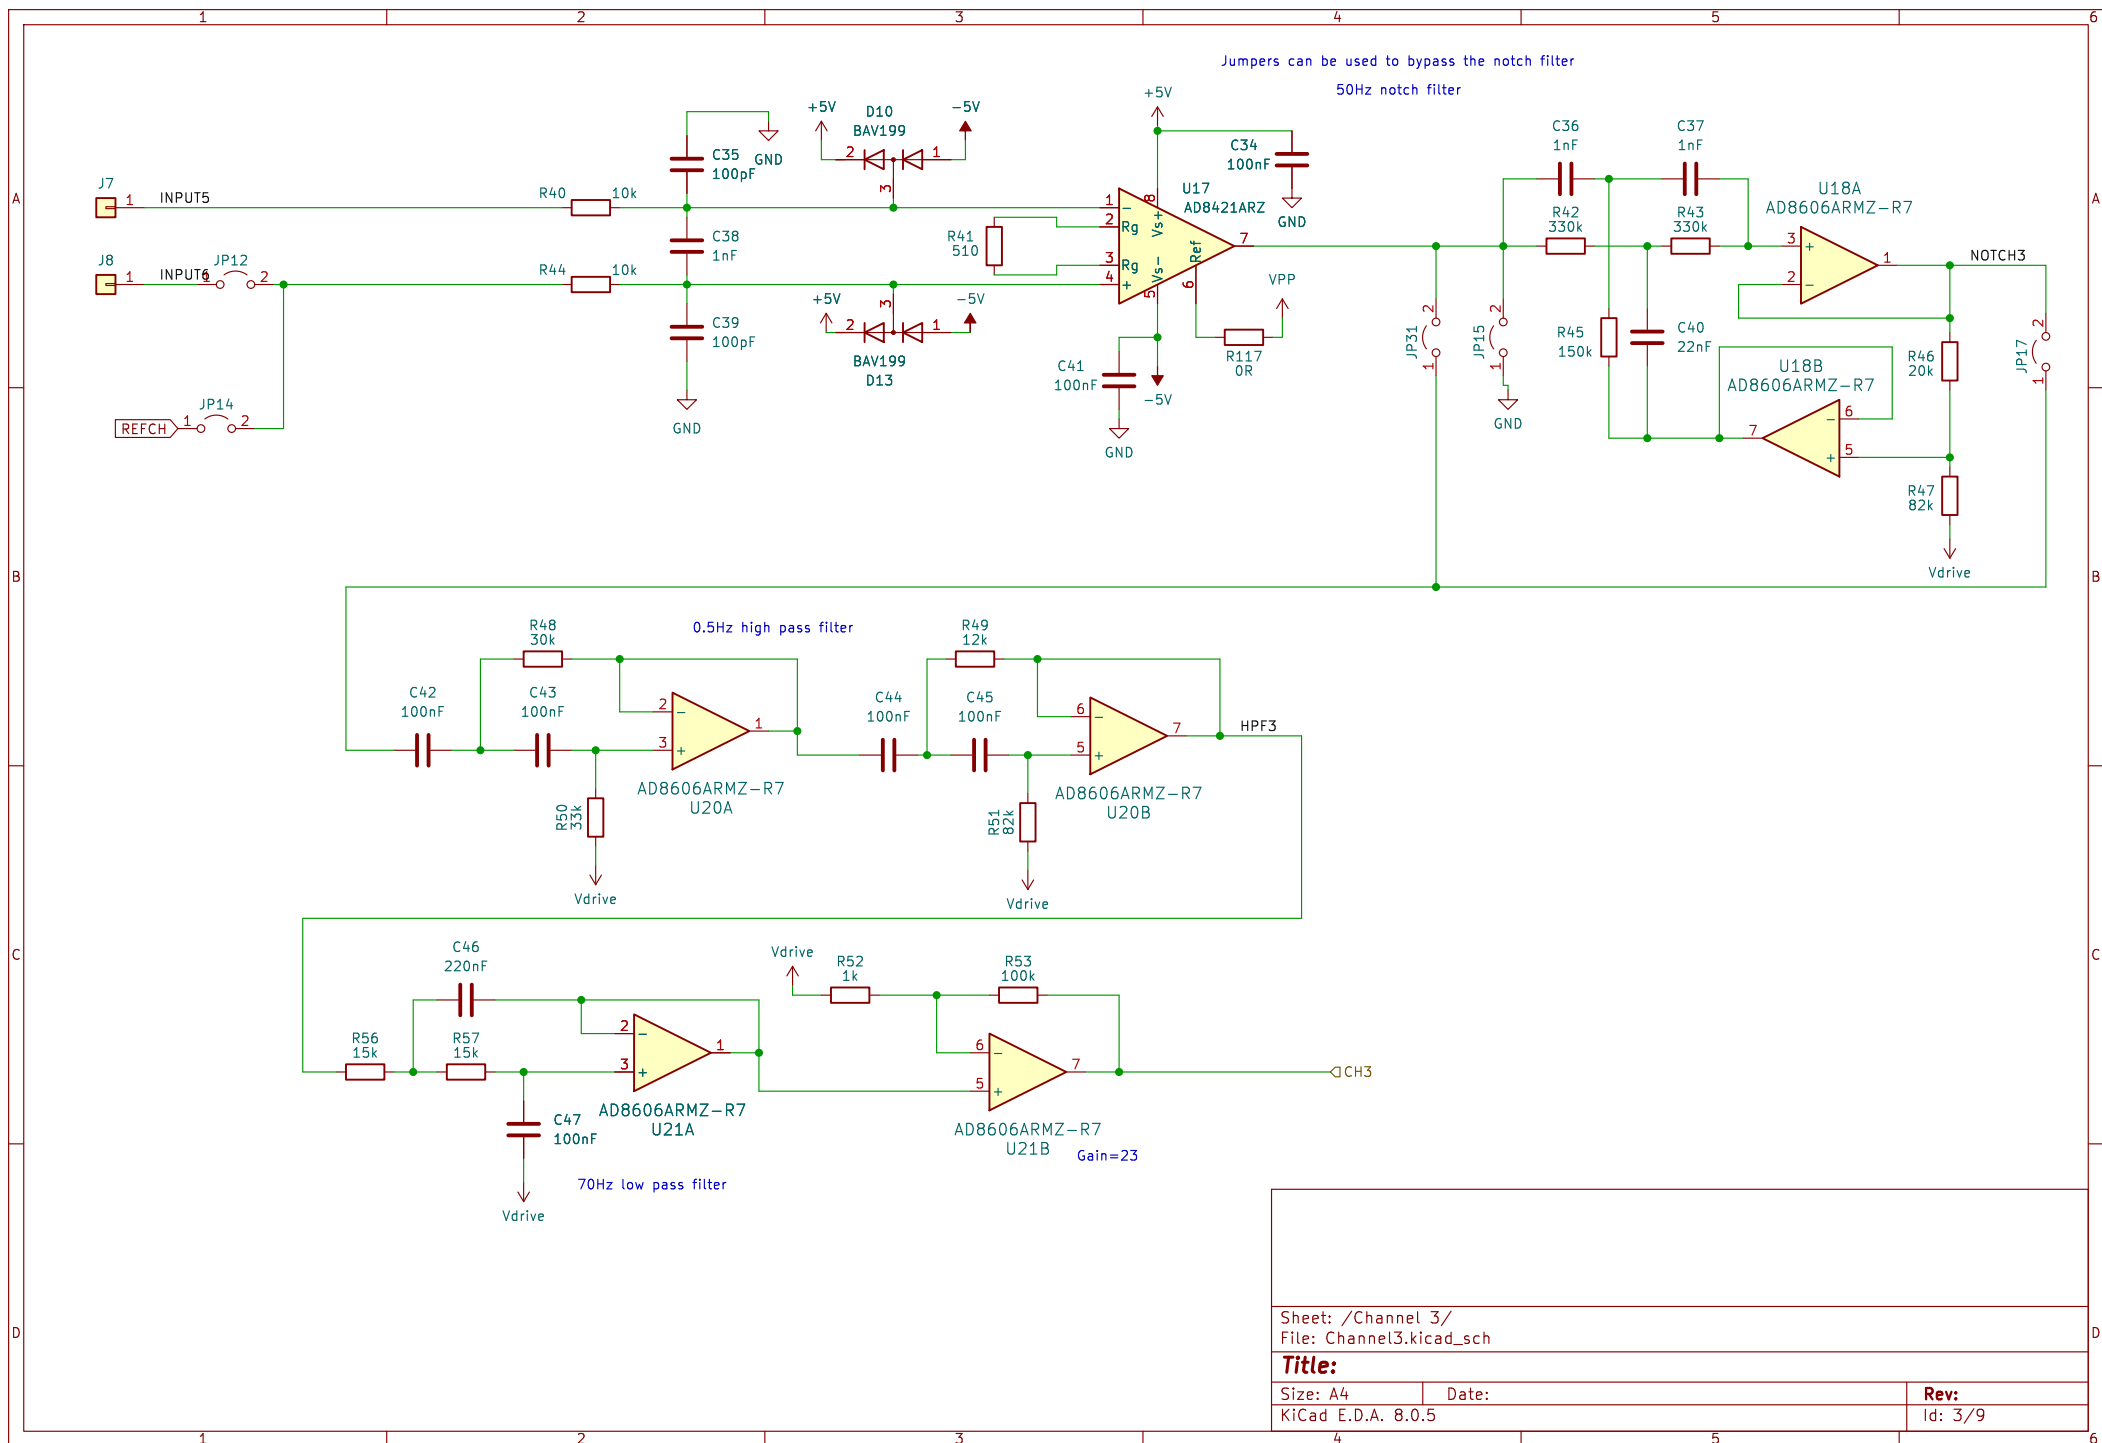

Sheet: /Channel 3/
File: Channel3.kicad_sch

Title:


Size: A4



Date:

KiCad E.D.A. 8.0.5

Rev:

Id: 3/9

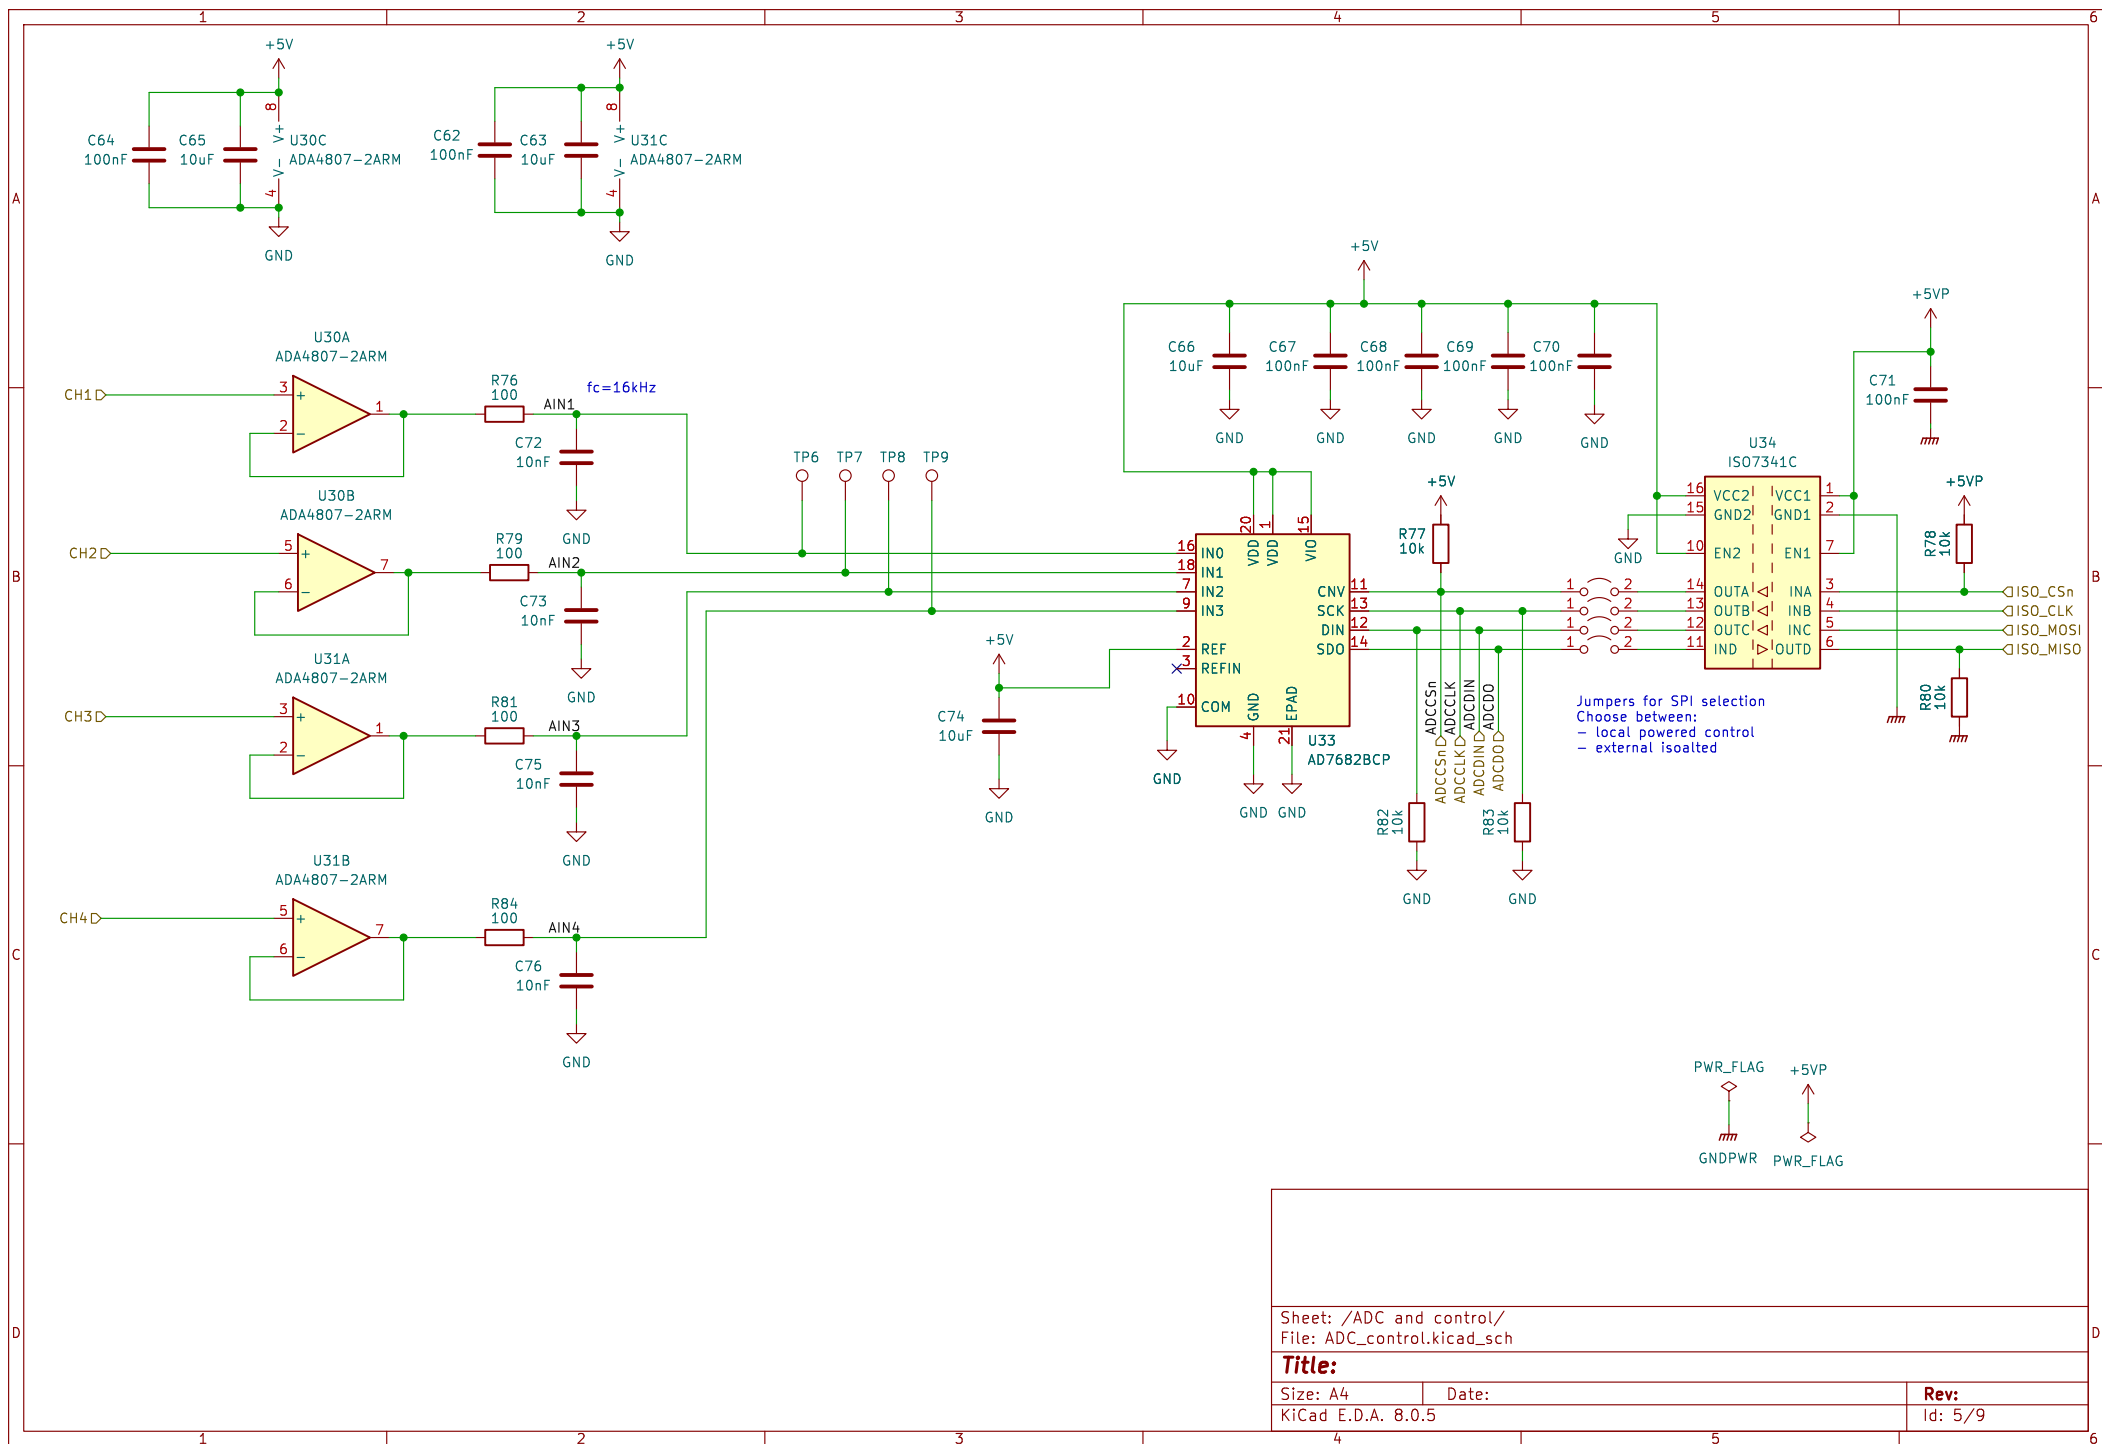

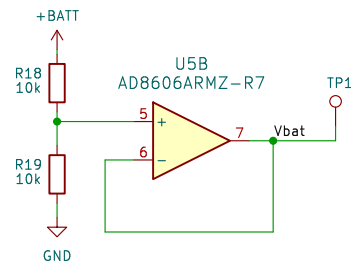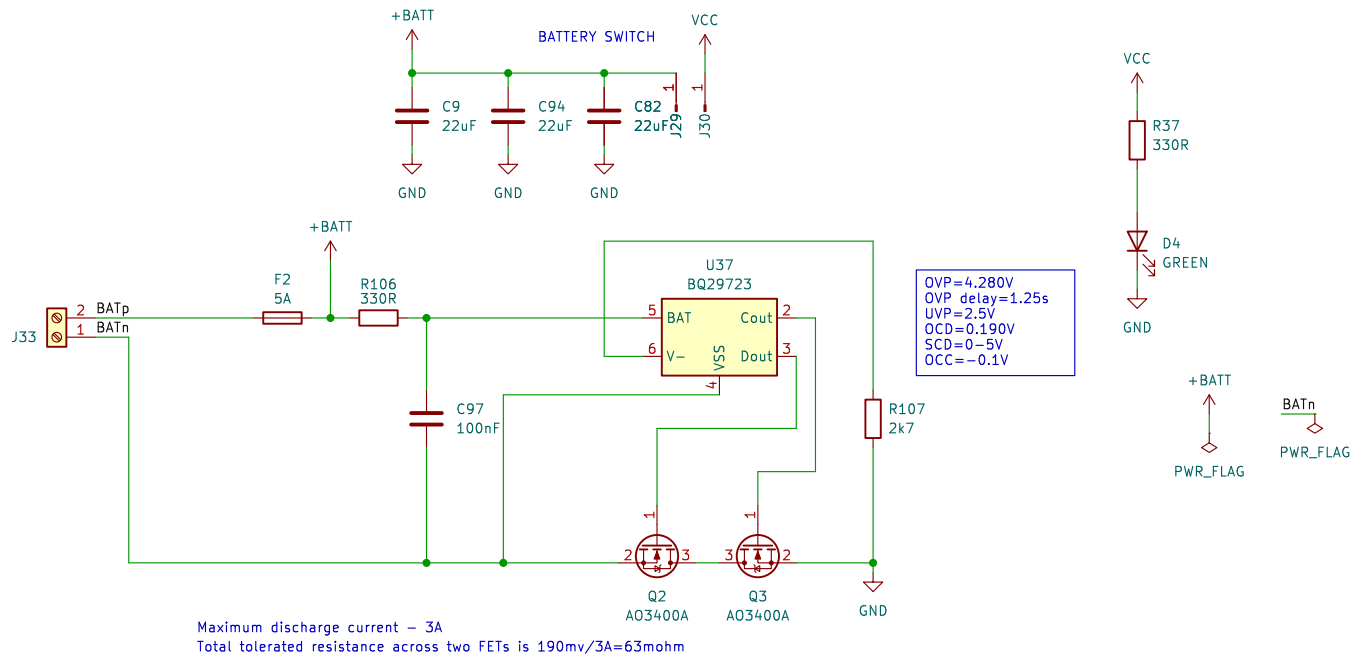

Sheet: /Battery input/
File: Battery_input.kicad_sch

Title:


Size: A4


Date:

KiCad E.D.A. 8.0.5

Rev:

Id: 8/9

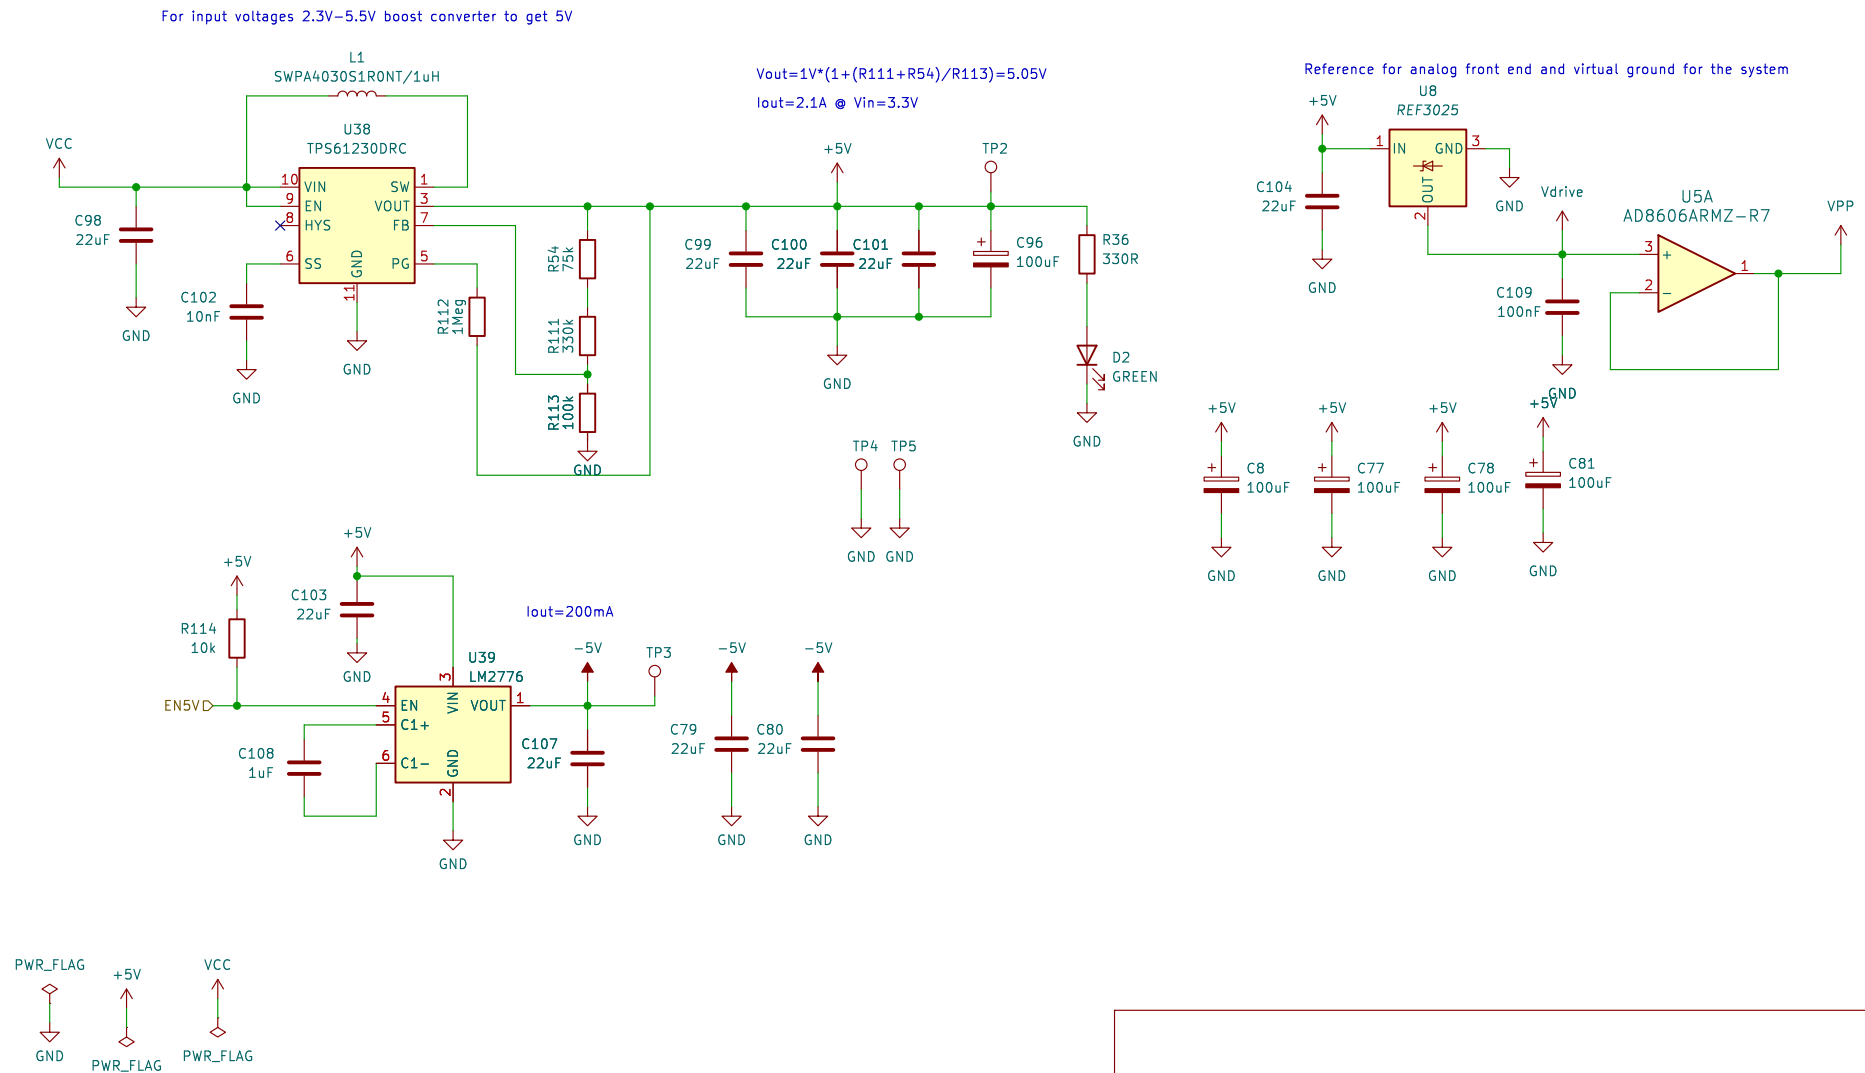



Rev:
Id: 11/9