

# WaveVis inverse-sheet architecture for rounded breaking-wave linkage arrays

Alan N. Pham

AO Labs, WaveVis simulator, inverse deformation sheet record

WaveVis is an inverse computational-design record for a rectangular linkage sheet that is being driven toward one localized plunging-wave deformation while keeping the mechanism visible. This PDF is not allowed to be a decorative paper, a candidate gallery, or a misleading overlay. It is the reconstruction manual for the project: the target references, coordinate frames, source files, equations, topology constraints, render/display split, validation gates, failure ledger, deployment boundary, and next iteration protocol needed for a fresh engineer to continue from source truth. The accepted reference family is now limited to the June 24 smooth gridded overview/sequence, the June 28 stage/cross-section sheet, the July 1 supplied side-view curl line used only for the side-view trace, and the retained ocean-curl photographs used only as secondary water-form references. The earlier trace-against-silhouette overlay is rejected paper evidence: it made the target look too pointy, encouraged profile-only fitting, and must not appear as an authoritative figure. The July 1 supplied side-view line is accepted as a side-view silhouette source, not as the full three-dimensional sheet target. The rejected geometry family is equally explicit: swept tunnels, side walls, skinny center-strip sails, triangular cuts, pointy side profiles, bowls, dimples, dark pockets, under-overhang support necks, profile-only completion claims, hidden mechanisms, fake filler bridges, old candidate screenshots, wrong or irrelevant stills, and any figure that makes the wrong geometry look authoritative. Current state is not a reference-match publication state. Candidate876 remains the last committed and previously route-checked baseline, and Local Candidates 898 through 903 remain rejected diagnostics because they either kept a pointy/spiral side read, became a blunt cylinder or half-pipe, collapsed into a mound without a curl, lost the overhang, or became a broad wall/blob. The July 1, 2026 repair after the pointy-profile complaint split the readable display target into a smoothed image-derived side-only reference trace and a separate localized three-dimensional/isometric trace, added numeric blockers for pointy/base-turn side traces, and widened the side camera framing for desktop/mobile inspection.

29 **That repair removes the old spear-like side read from the local source, but it does not close the**  
30 **full reference-match problem. The next valid iteration must preserve this side-profile blocker**  
31 **while improving the rendered full mechanism against the smooth gridded reference family, not a**  
32 **profile-only surrogate.**

33 **Fresh-chat use.** Read this PDF before changing WaveVis. Then inspect the current source, the live  
34 route, the latest handoff, and the rendered artifact. If any of those disagree, the live/source/rendered  
35 state wins over this prose until the PDF is rebuilt and reverified. A future chat should be able to  
36 reconstruct the model and the iteration state from this record without relying on old chat memory.

# Contents

37

|          |                                                   |           |    |
|----------|---------------------------------------------------|-----------|----|
| <b>1</b> | <b>Introduction</b>                               | <b>6</b>  | 38 |
| 1.1      | Reference geometry . . . . .                      | 7         | 39 |
| <b>2</b> | <b>Start here for a new WaveVis chat</b>          | <b>12</b> | 40 |
| 2.1      | What the next agent must not repeat . . . . .     | 15        | 41 |
| 2.2      | Current state ledger . . . . .                    | 16        | 42 |
| 2.3      | Figure and asset hygiene . . . . .                | 17        | 43 |
| 2.4      | File map . . . . .                                | 19        | 44 |
| 2.5      | Minimal continuation workflow . . . . .           | 20        | 45 |
| <b>3</b> | <b>Current implementation state</b>               | <b>20</b> | 46 |
| 3.1      | Defaults and target . . . . .                     | 21        | 47 |
| 3.2      | Target-field construction . . . . .               | 21        | 48 |
| 3.3      | Reconstruction-grade mathematical model . . . . . | 22        | 49 |
| 3.3.1    | Custom profile and readable-view split . . . . .  | 23        | 50 |
| 3.3.2    | Generated lip path . . . . .                      | 25        | 51 |
| 3.3.3    | Span localization . . . . .                       | 26        | 52 |
| 3.3.4    | Bowl/dimple blocker . . . . .                     | 27        | 53 |
| 3.3.5    | Connected X-cell equations . . . . .              | 27        | 54 |
| 3.3.6    | Acceptance objective . . . . .                    | 28        | 55 |
| 3.3.7    | Candidate iteration record . . . . .              | 29        | 56 |
| 3.4      | Rigid controls . . . . .                          | 29        | 57 |
| 3.5      | Morph control . . . . .                           | 30        | 58 |
| 3.6      | Flat contribution and ground transition . . . . . | 30        | 59 |
| 3.7      | Lip dip and terminal curl . . . . .               | 30        | 60 |

|    |                                                   |           |
|----|---------------------------------------------------|-----------|
| 61 | 3.8 Rendering contract . . . . .                  | 31        |
| 62 | <b>4 Target outcome</b>                           | <b>32</b> |
| 63 | 4.1 Human-facing shape . . . . .                  | 32        |
| 64 | 4.2 Hard constraints . . . . .                    | 33        |
| 65 | <b>5 Coordinate model</b>                         | <b>33</b> |
| 66 | <b>6 Generation pipeline</b>                      | <b>34</b> |
| 67 | <b>7 Supplied rounded target</b>                  | <b>35</b> |
| 68 | <b>8 Slider semantics</b>                         | <b>36</b> |
| 69 | <b>9 Breaking-wave geometry</b>                   | <b>36</b> |
| 70 | <b>10 Mechanism topology</b>                      | <b>37</b> |
| 71 | <b>11 Rendering modes</b>                         | <b>38</b> |
| 72 | 11.1 Magnetic valve geometry comparator . . . . . | 39        |
| 73 | <b>12 Verification gates</b>                      | <b>40</b> |
| 74 | 12.1 Current regression command set . . . . .     | 42        |
| 75 | 12.2 Rendered verification . . . . .              | 44        |
| 76 | <b>13 Build, deploy, and publication runbook</b>  | <b>45</b> |
| 77 | 13.1 Local development . . . . .                  | 45        |
| 78 | 13.2 Public fallback deployment . . . . .         | 45        |
| 79 | 13.3 Custom-domain boundary . . . . .             | 46        |
| 80 | 13.4 Progress logging . . . . .                   | 46        |
| 81 | <b>14 Current verified and open state</b>         | <b>47</b> |

---

|                                  |           |    |
|----------------------------------|-----------|----|
| <b>15 Failure modes</b>          | <b>48</b> | 82 |
| <b>16 Materials and Methods</b>  | <b>50</b> | 83 |
| <b>17 Discussion</b>             | <b>50</b> | 84 |
| <b>18 Acknowledgements</b>       | <b>51</b> | 85 |
| <b>19 Funding</b>                | <b>51</b> | 86 |
| <b>20 Author contributions</b>   | <b>52</b> | 87 |
| <b>21 Competing interests</b>    | <b>52</b> | 88 |
| <b>22 Data availability</b>      | <b>52</b> | 89 |
| <b>23 Code availability</b>      | <b>52</b> | 90 |
| <b>24 Additional information</b> | <b>52</b> | 91 |
| <b>25 References</b>             | <b>53</b> | 92 |

# 1 Introduction

WaveVis is an inverse-design simulator for a deployable mechanism. It takes a target surface intent, samples it on a rectangular sheet, and renders the resulting cell/connector mechanism rather than only a smooth mesh. That places it between several technical families: deformable-body, cloth, shell, rod, and mass-spring simulation where surfaces and slender members are discretized, regularized, and advanced under mechanical constraints (1–5); spacetime, constraint-projection, projective-dynamics, and differentiable-simulation methods where feasibility is enforced by explicit objective terms, local/global corrections, or gradients (6–10); computational mechanism design where actuator placement, linkage topology, compliant flexures, and contact constraints are part of the design object (11–17); and inverse/topology design of mechanisms, deformation-programmed materials, inflatables, auxetics, soft robots, and metamaterials where a desired deformation field must be made compatible with a manufacturable structure (18–27). WaveVis is not a solved member of any of those literatures. It is an active reconstruction record for one specific mechanism question: can a rectangular linkage sheet be made to read as a localized plunging wave while keeping its full kinematic graph visible?

The design problem is stricter than drawing a curve or matching a screenshot. A side outline can look acceptable while the actual three-dimensional sheet has a wall across the underside, a cavity where the lip should be open, an extruded barrel, or zig-zagging linkage legs that no longer read as a mechanism. Conversely, a mechanism can satisfy a local numerical check while failing the human outcome: a full rectangular sheet with a localized plunging wave. WaveVis must therefore treat the visible artifact, target field, kinematic topology, URL state, source checks, paper figures, and public deployment as one coupled system.

The central correction captured here is that a breaking wave is not made by sweeping one two-dimensional profile sideways. A swept profile creates a tunnel, canopy, or half-pipe. The required object is a localized deformation field on a flat sheet:

$$\Phi : (x, y) \mapsto (x + \Delta_x(x, y), y + \Delta_y(x, y), \Delta_z(x, y)),$$

where the displacement is concentrated near the middle span, gradually fades toward the lateral sides, and is exactly zero on the perimeter. The curl must be strongest near the centerline and weaker toward the sides. This spatial falloff is part of the target shape, not a rendering trick.

The hard failure classes are not subtle. One rendered state showed an inward support neck and dimple below the curling lip. Another rendered side profile ended in a pointy surrogate curl that did not match the July 1 supplied side-view reference. Both classes are banned because they make the simulator solve the wrong object: either a local support column where the reference requires an open throat, or a side-view trace whose crest, hook, and low return are wrong. No overlay, centerline plot, paper caption, or metric-only pass may convert those failures into evidence.

## 1.1 Reference geometry

The design reference is the gridded breaking-wave reference set, the July 1 supplied side-view curl line, and retained ocean-curl photographs: a smooth, localized volume that rises out of a larger flat sheet, grows into a broad rounded crest, curls into a smaller inward spiral, and finishes with a smooth downturned tapered lip while leaving an open underside and a long low return. The July 1 side line is accepted only as the side-view silhouette source; it cannot define the full three-dimensional sheet, top-view footprint, front/cross-section body, or mechanism visibility contract by itself. The older trace-against-silhouette overlay is rejected because it made the target look pointy and mixed an internal centerline diagnostic with a supposed paper reference. These reference frames are not decorative. They are the visual contract for the simulator's target geometry. A successful WaveVis state should read as a simplified linkage approximation of this water form: the outer radius is large and smooth, the inner curl radius is smaller, the lip projects forward before curling down, the front/cross-section view is rounded rather than pointed, and the side field fades away instead of forming a constant barrel. This is deliberately stricter than matching any side-profile curve: the full linkage array in side and isometric views must preserve the open curl without side walls, erratic zig-zags, disconnected cells, or hidden filler geometry.


**Current verification boundary.** This document records the target, architecture, and required gates. It does not by itself prove that the current generator has matched the supplied references. The rendered full-array artifact remains the source of truth. If the page, screenshots, or live route do not visibly match the localized plunging-wave reference family while preserving linkage cells and flat perimeter, the correct state is “open visual mismatch,” not “reference matched.”




**Figure 1.** Primary supplied reference geometry. The target form is a localized plunging water sheet with a rounded crest, open underside, and forward/downward lip. The WaveVis sheet must approximate this geometry while preserving flat perimeter boundary nodes and visible linkage cells.




**Figure 2.** Secondary supplied open-throat reference. The image is used only to define the underside condition: the lip is suspended, the throat remains open, and no side wall, support neck, or dark pocket may be used to close the curl.

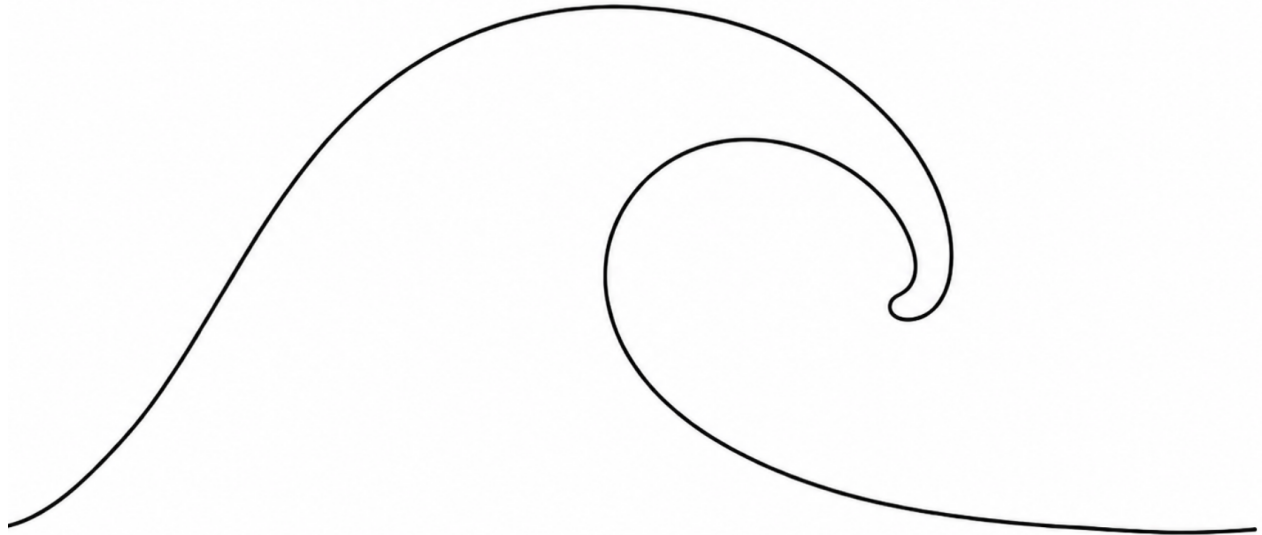


**Figure 3.** July 1 supplied side-view curl reference. This image is the source for the readable side-only trace in `src/LatticeViewer3D.tsx`. It is not a full three-dimensional mechanism target by itself: top, front, isometric, open-throat, perimeter-flatness, and mechanism-visibility gates still decide whether the rendered WaveVis sheet is acceptable.

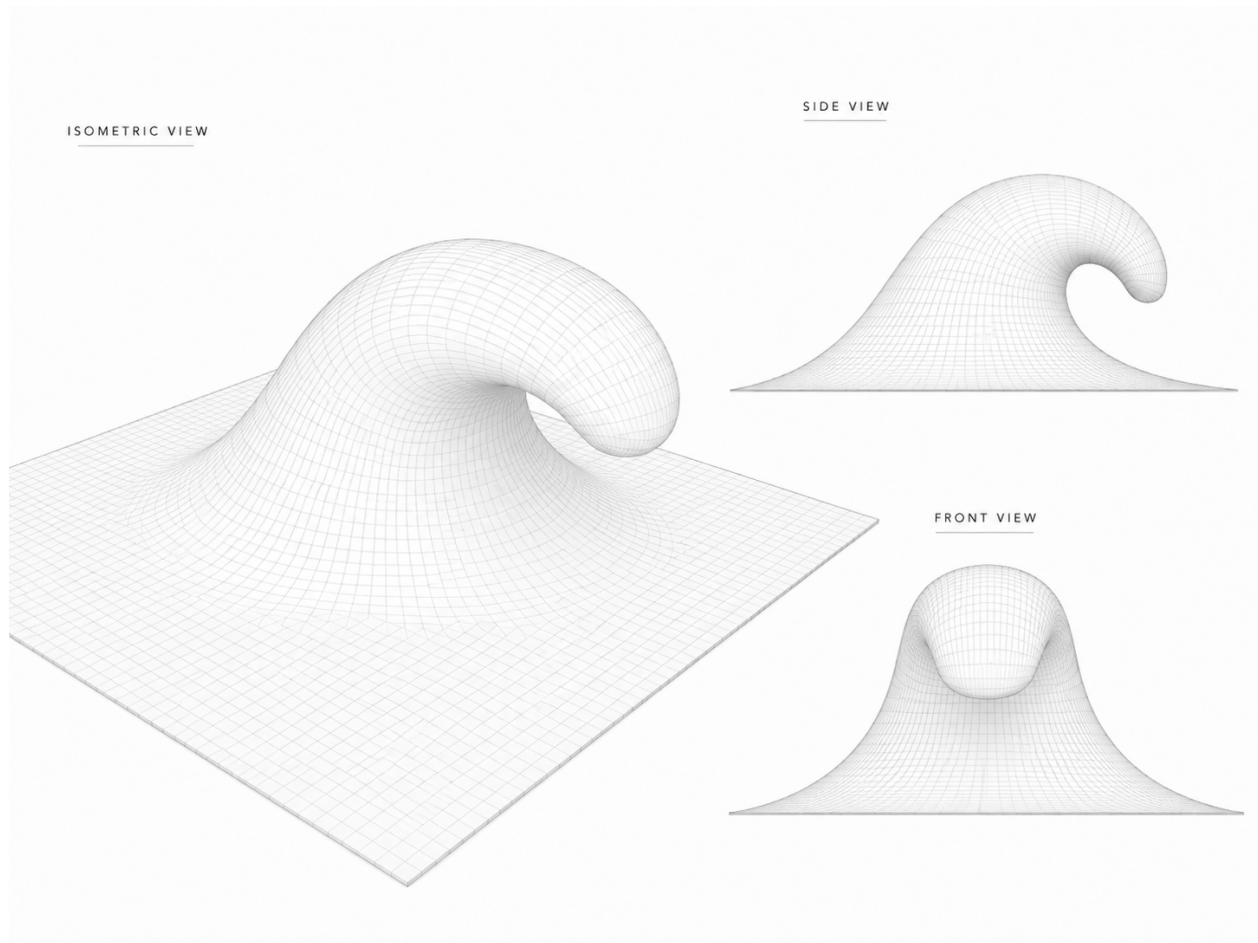

**Figure 4.** June 24 supplied smooth gridded reference overview. Alan re-supplied this image and said “remember.” It is now a preserved project reference for the desired visual grammar: a continuous square sheet surface, rounded rising face, tube-like crest, downturned lip, open clean throat, and centered front view. A jagged linkage trace, side-wall tunnel, or metric-only improvement does not satisfy this reference.

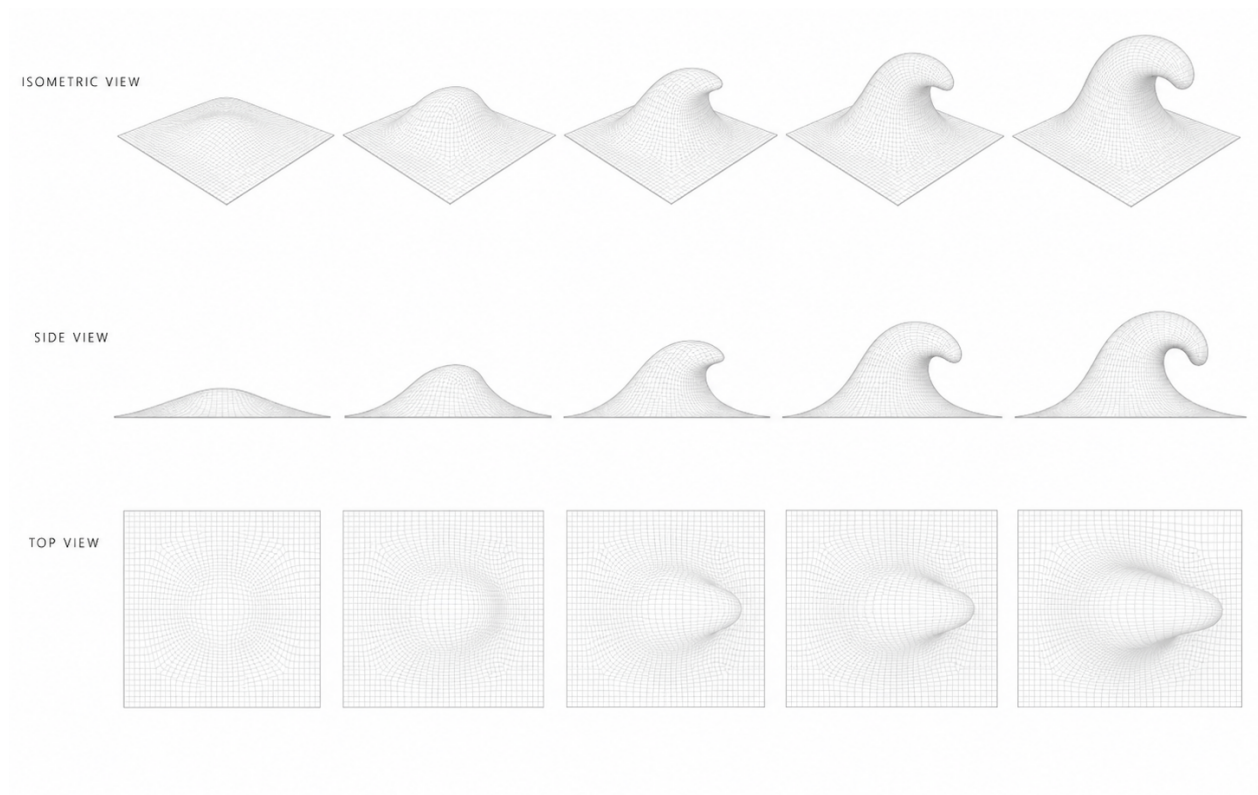

**Figure 5.** June 24 supplied smooth gridded reference sequence. The sequence records the intended progression across isometric, side, and top views: the deformation grows from a flat square sheet into a localized rounded wave with a curled lip while the top view remains a rounded localized body, not a triangular fan or swept strip.

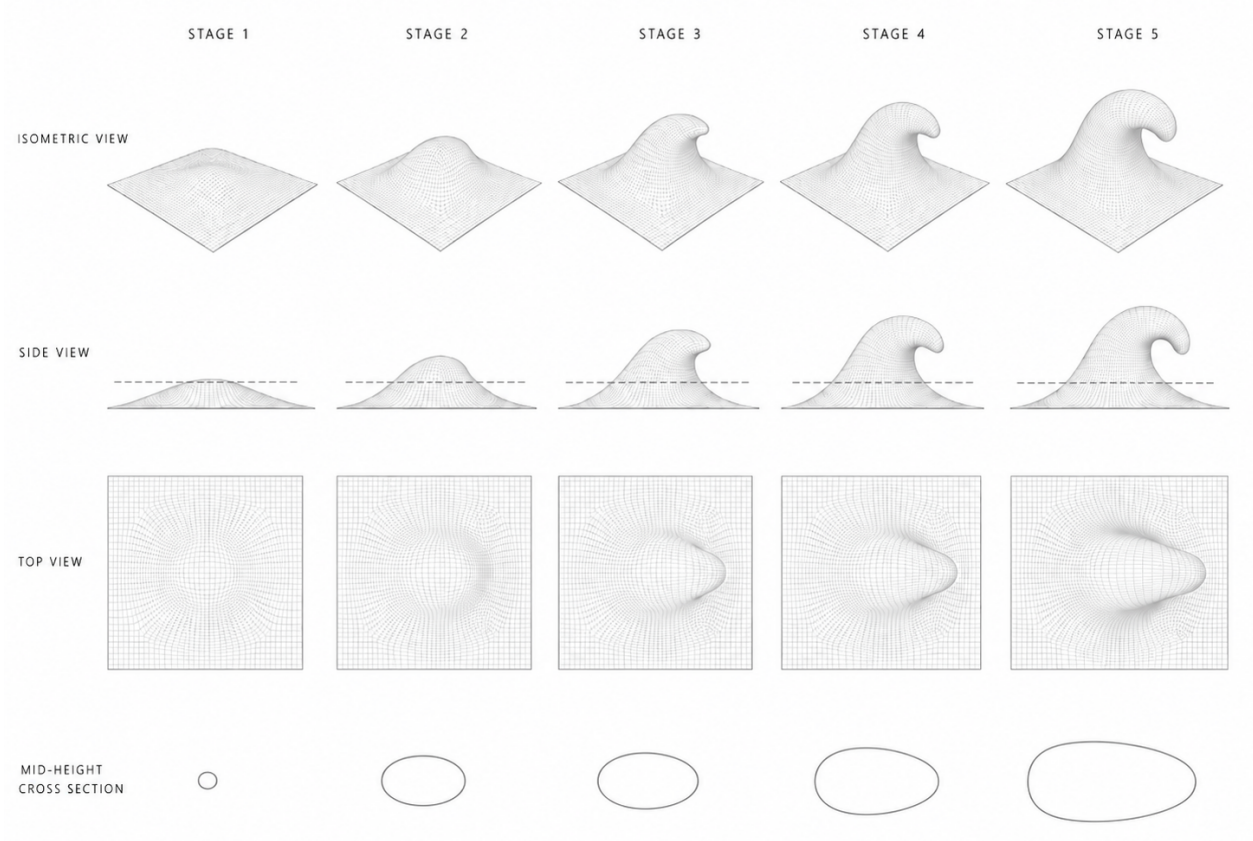

**Figure 6.** June 28 supplied stage sequence with an explicit mid-height cross-section row. The bottom row tightens the plan-footprint target: the active body should grow into one smooth oval or teardrop-like section through the curl, not a pointed spear, pinched hourglass, terminal stripe, or pasted helper contour. This reference is now part of the WaveVis acceptance set.

## 2 Start here for a new WaveVis chat

If this PDF is the only WaveVis context available, start with this section and then inspect the live artifact. The current project state is:

- **Verified public routes:** <https://wavevis.aolabs.io/> and <https://aolabs.io/wavevis/>. On July 2, 2026, both routes served the same Magnetic Valve bundle, the same architecture PDF hash, and the rendered magnetic ball-pull tab.
- **Standalone HTTPS state:** <https://wavevis.aolabs.io/> is the preferred branded route. The July 2 fix published the current bundle to the repository `gh-pages` branch, re-created the GitHub Pages custom-domain certificate, and enabled HTTPS enforcement.

- **Visible PDF action:** the WaveVis header links to the paper file under `/proofs/`. File: `wavevis-system-architecture.pdf`. The old connector proof remains a source artifact, not the primary user-facing paper action.
- **Current source root:** workspace path `_apps/wavevis.aolabs.io/`.
- **Public fallback mirror:** workspace path `_apps/aolabs-site/wavevis/`. A WaveVis deploy to its own `gh-pages` branch does not automatically update the `aolabs.io/wavevis/` fallback unless the built files are mirrored there and the hub site is pushed.
- **Current architectural direction:** curated supplied-reference field localized into the inverse-sheet model, plus a separate readable display surface for visual inspection. Manual *xz* and *xy* profile editors are not the active path.
- **Current branch state:** Candidate876 is the last committed baseline source state, but the working July 1 side-profile repair changes `src/LatticeViewer3D.tsx`, `src/latticeGeometry.ts`, and `scripts/check-inverse-sheet.cjs`. The repair replaces the pointy readable side trace with a smoothed side-only trace extracted from Figure 3, keeps top/isometric/front on a localized three-dimensional reference field, releases the suspended lip back to the flat body before the endpoint, weakens the top-view shadow so it no longer reads as a dark rectangular wall, widens the side camera framing, and adds source-level rejections for side traces whose terminal backtrack ratio is too small or whose low backtracked turn collapses near the flat base. Candidate841 through Candidate875 are rejected or superseded diagnostics that explain support-neck dimples, broad roof/curtain, triangular cut/fin, side-wall tunnel, pointy side profile, full-length front projection, and squared terminal foot failures. Candidate898 through Candidate903 are newer rejected local diagnostics: old smooth trace kept a spiral/pointy side and pinched top; tail release became a blunt cylinder; smooth product profile became a loop/half-pipe; no-loop cap became a mound with no curl; Moana lip anchors made a steep nose without the needed overhang; analytic rounded curl became a broad wall/blob.
- **Current verification state:** `npm run check:geometry` passes and `npm run build` passes on the July 1 side-profile repair. The inverse-sheet checker reports these named contracts as true:
  - `readableSurfaceRenderContract.ok=true`
  - `readableSideProfileCavityBlock.ok=true`
  - `readableTunnelSweepBlock.ok=true`

```
xRenderDirectLines.sourceUsesConnectedXMechanism=true
```

The side trace pointy-notch blocker is active: `terminalBacktrackRatio=0.2658`, above the rejection floor `0.24`. The current side trace reports:

```
pointCount=72
crest=(0.505,1)
terminalBacktrack=0.281
terminalFlatRunFromEightPercent=0.31
minLowReturnX=0.482
maxAbruptPostCrestAngleDeg=7.6085
maxTerminalDescentAngleDeg=81.0851
```

Browser screenshots exist in:

```
_verification/
browser-20260701-side-reference-smoothed/
browser-20260701-side-long-tail/
browser-20260701-side-rounded-arc/
```

These checks prove that the July 1 repair is buildable, has a closed source-level mechanism checker, and is no longer the earlier pointy side-profile candidate. They do not prove exact reference match or live deployment by themselves. For live-route claims, verify both <https://wavevis.aolabs.io/> and <https://aolabs.io/wavevis/> from the current deployed bundle.

- **Correct acceptance target:** the supplied June 24 smooth breaking-wave reference family, the June 28 stage/cross-section reference, and the July 1 side-view reference for the side-only silhouette. The wrong target is the removed internal trace-overlay diagram, a centerline-only plot, a profile-only completion claim, or any helper contour that cannot reconstruct the mechanism.
- **Current mechanism contract:** every interior cell is one black square body with four straight legs; opposite leg pairs are equal length and collinear through the cell center; every spherical connector node is a physical two-cell joint with exactly two attached leg uses; crossing diagonal families are separate joints rather than four-cell connector collisions.
- **Do-not-claim boundary:** do not claim reference match, paper current, or public completion from a geometry log, a compiled PDF, a local screenshot, an internal overlay, or a smoother profile string. The rendered full mechanism is the acceptance object.

## 2.1 What the next agent must not repeat

216

The repeated failures that this document is meant to prevent are:

217

1. Do not make a swept tunnel, ribbon, canopy, roof, half-pipe, bridge, or extruded strip. 218
2. Do not form a bowl, dimple, cavity, pucker, under-overhang throat bite, or side wall that covers 219  
or pinches the underside of the curl. 220
3. Do not replace Side with a profile-only debug view. Side is a side camera view of the full 221  
three-dimensional sheet. 222
4. Do not hide, ghost, clip, or remove linkage cells because they look bad. Fix the geometry. 223
5. Do not remove the full array, one-center X cells, exact collinear equal opposite pairs, two-use 224  
physical connector joints, or two-cell linkage truth while chasing a prettier outline. 225
6. Do not wire the lip directly to the ground or draw filler geometry across the open underside. 226
7. Do not make position or steer shape controls. They are rigid post-shape transforms. 227
8. Do not call the work done from code intent, automated checks, a nicer profile line, or a local-only 228  
screenshot. 229
9. Do not let the top view collapse into a big triangle, wedge, or V fan while the side view looks 230  
acceptable. 231
10. Do not paste a mid-height contour, helper ellipse, bridge, or cross-section overlay into the 232  
product view to fake the June 28 cross-section row. Fix the surface projection and preserve the 233  
X-only proof path. 234

## 2.2 Current state ledger

This subsection replaces the old Candidate785 figure gallery. Those screenshots are historical diagnostics, not final paper evidence. The paper must not show a stale candidate as if it were the correct geometry. The current ledger is:

| Class                     | Current source                                                                                                                                                                                                                                                                             | Paper/display rule                                                                                                                                                                                                                                                                   |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Accepted references       | June 24 smooth gridded overview/sequence, June 28 stage/cross-section reference, July 1 side-view curl line for side-only tracing, and retained ocean-curl photos used only for water-form context.                                                                                        | Keep as target figures and cite them as references, not as achieved WaveVis output. The July 1 side line constrains only the side silhouette; it does not replace top/front/isometric or mechanism gates.                                                                            |
| Rejected display asset    | Profile-trace overlay image, old pointy side-profile surrogate, and non-target stills.                                                                                                                                                                                                     | Removed from the paper figure sequence; do not use internal trace overlays, side-line completion claims, or visually irrelevant stills as paper figures.                                                                                                                             |
| Rejected candidate states | Candidate785, Candidate841 through Candidate875, and Candidate898 through Candidate903 screenshots.                                                                                                                                                                                        | Historical diagnostics only. Do not describe them as accepted renders after Alan identified support-neck, pointy-profile, front-fin, wall, blob, cone, terminal-foot, blunt-cylinder, half-pipe, no-curl mound, steep-nose, and broad-wall families.                                 |
| Current source repair     | July 1 side-profile repair after the pointy-profile complaint: smoothed image-derived side trace, separate localized 3D/isometric trace, endpoint release, softened top-view shadow, side camera fit, terminal-backtrack floor, low-turn-height blocker, and side-reference descent limit. | Treat as the current source state after <code>npm run check:geometry</code> and <code>npm run build</code> pass. It removes the prior pointy side profile but remains an open visual-match state until the live rendered full mechanism is verified against the accepted references. |
| Mechanism invariant       | One-center four-leg X cells with exact opposite-pair collinearity/equal length and physical two-use connector nodes.                                                                                                                                                                       | Keep as a hard gate and cite source/checker values after each accepted candidate.                                                                                                                                                                                                    |
| Open boundary             | Exact rounded reference-family match, public/fallback route parity, and PDF figure/source consistency.                                                                                                                                                                                     | Blocks final reference-match claims until live routes, screenshot views, and PDF renders are verified.                                                                                                                                                                               |

**Table 1.** WaveVis state ledger as of July 1, 2026. The paper tracks which information is reference truth, rejected history, active source state, and still-open defect state.

The only current figures that belong in the paper by default are target references and mechanism-proof figures that still define the actual constraint. Candidate screenshots belong only when they are labeled as rejected or diagnostic and they help the next iteration avoid a known failure.

## 2.3 Figure and asset hygiene

WaveVis now treats paper figures as source evidence, not decoration. A file can appear in this PDF only if it belongs to one of four classes:

1. a target reference that defines the accepted geometry family;
2. a current accepted render that passed source checks, browser inspection, and route verification;
3. a mechanism proof figure that defines a hard constraint still used by the source;
4. a clearly labeled rejected diagnostic that explains a failure mode future iterations must avoid.

Profile-trace overlays, centerline-only comparisons, stale candidate screenshots, unrelated stills, helper contours, and any image whose purpose is to make the current source look more correct than the rendered mechanism must stay out of the paper and the public proof folder. When an asset is removed for this reason, the removal is part of the source-of-truth record rather than cleanup churn.



## 2.4 File map

253

| File or route                                  | Ownership                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>src/latticeGeometry.ts</code>            | Source of truth for the inverse sheet model, defaults, sanitization, target displacement field, morph behavior, metrics, and geometry sanity checks.                                                                                                                                                                                                                                                                                            |
| <code>src/LatticeViewer3D.tsx</code>           | Source of truth for Canvas rendering, side/isometric/top full-sheet camera behavior, surface visibility, camera presets, visual layers, and the rendered collinear equal-pair X-cell and shared-joint layers.                                                                                                                                                                                                                                   |
| <code>src/xCellMechanism.ts</code>             | Source of truth for the connected X-cell display mechanism: one black-square cell body per lattice cell, four straight center-to-connector legs per cell, exact collinear/equal opposite pairs through the cell center, and spherical connector nodes with exactly two attached leg uses.                                                                                                                                                       |
| <code>src/TargetShapeControls.tsx</code>       | Source of truth for the visible inverse-sheet controls: rows, columns, views, scale, morph, position, steer, display toggles, reset, export, and import.                                                                                                                                                                                                                                                                                        |
| <code>src/InverseSheetTab.tsx</code>           | Source of truth for URL-state loading, tab order, view requests, import/export plumbing, and the Inverse Sheet first-tab behavior.                                                                                                                                                                                                                                                                                                              |
| <code>src/MagneticValveTab.tsx</code>          | Source of truth for the magnetic-valve ball-pull view: the default aligned parallel EPM stack, Alnico, NdFeB, two iron end pieces, steel ball, direct drag/resize controls, Alnico off/NS/SN state, coil pulse controls, material grade controls, N-to-S flux lines, strongest-line path, and force-vector readout. Fake guide lines between the iron pieces are not part of the render contract.                                               |
| <code>src/magneticValveModel.ts</code>         | Source of truth for the lightweight magnetic ball-pull estimator. It uses an approximate EPM circuit model, pulse-programmed Alnico state, NdFeB grade data, bounded iron-pole concentration, traced smooth flux lines, bounded steel-ball line perturbation, and a steel-ball force estimate from the external local gradient of $B^2$ . It is not a finite-element, COMSOL, measured magnetic-force, or validated flow solver.                |
| <code>scripts/check-inverse-sheet.cjs</code>   | Main inverse-sheet regression checker. It compiles the TypeScript geometry and checks parameter semantics, lip curl, flatContribution, low-lip stability, lateral smoothness, no bowl pockets, terminal taper, startup URL coverage, and the collinear equal-pair X-cell render contract.                                                                                                                                                       |
| <code>scripts/check-magnetic-valve.cjs</code>  | Magnetic-valve regression checker for the four-component layout, aligned default EPM geometry, EPM circuit behavior, Alnico off/NS/SN and pulse programming, winding reversal, material grades, flux-line strength spread, smooth flux-line integration, force magnitude, force direction, ball-next-to-pole force, ball-induced line-path change, ball size, iron-piece concentration, and 320 deterministic randomized geometry stress cases. |
| <code>scripts/check-magnetic-ui-cdp.mjs</code> | Browser-level magnetic-valve regression checker. It verifies run and pulse button behavior, aligned parallel EPM default rendering, flux-line rendering without a heat-map gradient or fake ball-guide lines, variable flux-line widths, ball drag motion, direct numeric size/pulse controls, material-grade controls, and no desktop horizontal overflow.                                                                                     |

---

## 2.5 Minimal continuation workflow

A fresh agent continuing WaveVis should do the following in order:

1. Read this PDF and `src/latticeGeometry.ts`, then inspect `src/LatticeViewer3D.tsx` and `src/TargetShapeControls.tsx`.
2. Open the verified public route `https://aolabs.io/wavevis/` and the current local route if a dev server is running.
3. Reproduce Alan's active preset from the URL before changing source. Do not judge a different default state.
4. Run `npm run check:geometry`. If it fails, fix source before visual tuning.
5. Render and inspect Side, 3D, and Top. Side and 3D must both be full-sheet views with the curl visible.
6. Make the smallest source change that improves the human-facing breaking-wave outcome without regressing the mechanism invariants.
7. Re-run `npm run check:geometry` and `npm run build`.
8. Verify live/public output after deploy or fallback mirror update. A local screenshot is not the public artifact.
9. Update this PDF if the architecture, current state, source map, controls, or known failure classes changed.
10. Post a Progress event with complaint, issue, Codex change, observed source change, provenance, and commit ids.

## 3 Current implementation state

---

### 3.1 Defaults and target

The current inverse-sheet default is intentionally taller and sharper than earlier flat presets:

```

        rows = 44,                columns = 112,                morph = 1,
        height = 15.25, horizontalOffset = 22.5,    overhangWidth = 32,
overhangAngleDeg = 120,    overhangPosition = -0.15,    profileScale = 0.60,
        smoothing = 1,            lipSharpness = 0.50,    wallSmoothness = 0.28,
        flatContribution = 0.35.
```

The app displays only the narrow active controls by default. Legacy inputs such as `height`, `overhang`, `lipDip`, `width`, `lipSharpness`, `groundTransition`, `wallSmoothness`, and `flatContribution` can still be parsed from URLs and JSON imports because older test links and screenshots use them. The visible startup path favors `scale`, `morph`, `position`, and `steer` to keep the main wave profile stable.

The default reference-wave sheet remains `columns = 112`. The sanitizer now allows `columns ≥ 12` so X-cell proof routes can be inspected at low density, but compact column counts are not evidence of an exact reference-wave match. Dense-wave regression checks request the default column count explicitly; low-column screenshots are mechanism-readability proofs.

### 3.2 Target-field construction

The target is constructed in a canonical wave frame. The canonical frame removes `position` and `steer`; the shape is computed there; then `steer` and `position` are applied as rigid transforms afterward. This prevents the old bug where moving the wave also changed its profile.

The source sequence in `buildNodes` is:

1. build rest grid  $p_{ij}^0$ ;
2. compute core target positions from `targetFromDeformationField`;
3. pin perimeter nodes to rest;
4. apply span continuity smoothing for generated mode;
5. apply flat-contribution diffusion as a support apron, not as a flattening blend;

6. interpolate from rest to target with `morphGrowthAmount`;

7. build metrics, edges, quads, and dihedral pairs from the resulting grid.

The target function samples  $u$  along the wave field and  $v$  across span:

$$u = \frac{x - x_{\min}}{L}, \quad v = \frac{y + S/2}{S}.$$

The displacement is zero outside the support field and on the perimeter. The support field expands with smoothing and `flatContribution`, but the core wave must remain the same shape.

### 3.3 Reconstruction-grade mathematical model

Let the rest sheet be a rectangular lattice with  $R$  rows and  $C$  columns. In source,  $R = 44$ ,  $C = 112$ , rest sheet length  $L_s = 80$ , rest sheet span  $S_s = 80$ , wave-field length  $L = 43$ , and wave-field span  $S = 43$ .

A node is

$$p_{ij}^0 = \begin{bmatrix} -L_s/2 + jL_s/(C-1) \\ -S_s/2 + iS_s/(R-1) \\ 0 \end{bmatrix}, \quad 0 \leq i < R, \quad 0 \leq j < C.$$

Boundary nodes are hard pinned:

$$p_{ij}^* = p_{ij}^0 \quad \text{if } i \in \{0, R-1\} \text{ or } j \in \{0, C-1\}.$$

For interior nodes, WaveVis maps the world point into a canonical wave frame by removing user placement:

$$\tilde{p} = R_z(-\psi) \left( p^0 - a - \delta_x e_x \right) + a,$$

$$\psi = \frac{\pi}{4} \text{clamp}(\text{steer}, -1, 1),$$

$$\delta_x = 0.045L \text{clamp}(\text{position}, -1, 1).$$

The canonical target is

$$\tilde{p}^* = \tilde{p} + D(\tilde{x}, \tilde{y}; \theta),$$

and the world target is restored by applying the inverse rigid placement. This separation is required because inverse-design controls should not silently change the target surface. It follows the same general separation used in graphics simulators between state variables, constraints, and display transforms (7,

9). 312

The active source contains two target/display paths that must not be confused: 313

1. **Model target path**, owned by `src/latticeGeometry.ts`. It generates node targets, metrics, 314  
and the mechanism-check state. 315
2. **Readable display path**, owned by `src/LatticeViewer3D.tsx`. It draws a reference-like 316  
gridded surface and mechanism layer for visual inspection. It is not allowed to replace the model 317  
target or hide invalid mechanism state. 318

### Custom profile and readable-view split 319

When `profileMode='custom'`, the model source uses serialized control points in `src/` 320  
`latticeGeometry.ts`. The July 1 side-profile repair changed the model default to a mono- 321  
tone broad-rise profile rather than the older hooked point list: 322

(0, 0), (0.035, 0.006), (0.075, 0.026), (0.125, 0.08), (0.19, 0.18),  
(0.27, 0.33), (0.36, 0.52), (0.46, 0.70), (0.56, 0.86), (0.65, 0.96),  
(0.72, 1), (0.79, 0.98), (0.85, 0.90), (0.90, 0.75), (0.935, 0.55),  
(0.955, 0.36), (1, 0).

Those are normalized ( $x, z$ ) anchors for the model target, not final mechanism coordinates and not 323  
proof of reference match. They are sampled, scaled, localized across the span, morph-interpolated, 324  
and then checked against the mechanism constraints. 325

The readable display path in `src/LatticeViewer3D.tsx` now has a separate side-view trace. The 326

327 current side trace is a smoothed, normalized extraction from Figure 3:

(0, 0), (0.029, 0.046), (0.052, 0.091), (0.073, 0.136), (0.092, 0.181),  
 (0.108, 0.227), (0.124, 0.274), (0.138, 0.321), (0.152, 0.368), (0.164, 0.416),  
 (0.177, 0.465), (0.189, 0.515), (0.201, 0.565), (0.213, 0.616), (0.227, 0.666),  
 (0.242, 0.715), (0.258, 0.763), (0.277, 0.808), (0.299, 0.85), (0.324, 0.889),  
 (0.352, 0.924), (0.385, 0.954), (0.422, 0.978), (0.463, 0.995), (0.505, 1),  
 (0.545, 0.991), (0.584, 0.968), (0.619, 0.936), (0.649, 0.899), (0.674, 0.86),  
 (0.695, 0.817), (0.712, 0.773), (0.726, 0.726), (0.739, 0.678), (0.75, 0.627),  
 (0.758, 0.574), (0.757, 0.52), (0.748, 0.468), (0.735, 0.431), (0.725, 0.424),  
 (0.721, 0.452), (0.72, 0.5), (0.72, 0.554), (0.715, 0.609), (0.7, 0.659),  
 (0.673, 0.7), (0.637, 0.727), (0.598, 0.74), (0.563, 0.733), (0.534, 0.709),  
 (0.512, 0.671), (0.495, 0.623), (0.484, 0.57), (0.478, 0.515), (0.477, 0.461),  
 (0.482, 0.409), (0.49, 0.358), (0.503, 0.31), (0.52, 0.265), (0.54, 0.223),  
 (0.564, 0.184), (0.591, 0.149), (0.621, 0.117), (0.654, 0.089), (0.69, 0.065),  
 (0.728, 0.044), (0.769, 0.028), (0.812, 0.015), (0.857, 0.007), (0.904, 0.003),  
 (0.953, 0.003), (1, 0).

328 The side trace is allowed to backtrack enough to form a rounded curl, but it is not allowed to collapse  
 329 into a needle. The checker computes a terminal backtrack ratio

$$\rho_{\text{back}} = \frac{\sum_{k=k_c+1}^{n-1} \max(0, x_{k-1} - x_k)}{\sum_{k=k_c+1}^{n-1} |x_k - x_{k-1}|},$$

330 where  $k_c$  is the crest index. The July 1 source gate rejects  $\rho_{\text{back}} < 0.24$ , rejects a low backtracked turn  
 331 below  $0.16H$ , and uses a side-reference descent limit of  $82^\circ$  so the supplied curl can keep its tight inner  
 332 sweep without allowing the old base cusp. The current side trace reports  $\rho_{\text{back}} = 0.2658$ , max terminal  
 333 descent  $81.0851^\circ$ , max low-branch angle jump  $7.6085^\circ$ , and no readable side-profile blocker failures.  
 334 The isometric, top, and front readable product views do not use that side trace as a swept body. They

use the localized three-dimensional/isometric trace:

335

(0, 0), (0.04, 0.008), (0.095, 0.033), (0.17, 0.105), (0.275, 0.305),  
 (0.385, 0.58), (0.5, 0.82), (0.61, 0.965), (0.69, 1), (0.78, 0.965),  
 (0.858, 0.86), (0.922, 0.704), (0.967, 0.528), (0.985, 0.384),  
 (0.965, 0.3), (0.937, 0.228), (0.919, 0.16), (0.944, 0.112),  
 (0.969, 0.061), (0.994, 0.012), (1, 0).

This split is deliberate. A profile broad enough for the human side-view read can become a top-view  
 tunnel or wall if swept across the whole sheet. A valid future change must state which trace it changes,  
 why, and which rendered view failed before the edit.

336

337

338

### Generated lip path

339

The generated path uses a ramp/crest/lip decomposition:

340

$$P(u) = \begin{cases} P_{\text{ramp}}(u), & 0 \leq u < u_c, \\ P_{\text{crest}}(u), & u_c \leq u < u_l, \\ P_{\text{lip}}(u), & u_l \leq u \leq 1. \end{cases}$$

In source, `moanaReferenceLipPoints` builds a normalized list of lip anchors controlled by `dip` and  
`sharp`. The anchors are smoothed into cubic Bezier segments, then sampled by normalized arc length:

341

342

$$q(\alpha) = B_k(t) \quad \text{where} \quad \sum_{\ell < k} \int_0^1 \|B'_\ell(s)\| \, ds + \int_0^t \|B'_k(s)\| \, ds = \alpha \ell_{\text{total}}.$$

The source samples this curve numerically using 18 subdivisions per cubic segment. A future exact  
 reconstruction should replace that sampling with an analytic or higher-resolution arc-length inversion  
 only if the rendered mechanism improves and the validation gates still pass.

343

344

345

## Span localization

The readable display path uses a lateral envelope

$$E(s) = \cos^{1.42} \left( \frac{\pi}{2} |s| \right), \quad s \in [-1, 1],$$

then uses powers of  $E$  near the terminal lip to localize the curl. The source intentionally makes the lip narrower than the broad ramp; otherwise a centerline curl becomes a swept tunnel. The July 1 repair keeps the lip round early, but releases it back to the flat body near the terminal endpoint:

$$r(t) = S(0.84, 0.98, t),$$

$$\tau(t) = \text{clamp}_{[0,1]} \left( t - 0.07 \sin [\pi S(0.68, 1, t)] [1 - S(0.46, 0.78, S(0.68, 1, t))] \right),$$

$$F_{\text{fold}}(s, t) = \text{lerp} \left( F_{\text{shoulder}}, E(s)^{1.78}, 0.42 S(0.70, 1, t) \right),$$

$$F_{\text{lip}}(s, t) = \text{lerp} \left( E(s)^{1.18}, E(s)^{2.15}, 0.82 S(0.70, 1, t) \right).$$

The endpoint release  $r(t)$  also multiplies the curl interpolation and open-core lip blend, so the suspended lip does not drag a curl all the way to the flat terminal sheet. The repair also keeps a crest-cap exception around the rounded lip:

$$C(t) = S(0.54, 0.66, t) [1 - S(0.82, 0.94, t)],$$

$$H_{\text{cap}}(s) = (1 - S(0.20, 0.82, |s|))^{0.72},$$

and blends the height span toward  $H_{\text{cap}}$  with weight  $0.97C(t)$ . This is not a tunnel relaxation. It is the blocker against the opposite failure Alan identified: a pointy fin or spike in the front/cross-section view. In the model path, the same localization principle appears through `transverseSupportMask`, `lipAwareRimMask`, `terminalLipSpanMask`, `shapeMask`, and the post-core taper terms.

**Bowl/dimple blocker**

362

The source blocker `blockSurfaceBowlPockets` runs before node emission. For each interior node with active neighboring height, it replaces a local low point by the minimum of its four direct neighbors:

363

364

$$z_{ij}^{(k+1)} = \max \left( z_{ij}^{(k)}, \min(z_{i-1,j}^{(k)}, z_{i+1,j}^{(k)}, z_{i,j-1}^{(k)}, z_{i,j+1}^{(k)}) \right),$$

for up to six passes. This is a pre-render invariant sweep, not a visual cleanup. It catches bowl-like local minima, but it is not sufficient for the under-overhang support-neck failure; that failure also requires side/isometric throat sampling and human-facing render inspection.

365

366

367

**Connected X-cell equations**

368

For each node center  $c_n$ , the visible cell is one square body with four legs in directions  $\{\text{NE}, \text{SW}, \text{NW}, \text{SE}\}$ . For each opposite pair,

369

370

$$\|e_{\text{NE}} - c_n\| = \|e_{\text{SW}} - c_n\|, \quad e_{\text{NE}} + e_{\text{SW}} = 2c_n,$$

and similarly for NW/SE. The same connector point  $g_{ab}$  is shared by exactly two adjacent cells:

371

$$e_{a,+} = g_{ab} = e_{b,-}, \quad \#\{(n, d) : e_{n,d} = g_{ab}\} = 2.$$

The current source solves connector chains by alternating signs along each row/column family:

372

$$g_0 = f, \quad g_k = 2c_k - g_{k-1} \quad (k > 0),$$

then chooses  $f$  by least-squares midpoint residual over the adjacent pair family. This preserves exact cell-level opposite-pair closure and exposes center-corridor drift as a diagnostic rather than hiding it. The checker then groups connector positions by physical coordinate, not only by id, so two connector ids occupying one point cannot create a silent four-cell joint.

373

374

375

376

## Acceptance objective

WaveVis is not currently optimizing a single scalar objective. The useful mental model is a constrained inverse-design problem:

$$\min_{\theta, \mathcal{G}} w_r E_{\text{ref}}(\Phi_\theta, \Phi_{\text{ref}}) + w_s E_{\text{smooth}} + w_m E_{\text{mechanism}} + w_v E_{\text{view}}$$

subject to boundary pinning, topology completeness, connector occupancy, no bowl/dimple pockets, and public route verification. At this stage the objective is enforced as explicit gates rather than a continuous solver: reference match is judged on the rendered object; mechanism feasibility is checked in source; stale paper/public assets are treated as failures.

For a future continuous solver, the scalar terms should be reconstructed from the current gates rather than invented from scratch. A practical decomposition is:

$$\begin{aligned} E_{\text{ref}} &= \lambda_s D_{\text{side}}(S_{\text{side}}, R_{\text{side}}) + \lambda_t D_{\text{top}}(S_{\text{top}}, R_{\text{top}}) + \lambda_f D_{\text{front}}(S_{\text{front}}, R_{\text{front}}) + \lambda_o E_{\text{open}}, \\ E_{\text{smooth}} &= \sum_{(i,j)} \|\Delta_x^2 p_{ij}\|^2 + \|\Delta_y^2 p_{ij}\|^2, \\ E_{\text{mechanism}} &= \sum_n \left( \epsilon_{\text{oppLen}}(n)^2 + \epsilon_{\text{oppCol}}(n)^2 + \epsilon_{\text{jointUse}}(n)^2 + \epsilon_{\text{anchor}}(n)^2 \right), \\ E_{\text{view}} &= \epsilon_{\text{sideWall}}^2 + \epsilon_{\text{skinnySail}}^2 + \epsilon_{\text{frontPoint}}^2 + \epsilon_{\text{frontWall}}^2 + \epsilon_{\text{pointyProfile}}^2 + \epsilon_{\text{hiddenMech}}^2. \end{aligned}$$

Here  $R_{\text{side}}, R_{\text{top}}, R_{\text{front}}$  are view-level targets extracted from the accepted reference family.  $R_{\text{side}}$  may use the July 1 supplied side line;  $R_{\text{top}}, R_{\text{front}}$ , open-throat, perimeter, and mechanism terms must still come from the gridded and three-dimensional references.  $D_{\text{side}}$  may include a Frechet-like curve-distance term after a side contour is extracted from the full sheet, but that term is invalid if the top, front, open-throat, or mechanism-visibility terms fail.  $E_{\text{open}}$  samples the underside throat below the lip for dimples, bites, bowls, and support-necks, and  $D_{\text{top}}$  rejects broad terminal blobs, triangles, and V fans in plan view.  $E_{\text{frontPoint}}$  rejects a rounded-wave front view that collapses into a vertical fin;  $E_{\text{frontWall}}$  rejects the opposite full-width wall;  $\epsilon_{\text{pointyProfile}}$  rejects a sharp or needle-like side silhouette even when the outer curl radius appears continuous. This follows the general inverse-design pattern of optimizing a physically meaningful state subject to explicit manufacturability and simulation constraints (10, 22–24), but WaveVis should keep the gate form until the rendered artifact is stable enough that a scalar objective would not hide a visible failure.

## Candidate iteration record

Every new geometry candidate must be traceable. The minimum record is:

$$\mathcal{R}_k = \{\text{candidate id, source diff, intended defect, metrics, render captures, accept/reject reason}\}.$$

The accept/reject reason must name the rendered shape, not only the code change. A valid note says, for example, “rejected: side open throat improved but top became a broad terminal blob.” An invalid note says only “geometry check passed.” Candidate848 through Candidate875 are examples of why this record matters: some local gates passed, but browser renders still showed support ridges, broad top blobs, front-wall reads, pointy fin profiles, squared terminal feet, or support-cone reads. Candidate876 is the current committed baseline only; its old build pass and geometry-invariant pass do not override the later rendered pointy-profile complaint. Candidates 898 through 903 extend the rejection ledger: old smooth trace kept a spiral/pointy side and pinched top; tail release became a blunt cylinder; smooth product profile became a loop/half-pipe; no-loop cap became a mound with no curl; Moana lip anchors made a steep nose without the needed overhang; analytic rounded curl became a broad wall/blob. The current July 1 repair must be recorded as a separate source state: it passes the inverse-sheet source contract and removes the pointy side profile locally, but its rendered full-sheet reference match remains open unless the current public routes are inspected after the bundle update.

## 3.4 Rigid controls

position and steer are post-shape placement controls:

$$\Delta x_{\text{position}} = 0.045 L \text{ clamp}(\text{position}, -1, 1),$$

$$\psi_{\text{steer}} = 45^\circ \text{ clamp}(\text{steer}, -1, 1).$$

They must not modify the curated wave profile, width, curl, strain, or topology. Validation aligns geometries back to the canonical frame and checks that residual shape differences are near zero for position and bounded for steer.

### 3.5 Morph control

morph is not a shape recipe. It interpolates from rest to the completed target:

$$p_{ij}(m) = (1 - g(m))p_{ij}^0 + g(m)p_{ij}^*.$$

The current growth function combines a sine ease with a faster visible growth curve so the wave grows naturally without a dead early range. Morph must preserve topology, connector closure, and the visible wave identity throughout the range. If morph = 0.5 produces zig-zags, overlaps, missing cells, or a side-wall-covered curl, that is a geometry failure.

### 3.6 Flat contribution and ground transition

flatContribution does not mean flatten the wave. It means share deformation with the surrounding sheet through a support apron. In accepted behavior:

- the main wave height and overhang reach stay within a small residual;
- the centerline profile remains essentially unchanged;
- surrounding flat areas participate more gradually;
- strain concentration is reduced or spread rather than hidden.

The old behavior target = lerp(deformed, rest, flatContribution) is explicitly rejected because it turns flatContribution into a flattening slider.

smoothing, shown historically as ground transition, broadens the support field and root ramp. It should recruit surrounding flat sheet into the slope while keeping the perimeter pinned and preserving the terminal lip.

### 3.7 Lip dip and terminal curl

lipDip maps to overhangAngleDeg. Neutral is 90°. High curl is 120°. The accepted behavior is not endpoint lowering. The wave should rise, crest, reach forward, curl downward, then return smoothly to the flat sheet without closing into a bowl. The current validation checks:

- the selected lip nose is a mid-height visible point below the last peak, not the near-floor return;
- the terminal slope is negative;

- the tip is forward of the crest and tucked under the shoulder by a bounded amount; 443
- the return advances toward the flat front instead of folding backward; 444
- the terminal cavity blocker, backfold blocker, and visible-dimple blocker remain true. 445

These checks are guards, not substitutes for the human-facing screenshot. A visible dimple, under- 446  
overhang pocket, side wall, or missing curl still means open work. 447

### 3.8 Rendering contract 448

`LatticeViewer3D.tsx` renders the readable surface and a connected X-cell mechanism from the 449  
actual lattice graph. In the current contract: 450

- `view=side` sets a side camera over the full three-dimensional linkage array; 451
- `view=front` sets a front camera over a crest-section window sampled from the same readable 452  
three-dimensional field, so the view inspects the rounded cross-section instead of projecting the 453  
whole side trace into a fin; 454
- `view=isometric` shows the full rectangular sheet in perspective while still making the curl and 455  
lip readable; 456
- the default product view uses a smooth gridded surface skin plus one-center four-leg X-cell leg 457  
lines, black square cell bodies, and spherical connector nodes; 458
- Side, Front, and 3D use view-specific mesh outlines instead of the previous SVG overlay, centerline 459  
comparison, or red terminal trace; 460
- each rendered X cell is one black square cell body with four visible center-to-connector legs; 461
- each connector is a spherical two-use physical node between adjacent cells; 462
- each connector has exactly two endpoint uses: one leg from each of those two centers; 463
- crossing diagonal families must stay visually and physically separate instead of collapsing into a 464  
four-cell joint; 465
- connector corridor drift is reported as a bounded diagnostic when exact cell-level opposite-pair 466  
closure moves a connector away from the old midpoint corridor; 467

- cells and X legs are display toggles, not repair paths, and their render scope remains covered by the geometry check.

If the renderer needs to hide rows to make the shape readable, the generator is still wrong.

## 4 Target outcome

### 4.1 Human-facing shape

The accepted target is a “flat sheet plus localized plunging wave”:

- the outer perimeter of the rectangular sheet remains flat and fixed;
- the wave emerges through a broad, smooth ramp rather than a vertical wall;
- the crest is rounded, with no top dent;
- the lip projects forward and curls downward;
- the open underside is visible from side view, not covered by a side wall;
- the shape fades back to flat in every direction;
- the array remains a full linkage field with nodes and legs, not a hidden or clipped shell.

The practical acceptance boundary is a projected full-sheet condition, not a standalone drawn profile.

Let the rest sheet be  $\Omega = [-1, 1] \times [-1, 1]$  with boundary  $\partial\Omega$ , sampled by linkage nodes  $r_{ij} = (x_i, y_j, 0)$ , and let the generated mechanism state be  $p_{ij} = \Phi_\theta(r_{ij})$ . A future candidate is eligible for visual review only if

$$\max_{r_{ij} \in \partial\Omega} \|p_{ij} - r_{ij}\| \leq \varepsilon_\partial, \quad \mathcal{V}_{\text{mech}}(p, \mathcal{G}) = 1,$$

where  $\mathcal{V}_{\text{mech}}$  means full visible cell bodies, four straight legs per cell, two-use connector joints, and no hidden filler geometry. The side, top, front, and isometric views are then projections of the same state:

$$S_{\text{side}} = \Pi_{xz}\{p_{ij}\}, \quad S_{\text{top}} = \Pi_{xy}\{p_{ij}\}, \quad S_{\text{front}} = \Pi_{yz}\{p_{ij}\}.$$

The candidate must satisfy all three projected readings at once: broad rounded side curl, rounded localized top footprint, and rounded front/cross-section body. A side-line surrogate is rejected even if it looks clean in isolation, because it cannot encode span localization, open throat clearance, perimeter

flatness, or mechanism visibility.

490

## 4.2 Hard constraints

491

The WaveVis generator and renderer must preserve the following hard constraints:

492

1. **Flat perimeter.** Boundary nodes must remain on the rest sheet. No side, front, or rear perimeter should be pulled into the wave. 493  
494
2. **Full array visibility.** The rendered artifact must show the actual linkage grid. Hiding or ghosting broken cells does not count as a fix. 495  
496
3. **Connector closure.** A cell connector is an actual shared graph location. Lines should meet at nodes; apparent detached legs are a failure. 497  
498
4. **No erratic legs.** Long arms, spikes, zig-zags, random backtracking, and visible overlaps indicate a broken geometry or render path. 499  
500
5. **Smooth strain sharing.** Adjacent rows and columns should change gradually enough that the mesh reads as a continuous mechanism field. 501  
502
6. **Localized wave.** The curl must be strongest near the center and fade laterally. A constant side-to-side tunnel is not the target. 503  
504
7. **Full-view side semantics.** Side view shows the full three-dimensional render from the side. It must not be replaced by a profile-only debug view. 505  
506
8. **No filler geometry.** Cosmetic walls, caps, planks, bridges, hidden couplers, or masks must not be used to conceal a bad mechanism. 507  
508

## 5 Coordinate model

509

The simulator starts from a rectangular rest lattice. A node with row  $i$  and column  $j$  has rest position

510

$$p_{ij}^0 = (x_j, y_i, 0).$$

The target is a displacement field

511

$$p_{ij}^* = p_{ij}^0 + m D(x_j, y_i; \theta),$$

where  $m \in [0, 1]$  is the morph amount and  $\theta$  represents all shape parameters except rigid placement. The morph parameter only interpolates between rest and the finalized target. It must not change the target shape definition, remesh the lattice, or introduce a different topology.

The longitudinal coordinate  $u \in [0, 1]$  measures progress through the wave region from rear/root to front/lip. The span coordinate  $v \in [-1, 1]$  measures lateral distance from the centerline. A good WaveVis target uses both:

$$D(x, y) = A(u, v) P(u) + B(u, v) Q(u),$$

where  $P(u)$  is the side-profile contribution,  $Q(u)$  can include forward curl or secondary displacement terms, and  $A, B$  are smooth two-dimensional envelopes that go to zero at the sheet perimeter.

The key architectural rule is that  $A(u, v)$  is not constant in  $v$ . A constant span envelope turns any attractive profile into a tunnel. A localized plunging wave requires  $A(u, 0)$  large near the centerline and  $A(u, \pm 1) \approx 0$  near the sides, with a monotone or smoothly unimodal falloff rather than a hard wall.

## 6 Generation pipeline

The target-building pipeline is:

1. sanitize rows, columns, visible sliders, hidden legacy shape parameters, display flags, and URL parameters;
2. build the full rectangular node grid;
3. compute the canonical rounded breaking-wave displacement from the supplied reference target;
4. apply the span envelope that localizes the wave in  $y$ ;
5. preserve the boundary by forcing perimeter displacement to zero;
6. apply morph interpolation from rest to target;
7. apply rigid steer and position transforms after the shape is finalized;
8. build full rectangular edge and quad topology;
9. compute strain, bend, shear, dihedral, and display metrics;

10. render the full array, side view, 3D view, and top view without substituting fake surfaces. 535

The distinction between the supplied reference target and rigid placement parameters is essential. The 536  
visible app no longer exposes manual  $xz$  or  $xy$  profile editors. The source target owns the rounded 537  
breaking-wave profile. The user-facing sliders are intentionally narrow: scale uniformly resizes that 538  
target, morph blends from rest to the completed target, steer rotates the finished target around the 539  
anchor, and position translates the finished target horizontally. Neither steer nor position may feed 540  
back into profile curvature, curl, width, strain generation, or cell topology. 541

| Stage          | Contract                                                                                                                       | Failure caught                                                                                                    |
|----------------|--------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Target profile | Defines the desired side profile shape.                                                                                        | Blob, neck/head, hill without lip, top dent.                                                                      |
| Span envelope  | Localizes the wave in the sheet.                                                                                               | Swept barrel, side wall, U-shaped tube blocker.                                                                   |
| Boundary clamp | Keeps the perimeter flat.                                                                                                      | Pulled sheet edges, non-flat perimeter.                                                                           |
| Morph          | Interpolates rest to target only.                                                                                              | Half-morph mangling, topology change while sliding.                                                               |
| Topology       | Keeps full node/edge/quad graph.                                                                                               | Missing grid, hidden cells, detached legs.                                                                        |
| Renderer       | Shows the actual mechanism.                                                                                                    | Fake shell, hidden wall, side view as profile-only debug output.                                                  |
| Paper evidence | Includes only target references, accepted mechanism proofs, accepted current renders, or clearly labeled rejected diagnostics. | Stale candidate screenshots, misleading overlays, and internal trace diagrams appearing as authoritative figures. |

**Table 3.** Pipeline stages and the failure modes each stage must prevent.

## 7 Supplied rounded target 542

The current visible app does not ask the user to draw a profile. That path created too much ambiguity 543  
and repeatedly made the simulator look like a swept tunnel or hand-edited cavity rather than a single 544  
coherent wave. The user-facing target is now driven by the supplied rounded breaking-wave lip/body 545  
profile: a localized ocean deformation with a broad rear ramp, rounded crest, forward-and-down lip, 546  
open underside, smooth lateral fade, and flat rectangular perimeter. 547

The curated target is a reference field, not a set of cell locations. The final cell grid is determined by 548  
row and column counts, then sampled against that target. A clean state must keep the full linkage array 549  
visible while making the centerline and lateral profile read as one plunging wave. The target must 550

never stitch the lip directly to the ground or draw a hard polygon boundary around a former editor curve, because that creates the wall, bowl, cavity, and silhouette-only failures this record explicitly rejects. The curl is also resolution-sensitive: the default reference-wave state keeps 112 columns, while reduced column counts are reserved for low-density mechanism inspection and must not be mistaken for a completed reference-shape view.

## 8 Slider semantics

| Control         | Intended effect                                                | Must not do                                                      |
|-----------------|----------------------------------------------------------------|------------------------------------------------------------------|
| morph           | Blend rest sheet into the completed target.                    | Remesh, flip cells, create zig-zags, change profile identity.    |
| scale           | Uniformly enlarge or reduce the supplied rounded target.       | Change steer, position, topology, or the target's wave identity. |
| steer           | Rigid yaw rotation of the finished wave.                       | Bend, stretch, or reshape the wave.                              |
| position        | Rigid horizontal translation of the finished wave.             | Change profile, strain field, or curl.                           |
| display toggles | Surface, flat grid, cells, and X legs are display layers only. | Hide broken geometry or substitute a fake repair path.           |

**Table 4.** Visible control contract after removing manual profile editors and hidden shape sliders. The supplied rounded target is the default shape; visible controls must preserve that shape unless their narrow role explicitly changes scale, morph, steer, position, or display layers.

## 9 Breaking-wave geometry

The desired default profile is closer to a localized plunging wave than to a cone, cylinder, or arch. The useful approximation is a tapered, asymmetric surface whose highest crest sits behind the curl, whose outer radius is larger than the inner radius, and whose underside remains open. Along the centerline, a breaking wave profile can be represented as three joined curve families:

$$P(u) = \begin{cases} P_{\text{ramp}}(u), & 0 \leq u < u_c, \\ P_{\text{crest}}(u), & u_c \leq u < u_l, \\ P_{\text{lip}}(u), & u_l \leq u \leq 1. \end{cases}$$

The ramp rises from the sheet. The crest rounds over. The lip turns forward and downward. The derivative at the terminal lip should point downward when  $\text{lipDip} > 90^\circ$ :

$$\left. \frac{dz}{dx} \right|_{\text{tip}} < 0.$$

The final point is allowed to be lower than the farthest horizontal reach. In a real breaking wave, the maximum reach can occur at the shoulder while the lip tip turns down from that shoulder. The downturn must remain open and forward-readable from the side; it must not fold into a closed pucker, dimple, bowl, or side-wall pocket. Treating the farthest-right point as the tip is the mistake that produces a straight falling chute, while overcorrecting into an under-tucked return is the mistake that produces the rejected cavity. The underside return must also advance back into the flat sheet after the lowest lip sample; a backward floor point is disallowed because it reads as a small lower-lip dimple even when it does not trip a larger bowl metric. Candidate785 was the previous recovery floor for this idea, not the accepted answer; the current acceptance test is still the rendered full mechanism with an open throat and no support-neck pocket.

The three-dimensional field must multiply this centerline motion by a span falloff:

$$E(v; u) = \exp \left[ - \left( \frac{|v|}{w(u)} \right)^\alpha \right],$$

with  $w(u)$  varying through the wave. The curl should have a smaller active width than the broad back ramp, so the lip is localized and the open underside remains visible from the side.


## 10 Mechanism topology

WaveVis uses a rectangular graph of nodes, horizontal profile edges, vertical span edges, and quads as the source lattice. The visible mechanism layer then derives a connected X cell at each lattice node. This is a kinematic-design problem, not a drawing style: linkage synthesis and symbolic kinematics treat joints, bars, and closure equations as the object being designed (15–17). The WaveVis renderer must therefore show the constraint truth rather than draw a smoother surrogate.

Each cell renders as a black square body with four visible legs that leave the same center. Opposite leg pairs are equal length and collinear through that center, so the center bisects both bars. Each leg terminates at a spherical connector node that is shared by exactly two adjacent cells. Crossing

diagonal families are separated into distinct physical joints so a crossing point cannot become a four-cell connector. The graph is not allowed to become isolated crossed marks, two nearby two-leg pseudo-cells, or a set of isolated rows.

The mechanism evidence from the earlier proof remains relevant as a warning against fake filler surfaces and impossible all-four-equal closure. The current mechanism rule is cell-level, not candidate-level: each cell has one square center and four straight legs, opposite pairs are collinear and equal length through that center, and each connector is a spherical physical joint used by exactly two adjacent cells. The old center-pair corridor is a drift diagnostic, not the hard pass condition (28).

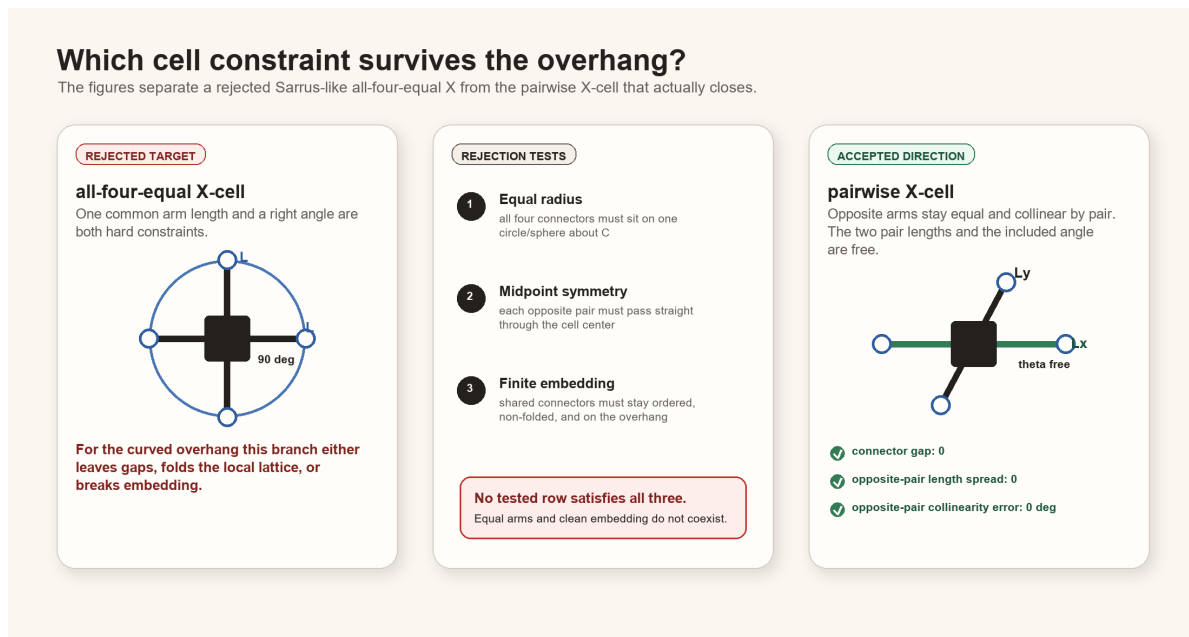

**Figure 7.** Mechanism contract inherited from the constraint proof and updated in the current renderer. WaveVis should preserve exact shared contact, one-center cells, and two-cell connector joints on adjacent-center spans rather than hiding infeasible geometry behind filler surfaces or a connector-ID count.

## 11 Rendering modes

WaveVis has three inverse-sheet product views:

- **3D/isometric view** shows the full rectangular array in perspective.
- **Side view** is a camera view of the full three-dimensional render from the side and must show the curl.
- **Top view** shows the full square plan sheet with localized interior deformation and catches terminal caps, triangular fans, wedges, or cropped-patch regressions.

The view contract matters because a side view can hide the curl if lateral geometry forms a wall over the open underside. In that case the correct fix is to reshape the three-dimensional surface so the lateral envelope follows the wave contour and fades out, not to switch the side view into a profile-only debug output or hide the wall.

## 11.1 Magnetic valve geometry comparator

The July 2026 advisor-call transcript added a separate design need: a fast sandbox for choosing a small magnetic valve geometry before committing to heavier COMSOL-style work. The narrowed first question is not pneumatic flow. It is which arrangement of Alnico, NdFeB, two iron pieces, and a steel ball pulls the ball hardest and in which direction. Electropermanent-magnet work gives the governing simplification: a hard NdFeB magnet keeps its magnetization, a lower-coercivity Alnico magnet can be switched by a current pulse, and soft-iron pole pieces route the external flux when the two magnet moments reinforce rather than cancel (29–31). This tab is not a replacement for finite-element magnetics or measured magnetic-force validation. It is a build-selection tool for the first physical choices: where to place and size the Alnico magnet, the NdFeB magnet, the two iron end pieces, and the ball.

The tab named `Magnetic Valve` now renders a simple magnetic ball-pull cross-section as the primary object. The default preset is the aligned EPM sketch Alan supplied: a long NdFeB magnet above a long Alnico magnet, both magnetized S-left/N-right, with iron pole pieces at the left and right ends and the steel ball placed near the left pole. The public object set is fixed: one Alnico magnet, one NdFeB magnet, two iron pieces, and one steel ball. The user can drag each object, resize it with direct numeric and slider controls, set Alnico to off, NS, or SN, choose an Alnico grade, choose an NdFeB grade, set coil turns, pulse current, pulse duration, and winding direction, optionally flip the NdFeB polarity, then press run. A run draws multiple estimated N-to-S flux lines. Stronger lines are drawn thicker and darker from the same approximate field/gradient score used by the force estimate; no heat-map gradient and no fake ball-guide line are shown. The strongest field path remains distinct, and a force arrow at the ball reports the approximate force magnitude and direction.

The client-side model keeps the physics deliberately approximate. NdFeB is always magnetized. Alnico stores a programmed direction and strength from the pulse field  $H \approx NI/\ell$ , where  $N$  is turns,  $I$  is current, and  $\ell$  is the Alnico length used by the coil. The selected Alnico grade sets the approximate switching field; the selected NdFeB grade sets the fixed remanence scale. Iron pieces apply bounded

pole-piece concentration rather than a solved nonlinear permeability field. The external EPM moment is treated as the NdFeB moment plus the programmed Alnico moment, with reduced external flux when the two oppose and route more flux internally. The displayed flux lines are numerically integrated through the approximate two-dimensional field and are rejected before rendering if they contain long jumps or sharp V-shaped turns. The steel ball perturbs the displayed field-line paths with a bounded induced-pole approximation so moving the ball near a pole changes the line geometry; the force computation itself uses the external field gradient so the ball does not pull on its own induced field. The steel-ball force is estimated as a two-dimensional vector proportional to the local gradient of  $B^2$ , scaled by ball volume, ferrous strength, and stiction. The visible readout reports total force, force direction, side pull, EPM circuit mode, and pulse field. No validated flux-density solution, exact Maxwell boundary solution, pressure, airflow, cutoff state, or measured force claim is part of the current goal.

## 12 Verification gates

The generator should be checked with both numeric and visual gates. Numeric checks are not sufficient, but they catch repeated hard failures before visual review.

| Gate                       | Measurement                                                                                                            | Acceptance intent                                                                                                                                                                                                                     |
|----------------------------|------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Perimeter flatness         | $\max_{\partial\Omega} \ p^* - p^0\ $ .                                                                                | Boundary displacement is zero or visually negligible.                                                                                                                                                                                 |
| Topology completeness      | Expected node, edge, and quad counts.                                                                                  | Full rectangular sheet graph remains visible.                                                                                                                                                                                         |
| Connector closure          | Edge endpoints meet their node coordinates.                                                                            | No detached legs or fake bridges.                                                                                                                                                                                                     |
| Lip curl                   | Crest-to-lip height gap, terminal slope, run gate, and cavity gate.                                                    | The lip curls down into a smooth tapered branch rather than ending as a hill, near-vertical chute, hooked tip, bowl, dimple, or cavity.                                                                                               |
| Span localization          | Row-wise height profile across $y$ .                                                                                   | Center strong, sides faded; no swept tunnel.                                                                                                                                                                                          |
| Morph continuity           | Residual between adjacent morph samples.                                                                               | No sudden jumps or topology flips.                                                                                                                                                                                                    |
| Slider isolation           | Aligned geometries across position/steer/width changes.                                                                | Rigid controls stay rigid; width stays span-only.                                                                                                                                                                                     |
| Visual side check          | Browser side view screenshot or direct render inspection.                                                              | Curl visible in the full side view.                                                                                                                                                                                                   |
| Defect repair loop         | Confirmed visible defects re-enter source repair.                                                                      | Acknowledging dimples, pockets, walls, or missing curl is not a stopping state.                                                                                                                                                       |
| Terminal side-profile gate | Literal readable profile, sampled model side trace, terminal backtrack ratio, and side camera fit.                     | Before visual QA, reject any lower-branch re-rise, under-lip valley rebound, pointy-notch under-backtrack, excessive lower-branch backtrack, abrupt terminal angle jump, steep visible terminal descent, or cropped mobile side view. |
| Startup URL parser         | Covers all public and legacy slider aliases.                                                                           | A shared verification URL cannot silently load a different height, overhang, lip dip, width, or smoothing state.                                                                                                                      |
| Paper figure hygiene       | Every figure is a target reference, accepted mechanism proof, current accepted render, or labeled rejected diagnostic. | Internal overlays, stale screenshots, and profile-only traces cannot become authoritative paper evidence.                                                                                                                             |

**Table 5.** Verification gates. A build passing TypeScript is not enough; WaveVis must pass the rendered outcome Alan actually uses.

## 12.1 Current regression command set

The current inverse-sheet source-level gate is:

```
npm run check:geometry
```

which expands to:

```
node scripts/check-geometry-invariants.cjs
```

```
node scripts/check-inverse-sheet.cjs
```

```
node scripts/readable-wave-metrics.cjs
```

The inverse-sheet checker compiles the TypeScript geometry into a temporary CommonJS module and then evaluates the default state, low/high lip dip, morph, position, steer, flat contribution, smoothing, width, lateral taper, bowl-pocket, side-render, and startup-URL cases. The readable-wave metrics gate preserves the current reference-shape blockers. The geometry-invariant checker covers mechanism-level consistency.

The magnetic-valve sandbox has its own direct regression gate:

```
node scripts/check-magnetic-valve.cjs
```

That checker compiles the lightweight valve model and checks the current magnetic-only gates: the layout contains exactly Alnico, NdFeB, two iron pieces, and the ball; the default starts as the aligned parallel EPM stack; a run returns one strongest N-to-S line selected from the traced flux lines; moving the ball closer increases force; a ball beside either pole still reports finite pull; moving the ball near the active pole changes the traced line path; magnetizing Alnico adds pull; opposing Alnico and NdFeB reduce external pull; Alnico can reverse the dominant line direction only when its programmed moment dominates; larger NdFeB geometry increases force; nearby iron pieces concentrate pull; moving the ball across the stack changes the force-direction readout; and 320 deterministic randomized geometries return finite values without rendered line jumps or sharp V-shaped flux-line turns.

The magnetic-valve tab also has a browser interaction gate:

```
node scripts/check-magnetic-ui-cdp.mjs
```

That checker opens the actual rendered app in headless Chrome and verifies the human-facing behavior: run draws a strongest line, a force vector, and multiple flux lines; the default NdFeB and Alnico render

as a parallel aligned stack with iron pieces on the two ends; the removed field-strength heat-map  
 gradient does not render; fake ball-guide lines between the iron pieces do not render; the flux lines  
 have varied widths so stronger and weaker pull paths are visually distinguishable; pulse + keeps  
 the aligned EPM state active under the default winding; the ball can be dragged with a pointer event;  
 direct numeric size/pulse inputs and material-grade selectors are present; and the desktop route has no  
 horizontal overflow. This browser gate is paired with desktop and mobile screenshots before public  
 release.

The current acceptance evidence expected from `scripts/check-inverse-sheet.cjs` includes:

- startup display defaults to `showSurface=true`, `showEdges=true`, `showNodes=true`, and  
`showHeatmap=false`;
- rendered black-square cell count equals the full rectangular grid count 4928;
- rendered center-to-connector X leg segment count equals the expected connector-use count 19400;
- every interior X cell has exactly four legs from one black square body;
- rendered spherical connector-node count equals the expected adjacent connector count 9700;
- each physical connector has exactly two endpoint uses;
- maximum X connector endpoint gap is zero;
- maximum opposite-pair length spread is zero;
- maximum opposite-pair collinearity error is zero degrees;
- maximum opposite-center residual is zero;
- connector corridor drift is bounded as a diagnostic rather than used as the pass condition;
- `sourceUsesCollinearEqualPairConnectors=true`;
- connected X-cell bodies stay close to the sampled wave surface rather than becoming a detached  
 fake mechanism;
- no bowl-pocket count is reported for default, compact-user, and breaking-wide presets;
- the literal readable side trace, side/isometric readable profile, startup default, user morph half-lip  
 case, and slider sweeps all pass the terminal and readable side-profile cavity blockers before browser

screenshots are treated as useful evidence; the July 1 side trace reports  $\rho_{\text{back}} = 0.2658$  against the pointy-notch rejection floor 0.24;

- `blockSurfaceBowlPockets` runs on the target grid before morphing and node emission, and the named 79-case slider sweep reports empty `badCases` arrays for the side-cavity and surface-bowl gates;
- side-overhang aspect stays in the downturned-lip band after the supplied-line update: startup default aspect between 1.35 and 3.05, compact user morph case between 1.45 and 3.15, and both with reach-to-height between 0.72 and 1.35;
- broad open-curl lip stats keep open-throat, no-dimple, no-under-overhang-bite, no-backfold, and return-to-flat checks true;
- those lip stats allow a wide rounded cap and tucked nose instead of forcing the old vertical-chute proxy;
- slider robustness exits cleanly for the named acceptance sweeps, while printed diagnostic subcases can still expose unsupported-resolution or terminal-angle failures that must not be described as accepted visual states.

These checks are designed around Alan's repeated failures. If a future change removes one of these cases because it is inconvenient, that is a regression unless the PDF and source explain an intentional replacement gate that still catches the same failure.

## 12.2 Rendered verification

Numeric checks must be followed by rendered verification. The minimum visual pass is:

1. render the exact user URL/preset, not a nearby default;
2. check Side: full side camera, visible broad curl, no pointy side profile, no cropped mobile curl, no wall covering the open underside, and no dimple or dark pocket under the overhang;
3. check 3D: full-sheet perspective view, visible curl/overhang, localized center deformation, no swept tunnel, no hidden rows, and no underside bite hidden by the camera angle;
4. check Top: the sheet should remain square while the interior footprint localizes toward the curl; it must not become a constant extruded strip, broad terminal cap, clipped patch, or large

triangular fan; 725

5. inspect cells/connectors at the curl for zig-zags, random long arms, detached legs, overlaps, or 726  
missing four-leg interior connectivity; 727

6. check lower `lipDip` values as well as  $120^\circ$ , because old low-lip cases became unstable even 728  
when max lip looked acceptable; 729

7. check `morph=0`, `0.5`, and `1` because half-morph repeatedly exposed mangled intermediate states. 730

Screenshots are evidence only when they show the actual rendered canvas and the URL or visible 731  
controls identify the tested state. A screenshot of a nice profile line is not evidence that the full linkage 732  
array is correct. 733

## 13 Build, deploy, and publication runbook 734

### 13.1 Local development 735

Use the WaveVis app root: 736

```
_apps/wavevis.aolabs.io/.
```

Typical local commands are: 737

- `npm run dev` to run the Vite development server; 738
- `npm run check:geometry` to run geometry and mechanism checks; 739
- `npm run build` to build the static app; 740
- `npm run deploy` to publish the app's own GitHub Pages branch. 741

Do not manually edit `dist`. Build it from source. 742

### 13.2 Public fallback deployment 743

The route Alan can reliably use is `https://wavevis.aolabs.io/`. The fallback route 744  
`https://aolabs.io/wavevis/` is served from the AO Labs hub/fallback repository, not di- 745  
rectly from the WaveVis app repository. Therefore a public WaveVis update requires two publication 746  
steps when both routes must stay current: 747

1. build and publish the WaveVis app;
2. copy the built dist contents into `_apps/aolabs-site/wavevis/`;
3. commit and push the AO Labs site mirror;
4. publish the exact verified bundle to the WaveVis repository `gh-pages` branch when the standalone Pages route must update;
5. verify that `https://wavevis.aolabs.io/` and `https://aolabs.io/wavevis/` serve the new bundle hash and the rendered artifact.

This is not optional. A source commit, fallback mirror update, or WaveVis `gh-pages` deploy can still leave one public route stale if the other route is not checked.

### 13.3 Custom-domain boundary

`https://wavevis.aolabs.io/` is the preferred branded route. The current Progress source still separates `wavevis_home` from `wavevis_custom_domain`; keep them separate so future work catches stale-route or certificate regressions. Do not claim the custom subdomain is fixed from repository settings alone. Verify the certificate, the redirected HTTP path, the body, the current bundle hash, the PDF route, and the rendered artifact from that hostname.

### 13.4 Progress logging

After meaningful WaveVis work, write a Progress event before final response when practical. The event must include:

- `source_ids`: usually `wavevis_home` and `wavevis_custom_domain`;
- Alan's complaint/request;
- the issue being solved;
- the Codex change;
- the observed public source change;
- provenance: thread, commits, checks, screenshots, and deployment basis;
- uncertainty: exact match not proven, custom domain stale, or any unverified surface.

Progress does not automatically ingest every active Codex chat. If a future WaveVis chat uses this PDF and changes the app, it must still write the event itself.

## 14 Current verified and open state

This section is intentionally blunt so a future chat does not have to infer whether the system is finished.

### Verified current facts on July 2, 2026:

- The reliable public routes are:

- <https://wavevis.aolabs.io/>

- <https://aolabs.io/wavevis/>

The standalone route has an approved GitHub Pages certificate and HTTPS enforcement.

- The Inverse Sheet tab is the first/default option; Double-Layer Sarrus is secondary.
- The public PDF route is `/wavevis/proofs/wavevis-system-architecture.pdf`.
- Side, Front, Top, and 3D are product view modes. Side is a full three-dimensional sheet view, not a profile-only debug trace.
- The current source tree contains the one-center four-leg X mechanism renderer, black square cell-body renderer, spherical connector-node renderer, and the geometry checkers that measure those invariants. The July 1 checker run reports the connected-X source contract as true:

```
xRenderDirectLines.sourceUsesConnectedXMechanism=true
```

- The July 1 side-profile repair passes `local npm run check:geometry`. The same run reports:

```
readableSurfaceRenderContract.ok=true
```

```
readableSideProfileCavityBlock.ok=true
```

```
readableTunnelSweepBlock.ok=true
```

and no inverse-sheet checker failures.

- The July 1 side-profile repair passes `local npm run build`; the built bundle is in `dist/`.
- Browser captures for the current local repair exist in:

```
_verification/
```

```
browser-20260701-
```

browser-20260701-side-reference-smoothed/

browser-20260701-side-long-tail/

The first folder contains the widened side desktop/mobile fit evidence; the second contains side, front, top, and isometric evidence before the final side framing change.

- The wrong internal reference-overlay figure and irrelevant stills have been removed from the paper figure sequence. The July 1 supplied side-view line is preserved as a side-only reference figure.

### Open state that blocks completion:

- Candidate876 was previously source/build/PDF/live-route checked as a baseline, but it is superseded by the July 1 side-profile repair after the pointy-profile complaint.
- Candidate785, Candidate841 through Candidate875, and Candidate898 through Candidate903 are not final accepted states. They remain rejected or superseded diagnostics.
- The current local side profile is no longer the earlier pointy spear/notch, and the mobile side view is no longer cropped. Exact reference-family match is still not proven because the rendered full mechanism must be judged across side, isometric, top, and front against the supplied gridded references.
- Exact matching to the June 24 gridded reference, June 28 stage/cross-section reference, July 1 side-view reference, or retained ocean-curl photographs is not proven. The July 1 side line constrains the side silhouette only; it is not a standalone acceptance target.
- This is a simulator and architecture record. It is not evidence that a physical lattice prototype has been fabricated or experimentally validated.
- If the live app, source, screenshots, Progress, or this PDF disagree, the current rendered artifact and source tree must be inspected and reconciled before any completion claim.

## 15 Failure modes

The most important failure classes are now explicit:

1. **Swept barrel.** One side profile is dragged sideways at constant span. The result reads as a tunnel, roof, half-pipe, or bridge.

2. **Side-wall cover.** The lip may exist in a center profile, but full side view shows a wall covering the open underside. 825  
826
3. **Straight chute.** The crest drops nearly vertically to a flat shelf instead of curling forward and under. 827  
828
4. **Blob or lump.** Excess smoothing or broad support creates a mound with no wave identity. 829
5. **Top dent.** The outer crest has a kink or concave dent where a smooth radius is required. 830
6. **Dimple, cavity, under-lip bite, or bowl.** The surface creates a pocket, pucker, enclosed hollow, under-overhang throat notch, or bowl-like depression rather than a plunging sheet. 831  
832
7. **Dangling terminal connection.** The side view avoids the old dimple metric but leaves a visible lower terminal tongue or foot under the lip. This still fails because the reference curl has a smooth open throat and a flat sheet return, not a small support hook that visually wires the lip to the ground. 833  
834  
835  
836
8. **Stale URL state.** A browser URL contains height, overhang, width, lipDip, or smoothing values, but startup ignores them and renders a different state. 837  
838
9. **Zig-zag linkage.** Neighboring legs alternate direction or length erratically. 839
10. **Hidden mechanism.** Broken topology is ghosted, clipped, or replaced by a cosmetic surface. 840
11. **Pointy surrogate target.** A clean side line or internal contour is treated as the whole target even though it produces a pointy profile or does not define the gridded sheet, top footprint, front body, open throat, or visible mechanism. 841  
842  
843
12. **Wrong paper evidence.** A stale overlay, profile trace, internal debug diagram, or rejected candidate screenshot appears as if it is a correct reference or accepted result. 844  
845
13. **Passive defect acknowledgement.** A visible problem is named in chat or recorded in this paper, but the generator and rendered artifact are not repaired and rechecked. 846  
847

The solution direction is to simplify the target field while strengthening the gates: localized smooth wave first, full array second, mechanism-clean render third. Complexity should be added only if it improves one of those outcomes without breaking the others. 848  
849  
850

## 16 Materials and Methods

The implementation source is the WaveVis React and TypeScript app (32). The source map above names the inverse-sheet geometry, renderer, controls, and magnetic-valve files. The magnetic-valve ball-pull view is declared in `src/MagneticValveTab.tsx`; its approximate model is declared in `src/magneticValveModel.ts`. Regression checks are run through `scripts/check-inverse-sheet.cjs`, `scripts/readable-wave-metrics.cjs`, `scripts/check-magnetic-valve.cjs`, and `scripts/check-magnetic-ui-cdp.mjs`; the magnetic checks are required whenever the EPM default, flux-line rendering, ball coupling, or force readout changes.

The model is deliberately written as an inspectable engineering simulator rather than a black-box optimizer. The validation style borrows from topology-optimization practice, where a compact code can still be valuable when its filters, constraints, and objective terms are explicit (20, 33); from linkage and compliant-mechanism design, where target motion is inseparable from topology, joint placement, actuator choice, and manufacturable compliance (12–14, 19); from deformation-programmed material and soft-robot design, where the local material or actuator rule controls the reachable shape space (21, 25); from inflatable and auxetic inverse design, where a desired three-dimensional target must be produced by a planar pattern or cell field rather than by a decorative surface (22–24); and from mechanical metamaterials, where local cell rules can create global deformation modes but can also produce unintended instabilities if the cell rule is not made explicit (26, 27, 34). WaveVis currently encodes those lessons as hard source gates rather than as a mature continuous optimizer.

The public app serves a static build. The architecture PDF is placed in the public proofs directory as `wavevis-system-architecture.pdf` and linked from the WaveVis control headers. The old connector proof remains a source artifact for the mechanism decision, but the visible paper action now points to this architecture record because the current work is broader than connector assignment.

## 17 Discussion

The main design lesson is that WaveVis cannot be corrected by tuning only the side profile. The user-facing failure was three-dimensional: side walls, swept tubes, missing full-array linkages, broken side-view semantics, pointy front fins, and zig-zag legs. The architecture therefore now uses a single curated target contract rather than a manual editor contract. The sheet generator is responsible

for creating a localized breaking-wave displacement field with lateral fade, boundary preservation, topology completeness, and a visible curled lip.

This distinction also clarifies future work. If the simulator produces a good center profile but a bad side view, the profile is only evidence that the curve exists somewhere. The real artifact still fails if the full three-dimensional render hides the curl or reads as an extrusion. Similarly, if the mesh is clean but the wave looks like a low mound, the mechanism is not enough. Both the shape and the linkage must be correct.

A newer lesson is that defect naming is not progress by itself. If a rendered state shows dimples, under-overhang pockets, side walls, a pointy side surrogate, or a missing curl, the correct workflow is source repair, geometry-check update, rendered screenshot verification, and public-bundle verification. The current checks name this directly through `noVisibleDimplePocket`, `readableSideProfileCavityBlock`, the side terminal-backtrack floor, and the side-camera fit: the lip must remain an open downturned branch with visible clearance and a return that advances into the flat sheet instead of folding into a pucker, dark throat bite, or needle-like side notch. The same source-of-truth rule applies to URL state. Several correction screenshots used URLs that carried explicit height, overhang, width, `lipDip`, and smoothing values; ignoring those parameters caused the page to render a different geometry than the requested test state. The startup parser is now part of validation through `startupUrlParamCoverage`. The architecture record is useful only if it changes the generator, state loader, and acceptance loop; it cannot substitute for a corrected human-facing WaveVis render.

## 18 Acknowledgements

This record was written to reduce repeated handoff burden during WaveVis development. The repeated complaints about side walls, missing cells, zig-zag legs, profile-view confusion, and swept-barrel geometry are treated as acceptance criteria rather than optional polish notes.

## 19 Funding

No external funding is claimed in this system architecture record.

---

## 20 Author contributions

Alan N. Pham defined the target artifact, accepted and rejected visual states, and the mechanism constraints. Codex generated this architecture record from the current WaveVis source and the active development contract.

---

## 21 Competing interests

The author declares no competing interests for this internal architecture record.

---

## 22 Data availability

The source data for this record is the WaveVis source tree, the accepted June 24 gridded reference family, the June 28 stage/cross-section reference, the July 1 supplied side-view line, the retained ocean-curl references copied into the proof figure set, the local proof diagrams, rejected-candidate verification folders, and the current simulator behavior. The rejected trace-overlay line is recorded only as a failure class, not as accepted source data. The public PDF is served with the WaveVis static app.

---

## 23 Code availability

The relevant implementation files are `src/latticeGeometry.ts`, `src/LatticeViewer3D.tsx`, `src/TargetShapeControls.tsx`, and `scripts/check-inverse-sheet.cjs` in the WaveVis app repository.

---

## 24 Additional information

This document supersedes the old header link to the narrow connector-contact constraint proof as the primary public WaveVis PDF. The connector proof remains an implementation reference for mechanism feasibility, but the current public artifact needs the broader system architecture and outcome-verification contract.

---

## 25 References

1. D. Terzopoulos, J. Platt, A. Barr, K. Fleischer, Elastically Deformable Models. *ACM SIGGRAPH Computer Graphics* **21**, 205–214 (1987). 928 929
2. D. Baraff, A. Witkin, presented at the Proceedings of SIGGRAPH 1998, pp. 43–54. 930
3. E. Grinspun, A. N. Hirani, M. Desbrun, P. Schröder, presented at the Proceedings of the 2003 ACM SIGGRAPH/Eurographics Symposium on Computer Animation, pp. 62–67. 931 932
4. M. Bergou, M. Wardetzky, S. Robinson, B. Audoly, E. Grinspun, Discrete Elastic Rods. *ACM Transactions on Graphics* **27**, 63:1–63:12 (2008). 933 934
5. T. Liu, A. W. Bargteil, J. F. O’Brien, L. Kavan, Fast Simulation of Mass-Spring Systems. *ACM Transactions on Graphics* **32**, 214:1–214:7 (2013). 935 936
6. A. Witkin, M. Kass, presented at the Proceedings of SIGGRAPH 1988, pp. 159–168. 937
7. M. Müller, B. Heidelberger, M. Hennix, J. Ratcliff, Position Based Dynamics. *Journal of Visual Communication and Image Representation* **18**, 109–118 (2007). 938 939
8. O. Sorkine, M. Alexa, presented at the Proceedings of the Fifth Eurographics Symposium on Geometry Processing, pp. 109–116. 940 941
9. S. Bouaziz, S. Martin, T. Liu, L. Kavan, M. Pauly, Projective Dynamics: Fusing Constraint Projections for Fast Simulation. *ACM Transactions on Graphics* **33**, 154:1–154:11 (2014). 942 943
10. T. Du *et al.*, DiffPD: Differentiable Projective Dynamics. *ACM Transactions on Graphics* **41**, 13:1–13:21 (2022). 944 945
11. M. Skouras, B. Thomaszewski, S. Coros, B. Bickel, M. Gross, Computational Design of Actuated Deformable Characters. *ACM Transactions on Graphics* **32**, 82:1–82:10 (2013). 946 947
12. S. Coros *et al.*, Computational Design of Mechanical Characters. *ACM Transactions on Graphics* **32**, 83:1–83:12 (2013). 948 949
13. B. Thomaszewski *et al.*, Computational Design of Linkage-Based Characters. *ACM Transactions on Graphics* **33**, 64:1–64:9 (2014). 950 951
14. V. Megaro *et al.*, A Computational Design Tool for Compliant Mechanisms. *ACM Transactions on Graphics* **36**, 82:1–82:12 (2017). 952 953
15. L. Zhu *et al.*, LinkEdit: Interactive Linkage Editing Using Symbolic Kinematics. *ACM Transactions on Graphics* **34**, 99:1–99:8 (2015). 954 955

- 956 16. J. M. McCarthy, *Geometric Design of Linkages* (Springer, 2000).
- 957 17. K. H. Hunt, *Kinematic Geometry of Mechanisms* (Oxford University Press, 1978).
- 958 18. M. P. Bendsøe, N. Kikuchi, Generating Optimal Topologies in Structural Design Using a  
959 Homogenization Method. *Computer Methods in Applied Mechanics and Engineering* **71**, 197–  
960 224 (1988).
- 961 19. O. Sigmund, On the Design of Compliant Mechanisms Using Topology Optimization. *Mechanics  
962 of Structures and Machines* **25**, 493–524 (1997).
- 963 20. O. Sigmund, K. Maute, Topology Optimization Approaches: A Comparative Review. *Structural  
964 and Multidisciplinary Optimization* **48**, 1031–1055 (2013).
- 965 21. B. Bickel *et al.*, Design and Fabrication of Materials with Desired Deformation Behavior. *ACM  
966 Transactions on Graphics* **29**, 63:1–63:10 (2010).
- 967 22. M. Skouras *et al.*, Designing Inflatable Structures. *ACM Transactions on Graphics* **33**, 63:1–63:10  
968 (2014).
- 969 23. M. Konaković-Luković *et al.*, Beyond Developable: Computational Design and Fabrication with  
970 Auxetic Materials. *ACM Transactions on Graphics* **35**, 89:1–89:11 (2016).
- 971 24. J. Panetta *et al.*, Computational Inverse Design of Surface-Based Inflatables. *ACM Transactions  
972 on Graphics* **40**, 40:1–40:14 (2021).
- 973 25. D. Rus, M. T. Tolley, Design, Fabrication and Control of Soft Robots. *Nature* **521**, 467–475  
974 (2015).
- 975 26. C. Coulais, E. Teomy, K. de Reus, Y. Shokef, M. van Hecke, Combinatorial Design of Textured  
976 Mechanical Metamaterials. *Nature* **535**, 529–532 (2016).
- 977 27. M. Kadic, G. W. Milton, M. van Hecke, M. Wegener, 3D Metamaterials. *Nature Reviews Physics*  
978 **1**, 198–210 (2019).
- 979 28. A. N. Pham, *WaveVis overhang connector assignment: evidence rejecting all-four-equal X-cells*,  
980 Internal WaveVis constraint proof and simulator evidence figures, 2026.
- 981 29. A. N. Knaian, PhD thesis, Massachusetts Institute of Technology, 2010.
- 982 30. W. R. Johnson, R. Kramer-Bottiglio, presented at the 2024 IEEE 7th International Conference on  
983 Soft Robotics (RoboSoft), pp. 347–352.

- 
31. A. M. Moran *et al.*, An Electropermanent Magnet Valve for the Onboard Control of Multi-Degree of Freedom Pneumatic Soft Robots. *Communications Engineering* **3**, 117 (2024). 984  
985
32. A. N. Pham, *WaveVis inverse-sheet simulator source tree*, Local source files: src/latticeGeometry.ts, 986  
src/LatticeViewer3D.tsx, src/TargetShapeControls.tsx, scripts/check-inverse-sheet.cjs, 2026. 987
33. O. Sigmund, A 99 Line Topology Optimization Code Written in Matlab. *Structural and Multidisciplinary Optimization* **21**, 120–127 (2001). 988  
989
34. K. Bertoldi, P. M. Reis, S. Willshaw, T. Mullin, Negative Poisson’s Ratio Behavior Induced by 990  
an Elastic Instability. *Advanced Materials* **22**, 361–366 (2010). 991