

# Design of a drift chamber for an experiment at FCC-ee for IEEE Conferences

Niloufar Alipour Tehrani  
CERN, Geneva, Switzerland  
Email: niloufar.alipour.tehrani@cern.ch

**Abstract**—The physics aims at the electron positron option for the Future Circular Collider (FCC-ee) impose high precision requirements on the vertex and tracking detectors. The detector has also to match the experimental conditions such as the collisions rate and the presence of beam-induced backgrounds. A light weight tracking detector is under investigation for the IDEA (International Detector for Electron-Positron Accelerator) detector concept and consists of a drift chamber. Simulation studies of the drift chamber using the FCCSW (FCC software) are presented. Full simulations are used to study the effect of beam-induced backgrounds on such detector.

## I. INTRODUCTION

The FCC-ee high-luminosity circular electron-positron collider, with center-of-mass energies from 91.2 GeV to 365 GeV, allows for high-precision measurements of the properties of the Z, the W, the top quark and the Higgs boson. As a predecessor of a new 100 TeV proton-proton collider, the FCC-ee collider is foreseen to be placed in a 100 km tunnel. The IDEA detector, one of the two detector concepts under development for FCC-ee, has demanding requirements to match the experimental conditions. Its main components consist of: an ultra-light silicon-based vertex detector, an ultra-light drift chamber for track reconstruction and particle identification, a double-readout calorimeter, a 2 T solenoid magnetic field and an instrumented return yoke. The drift chamber is being investigated using GEANT4-based simulations. Its performance and the effect of beam-induced backgrounds are presented here-below.

## II. DRIFT CHAMBER

The parameters of the drift chamber for the IDEA detector is summarized in table I. The Isobutane gas is foreseen to be used. The time-difference method is combined with the stereo angle of the sensitive wires are used to improve the resolutions of the detector.

## III. SIMULATION WITH THE FCC SOFTWARE

The FCC Software (FCCSW) [1] is a common software for all FCC experiments. It is based on the Gaudi software framework [2] for parallel data processing, GEANT4 simulation toolkit [3] and the DD4hep detector description toolkit for high energy physics [4]. The FCCSW simulation pipeline is summarized in fig. 1 and described here-below.

TABLE I  
PARAMETERS OF THE DRIFT CHAMBER FOR THE IDEA DETECTOR

Length	4500 mm
Inner radius	345 mm
Outer radius	2000 mm
Number of sensitive wires	56448
Single cell resolution	0.1 mm




Fig. 1. FCCSW simulation chain.

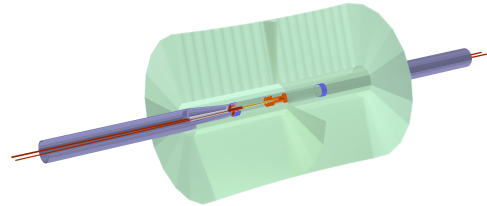


Fig. 2. The detectors at the interaction region for the FCC-ee IDEA concept.

### A. Geometry description with DD4hep

First, the geometry of the detector is described using the DD4hep simulation framework. The implementation of the detectors in the interaction region for the IDEA detector is shown in fig. 2 and includes the beampipe, the luminosity calorimeter, the vertex detector and the drift chamber.

### B. Segmentation

### C. GEANT4 simulation

### D. Digitization

## IV. IMPACT OF BEAM-INDUCED BACKGROUNDS

## V. CONCLUSION

## ACKNOWLEDGMENT

The authors would like to thank...

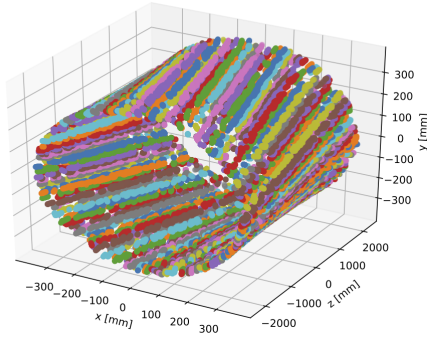


Fig. 3. The detectors at the interaction region for the FCC-ee IDEA concept.

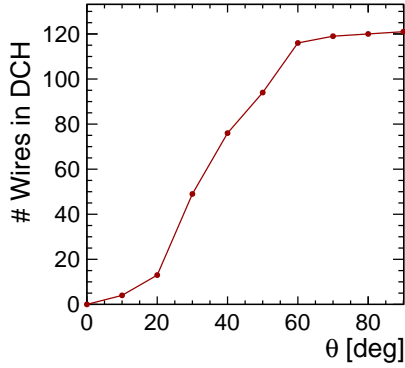


Fig. 4. The detectors at the interaction region for the FCC-ee IDEA concept.

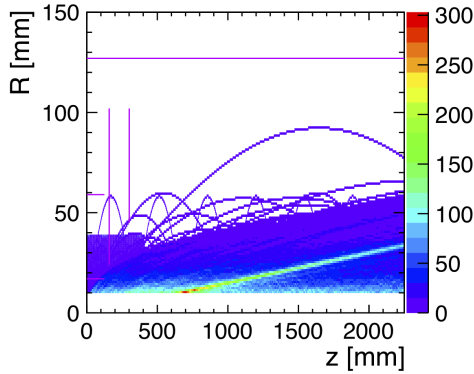


Fig. 5. The detectors at the interaction region for the FCC-ee IDEA concept.

#### REFERENCES

- [1] "The Future Circular Collider Software Framework." [Online]. Available: <http://fccsw.web.cern.ch/fccsw>
- [2] G. Barrand *et al.*, "GAUDI - A software architecture and framework for building HEP data processing applications," *Comput. Phys. Commun.*, vol. 140, pp. 45–55, 2001.
- [3] S. Agostinelli *et al.*, "GEANT4: A Simulation toolkit," *Nucl. Instrum. Meth.*, vol. A506, pp. 250–303, 2003.
- [4] M. Frank, F. Gaede, and P. Mato, "DD4hep: A Detector Description Toolkit for High Energy Physics Experiments," *J. Phys.: Conf. Ser.*, vol. 513, no. AIDA-CONF-2014-004, p. 022010, Oct 2013. [Online]. Available: <http://cds.cern.ch/record/1670270>

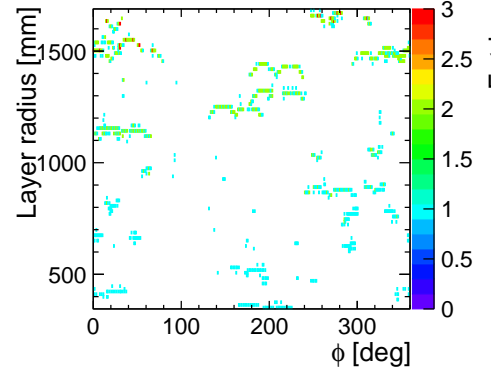


Fig. 6. The detectors at the interaction region for the FCC-ee IDEA concept.

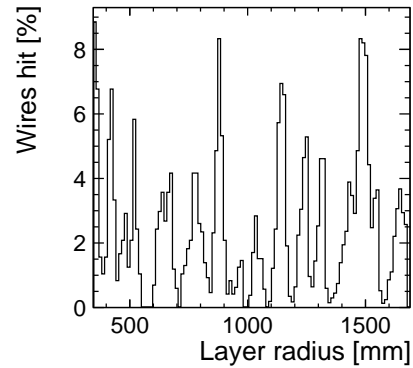


Fig. 7. The detectors at the interaction region for the FCC-ee IDEA concept.