




NAFLON
11/25/2024

TRACKMAN REPORT


DISPERSION

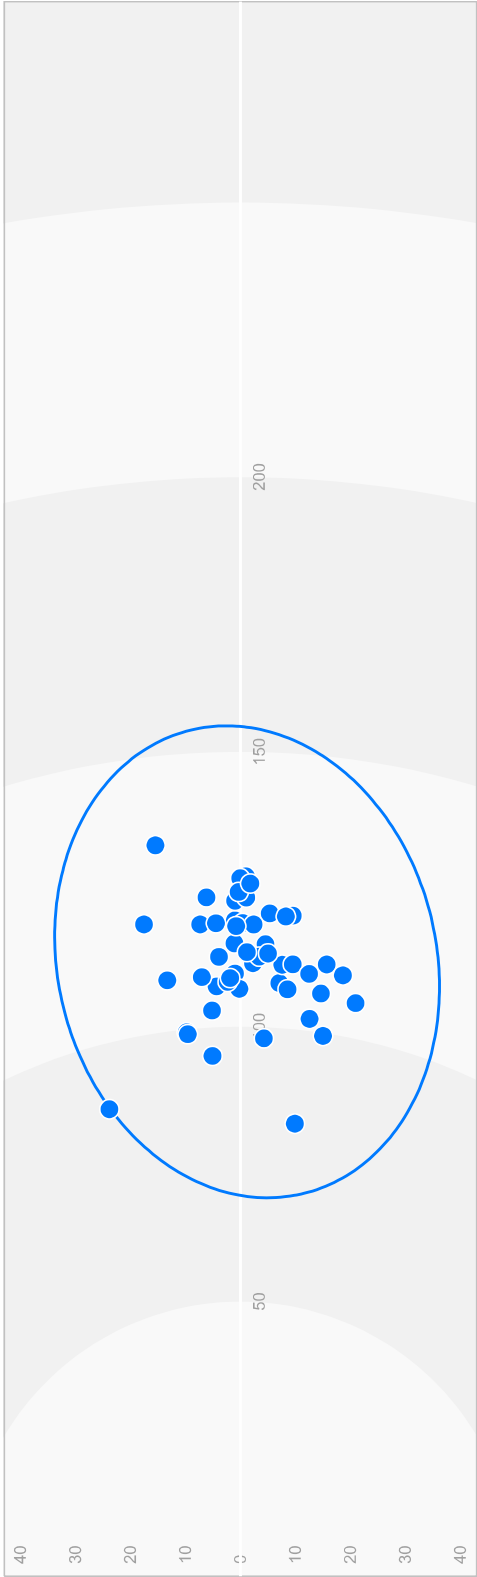

LEGENDS

8Iron	50
-------	----

TRAJECTORY

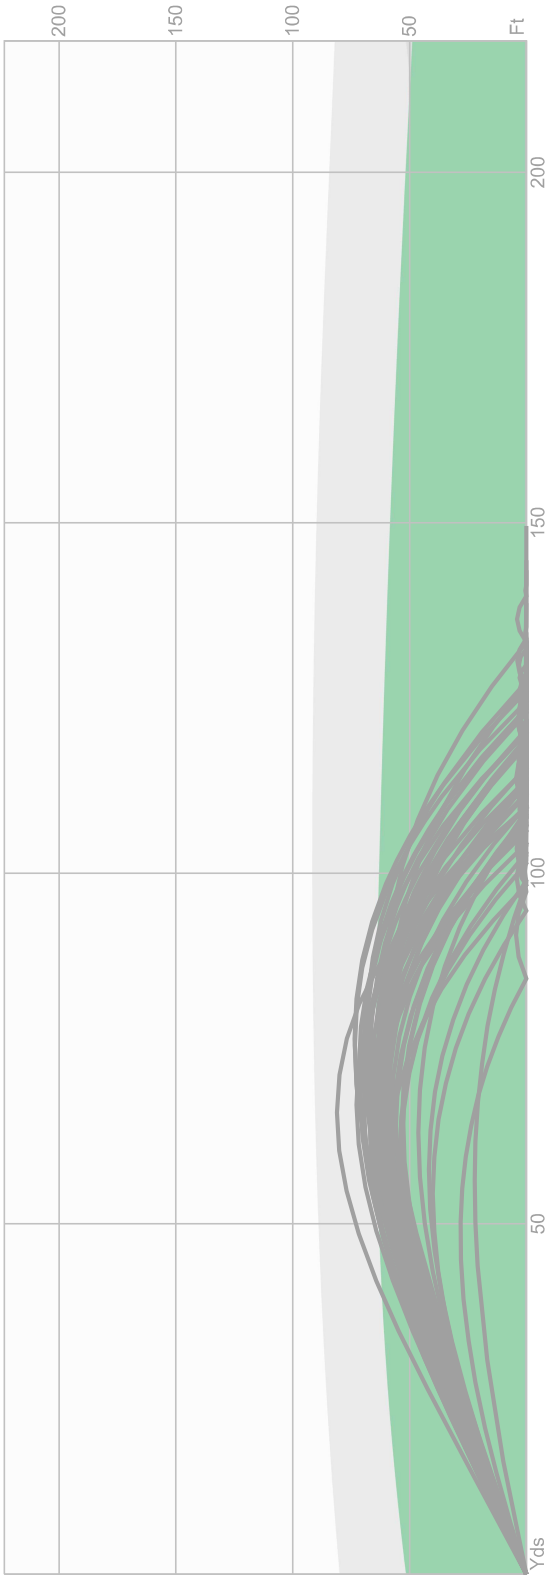

8i8Iron										
Yds/Ft, Mph	Carry	Total	Curve	Club Speed	Ball Speed	Smash Fac.	Spin Rate	Attack Ang.	Club Path	Face To Path
Yds	Yds	Yds	Ft	Mph	Mph		Rpm	Deg	Deg	Deg
1.	82.9	90.0	-	64.1	72.4	1.13	7110	-	-	-
2.	106.3	113.5	27.3R	67.1	85.6	1.28	7040	-0.8	-0.2	9.2
3.	108.2	121.3	16.1R	-	85.7	-1.00	6055	-	-	-
4.	98.0	102.1	-	-	81.2	-	7910	-	-	-
5.	112.8	126.0	5.7R	65.0	87.3	1.34	5416	-0.8	-4.2	1.6
6.	94.8	118.6	6.0L	64.0	78.3	1.22	4630	1.8	-0.2	-2.3
7.	99.4	108.7	26.4R	64.9	81.6	1.26	7065	-1.2	-3.8	10.3
8.	109.2	125.4	10.0L	65.9	85.2	1.29	5010	-0.6	-2.8	-3.2
9.	109.7	122.1	10.3R	65.0	86.3	1.33	5950	-2.0	-4.6	3.1
10.	103.1	116.5	5.4R	68.7	82.7	1.20	5930	-0.4	-5.2	1.8
11.	111.6	123.1	20.2R	65.7	87.5	1.33	6093	-2.2	-6.8	6.0
12.	119.3	132.5	4.7L	66.0	91.1	1.38	5550	-2.6	1.2	-1.2
13.	102.2	114.7	15.3R	65.8	82.6	1.25	6330	-1.1	0.3	5.4
14.	120.7	132.1	7.0R	67.4	92.4	1.37	5981	-2.2	0.2	1.6
15.	111.5	121.5	15.3R	68.1	87.4	1.28	6111	-2.0	-2.2	4.6
16.	127.4	138.5	4.8L	68.7	95.0	1.38	5420	-1.8	2.0	-1.1
17.	107.0	114.3	18.1R	66.4	85.6	1.29	6710	-0.4	0.2	6.0
18.	107.4	121.9	1.6R	67.7	83.2	1.23	4542	1.2	-3.0	0.5
19.	107.1	112.6	-	68.8	86.5	1.26	7680	-	-	-
20.	115.1	125.9	5.4L	-	89.5	-1.00	6160	-	-	-

21.			111.7	120.3	5.5L	66.6	87.4	1.31	6140	0.0	7.0	-1.6
22.			118.8	133.9	22.3L	71.3	88.1	1.24	3913	3.6	4.6	-5.7
23.			99.4	121.9	23.3L	71.4	81.7	1.15	5310	1.8	4.2	-7.5
24.			110.3	116.7	30.4R	70.3	88.5	1.26	7629	-2.0	-5.6	9.5
25.			127.0	143.2	9.3L	67.6	94.3	1.39	4810	-1.4	3.0	-2.1
26.			120.6	130.5	10.2R	69.4	91.9	1.32	5790	-2.6	0.8	2.7
27.			119.9	132.2	23.6L	67.9	91.6	1.35	5660	-1.8	0.0	-6.1
28.			106.9	117.1	12.5R	66.0	84.0	1.27	5492	0.0	-5.4	4.0
29.			112.4	118.0	18.8R	71.5	89.3	1.25	7243	-3.0	0.6	5.7
30.			123.7	133.4	8.6L	70.1	93.4	1.33	5670	0.0	0.0	-2.0
31.			115.1	122.0	8.3L	69.2	89.9	1.30	6540	0.2	5.2	-2.2
32.			112.8	122.0	1.6L	71.8	88.3	1.23	6340	-0.6	2.2	-0.3
33.			122.9	133.4	11.1L	-	93.4	-1.00	5867	-	-	-
34.			113.6	125.8	4.8L	70.9	87.9	1.24	5592	-0.6	2.4	-1.3
35.			108.2	122.1	6.6R	69.2	86.4	1.25	6497	-2.2	-3.8	1.9
36.			123.5	133.1	4.9R	68.4	93.7	1.37	5890	-1.6	-1.0	1.0
37.			133.9	150.9	41.8L	70.2	98.7	1.41	4860	-1.6	6.0	-8.4
38.			118.9	133.3	11.8L	68.6	90.3	1.32	5130	-1.2	4.4	-3.0
39.			109.2	133.1	20.3L	71.6	85.0	1.19	3948	0.6	4.8	-6.2
40.			110.9	114.1	21.6R	73.4	89.8	1.22	7960	-0.4	1.2	6.7
41.			108.9	117.0	-	70.8	87.2	1.23	6890	-	-	-
42.			99.1	145.6	14.2L	-	88.5	-1.00	2840	-	-	-
43.			120.3	127.8	8.8R	70.5	92.8	1.32	6510	-3.0	0.8	2.3

44.			124.5	132.3	1.6L	71.7	94.5	1.32	6074	-1.0	0.4	-0.4
45.			118.6	128.9	2.1R	70.7	90.8	1.28	5784	-0.8	0.4	0.5
46.			118.3	129.8	0.3R	70.5	91.5	1.30	6259	-3.0	-0.4	-0.0
47.			113.4	119.9	9.6R	69.0	89.4	1.30	6890	-1.6	-1.0	2.6
48.			88.3	126.5	39.4L	69.0	80.2	1.16	4170	4.2	5.2	-
49.			118.9	130.3	10.7L	73.1	90.9	1.24	5706	0.0	1.4	-2.5
50.			126.0	134.4	8.6L	71.6	95.0	1.33	5840	-1.6	3.6	-1.9
Average			112.2	124.6	0.1L	68.7	88.0	1.10	5919	-0.8	0.3	0.7
Consistency			10.0	10.5	16.0R	2.4	4.9	0.63	1034	1.6	3.4	4.4

