




NAFLON
3/5/2025

TRACKMAN REPORT


DISPERSION

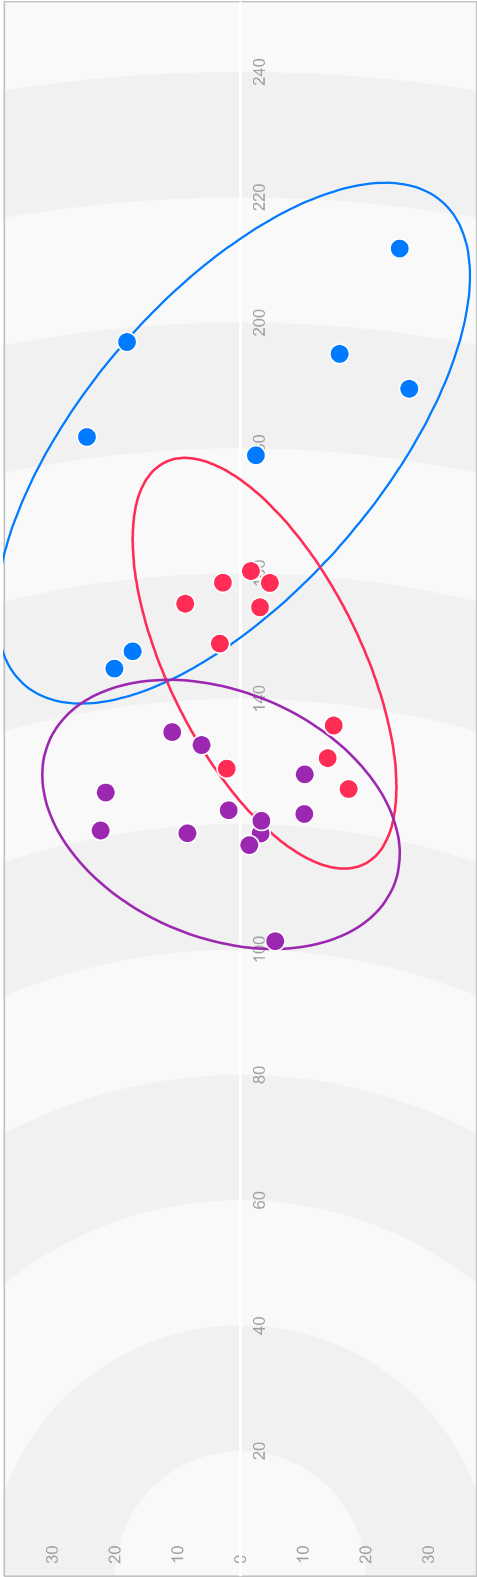

LEGENDS

3Wood	8
5Iron	10
8Iron	12

TRAJECTORY

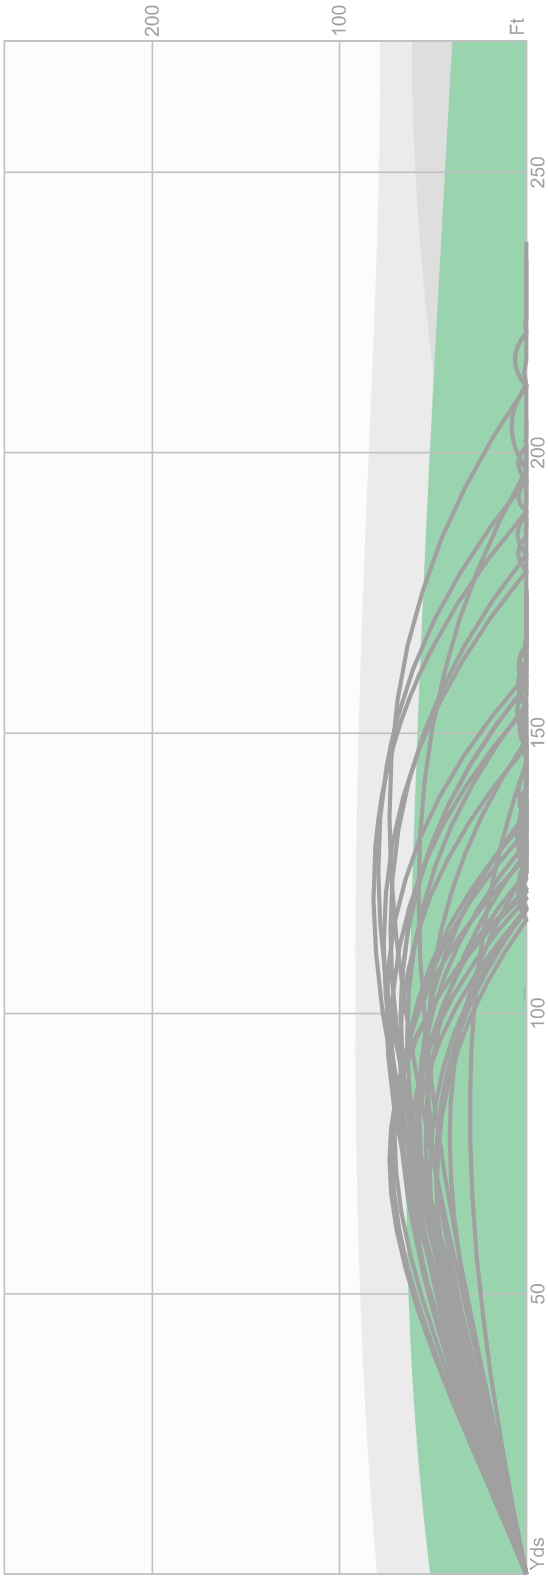

3W 3Wood											
Yds/Ft, Mph	Carry Yds	Total Yds	Curve Ft	Club Speed Mph	Ball Speed Mph	Smash Fac.	Spin Rate Rpm	Attack Ang. Deg	Club Path Deg	Face To Path Deg	
1.  	191.4	208.0	68.3R	87.4	126.6	1.45	3880	-1.2	-3.2	5.4	
2.  	148.6	162.8	22.0L	87.4	107.5	1.23	5452	-1.6	0.2	-5.3	
3.  	195.7	213.0	41.0R	88.9	129.1	1.45	3940	-2.2	-1.2	2.2	
4.  	183.4	203.4	20.5L	87.7	121.8	1.39	3710	-1.2	-2.2	-4.0	
5.  	178.9	196.3	20.4R	86.4	119.2	1.38	3810	-0.8	-1.6	0.3	
6.  	146.2	191.6	66.8L	87.2	122.8	1.41	1970	2.4	6.4	-6.4	
7.  	197.7	235.7	60.7L	90.1	130.1	1.44	2550	-0.2	6.4	-6.6	
8.  	213.3	239.3	4.5L	91.3	135.0	1.48	2980	-0.2	5.6	1.9	
Average 	181.9	206.3	5.6L	88.3	124.0	1.40	3536	-0.6	1.3	-1.6	
Consistency	22.1	22.9	44.1R	1.6	7.9	0.07	987	1.3	3.9	4.3	

5i 5Iron											
Yds/Ft, Mph		Carry Yds	Total Yds	Curve Ft	Club Speed Mph	Ball Speed Mph	Smash Fac.	Spin Rate Rpm	Attack Ang. Deg	Club Path Deg	Face To Path Deg
1.		155.4	175.1	1.0L	76.5	108.8	1.42	4240	-1.8	-3.0	-0.1
2.		136.5	155.7	33.9R	76.9	100.9	1.31	5050	-2.6	-3.2	6.0
3.		131.3	146.3	45.5R	78.3	101.2	1.29	6856	-4.4	-7.0	8.7
4.		128.9	149.5	13.6R	77.6	96.0	1.24	4690	0.0	-5.0	2.6
5.		160.4	174.3	35.3R	78.2	112.3	1.44	4825	-2.4	-7.2	4.5
6.		126.8	155.0	45.3R	78.2	100.6	1.29	5964	-2.8	-4.8	8.0
7.		158.5	175.4	39.3R	78.1	112.2	1.44	4890	-4.0	-7.2	5.2
8.		148.8	174.3	21.4R	77.5	107.5	1.39	4440	-4.2	-6.8	3.5
9.		158.6	175.6	22.0R	78.5	111.4	1.42	4690	-3.4	-5.8	2.7
10.		154.6	168.5	29.5R	77.2	109.7	1.42	5043	-3.0	-5.6	3.9
Average		146.0	165.0	28.5R	77.7	106.1	1.37	5069	-2.9	-5.6	4.5
Consistency		12.9	11.3	14.0R	0.6	5.6	0.07	739	1.2	1.5	2.5

8i8Iron											
Yds/Ft, Mph	Carry Yds	Total Yds	Curve Ft	Club Speed Mph	Ball Speed Mph	Smash Fac.	Spin Rate Rpm	Attack Ang. Deg	Club Path Deg	Face To Path Deg	
1.	101.5	110.6	-	68.5	83.1	1.21	6650	-	-	-	
2.	121.1	141.3	26.7L	69.6	92.5	1.33	5011	-1.0	-1.6	-6.2	
3.	118.6	131.2	1.8R	70.9	91.3	1.29	6006	-2.0	1.0	0.4	
4.	116.7	138.7	7.0R	70.1	90.2	1.29	4970	-4.0	-1.8	1.7	
5.	120.6	131.2	13.5R	71.3	93.6	1.31	6889	-4.6	-3.0	3.3	
6.	135.1	148.6	6.8L	70.6	99.1	1.40	5180	-3.2	-2.6	-1.4	
7.	118.8	138.6	4.7L	70.7	92.9	1.31	6003	-4.2	-2.4	-1.2	
8.	128.3	138.1	18.0R	71.7	96.4	1.34	5870	-3.2	-1.2	4.0	
9.	126.9	142.1	16.9L	71.3	95.8	1.34	5599	-3.0	-4.2	-3.9	
10.	122.0	128.9	19.6R	70.8	94.4	1.33	6890	-3.2	-1.8	4.7	
11.	122.2	129.6	11.5R	72.5	94.2	1.30	6739	-3.6	-4.8	2.8	
12.	132.8	145.1	6.0L	72.4	98.5	1.36	5580	-2.4	-0.8	-1.3	
Average	122.0	135.3	0.9R	70.9	93.5	1.32	5949	-3.1	-2.1	0.3	
Consistency	8.3	9.6	14.0R	1.1	4.0	0.04	682	1.0	1.5	3.3	

