




NAFLON
7/24/2025

TRACKMAN REPORT


DISPERSION

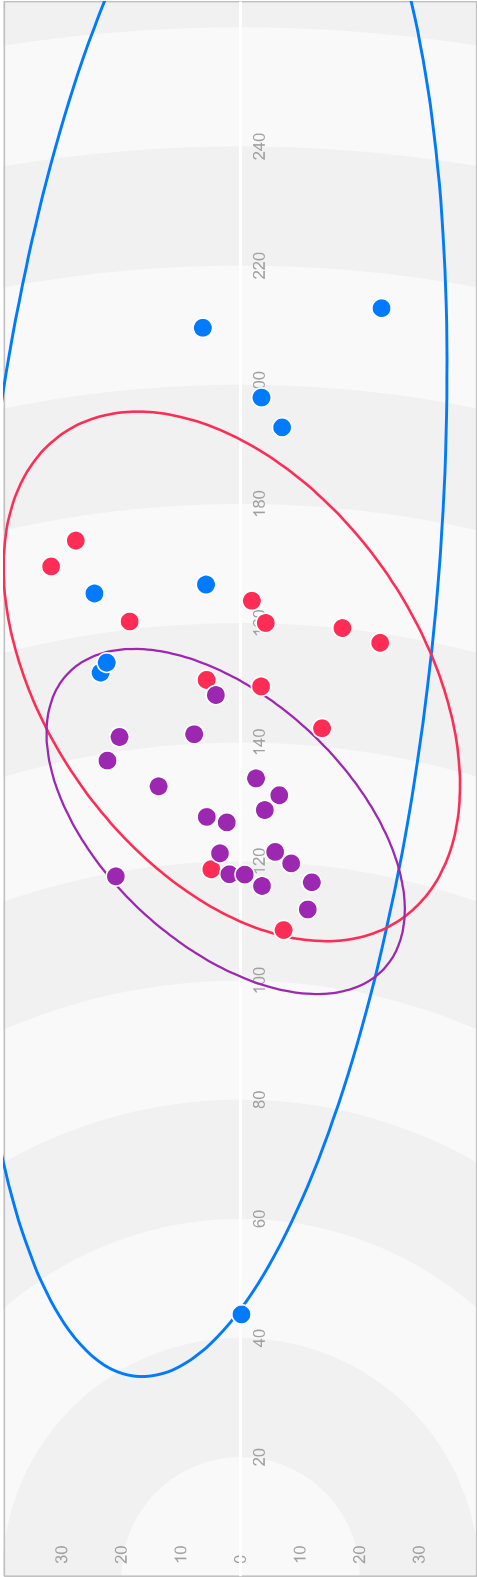

LEGENDS

Driver	9
5Iron	12
8Iron	19

TRAJECTORY

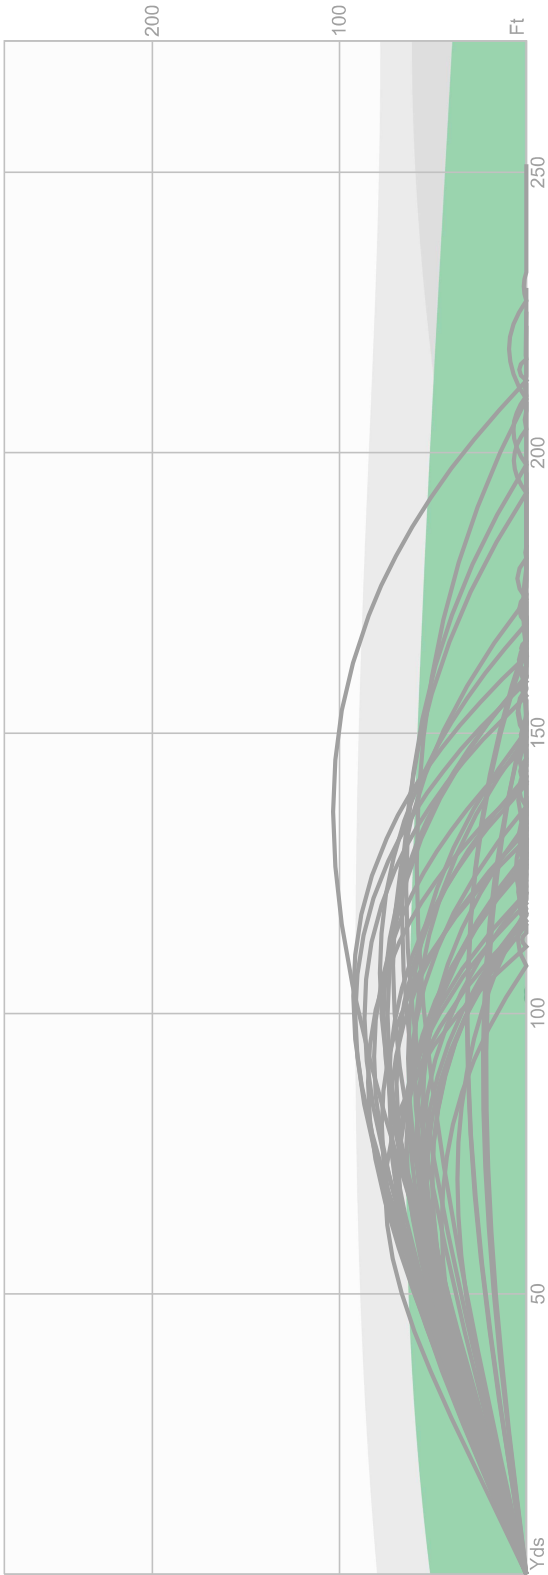

Driver											
Yds/Ft, Mph	Carry Yds	Total Yds	Club Speed Mph	Ball Speed Mph	Smash Fac.	Spin Rate Rpm	Attack Ang. Deg	Club Path Deg	Face To Path Deg	Low Point In	
1.   	44.0	109.7	-	98.7	-	2150	-	-	-	-	
2.   	193.0	222.8	85.3	123.8	1.45	2610	1.9	4.1	-0.7	2.4B	
3.   	166.6	212.6	83.9	125.0	1.49	2020	0.9	0.9	-1.5	1.1B	
4.   	197.9	229.4	93.5	127.4	1.36	2680	1.7	6.3	-3.2	2.2B	
5.   	153.5	200.0	95.3	128.8	1.35	2390	1.1	5.9	-9.1	1.2B	
6.   	155.0	201.9	97.0	137.5	1.42	1960	3.5	6.7	-9.1	4.2B	
7.   	214.2	226.5	92.9	134.0	1.44	3330	1.1	8.5	-1.3	1.2B	
8.   	166.8	212.4	95.5	127.6	1.34	2300	2.3	5.3	-8.6	3.0B	
9.   	209.7	251.7	95.0	136.7	1.44	2050	4.7	8.7	-5.5	5.5B	
Average 	166.7	207.4	92.3	126.6	1.41	2388	2.1	5.8	-4.9	2.6B	
Consistency	48.5	37.6	4.6	10.9	0.05	411	1.2	2.3	3.4	1.5A	

5i Iron											
Yds/Ft, Mph		Carry	Total	Club Speed Mph	Ball Speed Mph	Smash Fac.	Spin Rate Rpm	Attack Ang. Deg	Club Path Deg	Face To Path Deg	Low Point In
1.	  	118.8	154.1	66.2	93.8	1.42	4378	-4.8	-7.0	3.2	4.4A
2.	  	108.7	133.9	73.4	84.6	1.15	3671	0.0	-6.2	7.3	0.3B
3.	  	143.0	156.9	73.7	104.1	1.41	5229	-2.2	-8.8	9.0	2.0A
4.	  	172.5	186.8	81.5	117.6	1.44	4440	-1.2	-8.6	-1.1	1.0A
5.	  	149.4	170.9	81.3	105.7	1.30	4108	-1.4	-2.6	2.3	1.1A
6.	  	160.1	167.9	80.5	112.9	1.40	5210	0.2	-4.2	5.9	0.4B
7.	  	161.3	176.2	81.7	111.5	1.37	4430	0.2	-4.6	-1.2	0.3B
8.	  	150.6	170.4	81.2	105.6	1.30	4041	0.0	-2.4	0.1	0.2B
9.	  	158.4	166.5	81.8	113.8	1.39	5828	-3.2	-4.2	7.5	3.2A
10.	  	176.0	196.4	81.4	117.4	1.44	3581	-1.0	-3.8	-2.9	0.9A
11.	  	160.1	173.6	80.8	111.5	1.38	4681	-0.6	-3.4	2.7	0.6A
12.	  	163.8	171.0	82.0	115.2	1.41	5350	-1.2	-6.8	4.1	1.0A
Average		151.9	168.7	78.8	107.8	1.37	4579	-1.3	-5.2	3.1	1.1A
Consistency		19.3	15.2	4.8	9.5	0.08	671	1.4	2.1	3.7	1.4A

8i Iron											
Yds/Ft, Mph		Carry Yds	Total Yds	Club Speed Mph	Ball Speed Mph	Smash Fac.	Spin Rate Rpm	Attack Ang. Deg	Club Path Deg	Face To Path Deg	Low Point In
1.	  	117.9	134.6	64.5	90.1	1.40	5114	-3.0	-3.8	2.1	2.5A
2.	  	117.8	137.9	68.3	90.6	1.33	5086	-3.2	-1.0	0.9	2.4A
3.	  	128.7	144.6	68.4	96.5	1.41	5412	-4.4	-3.6	3.7	3.4A
4.	  	115.9	131.0	71.9	91.3	1.27	6605	-5.4	-5.6	5.4	4.4A
5.	  	119.3	139.9	72.5	91.8	1.27	5123	-2.6	-3.4	-4.7	1.9A
6.	  	117.1	124.7	73.0	92.2	1.26	7400	-3.2	-4.2	7.5	2.5A
7.	  	120.0	128.6	72.3	93.0	1.29	6666	-3.0	-5.8	7.2	2.4A
8.	  	126.6	138.8	71.2	95.8	1.34	5955	-3.4	-7.0	4.1	2.4A
9.	  	127.6	141.8	75.7	97.2	1.28	6238	-3.2	-2.6	0.0	3.0A
10.	  	133.3	143.3	76.1	98.6	1.30	5615	0.0	-3.8	-1.4	0.0B
11.	  	148.0	156.2	77.0	107.2	1.39	5793	-2.4	-4.4	1.7	2.0A
12.	  	121.4	137.6	76.2	92.3	1.21	5343	-1.4	-0.6	-0.7	1.1A
13.	  	134.0	153.7	77.4	99.4	1.28	5050	-3.4	-2.8	2.5	2.8A
14.	  	112.5	116.6	75.3	90.9	1.21	8610	-4.3	-2.3	6.4	3.7A
15.	  	138.7	154.5	74.2	101.4	1.37	5097	-2.2	-3.6	-3.6	1.6A
16.	  	131.3	138.2	75.4	98.9	1.31	6370	-2.0	-1.6	3.0	1.5A
17.	  	142.3	153.9	76.9	102.9	1.34	5200	-1.2	-2.8	-3.5	0.9A
18.	  	121.7	131.7	72.7	92.4	1.27	5702	-0.6	-1.2	2.8	0.4A
19.	  	141.6	147.4	74.7	104.6	1.40	6250	-2.6	-3.8	0.4	2.4A
Average		127.1	139.7	73.4	96.2	1.31	5928	-2.7	-3.4	1.8	2.2A

Consistency	10.0	10.4	3.3	5.1	0.06	905	1.3	1.6	3.5	1.1A
-------------	------	------	-----	-----	------	-----	-----	-----	-----	------

